



- (51) International Patent Classification:
B82B 1/00 (2006.01)
- (21) International Application Number:
PCT/US2014/033855
- (22) International Filing Date:
11 April 2014 (11.04.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/811,500 12 April 2013 (12.04.2013) US
- (71) Applicant: THE REGENTS OF THE UNIVERSITY OF CALIFORNIA [US/US]; 1111 Franklin Street, 5th Floor, Oakland, California 94607-5200 (US).
- (72) Inventors: KIM, Ji Hun; 9115 Judicial Dr., Apt. 4130, San Diego, California 92122 (US). XIANG, Jie; 12922 Carmel Creek Road, Unit 32, San Diego, California 92130 (US). CHEN, Zack Ching-Yang; 1928 Jacaranda Street, West Covina, California 91791 (US). KWON, Soonshin; 9192 Regents Road, Apt. #E, La Jolla, California 92037 (US).
- (74) Agents: YEH, Ka-Lo et al.; Fish & Richardson P.C., P. O. Box 1022, Minneapolis, Minnesota 55440-1022 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: NANOWIRE NANOELECTROMECHANICAL FIELD-EFFECT TRANSISTORS

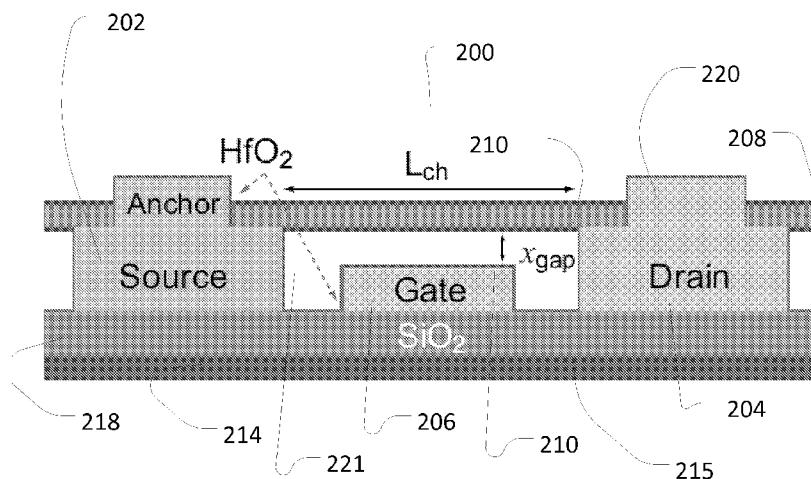


Fig. 2a

(57) Abstract: A three-terminal nano-electro-mechanical field-effect transistor (NEMFET) includes a source electrode, a gate electrode, a drain electrode and a nanoelectromechanically suspended channel bridging the source electrode and the drain electrode. The nanoelectromechanically suspended channel includes a moveable nanowire and a dielectric coating on a surface of the nanowire facing the gate electrode. A thickness of a gap between the nanowire and the gate electrode is determined by a thickness of the dielectric coating.

WO 2014/169242 A1

NANOWIRE NANOELECTROMECHANICAL FIELD-EFFECT TRANSISTORS**CROSS-REFERENCE TO RELATED APPLICATION**

[0001] This application claims priority to U.S. Application Serial No. 61/811,500, filed on April 12, 2013, which is incorporated herein by reference.

5

STATEMENT AS TO FEDERALLY SPONSORED RESEARCH

[0002] This invention was made with government support under grant number ECCS-955199 awarded by National Science Foundation (NSF). The government has certain rights in the invention.

10

BACKGROUND

[0003] This specification relates to transistors, such as VLSI (very-large-scale integration) for CMOS (complementary metal-oxide-semiconductor) transistors. Switches and field-effect transistors that use nanoelectro-mechanical-system (NEMS) to address the thermodynamic limits of MOSFETs have been demonstrated. NEMS exploits the mechanical degree of freedom using movable component like gate or channel. Nanowires have also demonstrated extreme high performance as field effect transistors with near-ballistic transport.

15

[0004] A NEMS switch (a two terminal device) is a well-known MEMS device that utilizes pull-in/pull-out movement of suspended components. Previous studies of two terminal NEMS switches have shown abrupt on/off switching, and reduced subthreshold slope (SS), which is the steepest transition rate for turning off a transistor, with movable gate or channel using various materials like metal, carbon nanotube, silicon carbide, Si nanowire (NW), or graphene. Two terminal NEMS switches suffer from the fundamental design limitation that when turned on, the current relies solely on the contact resistance between the two contact surface and that a typically large threshold voltage is used to pull in the device. Therefore two terminal switches have no control over their on or off current and their performances depend heavily on in the nature of the mechanical contacts which is still not well understood.

20

25

[0005] Three terminal suspended gate NEMS field effect transistors are configured as a traditional transistor with a gate voltage used to independently tune the current from source to drain. However the large micrometer sized metal suspended gate electrode in previously reported devices have limited operational speed of several MHz due to the large mass of the moving components

SUMMARY

[0006] This specification describes technologies relating to transistor design and fabrication. The disclosed nano-electro-mechanical field-effect transistor (NEMFET) technology concerns a novel nanoscale transistor structure that is based on both electrical transport and mechanical deformation in semiconductor nanowire materials and uses coupled nanoelectromechanical motion to achieve high switching speed as well as low standby power. The disclosed devices and methods provide a building block for future computation devices, such as mobile and personal computing devices.

[0007] This specification describes 3-D modeling of coupled nanomechanics-electrostatics-carrier transport to optimize performance, controlled nanomaterial preparation via chemical vapor deposition and wet chemical etching methods, fabrication of suspended nanowire transistor structures, and DC and RF characterization of the device arrays to verify their performance metrics as logic and non-volatile elements. Embodiments of the subject matter described in this specification can be implemented to realize one or more of the following advantages. A NEMFET can operate with zero sub-threshold slope (e.g., once the gating voltage is tuned to beyond a certain threshold, the current will abruptly drop to a low level). Thus there may not be any transition period between the on and off states, a feature not found in other MOSFETs.

[0008] A NEMFET can be a three-terminal mechanical device, where the third terminal is used as a gate to modulate current from the source to drain terminals. As no current needs to flow from the third terminal, standby power consumption, which poses a problem for other mechanical switches, is reduced (e.g., eliminated). Moreover, an NEMFET can operate at a mechanical resonating frequency of more than 1GHz (126 MHz demonstrated).

[0009] In one aspect, a device includes a three-terminal nano-electro-mechanical field-effect transistor (NEMFET) that includes a support substrate having a planar upper surface, a

source electrode disposed on the planar upper surface of the support substrate, a drain electrode disposed on the planar upper surface of the support substrate, a gate electrode disposed on the planar upper surface of the support substrate between the source electrode and the drain electrode, a nanoelectromechanically suspended channel. The
5 nanoelectromechanically suspended channel includes a moveable nanowire, the moveable nanowire having two opposing ends that are connected and vertically fixed to the source electrode and the drain electrode, and a gap between the nanowire and a top surface of the gate electrode. A portion of the nanowire over the gate electrode is configured to deflect in a direction perpendicular to the planar upper surface of the support substrate.

10 [00010] In one aspect, a device includes a three-terminal nano-electro-mechanical field-effect transistor (NEMFET) that includes a source electrode, a gate electrode, a drain electrode, and a nanoelectromechanically suspended channel bridging the source electrode and the drain electrode. The nanoelectromechanically suspended channel includes a moveable nanowire and a dielectric coating on a surface of the nanowire facing the gate
15 electrode. A thickness of a gap between the nanowire and the gate electrode is determined by a thickness of the dielectric coating.

[00011] Implementations may include one or more of the following features. The device may include a dielectric coating deposited on a top surface of the gate electrode facing the nanowire as a gate oxide. The dielectric coating may include a HfO_2 film and is configured
20 as a passivation covering for the nanowire. A diameter of the nanowire is on a same order as the gap between the nanowire and the top surface of the gate electrode. The gap may be an air gap having a dimension of 5-95 nanometers. The gap is an air gap and may have a thickness determined by oxide deposition that reduces the air gap and increases a diameter of the nanowire, and by a difference in thickness between the source electrode and the gate
25 electrode. The nanowire may include a Ge core and a Si shell. The nanowire is configured to be electrostatically attracted to contact the gate electrode when a sufficient gate voltage is applied to the gate electrode. The NEMFET is configured to not draw current from the gate electrode and there is no electrical contact with the gate electrode and the nanowire. A sub-threshold slope for the device may be less than 60 mV/decade. A sub-threshold slope for the
30 device may be 6 mV/decade. A nominal current may be configured to flow between the source electrode and the drain electrode when no gate voltage is applied to the gate electrode.

An off-current may flow between the source electrode and the drain electrode when the nanowire contacts the gate electrode, the off-current being at least 50 times less than a current that flows between the source electrode and the drain electrode when no gate voltage is applied to the gate electrode. A difference between a pull-in voltage and a pull-out voltage is less than 2 V, the pull-in voltage being a voltage applied to the gate electrode to cause the off-current to flow through the nanowire, and the pull-out voltage being a voltage applied to the device to cause the nominal current to resume flowing. An operational speed of the device is more than 120 MHz.

[00012] In one aspect, a method of fabricating a three-terminal nano-electro-mechanical field-effect transistor (NEMFET), the method includes forming an array of electrodes that includes depositing a plurality of source electrodes having a first thickness on a substrate, depositing a plurality drain electrodes having a second thickness on the substrate, and depositing a plurality of gate electrodes on the substrate on the substrate, each of the plurality of gate electrodes being deposited between a corresponding source and a corresponding drain electrode. The gate electrode has a third thickness, the third thickness may be smaller than the first and second thicknesses. The method includes dry transferring nanowires to suspend between a source electrode and a corresponding source electrode in the array of electrodes, and selecting a source electrode and corresponding drain and gate electrodes from the array of electrodes for connection. The method includes electrically connecting the selected electrodes to a probing pad during anchor electrode deposition in which a nanowire suspended across the selected source and drain electrodes is secured by deposition of a metal anchor layer on the source electrode and the drain electrode, and depositing an oxide to a selected thickness to increase a diameter of the nanowire and reduce an air gap between the suspended nanowire and a top surface of the gate electrode, in accordance with a breakdown voltage of the deposited oxide.

[00013] Implementations may include one or more of the following features. The method further includes verifying a position of the nanowire via SEM observation prior to selecting the source electrode and the corresponding drain and gate electrodes from the array of electrodes for connection. The nanowires may include a Ge core and a silicon shell, and the nanowires maybe formed using a vapor-liquid solid (VLS) method in low pressure chemical vapor deposition (LPCVD) with Au nano-particle. Depositing the oxide may include

depositing HfO₂ deposited atomic layer deposition. The method further includes depositing the oxide on the top surface of the gate electrode to form a gate oxide layer and the metal anchor layer may include Ni. Dry transferring of the nanowires may include manually rubbing a growth wafer containing the nanowires across the electrodes in a chosen direction.

5 [00014] The details of one or more embodiments of the subject matter described in this specification are set forth in the accompanying drawings and the description below. Other features, aspects, and advantages of the invention will become apparent from the description, the drawings, and the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

10 [00015] Fig. 1a shows operational principles of a NEMFET device having a suspended Ge/Si core/shell nanowire (NW). Fig. 1b shows a normalized dependence plot of gap distance versus gate voltage simulated using COMSOL. Fig. 1c shows a schematic of a simulated NEMFET and a list of simulation parameters. Fig. 1d is a plot of the percentage reduction in pull-in voltage (V_{pi}) for nanowire channels having different diameter when the
15 NW and the gate have 3-dimensional coupling instead of 2-dimensional coupling. Fig. 1e shows a cross-sectional plot of 3-dimensional coupling. Fig. 1f shows simulation results of drain current (I_d) versus gate voltage (V_g) from a NW-NEMFET maintained at power supply (V_d)=-0.5V. Fig. 1g shows scaling trends in resonant frequency (solid lines) and V_{pi} (dotted lines) as a function of the diameter (D) and length (L) of the NW. Fig. 1h shows simulated I_d
20 - V_g curve for a NEMFET device having NW channels containing different doping concentrations.

[00016] Fig. 2a is a schematic of a NEMFET having a suspended NW channel. Fig. 2b shows a schematic of the fabrication of the NEMFET. Fig. 2c shows a low magnification image of a fabricated NEMFET. Fig. 2d shows a scanning electron microscope (SEM) image
25 of the selectable electrode array scheme.

[00017] Fig. 3a shows a schematic of a device structure of a non-suspended nanowire FET to demonstrate the effects of passivation. Fig. 3b shows a plan view SEM image of a fabricated NEMFET. Fig. 3c shows I_d - V_g curves with and without HfO₂ passivation, respectively.

[00018] Fig. 4a is a 80° tilted SEM image of a fabricated NEMFET. Fig. 4b shows $I_d - V_g$ and leakage current (I_g) versus V_g curves for a NEMFET. Inset shows a $I_d - V_g$ curve during pull-in and pull-out for a NEMFET having a subthreshold slope (SS) of 6.0 mV/dec.

[00019] Fig. 5a shows $I_d - V_g$ curve for five cycles of the pull-in/pull-out switching of a NEMFET operated at $V_d=1V$. Fig. 5b shows selected $I_d - V_g$ curves at multiple switching up to 130 times. Fig. 5c shows variations in the pull-in voltage (V_{pi}) of six NEMFETs in their first ten cycles. Fig. 5d shows variations in V_{pi} and the difference between V_{pi} and pull-out voltage (V_o) over 100 cycles of pull-in/pull-out switching for the NEMFET measured in Fig. 5b.

[00020] Fig. 6a shows a schematic diagram of a resonance frequency measurement. Fig. 6b shows the mixing current (I_{mix}) amplitude versus driving frequency (f) at different drive amplitudes (V_d^{ac}). Fig. 6c shows the variation of on-resonance amplitude (I_{peak}) as a function of V_d^{ac} . Fig. 6d shows variations in resonant frequency, f_0 as a function of V_d^{ac} (open triangles), and variations in f_0 as a function of V_g (solid circles).

[00021] Like reference numbers and designations in the various drawings indicate like elements.

DETAILED DESCRIPTION

[00022] Static power consumption is a key limiting factor in the shrinkage of feature size of VLSI circuit using CMOS technology. One major reason of high static power consumption is the off-state sub-threshold leakage current of the transistor. The sub-threshold slope (SS) is thermodynamically limited to 60mV/decade ($k_B T/q$) at room temperature, a limit that is not scalable with reduced dimensions. This limitation is inherent to CMOS because its off-state is governed by thermally activated diffusive current over a gate-controlled potential barrier.

[00023] The presently disclosed NEMFET exploits the ultra-small mass and volume of a suspended semiconductor nanowires which has been shown to be able to scale to ultra-high-frequency (UHF) and beyond in mechanical resonance. In general, nanowires are single crystalline semiconductor structure having widths below 100 nm. Using a thin nanowire (NW) as the nanoelectromechanically suspended channel and exploiting its nanoelectromechanically movement-coupled surface potential, near zero SS and high operational speed have been demonstrated.

[00024] Fig. 1a shows the operation principle of a NEMFET 100. The NEMFET 100 is a three-terminal device that includes a source electrode 102, a drain electrode 104, and a gate electrode 106. A NW channel 108 is suspended above the gate electrode 106 with an air gap 112 having an initial (when NW channel 108 is unbent) thickness x_{gap} . The NW channel 108 is connected to the source electrode 102 and the drain electrode 104 both mechanically and electrically. A current flowing between the source electrode 102 and the drain electrode 104 is modulated by a gate voltage V_g applied to the gate electrode 106. The NEMFET 100 draws no current from the gate electrode 104 and the movable NW channel 108 does not need to have any electrical contact with the gate electrode 106.

[00025] The NW channel 108 is a conduction channel formed of a nanowire of single crystalline semiconductor material. For example, the NW channel 108 can be a nanowire having a Ge core and a silicon shell. Ge/Si core/shell NWs have high hole mobility. It is also easy to form ohmic contacts to the hole carrier gas in Ge/Si core/shell NW. In some embodiments, the NW channel 108 can have a diameter of less than 50 nm, less than 30 nm, for example, 25 nm. The NW channel 108 can have a length of less than 2 μm , less than 1.5 μm , for example, 1.32 μm .

[00026] The NEMFET 100 operates in accumulation mode, such that it is on at $V_g=0$ due to hole gas accumulation at the Ge-core/Si-shell interface and is turned off by the application of a positive gate voltage. The design of NEMFET 100 minimizes on-state gate leakage current I_g due to the existence of the air gap 112. As V_g increases, a distance x (shown in Fig. 1a) between a lower surface of the NW channel 108 and a top surface of an oxide layer 110 above the gate electrode 106 decreases as the NW channel 108 is pulled down by an electrostatic attraction force due to V_g . When the (downward) electrostatic attraction force generated by V_g overcomes the upward mechanical restoration force of the bent NW channel 108, the NW channel 108 abruptly comes in contact with the oxide layer 110 of the gate electrode 106 due to the imbalance of these forces across the air gap 112. This mechanical motion is called ‘pull-in’, and the threshold gate voltage at which pull-in occurs is the pull-in voltage (V_{pi}). Such an arrangement allows stronger gate coupling in the off state after pull-in due to elimination of the air gap.

[00027] Device simulation was performed by 3D modeling of a 1.3 μm long, 20 nm diameter suspended p-doped circular silicon NW 150 over planar p+ poly Si gate covered

with a 2 nm SiO₂ as gate oxide 152 in COMSOL. Fig. 1b shows the simulated device and associated device parameters. Quasi-static pull-down displacement x vs. V_g was solved self-consistently using moving mesh conditions by the Arbitrary Lagrangian Eulerian (ALE) method where the boundaries to the NW channel are constantly iterated.

5 [00028] Fig. 1c is a plot of the simulated normalized displacement (x/x_{gap}) as a function of V_g for the NEMFET depicted in Fig. 1b. The silicon NW 150 is suspended 10 nm (i.e., $x_{gap} = 10$ nm) above the SiO₂ gate oxide 152. Fig. 1c shows a NW being pulled down such that x is reduced to ~50% of x_{gap} before the NW is pulled in to contact the gate electrode ($x=0$) at $V_{pi} = 0.97$ V. When V_g sweeps back toward zero, the NW 150 returns to its original position at a
 10 smaller pull-out voltage (V_{po}). A smaller electrostatic force from the gate allows the restoring mechanical force to pull the NW 150 up to its original position. The abrupt pull-in/pull-out phenomena illustrated in Fig. 1c are governed by the interplay between the electrostatic pulling force and the mechanical restoration forces and are not dependent on temperature. Pull-in thus functions as an infinite gain mechanical amplification of the NW surface
 15 potential under the influence of V_g for the NW channel between the source and drain electrodes. In particular, as the diameter of the NW is on the same order of the air gap x_{gap} , electric field lines terminating on the sides of the NW contributed to an enhanced 3D electrostatic coupling and up to 20% reduction in V_{pi} compared to capacitive couplings that are limited to two dimensions in previous MOS-NEMFETs, as shown in Fig. 1d. Fig. 1d is a
 20 plot of the percentage reduction in V_{pi} for nanowire channels having different diameter when the nanowire channel and the gate have 3-dimensional coupling instead of 2-dimensional coupling. Fig. 1e shows a cross-sectional plot of 3-dimensional coupling.

[00029] The device's I_d - V_g transfer characteristics shown in Fig. 1f were calculated by importing the simulated data of x versus V_g (as shown in Fig. 1c) into Sentaurus. Sentaurus is
 25 a commercial technology computer aided design (TCAD) software. Fig. 1f shows a virtually vertical turn-off portion 120 for I_d when $V_g = V_{pi}$. The sub-threshold slope (SS) in this case is zero. The dotted line 130 in Fig. 1f has a gradient of 60 mV/decade, representative of SS in a conventional MOSFET. Similar to Fig. 1c, Fig. 1f shows the device switching on abruptly at $V_{po} = 0.64$ V as V_g returns to zero.

30 [00030] Fig. 1g shows a simulated V_{pi} map for NWs having a range of different diameter (D) and a range of different lengths (L) all with the same x_{gap} and thickness of the oxide layer

152 (t_{ox}). The grayscale represents $\log(1+ V_{pi})$ where a darker shade having a higher V_{pi} . Each of the dotted lines 162, 164 and solid lines 166, 168, 170 connects points having constant V_{pi} and constant frequency scaling for different device dimensions. The intersection of line 162 with line 166 indicates that devices operating at 300 MHz and V_{pi} of 5 V can be obtained for
5 Si NWs having a diameter of 11.7 nm. Furthermore, the scaling map shows the possibility of using NWs with diameters smaller than 5 nm for sub-1V operation.

[00031] The effect of doping in the suspended silicon NW 150 is also investigated using simulations. Fig. 1f shows the I_d-V_g curve 172 for Si NW having boron doping of $1 \times 10^{18}/\text{cm}^3$ and I_d-V_g curve 174 for boron doping of $3 \times 10^{18}/\text{cm}^3$. At lower doping, the
10 simulated on-off ratio, defined as the current ratio right before and after pull-in, was dramatically enhanced by 7 orders of magnitude. At the higher doping level, there is a decrease in both V_{pi} and V_{po} due to the higher electrostatic coupling with V_g caused by the higher carrier concentration in the NW.

[00032] Fig. 2a shows a schematic diagram of the NEMFET 200 having suspended NW
15 208. As shown in FIG. 2a, the NEMFET 200 includes a silicon substrate 214 having a generally planar upper surface 215 coated with a dielectric layer 218, e.g., silicon oxide. A source electrode 202, a drain electrode 204, and a gate electrode 206 are disposed on the dielectric layer 218. The source electrode 202 and drain electrode 204 are taller than the gate electrode (i.e., along a direction perpendicular to the planar upper surface 215 of the substrate
20 214). Opposing ends of a nanowire 208 are electrically connected and vertically fixed to the source electrode 102 and drain electrode 204, respectively, and a center portion of the nanowire 208 is suspended over the gate electrode 206, i.e., the gate 206 is between nanowire 208 and the substrate 214. In operation, the portion of the nanowire 208 over the gate 206 is deflected upward or downward, in the direction perpendicular to the planar upper surface
25 215 of the substrate 214.

[00033] Fig. 2b shows various fabrication details. A p+ Si substrate 214 having a layer 218 of thermal oxide is cut to appropriate sizes and cleaned followed by deposition and patterning of a source electrode 202 and a drain electrode 204, e.g., by electron beam lithography, for example, using JEOL6400 SEM with NPGS software, electron beam metal evaporation and a
30 conventional acetone lift-off process. In some embodiments, the layer 218 of thermal oxide can be less than 500 nm, for example, 300 nm. The source and drain electrodes 202 and 204

can each include for example, 5 nm of Cr and 90 nm thick Au. A gate electrode 206 is patterned with the same procedure and aligned with the source/drain electrodes 202 and 204 but with a smaller thickness, for example, 5 nm Cr and 35 nm Au.

[00034] The initial thickness x_{gap} of an air gap 221 between the suspended nanowire 208 and the surface of the gate electrode 206 is controlled by the differential thickness of metal films between the source/drain electrodes 202/204 and the gate electrode 206. The thickness can be controlled with an in-situ thickness monitoring sensor during the evaporation process and confirmed afterwards with AFM and tilted-view SEM. Here the air gap 221 can be for example, 95 nm (i.e., the thickness of electrodes 202/204) – 40 nm (i.e., the thickness of electrode 206) = 55 nm. The channel length L_{ch} can be designed to be 1.3 μm .

[00035] The core-shell NW 208, which was grown with VLS method in LPCVD with Au nano-particle, was transferred to the source/drain electrodes 202/204 perpendicularly with the dry transfer method. In such a method, a growth wafer containing nanowires is manually rubbed across the electrodes in a chosen direction, leaving aligned parallel nanowires on the electrodes. The successful suspension of NWs is verified at this stage by plan-view/tilt-view SEM observation.

[00036] Since the nanowire dry transfer was semi-random in density and position, an unwanted parasitic nanowire bridging between source and drain, or source/drain and gate may be formed. Any parasitic leakage current would interfere with the actual NEMFET signal from properly suspended nanowires. Thus, elimination of such parasitic leakage current increases the yield of fabricated NEMFET devices.

[00037] To avoid parasitic conduction due to unwanted parallel NW channels, a selectable electrode array scheme 250 with patterned isolated electrode arrays 260 was devised as shown in Fig. 2c. Only selected electrodes after SEM imaging observation are connected in subsequent steps to a probing pad 232 during an anchor electrode deposition step. Fig. 2d shows a NW channel 208 suspended across source electrode 202 and drain electrode 204.

[00038] Electron beam resist, for example, a MMA+PMMA double layer, is then spin coated covering the entire chip 270 and over the suspended NW channel 208, followed by one more electron beam lithography, metal deposition, and lift-off to fabricate anchors 220. The anchors 220 can for example, be 130 nm thick layer of Ni. Electrode wiring between the selected source/drain/gate electrode and bonding pads 234 predefined at the edge of the chip

270 is performed. The final drying process after anchor electrode lift-off uses critical point drying to increase the yield of suspended NW and minimize a slack of in the NW channel.

[00039] Finally, a dielectric coating, e.g., a HfO_2 film is deposited via atomic layer deposition (ALD) to provide a gate oxide layer 224 as well as passivation layer 210 covering the nanowire surface. ALD can be performed, for example, using Beneq TFS200. A HfO_2 thin layer 210 can be deposited, for example, using solid tetrakis(dimethylamino)hafnium, (TDMAH) as a source for Hf while H_2O serves as a source for oxygen. The TDMAH temperature can be set to 55°C , and deposition temperature to 200°C .

[00040] As the gate oxide 224 is deposited uniformly over the suspended NW channel 208 and gate electrode 206, the final air gap thickness t_{gap} is further reduced by twice the dielectric coating thickness. The thickness of gate oxide is carefully selected to balance the reduction of the final air gap thickness, increase in the final diameter of suspended NW channel 208, and the breakdown voltage of the deposited gate oxide. The use of ALD dielectric coating serves several purposes. First, the dielectric coating both on top of the Au gate electrode 206 and bottom of the NW channel 208 serves to further reduce the final air gap thickness t_{gap} . By using precise ALD deposition process, the final air gap thickness t_{gap} can be controlled with nm precision, which in turn enables the precise design of the V_{pi} threshold for NEMFET devices because $V_{pi} \propto t_{gap}^{1.5}$. An ALD HfO_2 also exhibits high breakdown voltage of beyond 20 V, which is beneficial in eliminating gate leakage current I_g after the NW channel 208 is pulled down in contact with the gate electrode 208.

Encapsulating the entire NW channel 208 with the thin ALD passivation layer 210, increases its total diameter, for example, to 45 nm, which in turn increases the mechanical resonant frequency ($f_0 \propto d$) of the suspended NW channel 208, thus improving its operational speed.

[00041] Fig. 3a shows a back-gated NW channel transistor 300 that was fabricated to confirm the passivation effect of HfO_2 in core/shell nanowire NW channel 308. A p-doped Si substrate 303 covered with thermal SiO_2 layer 305 is used as back gate substrate 306. The thermal SiO_2 layer can be, for example, 30 nm thick. The same NW 308 used for the NEMFET device 200 is transferred on the back gate substrate 306 with dry transfer method. Ni is patterned as source/drain contact 302/304 and probing pad using electron beam lithography and electron beam evaporation followed by lift-off with acetone. Fig. 3b is the plan-view SEM image of a

representative device. The defined channel length 312 is 880 nm, and the diameter 314 of NW channel is 26 nm. Electrical properties of the back-gated NWFET were measured within a vacuum probe station having a base pressure of less than 1×10^{-4} torr. The entire device was passivated with 150 nm thick of ALD HfO₂ layer 310 at 200 °C using TDMAH and H₂O after the electrical measurement. Electrical properties of the same NWFETs were measured again to compare the effect of passivation.

[00042] Curve 350 in Fig. 3c is an I_d - V_g curve of the NW-NEMFET without passivation. SS is 3.3 V/dec with $V_{th}=2.6$ V and maximum $I_{on}/I_{off}=60$. V_{th} is the transistor threshold gate voltage beyond which the current is turned off. With passivation, the transfer characteristics as shown in curve 360 in Fig. 3c improved dramatically with $SS = 0.7$ V/dec, $V_{th} = 1.7$ V, and $I_{on}/I_{off} = 10^5$. In the sub-threshold region, SS is determined by the factor $C_{it}/C_{ox}(SS = 60\text{mV} \times (1+C_{it}/C_{ox}))$, and $C_{ox_pass}/C_{ox_no-pass} = 2.1$ with COMSOL simulation. C_{it} , C_{ox} , are the interface state capacitance and gate oxide capacitance, respectively. C_{ox_pass} and $C_{ox_no-pass}$ are gate oxide capacitance with and without HfO₂ passivation. With the passivation, the gate capacitance increases almost two fold while C_{it} can be reduced 37.6 % as HfO₂ layer 310 passivates the surface states of Si shell successfully.

[00043] Fig. 4a is the SEM image (80° tilt) of a fabricated device 400 with the channel length 1.32 μm, initial air gap thickness 55nm, initial nanowire diameter 25 nm, HfO₂ thickness 10 nm and therefore a final air gap thickness t_{gap} of 35 nm. The shadow on the gate electrode 406 under the suspended nanowire channel 408 in Fig. 4a confirms the channel suspension and a thin light contrast HfO₂ shell around the nanowire channel 408 is also visible.

[00044] Fig. 4b shows the first demonstration of an operating NEMFET. The main panel shows measured transfer characteristics $I_d - V_g$ of the device in Fig. 4a. At $V_g < 17.8$ V, I_d slightly decreases from a maximum on current of 2 μA with increase of V_g , consistent with a p-type accumulation mode transistor. The weak gate dependence of I_d in the on state is expected and due to the existence of an air gap between the channel and gate electrode. At $V_{pi} = 17.8$ V, I_d turns off abruptly; I_d then turns back on at $V_{po} = 16.2$ V during pull-out. While the pull-in transition has no measurable data point, the apparent SS is 11.7 mV/dec and is only limited by the interval of data sampling. Inset to Fig. 4b shows another device of the same dimension with SS of 6 mV/dec. Importantly, the gate leakage current I_g stays at equipment measurement limit (<30 pA) for the entire V_g range (Fig. 4b), demonstrating that

the measured source to drain current I_d was indeed modulated by the mechanical motion from the electrostatic pull-in and no electrical contact with the gate was needed, a unique property of such three-terminal NEMS devices.

[00045] The variations of SS between the two devices can be attributed to the difference in $I_{on}-I_{off}$ ratios, which is 50 for the device shown in the main panel of Fig. 4b and 2200 for the device shown in the inset. In particular, for the device shown in the inset, given its on/off ratio, its SS value is near-zero as it is simply dominated by the V_g sweep step (20 mV/dec in this case). Quantitatively, $I_{on}/I_{off} = 10^{\left(\frac{V_{pi}-V_{th}}{SS}\right)} \approx e^{\left(\frac{V_{pi}-V_{th}}{SS}\right)}$. Here I_{off} is dictated by the threshold voltage V_{th} and SS of the NWFET in the pulled-in state, as $I_{off} \approx I_{on} / \exp[(V_{pi} - V_{th_stuck})/SS_{stuck}]$ and both are subject to sample variations. V_{th_stuck} and SS_{stuck} are the V_{th} and SS after the nanowire channel is pulled down and in contact with the gate, respectively. A NW channel with lower hole concentration will have a smaller V_{th} and will be more easily turned off, resulting in a smaller I_{off} after pull-in as confirmed by simulations in Fig. 1h. Therefore, the maximum $I_{on}-I_{off}$ ratio can be improved by optimizing the carrier density or doping concentration of the NW materials.

[00046] Small pull-in voltage has always been the promise of nanoscale NEMS switches. Even though the V_{pi} values here are more than 10 V, the $V_{pi} - V_{po}$ window is only 1.6 V, as shown in Fig. 4b. The value of $V_{pi} - V_{po}$ is an important parameter that describes an operational voltage window for the gate. Traditionally, transistor threshold voltages can be shifted by engineering the gate stack work function. In the case of mechanical switches, it has also been proposed that by using trapped charges in the oxide layer, the absolute values of V_{pi} and V_{po} can be shifted closer to zero, and only a voltage slightly higher than the 1.6 V window would be needed for NEMFETs disclosed herein. Combined with further reduction of x_{gap} from 35 nm as well as modifying dimensions of the NWs, it is possible to achieve sub-1 V operation NEMFETs, as confirmed by simulation results shown in Fig. 1f.

[00047] The reliability of the NEMFET was investigated by monitoring device parameter evolution during multiple consecutive switching. Lines 502, 504, 506, 508, and 510 in Fig. 5a show the first 5 pull-in/pull-out cycles of a device, respectively, with consistent SS of 12.0/11.5/11.6/11.6/11.2 mV/dec during the 5 switching cycles. The device's V_{pi} starts from 15.9 V, and gradually increases up to 18.2 V. Fig. 5b shows $I_d - V_g$ data from another device that was switched up to 130 times before the device failed due to stiction. Compared to

recent NEMS switches where oftentimes only one or a few switching cycles can be observed, the presently disclosed NEMFET demonstrates the benefit of a three-terminal device design in which the gate electrode does not need to be electrically contact the NW, thus greatly minimizing device wear. To visualize device stability over time, Figs. 5c and 5d show trends of V_{pi} and $V_{pi} - V_{po}$ window size as a function of the number of switching cycles. As shown in Fig. 5c, V_{pi} increases within the first few cycles (see the shaded region 525) in all six difference devices, which may be attributed to hardening effect of a doubly clamped NW beam with repeated mechanical movement. Beyond the first few cycles, Fig. 5d shows that V_{pi} remained stabilized at ~ 15 V for up to 100 switching cycles, suggesting that the device has stabilized. Interestingly, despite the V_{pi} variation, the $V_{pi} - V_{po}$ window remains stable at 0.83 ± 0.52 V (Fig. 5d) throughout the 100 cycles. A drop 530 in V_{pi} in this device occurred at the seventh cycle from 18 to 12 V, but there is no corresponding change in the size of the $V_{pi} - V_{po}$ window, suggesting that both V_{pi} and V_{po} are affected and shifted in the same direction. This is reminiscent of the rearrangement of positive surface charges as observed previously in MEMS suspended gate FETs and further suggests that both V_{pi} and V_{po} in the presently disclosed NEMFET could be reduced using fixed charges, while the average $V_{pi} - V_{po}$ operating window of 0.83 V is already compatible with modern transistor of traditional design. All the devices shown in Figs. 5a-d are measured at $V_d = 1$ V. For example, as shown in Fig. 2a, the source electrode can be fixed at ground with voltage of zero while a voltage V_d is applied on the drain electrode.

[00048] The operational speed of a NEMFET is one of its important characteristics, and is linked to the suspended beam's fundamental flexural resonant frequency. A higher operational frequency would involve more rigid structures in the NEMFET and is usually associated with an increased V_{pi} . For a suspended beam, the resonant frequency f_o can be expressed as

$$f_o = 1.03 \frac{d}{L^2} \sqrt{\frac{E}{\rho}} \quad (1)$$

where E is Young's modulus, ρ is the mass density, d is the thickness of the beam (in this case, the diameter of the NW including the ALD oxide) in the direction of motion, and L is the length of the suspended beam. A single source method is used to measure current I_{mix} . The measured current I_{mix} varies proportionally to the mechanical oscillating amplitude of the

suspended NW, which serves as a heterodyne signal mixer in the determination of the radio frequency NEMFET flexural resonance f_o . Fig. 6a shows a schematic of the measurement setup 600. I_{mix} is measured in a vacuum probe station (not shown in Fig. 6a). at pressures below 10^{-4} torr. A vacuum probe station is a measurement equipment in which production sample chips are probed and in which voltages to various electrodes can be supplied.

Lakeshore probe station is an example of such a vacuum probe station. A list of such measurement equipment can be found The signal 602 (V_d^{ac}) with frequency ω and amplitude modulated at $\Delta\omega$ is applied to the drain electrode 604, while the gate electrode 606 is held at a constant DC voltage 608 (V_g^{dc}). For example, the intermediate frequency $\Delta\omega$ is 400 Hz, and 99% AM modulation at $\Delta\omega$ is applied in some measurements, while the carrier frequency ω is swept from 124 to 128 MHz, as shown in Fig. 6b. The intermediate bandwidth mixing signal 609 generated by the NEMFET 601 is detected by a low frequency lock-in amplifier 610 in combination with a low noise amplifier 612. The mechanical motion of suspended NW channel 620 modulates the capacitance between the suspended NW channel 620 and the gate electrode 606, causing a modulation of output current $I_{MIX}(\omega)$ at the drive frequency ω , with the maximum modulation occurring at the resonant frequency f_o . The actual shape of resonance peak versus frequency can be distorted due to a phase difference with the electromagnetic environment of the probe station chamber. The measured I_{mix} signal is described by the equation:

$$I_{MIX}(\omega) = A + B\omega + \frac{H \cos(\arctan\left(\frac{f_o^2 - \omega^2}{f_o \omega / Q}\right) + \Delta\phi)}{\sqrt{\left(1 - \left(\frac{\omega^2}{f_o^2}\right)^2\right)^2 + \frac{\omega^2}{f_o Q}}} \quad (2)$$

where A , B , H , f_o , Q and $\Delta\phi$ are independent fitting parameters, ω is the drive angular frequency, f_o is resonant frequency, and Q is quality factor, which is defined as the ratio of the energy stored to the energy lost per cycle in the device. The shape of peak can be varied with phase difference $\Delta\phi$ which represents the impedance from the entire measurement

system environment.

[00049] Fig. 6b shows a series of I_{mix} amplitude as a function of driving frequency f at different drive amplitudes V_d^{ac} with a fixed $V_g = 5V$ while V_d^{ac} is varied from 40 to 140 mV. Solid lines 640, 642, 644, 646, 648, and 650 in the plots are fitted using equation (2). Based

on the fitted data, f_0 of 125.9MHz, and quality factor Q of 632 are obtained at drive amplitude of 40mV. The NEMFET thus operates at VHF range. Fig. 6c shows the resonance peak amplitude I_{peak} fitted as a parabolic function through the origin (curve 652) of the ac drive amplitude, a signature of electrostatic driving force on harmonic oscillators.

5 [00050] Interestingly, f_0 decreases nonlinearly with higher drive amplitude V_d^{ac} , as shown by data points marked by open triangles in Fig. 6d, indicative of a capacitive softening effect as observed in previously reported silicon NW and carbon nanotubes with electrostatic side gates. In the disclosed NEMFET, the ac drive voltage is applied to the drain electrode 604. With a constant V_g^{dc} applied to the gate electrode 606, an increase of V_d^{ac} , acts like an
10 asymmetrical side gate affecting the drain side only, giving rise to the capacitive softening.

[00051] As shown by the data points marked by solid circles in Fig. 6d, f_0 increases with V_g due to elastic hardening of the NW from the increased tension within the suspended beam at higher gate voltage.

[00052] By combining semiconductor NW FET and high-frequency NW NEMS resonators,
15 NEMFET is an exciting new device design that transcends previous NEMS switches and traditional FETs with finite subthreshold slopes. The three-terminal NEMFET eliminates the need for the gate electrode to contact the moving channel, meaning both can be covered with protective oxide layers, greatly increasing the reliability and stability of NEMS devices. By using suspended nanowire channels, the source-drain current is switched off abruptly by the
20 gate voltage due to the electromechanical pull-in effect, which does not depend on temperature or $k_B T$. As a result the effective SS of the device is near zero or 6 mV/dec as limited by instrument precision. The disclosed NEMFETs exhibit an operational voltage window $V_{pi} - V_{po}$ that is less than 2V and switching operation up to 130 times.

[00053] Using fixed surface charges or work function differences, V_{pi} values can be further
25 shifted toward zero. The disclosed NEMFETs can operate at 125.9 MHz and with further reduction in nanowire dimensions, operation range that extends well beyond very-high-frequency (VHF) region with less than 1V pull-in voltage is envisioned. Furthermore, by leveraging the wealth of materials research in NW materials and more importantly, high strength, lightweight carbon nanotubes and graphene-based materials, with further reduction
30 of device dimensions to under 10 nm diameter and an air gap of less than 10 nm air gap, reliable ultrahigh-frequency, low-power computational systems can be obtained.

[00054] Simulation embodiments of the subject matter described in this specification can be implemented using one or more modules of computer program instructions encoded on a computer-readable medium for execution by, or to control the operation of, data processing apparatus. The computer-readable medium can be a manufactured product, such as hard drive in a computer system or an optical disc sold through retail channels, or an embedded system. The computer-readable medium can be acquired separately and later encoded with the one or more modules of computer program instructions, such as by delivery of the one or more modules of computer program instructions over a wired or wireless network. The computer-readable medium can be a machine-readable storage device, a machine-readable storage substrate, a memory device, or a combination of one or more of them.

[00055] While this specification contains many implementation details, these should not be construed as limitations on the scope of the invention or of what may be claimed, but rather as descriptions of features specific to particular embodiments of the invention. Certain features that are described in this specification in the context of separate embodiments can also be implemented in combination in a single embodiment. Conversely, various features that are described in the context of a single embodiment can also be implemented in multiple embodiments separately or in any suitable subcombination. Moreover, although features may be described above as acting in certain combinations and even initially claimed as such, one or more features from a claimed combination can in some cases be excised from the combination, and the claimed combination may be directed to a subcombination or variation of a subcombination.

[00056] Similarly, while operations are depicted in the drawings in a particular order, this should not be understood as requiring that such operations be performed in the particular order shown or in sequential order, or that all illustrated operations be performed, to achieve desirable results. Thus, particular embodiments of the invention have been described. Other embodiments are within the scope of the following claims.

CLAIMS

What is claimed is:

1. A device comprising:

a three-terminal nano-electro-mechanical field-effect transistor (NEMFET)

5 comprising:

a support substrate having a planar upper surface;

a source electrode disposed on the planar upper surface of the support
substrate;

10 a drain electrode disposed on the planar upper surface of the support
substrate;

a gate electrode disposed on the planar upper surface of the support
substrate between the source electrode and the drain electrode;

15 a nanoelectromechanically suspended channel, the
nanoelectromechanically suspended channel comprising a moveable nanowire, the moveable
nanowire having two opposing ends that are connected and vertically fixed to the source
electrode and the drain electrode, and

a gap between the nanowire and a top surface of the gate electrode;

wherein a portion of the nanowire over the gate electrode is configured to deflect in a
direction perpendicular to the planar upper surface of the support substrate.

20

2. A device comprising:

a three-terminal nano-electro-mechanical field-effect transistor (NEMFET)

comprising:

a source electrode;

25 a gate electrode;

a drain electrode; and

a nanoelectromechanically suspended channel bridging the source electrode
and the drain electrode, the nanoelectromechanically suspended channel comprises a
moveable nanowire and a dielectric coating on a surface of the nanowire facing the gate

electrode,

wherein a thickness of a gap between the nanowire and the gate electrode is determined by a thickness of the dielectric coating.

5 3. The device of claim 2, wherein the dielectric coating is deposited on a top surface of the gate electrode facing the nanowire as a gate oxide.

4. The device of claim 2, wherein the dielectric coating comprises a HfO₂ film and is configured as a passivation covering for the nanowire.

10 5. The device of claims 1 or 2, wherein a diameter of the nanowire is on a same order as the gap between the nanowire and the top surface of the gate electrode.

6. The device of claim 5, wherein the gap is an air gap having a dimension of 5-95 nanometers.

15 7. The device of claims 1 or 2, wherein the gap is an air gap having a thickness determined by oxide deposition that reduces the air gap and increases a diameter of the nanowire, and by a difference in thickness between the source electrode and the gate electrode.

8. The device of claims 1 or 2, wherein the nanowire comprises a Ge core and a Si shell.

9. The device of claims 1 or 2, wherein the nanowire is configured to be electrostatically attracted to contact the gate electrode when a sufficient gate voltage is applied to the gate electrode.

20 10. The device of claims 1 or 2, wherein the NEMFET is configured to not draw current from the gate electrode and there is no electrical contact with the gate electrode and the nanowire.

11. The device of claims 1 or 2, wherein a sub-threshold slope for the device is less than 60 mV/ decade.

25 12. The device of claim 11, wherein the sub-threshold slope for the device is 6

mV/decade.

13. The device of claims 1 or 2, wherein a nominal current is configured to flow between the source electrode and the drain electrode when no gate voltage is applied to the gate electrode.

14. The device of claim 9, wherein an off-current flows between the source electrode and the drain electrode when the nanowire contacts the gate electrode, the off-current being at least 50 times less than a current that flows between the source electrode and the drain electrode when no gate voltage is applied to the gate electrode .

15. The device of claim 13, wherein a difference between a pull-in voltage and a pull-out voltage is less than 2 V, the pull-in voltage being a voltage applied to the gate electrode to cause the off-current to flow through the nanowire, and the pull-out voltage being a voltage applied to the device to cause the nominal current to resume flowing.

16. The device of claims 1 and 2, wherein an operational speed of the device is more than 120 MHz.

17. A method of fabricating a three-terminal nano-electro-mechanical field-effect transistor (NEMFET), the method comprising:

forming an array of electrodes, comprising:

depositing a plurality of source electrodes having a first thickness on a substrate;

depositing a plurality drain electrodes having a second thickness on the substrate; and

depositing a plurality of gate electrodes on the substrate on the substrate, each of the plurality of gate electrodes being deposited between a corresponding source and a corresponding drain electrode, the gate electrode having a third thickness, the third thickness being smaller than the first and second thicknesses;

dry transferring nanowires to suspend between a source electrode and a corresponding source electrode in the array of electrodes;

selecting a source electrode and corresponding drain and gate electrodes from the array of electrodes for connection;

electrically connecting the selected electrodes to a probing pad during anchor electrode deposition in which a nanowire suspended across the selected source and drain electrodes is secured by deposition of a metal anchor layer on the source electrode and the drain electrode; and

5 depositing an oxide to a selected thickness to increase a diameter of the nanowire and reduce an air gap between the suspended nanowire and a top surface of the gate electrode, in accordance with a breakdown voltage of the deposited oxide.



18. The method of claim 17, further comprising verifying a position of the nanowire via
10 SEM observation prior to selecting the source electrode and the corresponding drain and gate electrodes from the array of electrodes for connection.

19. The method of claim 17, wherein the nanowires comprise a Ge core and a silicon shell, and the nanowires are formed using a vapor-liquid solid (VLS) method in low pressure
15 chemical vapor deposition (LPCVD) with Au nano-particle.

20. The method of claim 17, wherein depositing the oxide comprises depositing HfO₂ deposited atomic layer deposition.

21. The method of claim 17, further comprising depositing the oxide on the top surface of the
20 gate electrode to form a gate oxide layer and the metal anchor layer comprises Ni.

22. The method of claim 17, wherein dry transferring of the nanowires comprises
manually rubbing a growth wafer containing the nanowires across the electrodes in a chosen
25 direction.

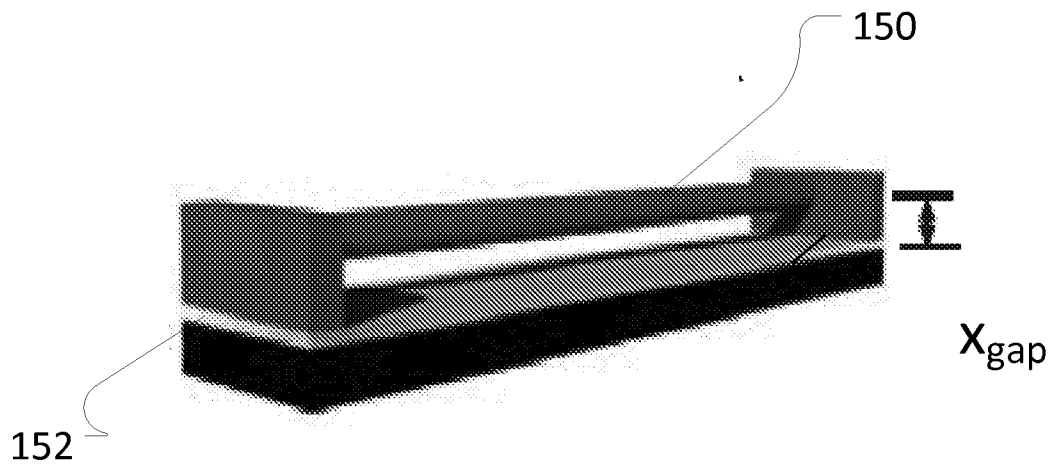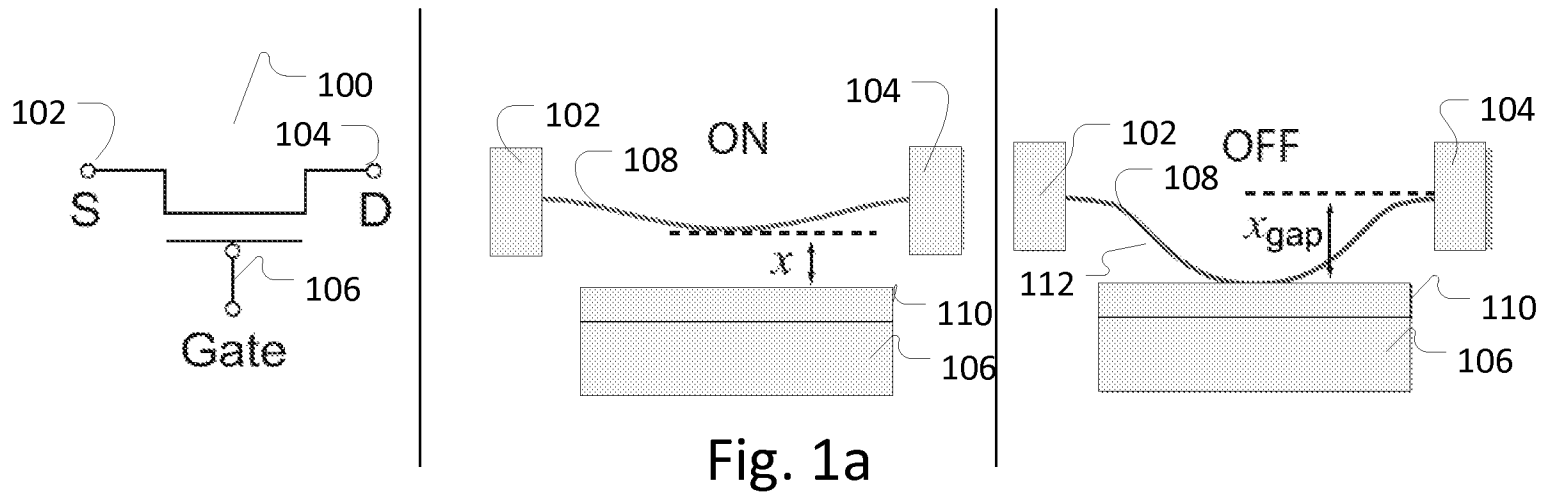

$L=1.3 \mu\text{m}$
 $D=20 \text{ nm}$
 Young's modulus $E = 153 \text{ GPa (Si)}$
 $x_{\text{gap}}=10 \text{ nm}$
 $t_{\text{ox}}= 2 \text{ nm SiO}_2$
 p doped drain/source
 $2 \times 10^{20} / \text{cm}^3$
 p doped channel
 $1 \times 10^{18} / \text{cm}^3$

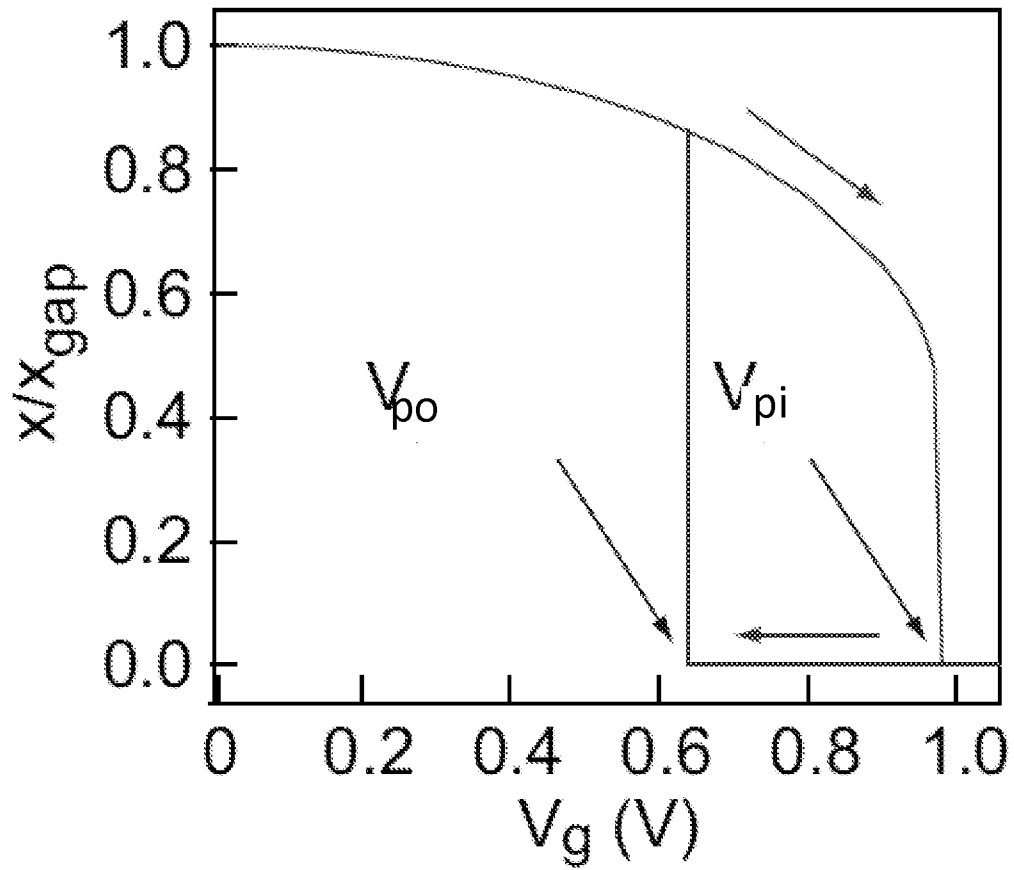


Fig. 1c

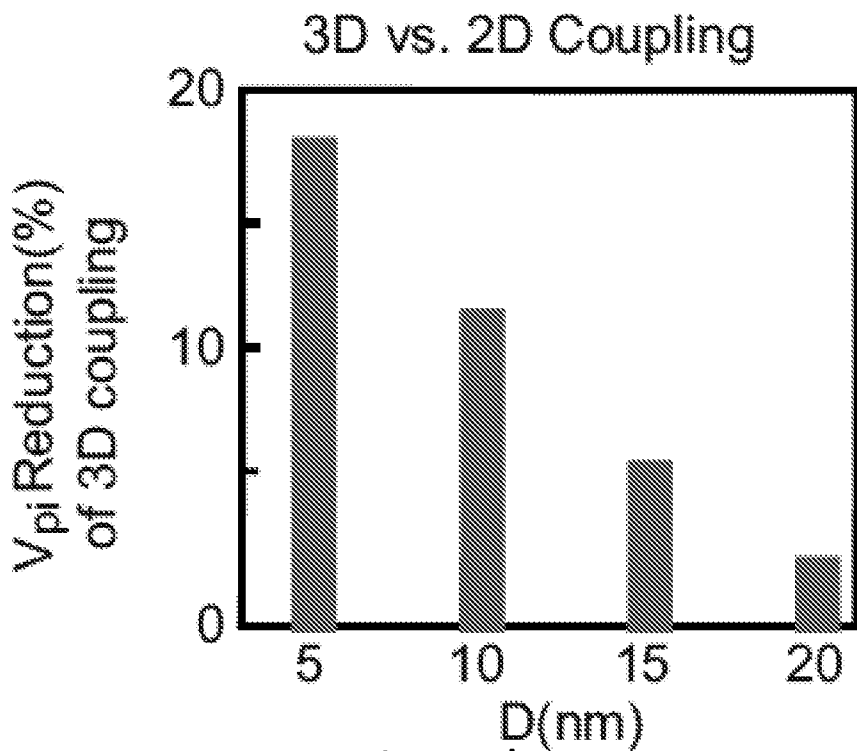


Fig. 1d

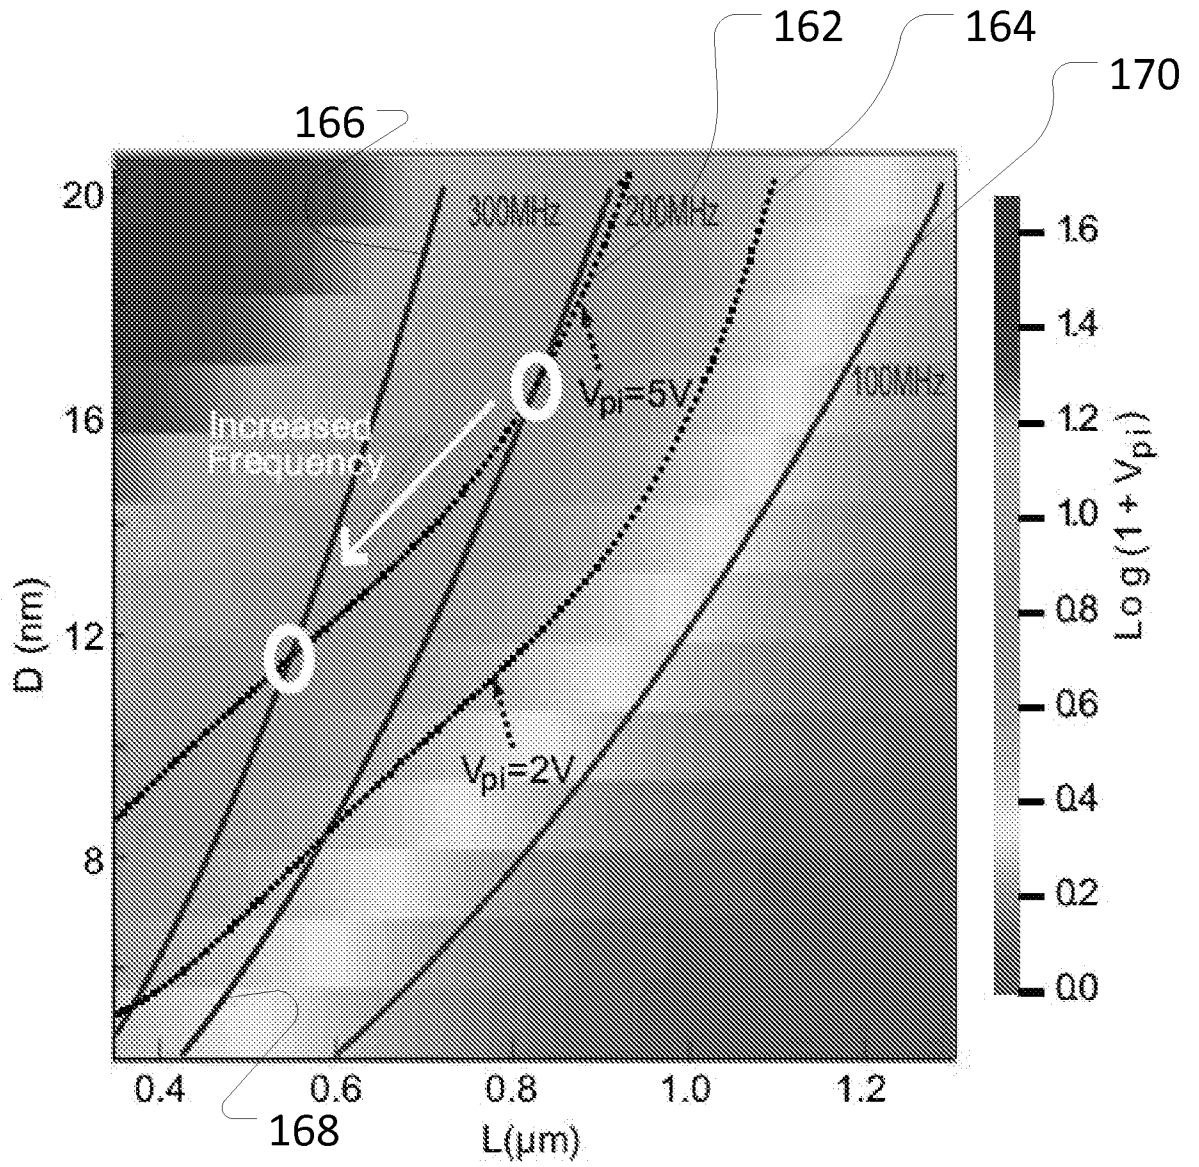


Fig. 1g

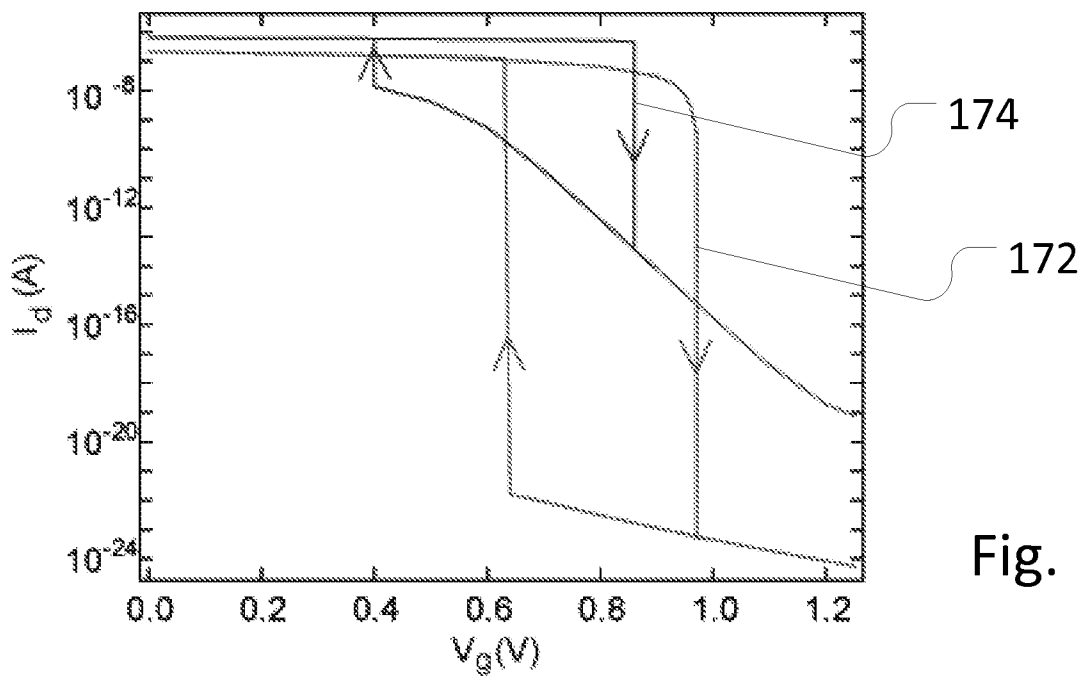


Fig. 1h

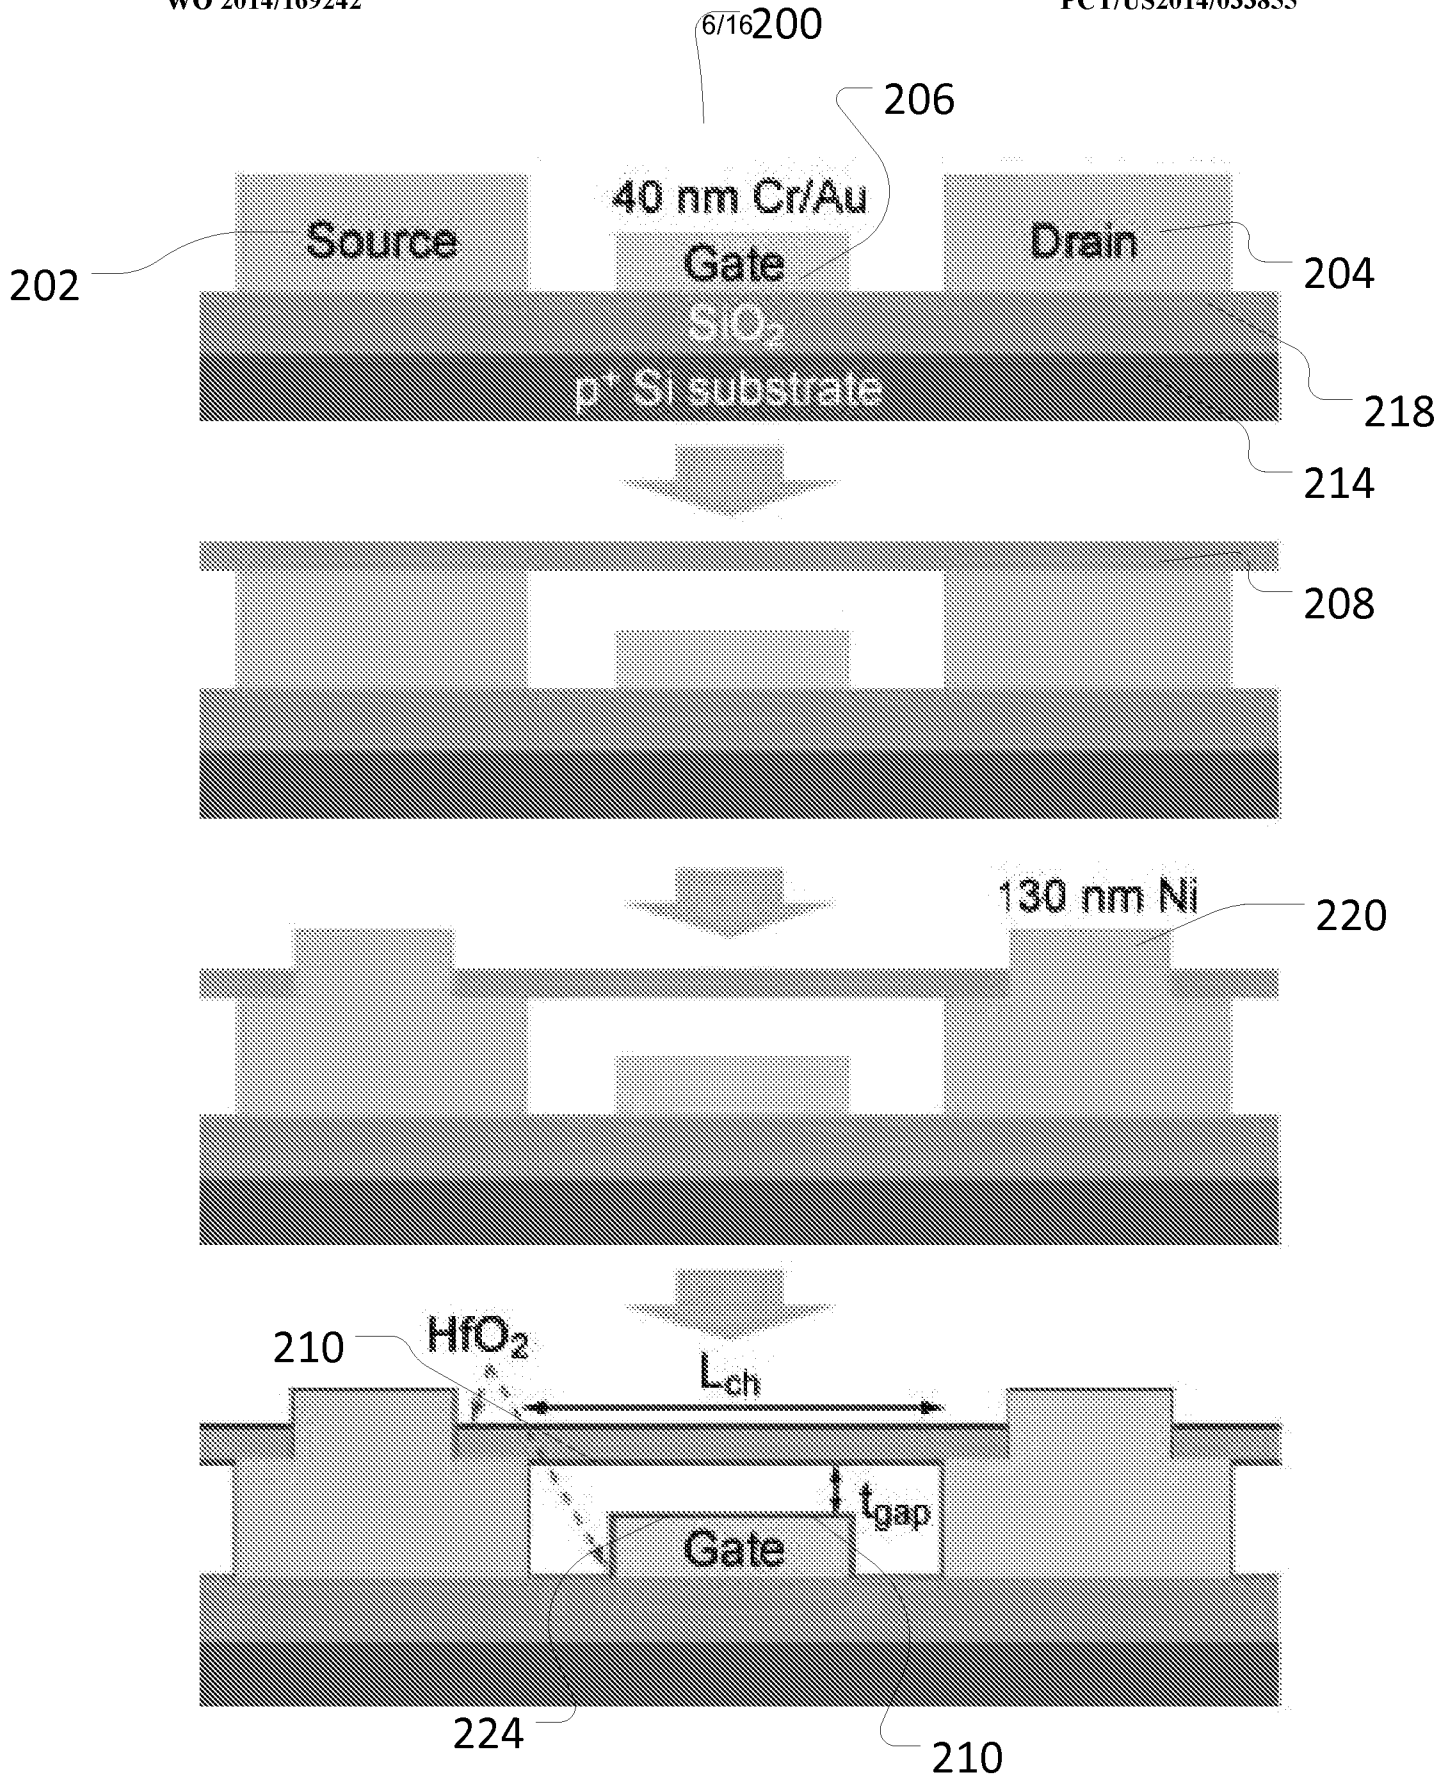


Fig. 2b

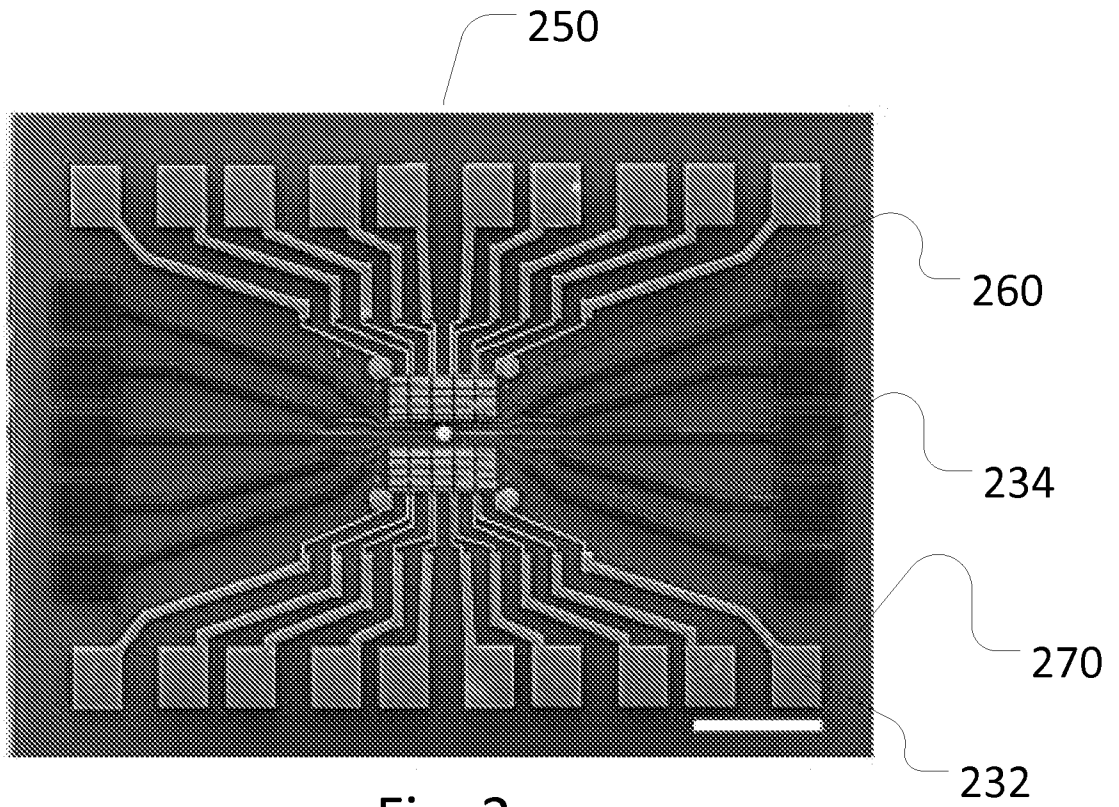


Fig. 2c

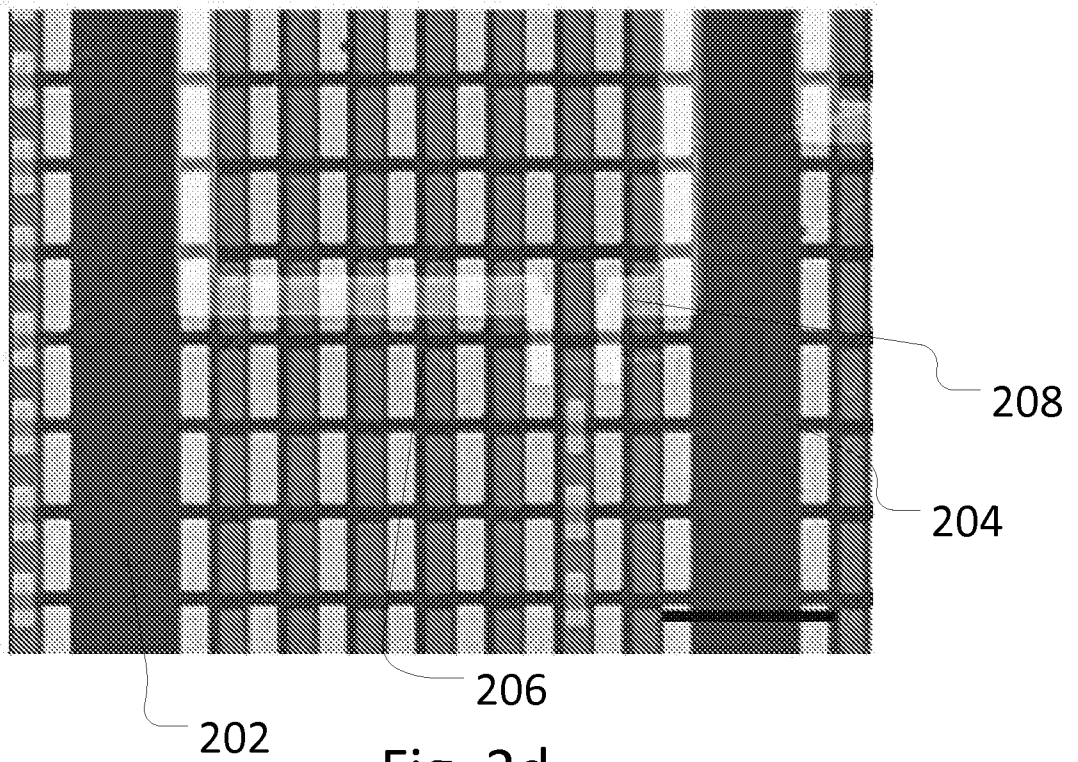
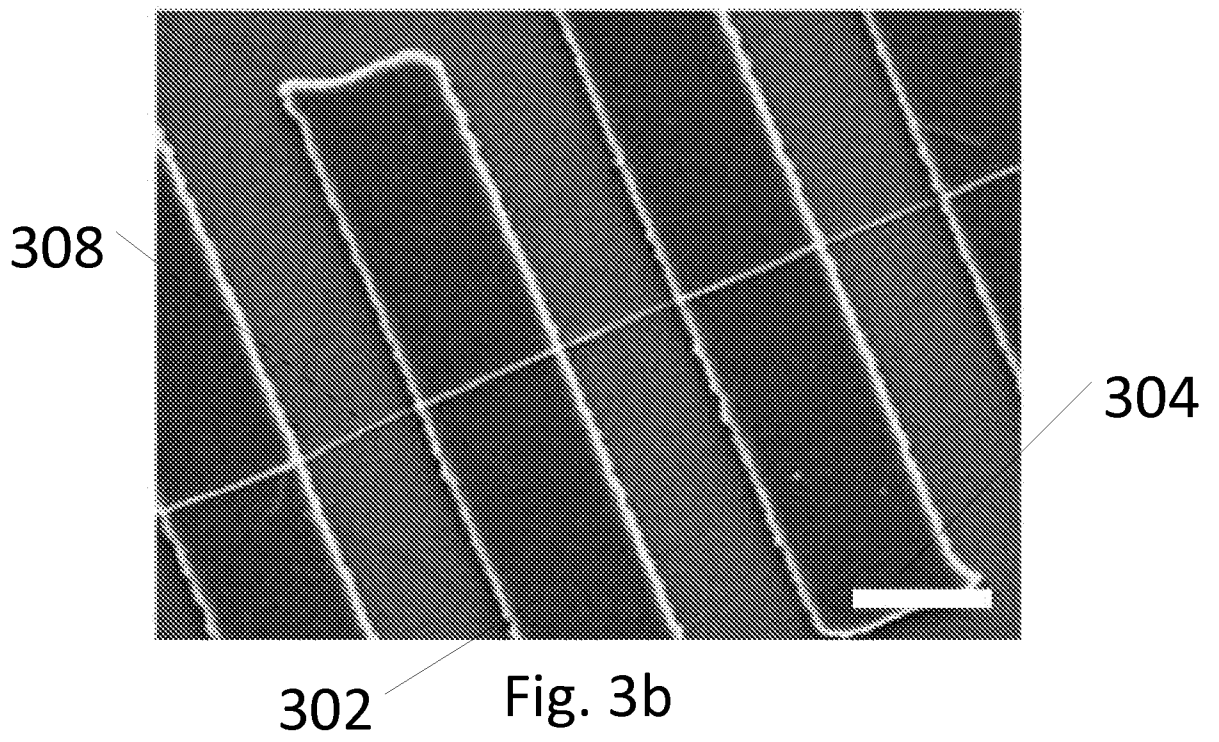
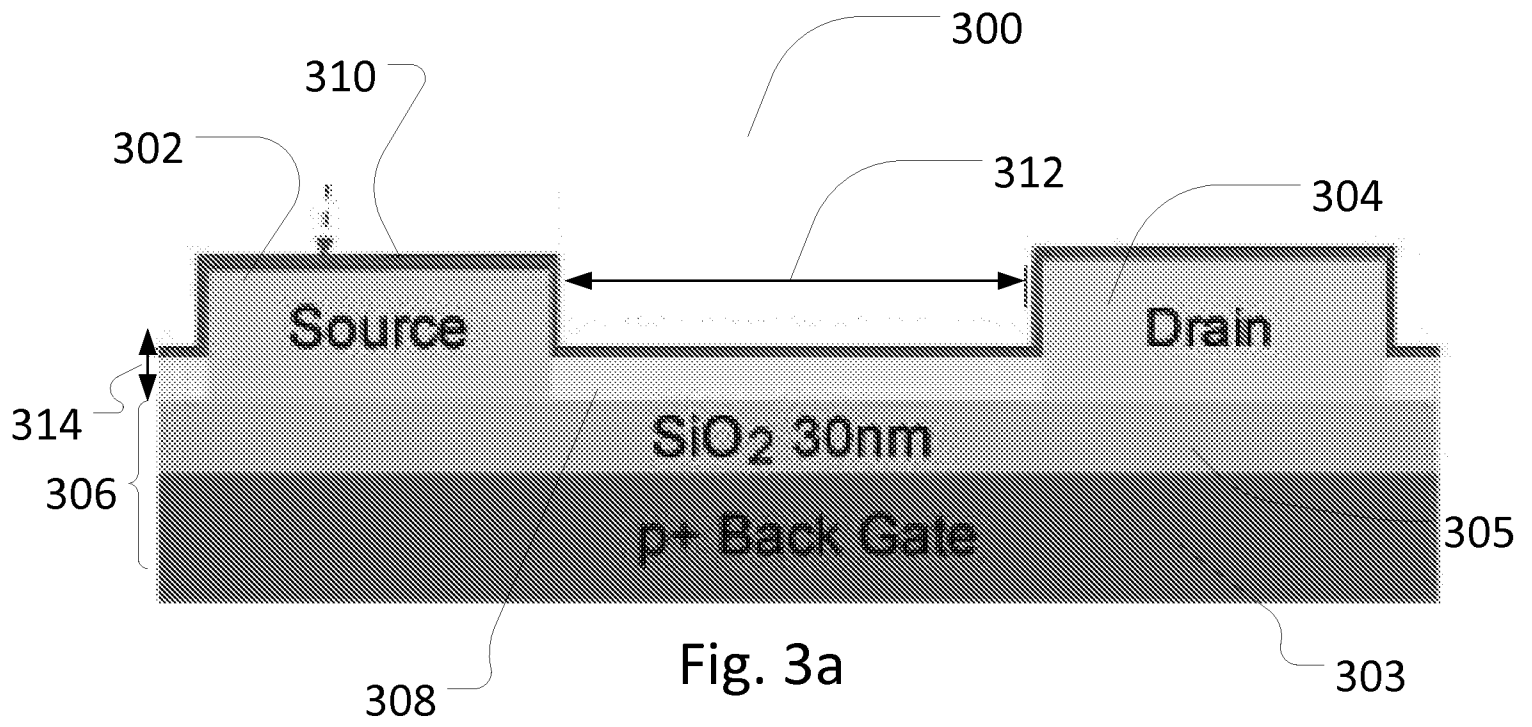


Fig. 2d




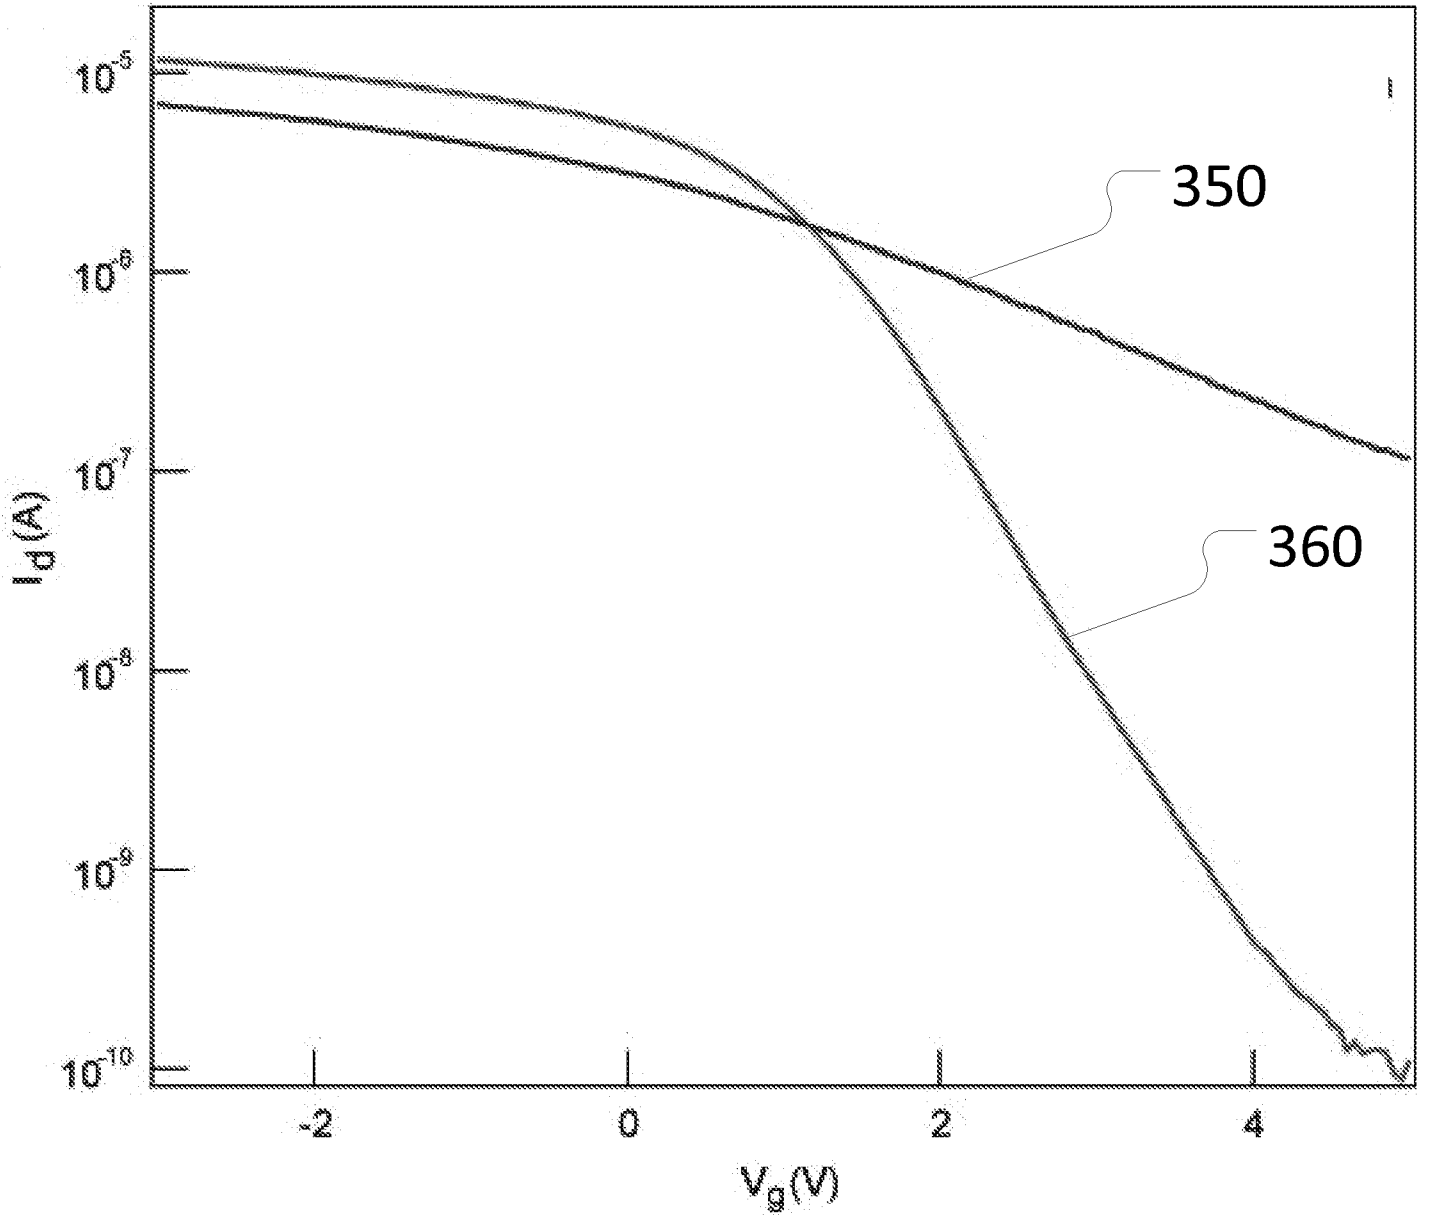


Fig. 3c

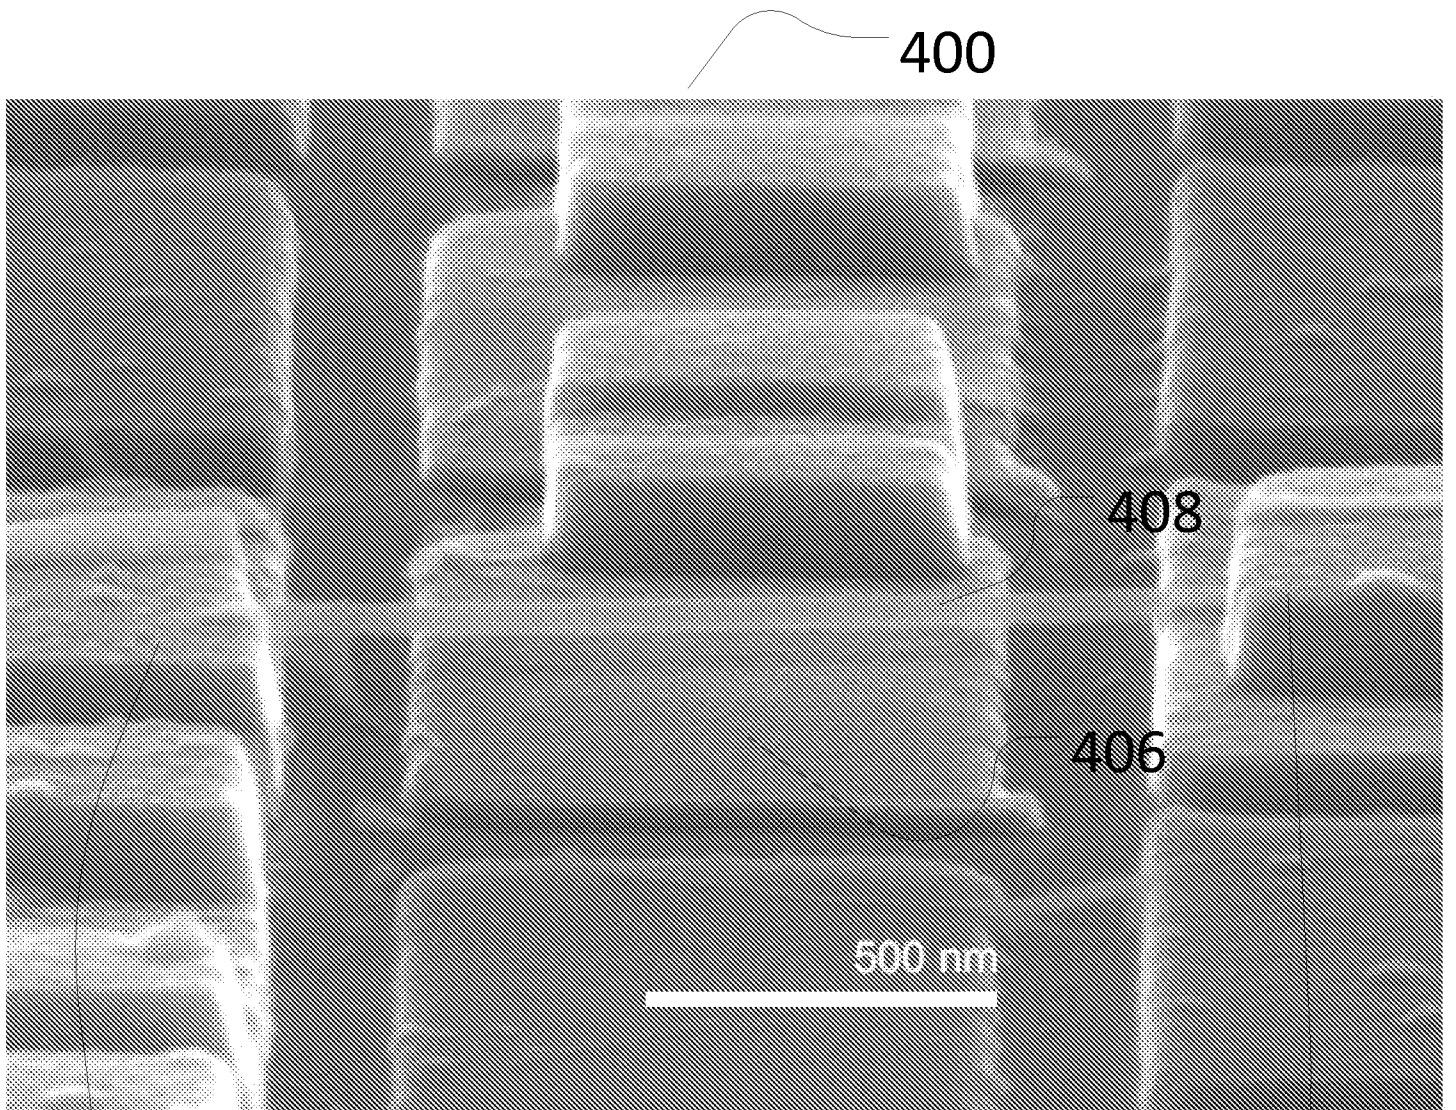

402

Fig. 4a

404

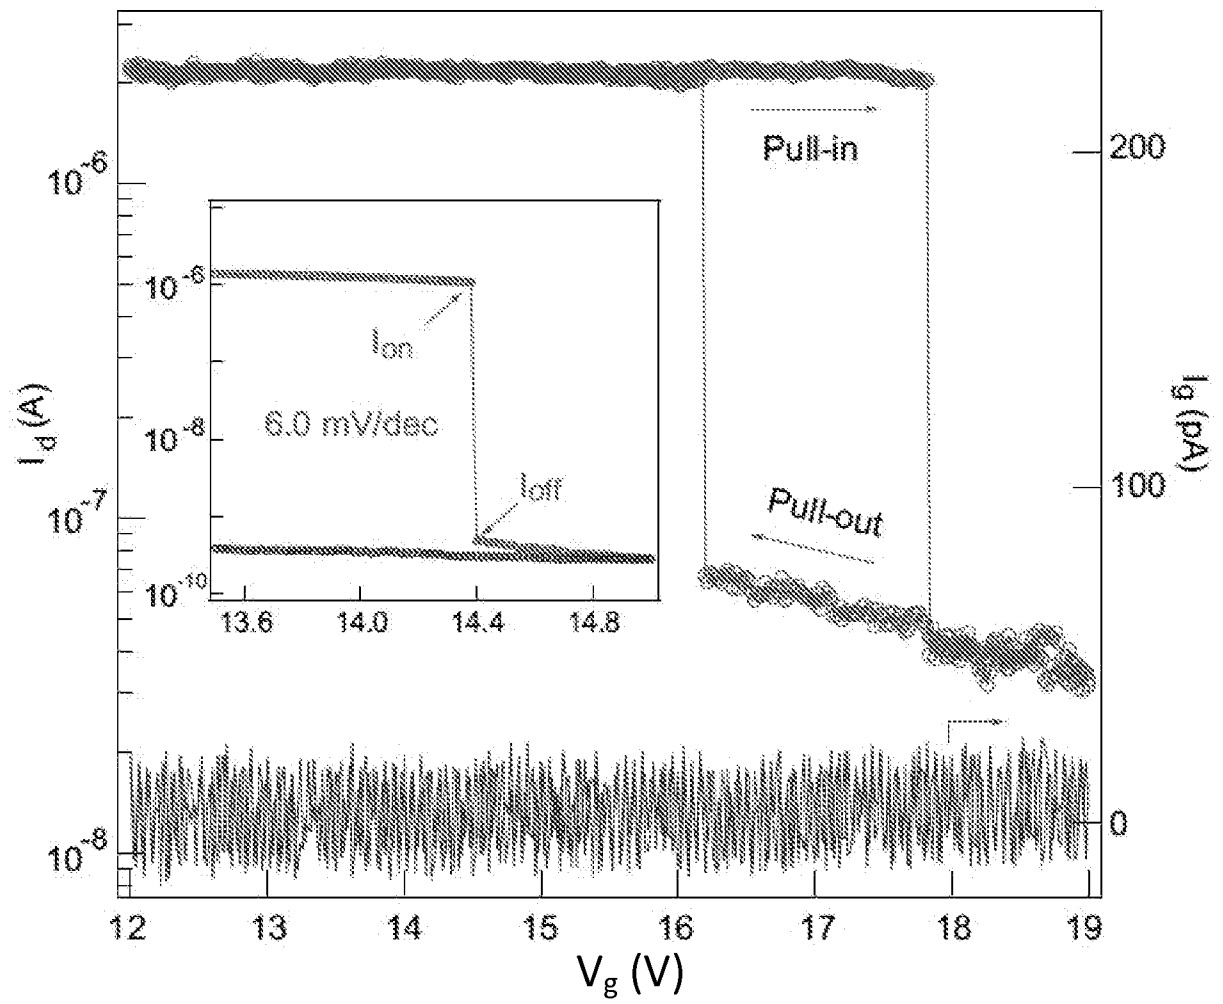


Fig. 4b

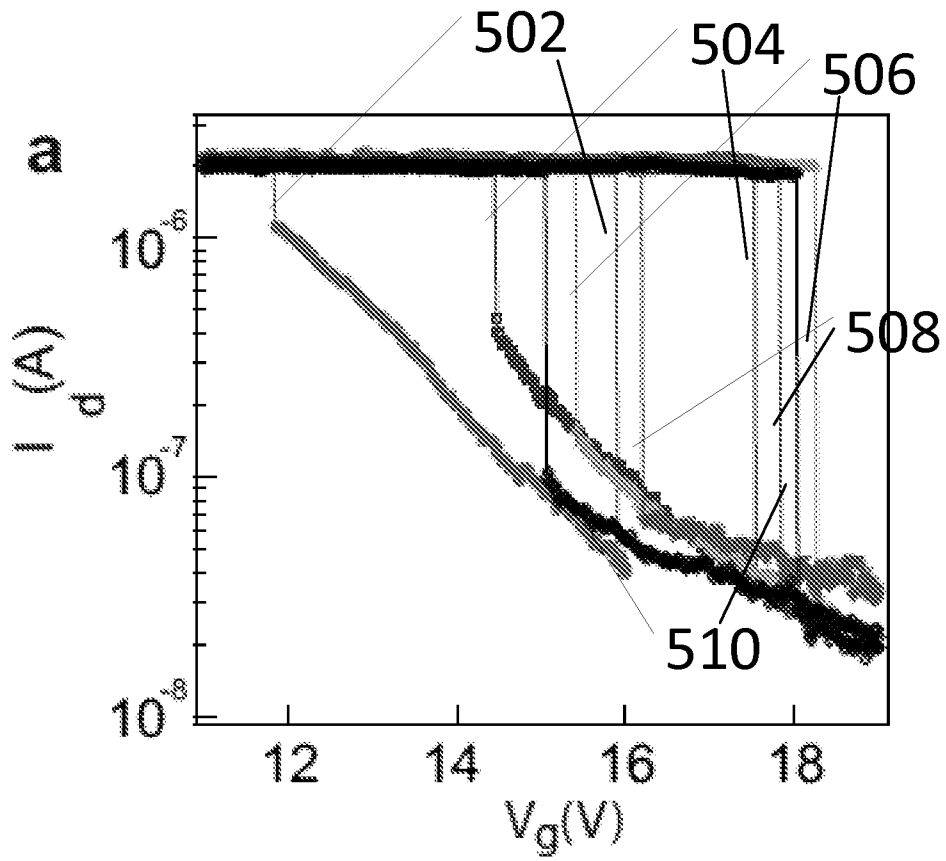


Fig. 5a


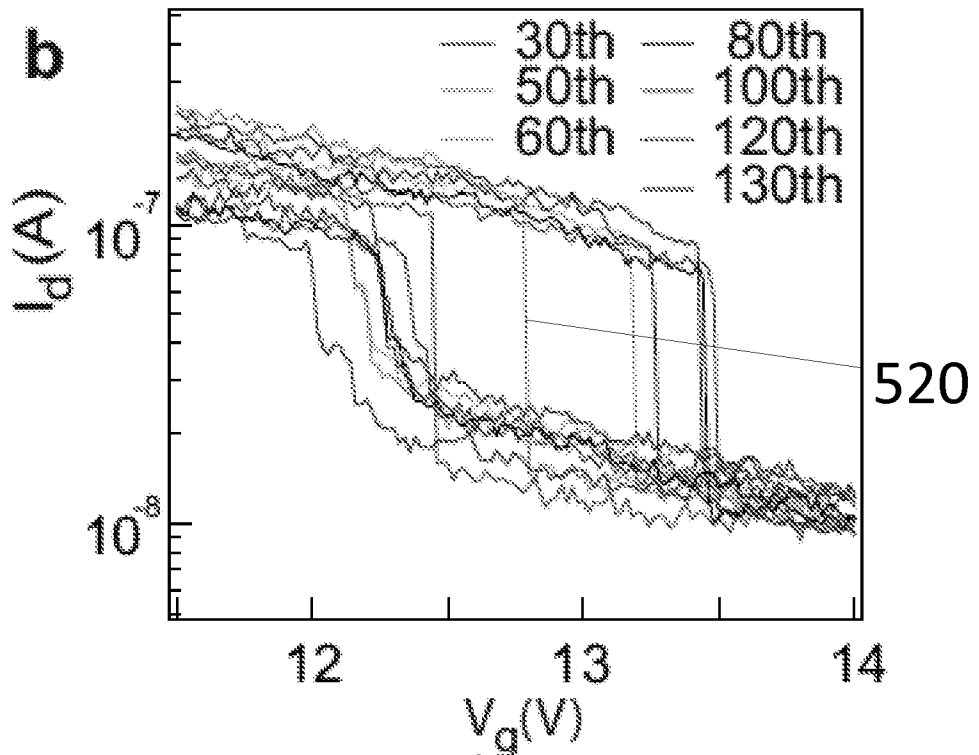


Fig. 5b

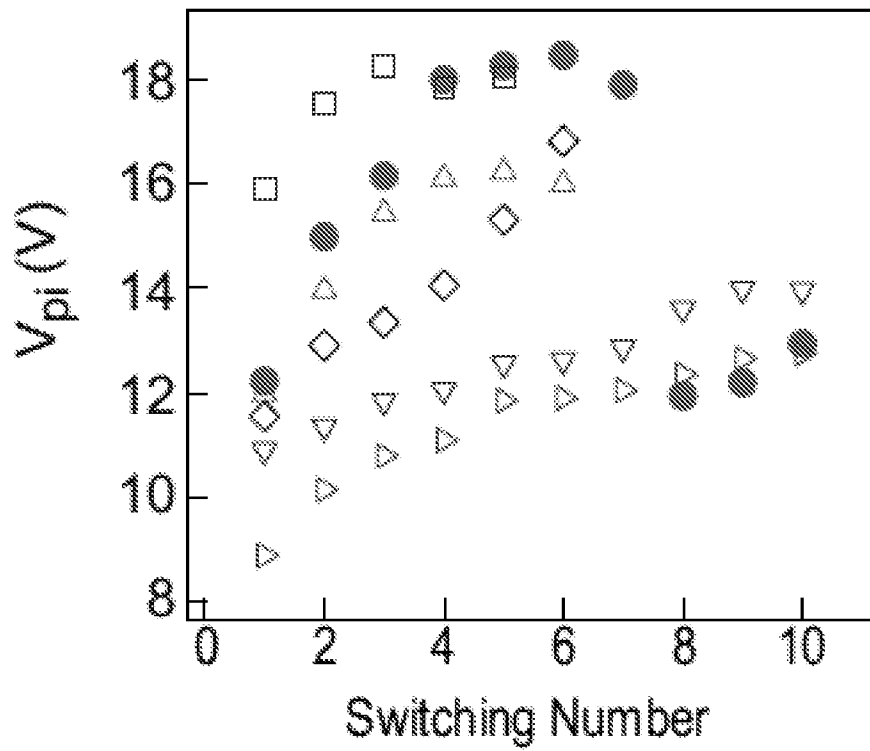

525
Fig. 5c

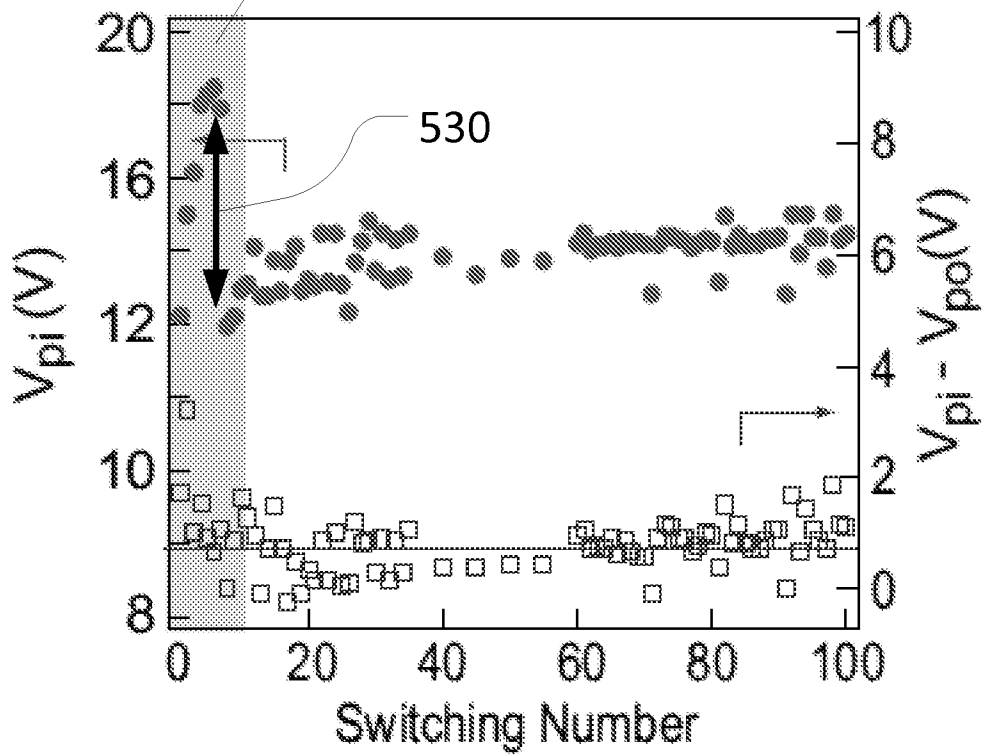


Fig. 5d

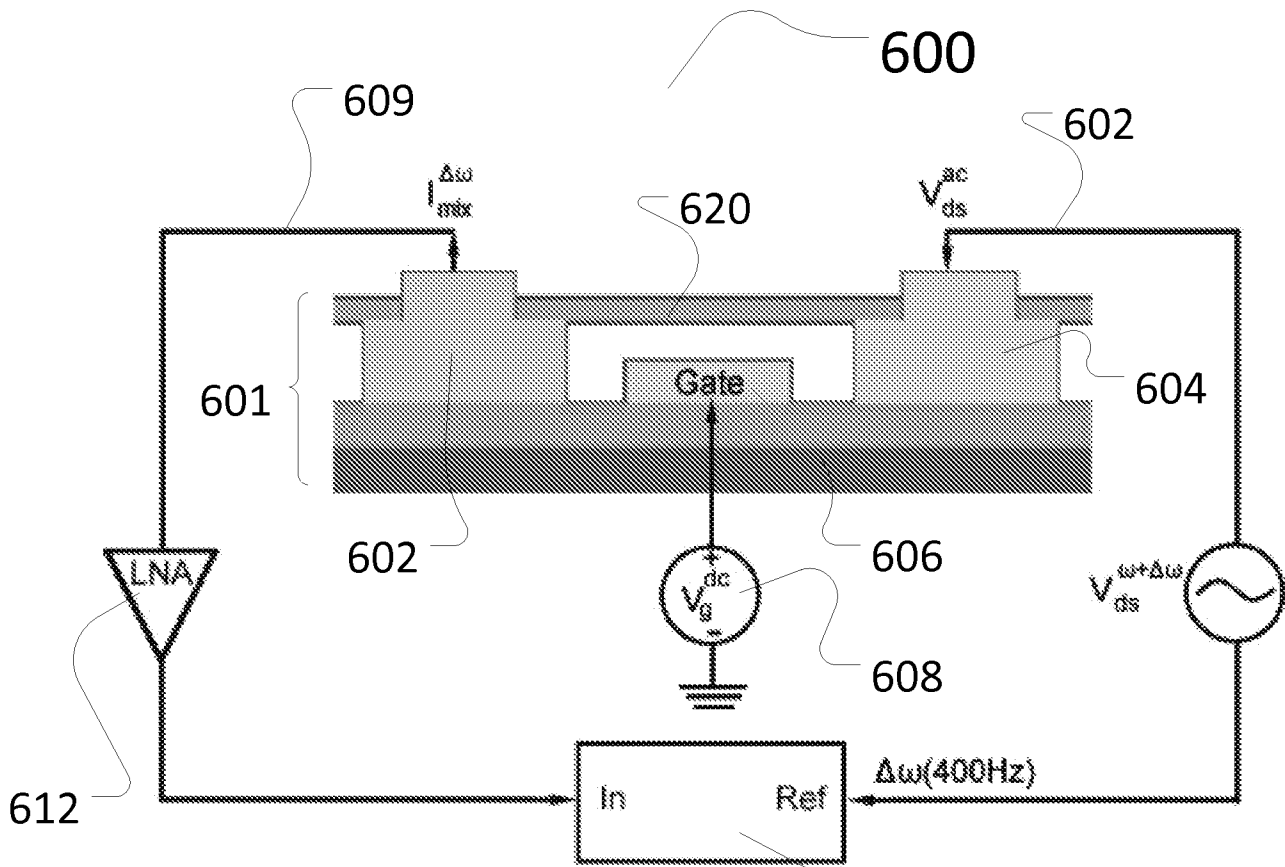


Fig. 6a

610

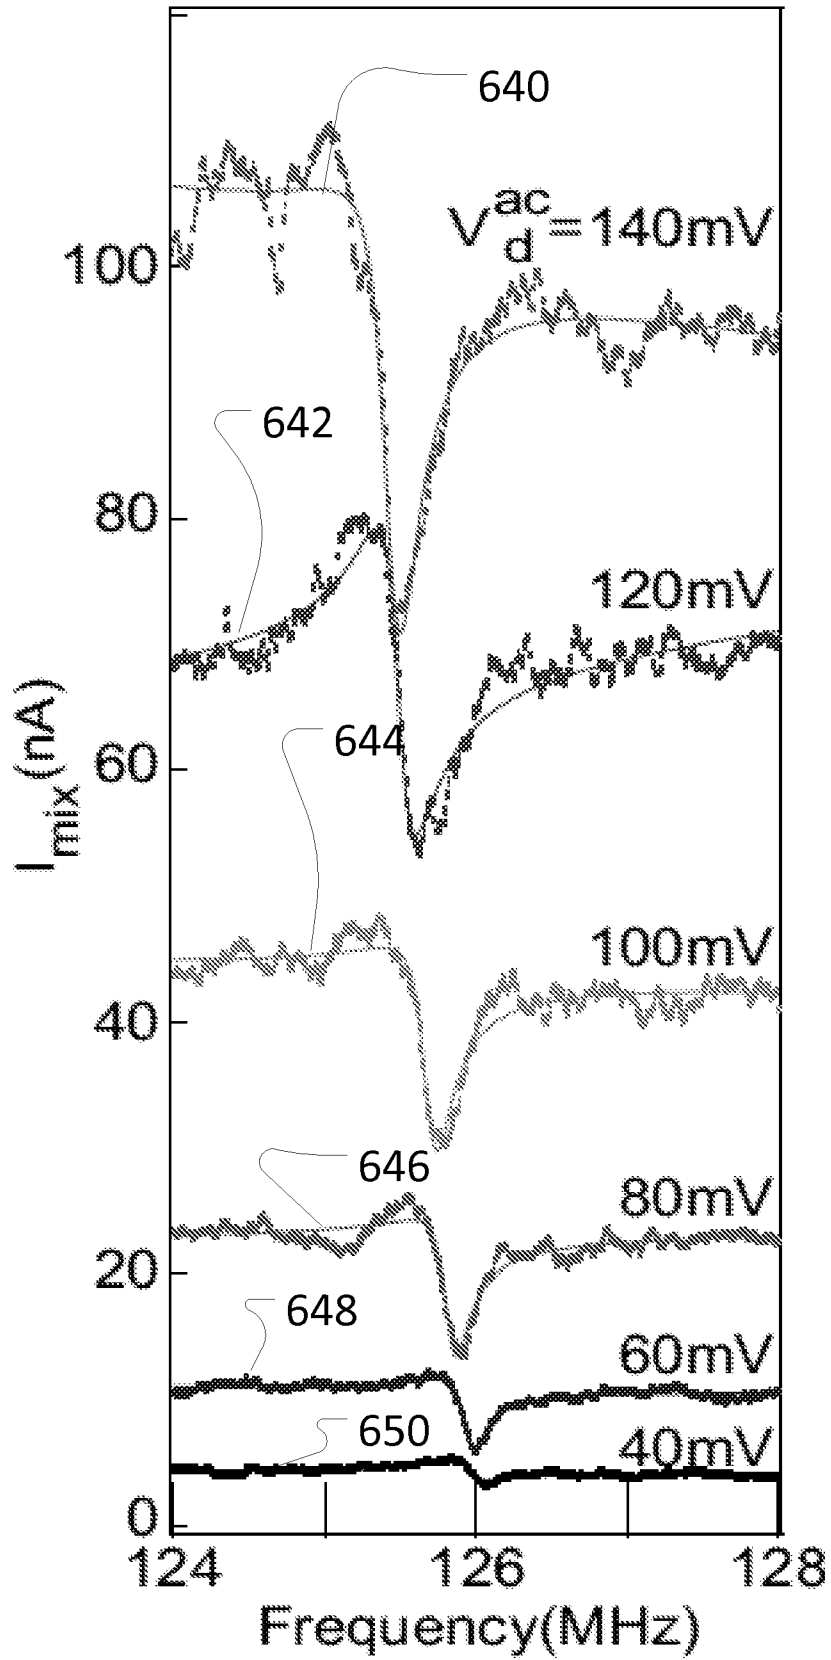


Fig. 6b

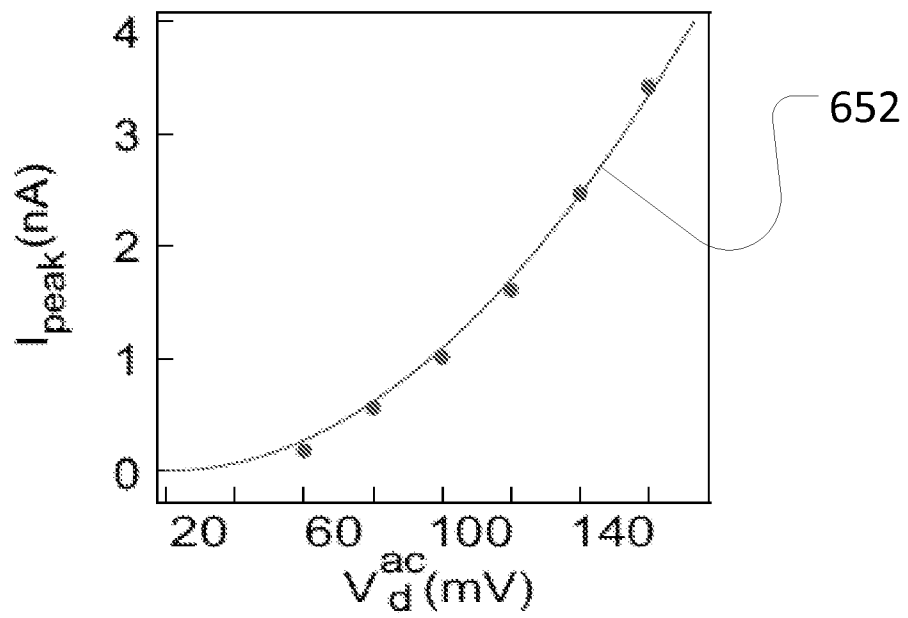


Fig. 6c

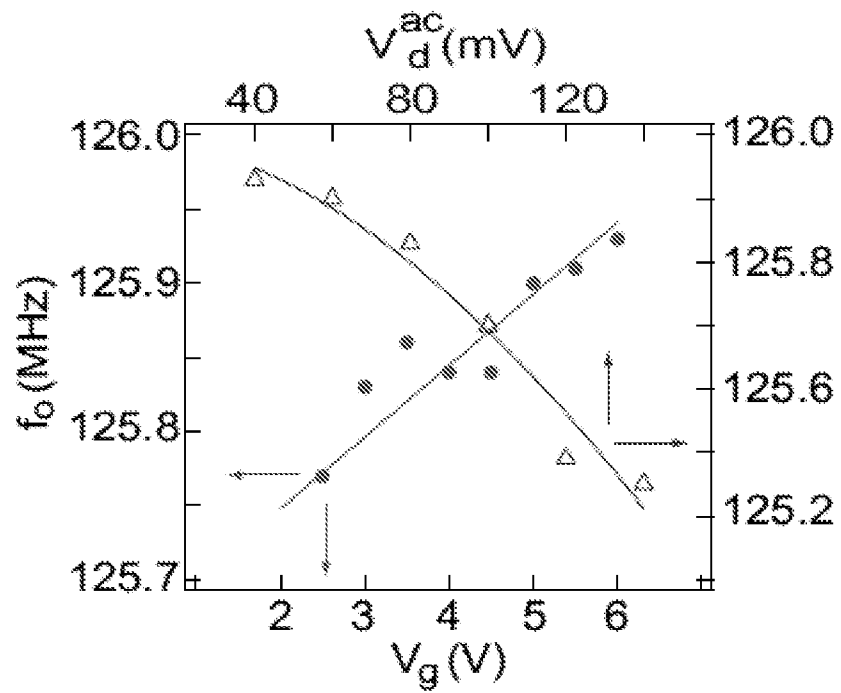


Fig. 6d

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2014/033855

A. CLASSIFICATION OF SUBJECT MATTER IPC(8) - B82B 1/00 (2014.01) USPC - 977/938 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC(8) - B81B 3/00; B82B 1/00; H01L 21/336, 29/772, 78, 786 (2014.01) USPC - 257/368, 410, 415, E29.255, E29.299; 977/762, 814, 938 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched CPC - B82Y 10/00; H01L 29/0665, 0669, 0673; Y10S 977/762, 814, 938 (2014.02) Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Orbit, Google Patents, Google Scholar		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2010/0096704 A1 (LIN et al) 22 April 2010 (22.04.2010) entire document	1-15, 17-22
Y	US 2008/0088899 A1 (KAMINS et al) 17 April 2008 (17.04.2008) entire document	1, 5-15, 17-22
Y	US 2009/0017572 A1 (ZHU) 15 January 2009 (15.01.2009) entire document	2-4, 20
Y	US 2008/0191196 A1 (LU et al) 14 August 2008 (14.08.2008) entire document	8, 19
Y	US 2006/0169788 A1 (EMPEDOCLES et al) 03 August 2006 (03.08.2006) entire document	17-22
Y	US 2011/0233512 A1 (YANG et al) 29 September 2011 (29.09.2011) entire document	18, 19
A	US 2008/0280069 A1 (PARCE et al) 13 November 2008 (13.11.2008) entire document	1-15, 17-22
A	US 2011/0059598 A1 (SARACCO et al) 10 March 2011 (10.03.2011) entire document	1-15, 17-22
A	US 2010/0214034 A1 (PENG et al) 26 August 2010 (26.08.2010) entire document	1-15, 17-22
A	US 2011/0260136 A1 (LEE et al) 27 October 2011 (27.10.2011) entire document	1-15, 17-22
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/>		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 12 August 2014		Date of mailing of the international search report 27 AUG 2014
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201		Authorized officer: Blaine R. Copenheaver PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2014/033855

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.: 16
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.