

GR-ML-10WPL Magnetic Pendant Light



Dimension




Unit:mm

Description&Feature

This is 20mm width type magnetic pendant lights, only work with 22mm type magnetic track. It is with magnetic parts with small clips, fast to do installation and freely move it on the track. It is made of aluminum body and reflectors, black/white powder coated. Only work with DC48V voltage.

Its lifetime can be up to 50000Hrs.The other extra function such as 0-10V, DALI dimmable or Zigbee smart controller available.

Light Distribution

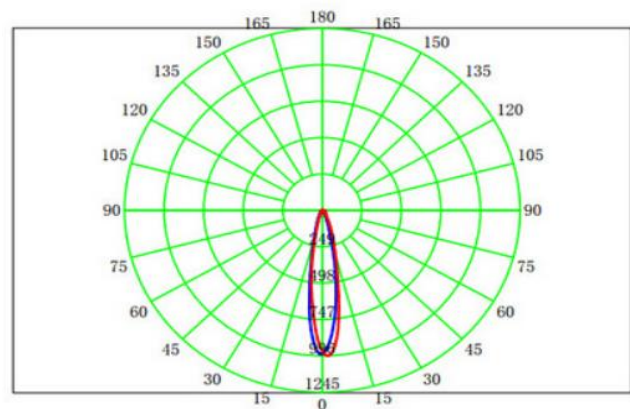

Specification

| | |
|---------------------|---|
| Order Model | GR-ML-10WPL |
| Dimension(mm) | Φ60mm*H300mm |
| Power | 10W±5% |
| Input voltage | DC48V |
| LED Chips brand | Bridgelux COB |
| Lumens | 900-1000lm |
| Color temperature | 3000K/4000K-4500K/6000K-6500K |
| Driver | Have to work with a DC48V Power supply |
| Installation | Track |
| Rope | Included |
| CRI | >90 |
| SDCM | <5 |
| Working life | >50000Hrs |
| Efficiency | >87% |
| Materials | Die-cast aluminum,Black/White finished optional |
| Beam angle | 24°/36° |
| IK Rate | IK07 |
| IP Grade | IP22 indoor use only |
| Dimmable | No. but it is ok to 0-10V /DALI or Zigbee |
| Working temperature | -25°C~+50°C |
| Storage temperature | -30°C~+55°C |
| Standard | CE LVD EMC RoHs |
| Warranty | 2/3Years |