

GRNLED
GOLUMEN® EuroLight
PRODUCT ALBUM



2024
BROCHURE
By Greenriy Technology Co., Limited



📍 6FL, Block 9, FuDing Street, Tiebian Village
528478, Henglan Town, Zhongshan, China

☎ +8613570825764 🌐 <https://grnled.com>

✉ info@grnled.com 📧 grnled01@gmail.com

Greenriy Technology Co.,Limited/Shenzhen Gelvmei Technology Co.,Ltd with brand GRNLED, GOLUMEN, and EuroLight which is especially for Nigeria Market is a professional manufacturer, factory, supplier of Led lights. Established in 2014 at Shenzhen city in China, has grown from its humble origins into an lighting industry leader and the best manufacturer and supplier. By focusing on advanced led technologies and outstanding talent, GRNLED offers professionals and users the solutions and support their need for a wide variety of applications. Our production capacity up to 10000pcs/days for common standard lighting. We pursue the following company culture to create the greatest value for customers

WHY US

- **Certification:** ISO9001:2015 listed. And all products are are CE Certified, RoHS Compliant.
- **One-stop supply:** Mostly all types led lights we can produce.
- **Better price:** Our led lamps are 10%-30% cheaper than other suppliers on the market.
- **OEM ODM Service:** Accept OEM ODM for different items.
- **Faster delivery:** Delivery time is fastest, some items is only 1-3days.
- **Quality Control:** Each lights will be 8-12hours age test before sent out.

WARRANTY


- The basic warranty periods for our led lights is 2-3years, and 5years .
- During guarantee periods, GRNLED provide following supports
- We can send **FREELY** new products or spares to you if there is any quality issues caused by us within guarantee periods.
- Out of warranty period, It is ok for us to provide extra spares, but all expense for repair and shipping cost should be paid by customers.

PARTNERS



CONTENT

Page 1	Led Panel Light	Page 10-30	LED Downlight	Page 34-37	LED High Bay Light	Page 47-49	LED Wall Light	Page 52	Outdoor Spotlight
Page 2-4	Magnetic track light System	Page 31	Led Linear Light	Page 38-40	LED Floodlight	Page 50	LED Bollard Light	Page 53	Underwater light
Page 5-9	Normal LED Track Light	Page 32-33	LED Batten Lighting	Page 42-46	LED Street Light	Page 51	Inground LED LIGHT		

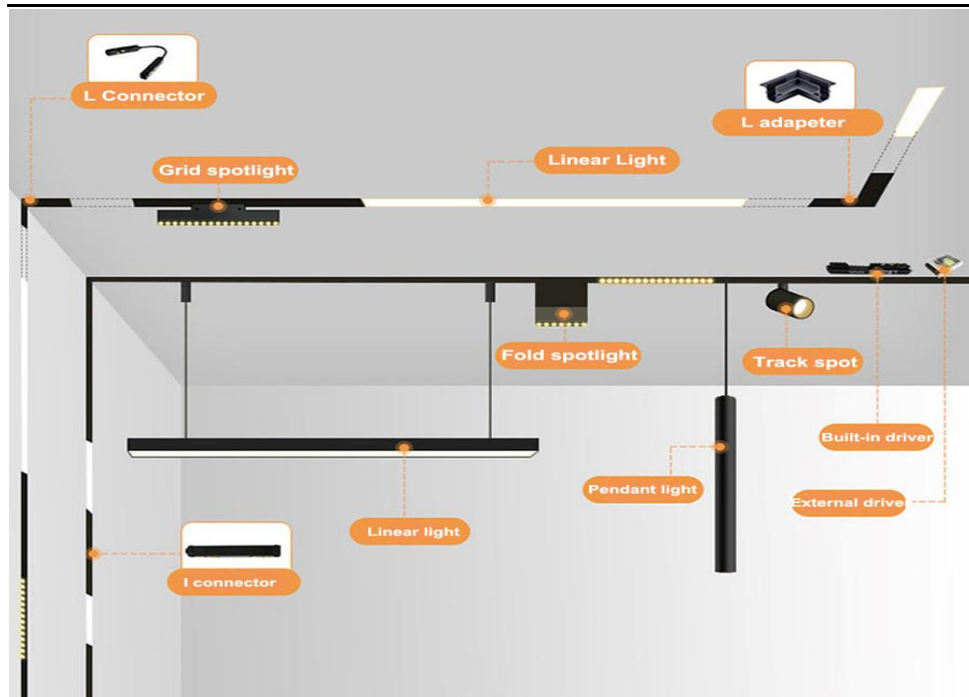

- DC48V Input
- 20MM/35MM Width Track optional. White/Black optional
- DALI Dimmable/ Remote control, Zigbee 3CCT+Dim solution Working with Google Home, Amazon Alexa smart speaker and TUYA APP.



Magnetic Grille Spotlights



Order Model	Power Watt	Dimension mm
GR-ML-6WGS	6W	L112*W22/35
GR-ML-12WGS	12W	L220*W22/35
GR-ML-18WGS	18W	L328*W22/35
GR-ML-24WGS	24W	L435*W22/35
GR-ML-30WGS	30W	L543*W22/35

Magnetic linear profile light



Order Model	Power Watt	Dimension mm
GR-ML-10WML	10W	L300*W22/35
GR-ML-20WML	20W	L600*W22/35
GR-ML-30WML	30W	L900*W22/35

Magnetic Fold Spotlights



Order Model	Power Watt	Dimension mm
GR-ML-6WFS	6W	L118*W22/35
GR-ML-12WFS	12W	L230*W22/35
GR-ML-18WFS	18W	L338*W20

Magnetic track spotlights




Order Model	Power Watt	Dimension mm
GR-ML-10WTL	10W	D50*100
GR-ML-15WTL	15W	D55*130
GR-ML-20WTL	20W	D60*135







MAGNETIC TRACK AND ACCESORIES

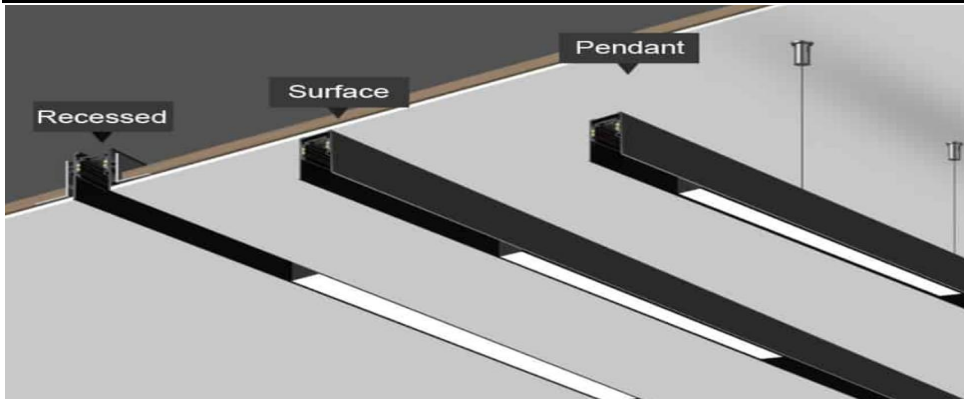


Recessed Track

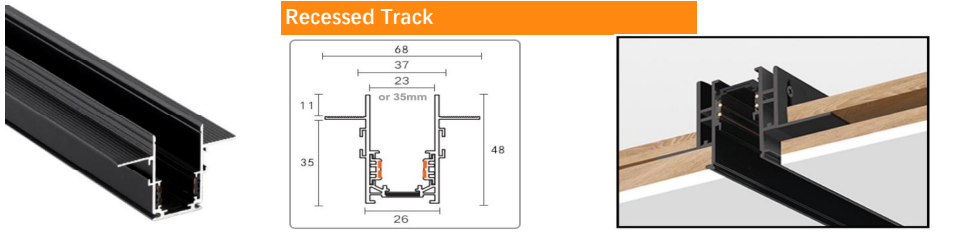

Surface/Suspension Track

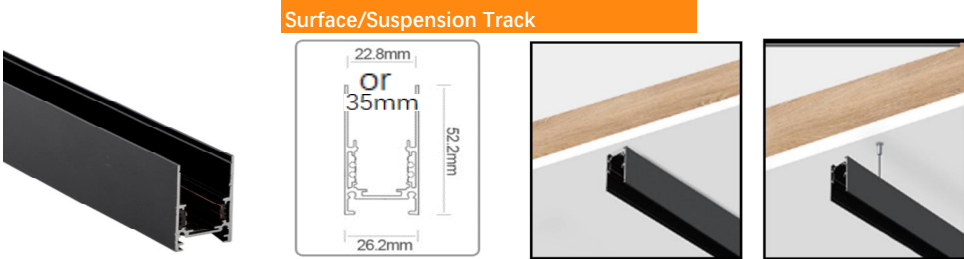


Trimless Track

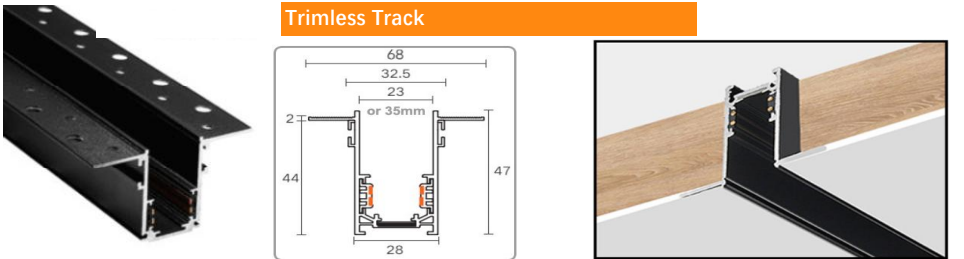

4 in 1 Magnetic track

One track can be compatible with surface, recessed, trimless, pendant installation

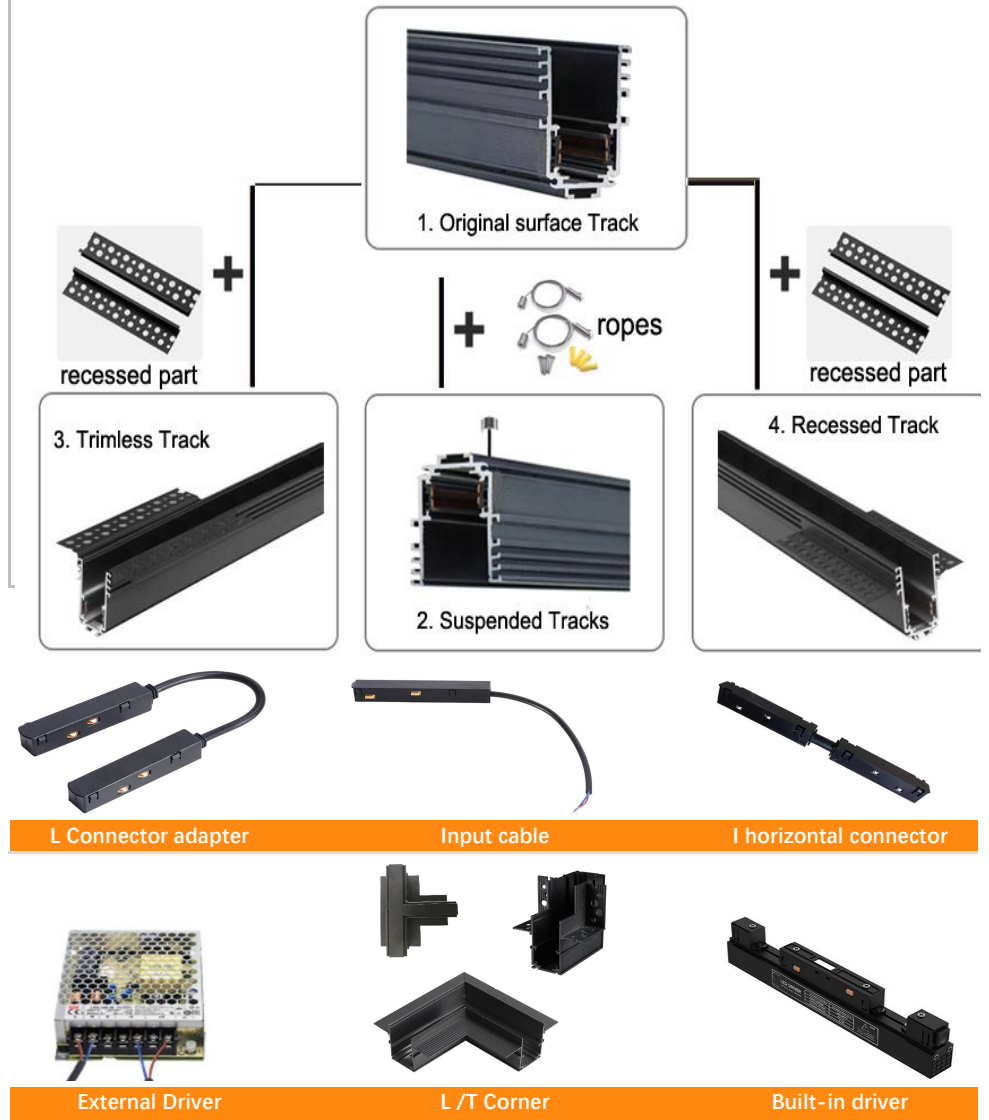




Order Model	Power Watt	CRI	Voltage
GR-ML-10WTL-03	10W	>90	48VDC
GR-ML-15WTL-03	15W	>90	48VDC
GR-ML-20WTL-03	20W	>90	48VDC
GR-ML-30WTL-03	30W	>90	48VDC



Surface Magnetic linear Light

Order Model	Power Watt	Dimension (mm)	Voltage
GR-ML-12WML-03	12W	L370*34	48VDC
GR-ML-24WML-03	24W	L675*34	48VDC
GR-ML-30WML-03	30W	L975*34	48VDC



Surface magnetic grille light

Order Model	Power Watt	Dimension (mm)	Voltage
GR-ML-10WGS-033	10W	L304*34	48VDC
GR-ML-20WGS-03	20W	L605*34	48VDC
GR-ML-30WGS-03	30W	L856*34	48VDC



Surface magnetic fold grill light

Order Model	Power Watt	Dimension (mm)	Voltage
GR-ML-6WFS-033	6W	L128*34	48VDC
GR-ML-12WFS-03	12W	L237*34	48VDC
GR-ML-18WFS-03	18W	L344*34	48VDC
GR-ML-24WFS-03	24W	L452*34	48VDC


ACCESSORIES



- Low glare, commercial application
- Osram/Bridgelux COB/SMD Chips, CRI92, 2700K-6500K
- 110/220-240VAC LiFud/Eagleries/Philips/Osram/TRIDONIC driver,3/5 Years warranty.
- Matt black/White housing optional.



Options

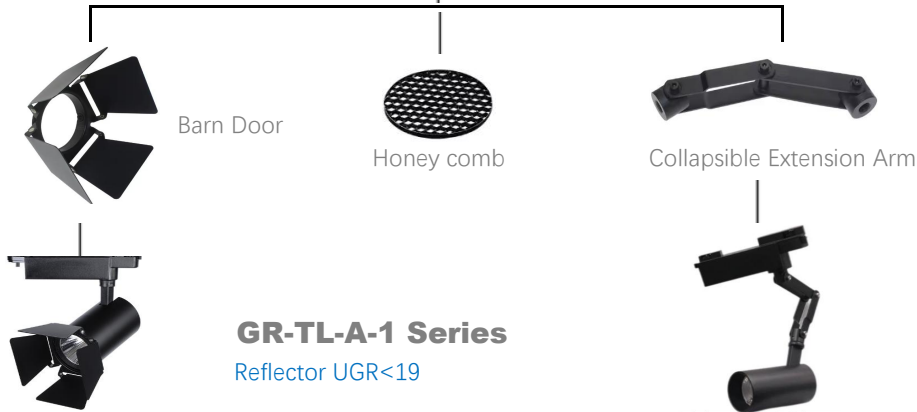

GR-TL-A-1 Series
Reflector UGR<19

Order Model	Power Watt	Dimension mm	Circuit	Lumens	Beam angle
GR-TL-10WA-1	10W	Φ50x100mm	1 circuit	1100lm	15/24/36°
GR-TL-15WA-1	15W	Φ60*135mm	1 circuit	1500lm	15/24/36°
GR-TL-20WA-1	20W	Φ60*135mm	1 circuit	2000lm	15/24/36°
GR-TL-25WA-1	25W	Φ80x145mm	1 circuit	2500lm	15/24/36°
GR-TL-30WA-1	30W	Φ80x150mm	1 circuit	3000lm	15/24/36°
GR-TL-35WA-1	35W	Φ90x160mm	1 circuit	2500lm	15/24/36°

GR-TL-A Series
Reflector UGR<19



Order Model	Power Watt	Dimension mm	Circuit	Lumens	Beam angle
GR-TL-10WA	10W	Φ50x100mm	1 circuit	1100lm	15/24/36/60°
GR-TL-15WA	15W	Φ60*135mm	1 circuit	1500lm	15/24/36/60°
GR-TL-20WA	20W	Φ70*145mm	1 circuit	2000lm	15/24/36/60°
GR-TL-30WA	30W	Φ80x150mm	1 circuit	3000lm	15/24/36/60°
GR-TL-35WA	35W	Φ90x160mm	1 circuit	3500lm	15/24/36/60°
GR-TL-40WA	40W	Φ90x160mm	1 circuit	4000lm	15/24/36/60°
GR-TL-45WA	45W	Φ90x160mm	1 circuit	4500lm	15/24/36/60°

GR-TL-B Series

1/ 3 Phases
0-10V/ DALI Dimmable options



Order Model	Power Watt	Dimension mm	Phase	Lumens	Beam angle
GR-TL-20WB	20W	Φ100*150mm	1 / 3 Phases	2000lm	15/24/36°
GR-TL-25WB	25W	Φ100*150mm	1 / 3 Phases	2500lm	15/24/36°
GR-TL-30WB	30W	Φ100*150mm	1 / 3 Phases	3000lm	15/24/36°
GR-TL-35WB	35W	Φ100*150mm	1 / 3 Phases	3500lm	15/24/36°



GR-TL-F-1 Series

1/ 3 Phases

Order Model	Power Watt	Dimension mm	Phase	Lumens	Beam angle
GR-TL-10WF-1	10W	Φ91*110mm	1 / 3 Phases	2500lm	15/24/36°
GR-TL-20WF-1	20W	Φ91*110mm	1 / 3 Phases	3000lm	15/24/36°
GR-TL-30WF-1	30W	Φ91*110mm	1 / 3 Phases	3500lm	15/24/36°

- Integrated driver in track
- Osram/Bridgelux COB/SMD Chips, CRI92, 2700K-6500K
- 110/220-240VAC Eagleries/ Osram/ Philips/ LiFud/ ALLOOKING driver,3/5 Years warranty.
- Matt black/White housing optional.
- 1phase / 3 phases / DALI /0-10V dimmable options



GR-TL-F-2 Series

1/ 3 Phases

DIP Switch CCT option

3 Color temperature in 1 light



Order Model	Power Watt	Dimension mm	Phase	Lumens	Beam angle
GR-TL-25WF-2	25W	Φ91*110mm	1 / 3 Phases	2500lm	15/24/36°
GR-TL-30WF-2	30W	Φ91*110mm	1 / 3 Phases	3000lm	15/24/36°
GR-TL-35WF-2	35W	Φ91*110mm	1 / 3 Phases	3500lm	15/24/36°
GR-TL-40WF-2	40W	Φ105*130mm	1 / 3 Phases	4000lm	15/24/36°

GR-TL-F Series

phase/ 3 Phases(3 Circuit):
15/24/36/60°



Order Model	Power Watt	Dimension mm	Phase	Lumens	Beam angle
GR-TL-15WF	15W	Φ90*90mm	1 / 3 Phases	1500lm	15/24/36/60°
GR-TL-20WF	20W	Φ90*90mm	1 / 3 Phases	2000lm	15/24/36/60°
GR-TL-25WF	25W	Φ90*90mm	1 / 3 Phases	2500lm	15/24/36/60°
GR-TL-30WF	30W	Φ100*100mm	1 / 3 Phases	3000lm	15/24/36/60°
GR-TL-35WF	35W	Φ100*100mm	1 / 3 Phases	3500lm	15/24/36/60°
GR-TL-40WF	40W	Φ100*106mm	1 / 3 Phases	4000lm	15/24/36/60°

LED TRACK LIGHT



GR-TL-D Series

Beam angle adjust from 15-60°



Order Model	Power Watt	Dimension mm	Track head	Lumens Lm	CRI
GR-TL-10WD	10W	Φ55*135mm	1/ 2 circuits	1000lm	>90
GR-TL-15WD	15W	Φ65*165mm	1/ 2 circuits	1500lm	>90
GR-TL-20WD	20W	Φ75*170mm	1/ 2 circuits	2000lm	>90
GR-TL-25WD	25W	Φ75*170mm	1/ 2 circuits	2500lm	>90
GR-TL-30WD	30W	Φ80*200mm	1/ 2 circuits	3000lm	>90



GR-TL-T Series

Shapeable & Zoomable

Surface/Track install

Order Model	Power Watt	Dimension mm	Installation	Lumens Lm	CRI
GR-TL-7WT	7W	Φ55*190mm	Surface/Track	700lm	>90
GR-TL-10WT	10W	Φ55*190mm	Surface/Track	1000lm	>90
GR-TL-15WT	15W	Φ55*190mm	Surface/Track	1500lm	>90



Order Model	Power Watt	Remark
GR-TL-30WH	30W-35W	1/3 phases




Order Model	Power Watt	Dimension mm
GR-TL-30WR	30W	10W

GR-TL-C Series
Round/Square



Order Model	Power Watt	Dimension mm	Installation	CRI	Beam angle
GR-TL-10WC	10W	Φ80*50mm	Surface/Track	>90	15/24/36/60°
GR-TL-20WC	20W	Φ100*55mm	Surface/Track	>90	15/24/36/60°
GR-TL-30WC	30W	Φ120*65mm	Surface/Track	>90	15/24/36/60°

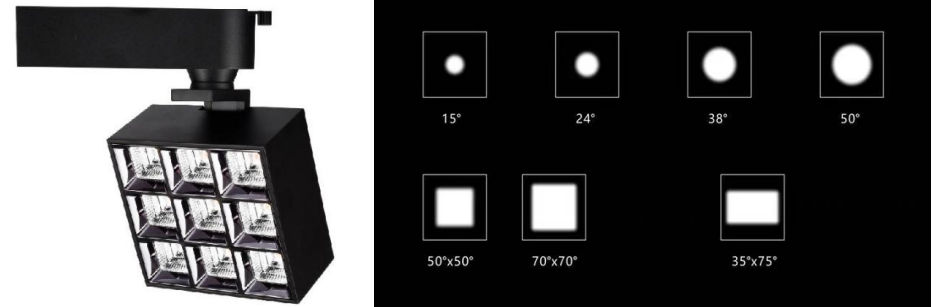

Order Model	Power Watt	Dimension mm	Installation	CRI	Beam angle
GR-TL-10WP	10W	65*65*45	2/3/4 Wires	>90	15/24/36/60°
GR-TL-15WP	15W	82*82*63	2/3/4 Wires	>90	15/24/36/60°
GR-TL-20WP	20W	95*95*63	2/3/4 Wires	>90	15/24/36/60°
GR-TL-30WP	30W	120*120*63	2/3/4 Wires	>90	15/24/36/60°

GR-TL-L Series
Linear grille spotlight/ profile



Order Model	Power Watt	Dimension mm	Installation	CRI	Beam angle
GR-TL-10WL	10W	214*33*57	2/3/4 Wires	>90	24/36/120°
GR-TL-18WL	18W	346*33*57	2/3/4 Wires	>90	24/36/120°
GR-TL-28WL	28-30W	478*33*57	2/3/4 Wires	>90	24/36/120°
GR-TL-35WL	35W	611*33*57	2/3/4 Wires	>90	24/36/120°




Order Model	Power Watt	Remark
GR-TL-30WQ	30W	1/3 phases


Order Model	Power Watt	Remark
GR-TL-30WY	30W	1/3 phases




2 wires Track



3 wires Track



4 wires Track



6 wires Track

Order Model	Material	Conductor	Length	Color	Beam angle
2Wire Track	PVC	Copper	1m/2m/3m	White/Black	24/36/120°
2 Wire Track	Aluminum	Copper	1m/2m/3m	White/Black	24/36/120°
3Wires Track	Aluminum	Copper	1m/2m/3m	White/Black	24/36/120°
4Wires Track	Aluminum	Copper	1m/2m/3m	White/Black	24/36/120°



GR-TL-G Series

Adjustable beam angle

From 15° to 60°

Order Model	Power Watt	CRI	Remark
GR-TL-25WG	25W	>92	1/3phases
GR-TL-35WG	35W	>92	1/3phases

GR-TL-U Series

Recessed/Surface options



Order Model	Power Watt	Input Voltage	Installation	CRI	Beam angle
GR-TL-10WU	10W	100-240VAC	Surface/recessed	>90	15/24/36°
GR-TL-20WU	20W	100-240VAC	Surface/recessed	>90	15/24/36°
GR-TL-30WU	30W	100-240VAC	Surface/recessed	>90	15/24/36°



Order Model	Material	Conductor
I connector	PVC	Copper
L connector	PVC	Copper
T Connector	PVC	Copper
Cross connector	PVC	Copper