

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
23 August 2001 (23.08.2001)

PCT

(10) International Publication Number  
**WO 01/61869 A1**

(51) International Patent Classification<sup>7</sup>: H03M 13/27

(21) International Application Number: PCT/FI01/00024

(22) International Filing Date: 12 January 2001 (12.01.2001)

(25) Filing Language: Finnish

(26) Publication Language: English

(30) Priority Data:  
20000312 14 February 2000 (14.02.2000) FI

(71) Applicant (for all designated States except US): **NOKIA NETWORKS OY** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SIPOLA, Jussi** [FI/FI]; Kansankatu 51 A 20, FIN-90100 Oulu (FI).

(74) Agent: **KOLSTER OY AB**; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: INTERLEAVING METHOD AND SYSTEM

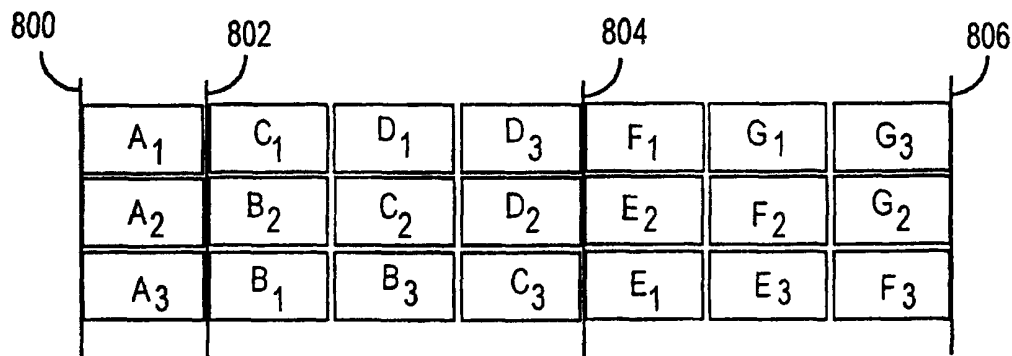

(57) Abstract: The invention relates to a method and an apparatus implementing the method for improving the performance of a radio system using interleaving. In the method of the invention, the interleaving depth and the type of interleaving method are selected specifically for each symbol block, the interleaving depth and the interleaving method type of the symbol blocks are signalled to a receiver in order to remove the interleaving, and the interleaving of the symbol blocks is removed using de-interleaving in the receiver. The method of the invention allows to combine rectangular interleaving and diagonal interleaving more efficiently without some blocks remaining partly empty and simultaneously to restrict the delay created in interleaving. The interleaving depth can also be selected block-specifically. An improvement provided by interleaving is thus achieved to the error tolerance of the system and the length of the delay caused by interleaving is adjusted at the same time. The method of the invention also allows to smoothly multiplex several transmitters together when using diagonal interleaving.

WO 01/61869 A1

## INTERLEAVING METHOD AND SYSTEM

### FIELD OF THE INVENTION

[0001] The invention relates to a method for improving the performance of a radio system using interleaving.

### 5 BACKGROUND OF THE INVENTION

[0002] When transferring digital information the reliability of the transfer in a noisy environment is generally improved by increasing redundancy. This is referred to as channel coding. Redundancy is typically increased by means of parity bits. Parity bits are calculated from information bits using particular channel coding algorithms. Channel coding is used to improve error detection as well as error correction. If the parity bits are calculated only using the information bits in the same symbol block, then a block code is concerned. If in turn the information bits in previous symbol blocks are taken into account when calculating the parity bits, then a convolution code is concerned. Decoding is carried out in two stages: at first an erroneous symbol block is detected and the position of the error is determined in the symbol block. The error is corrected by reversing an erroneous bit.

[0003] Most of the prior art codes intended to improve the reliability of information transmission are efficient when the radio channel is statistically independent. An example of such a channel is the Additive White Gaussian Noise AWGN channel. However, in actual radio communications environments multi-path propagation and fading cause burst errors when the signal level fades, even beneath the noise level. A code correcting random errors can be employed on a channel where burst errors occur. However, the errors must first be randomised using an interleaver and a de-interleaver. In interleaving the bits are rearranged in accordance with a method before sending them to the channel, and in the receiver interleaving is de-interleaved after demodulation in accordance with the method employed.

[0004] Interleaving always causes some delay owing to memory buffering, since a buffer memory has to be used for rearranging the bits in the interleaver and de-interleaver. The interleaving depth refers to the time that is used for sending the bits in one block. In other words, the deeper the interleaving depth is the better the performance of the system becomes, since the bits are more independent, or more random.

[0005] The performance of a digital data transmission system is estimated by determining a bit-error-rate BER describing the number of erroneous bits among all received bits. In power-restricted systems the bit-error-rate can be improved by employing different coding methods and modulation methods. A finite  $K$  bit information word whose energy is  $E_m$ , the bit energy  $E_b$  is determined by means of the energy in the information word

$$E_b = \frac{E_m}{K}$$

[0006] In addition to the energy in the information word the receiver also includes white noise, the single-sided power density of which is  $N_0$ . The bit-error-rate is often indicated by ratio  $E_b/N_0$ . The performance of different digital data transmission systems can therefore be compared.

[0007] The performance of the systems is often also indicated by determining a block-error-rate BLER, referring to the portion of symbol blocks including one or more errors in all the received symbol blocks. The block-error-rate is used in parallel with the bit-error-rate particularly in systems where the erroneous symbol blocks can be resent.

[0008] The problem is to find a balance to the interleaving depth between a low bit-error-ratio and a short delay.

[0009] In rectangular interleaving the symbol blocks are grouped into sets of a desired size. The bits in each set are rearranged. The size of the symbol block and the number of symbol blocks in the set determine the interleaving depth. Figure 1 shows an example of the rectangular interleaving principle. In this example the four symbol blocks 100, 102, 104, 106 in the receiver are regrouped so that one block 108, 110 on the radio channel comprises the bits in two original symbol blocks. In such a case the interleaving depth is twice the length of a single symbol block. Interleaving is removed in the receiver and the block structure is identical with the original, i.e. the number of symbol blocks is four. A problem with rectangular interleaving is the excessive delay. A delay of two symbol blocks is created in the transmitter, as the transmission of block 108 cannot be initiated before blocks 100 and 102 are completed. A delay of two symbol blocks is also created in the receiver, since block 100 cannot be de-interleaved until block 108 is entirely received. In total the delay lasts for four symbol blocks. The number of symbol blocks and the interleaving depth may vary from what is described here. In the simplest case

the number of symbol blocks included in the set is one, in which case the interleaving comprises only the rearrangement of the bits in one symbol block.

**[0010]** The delay caused by interleaving can be reduced using diagonal interleaving instead of rectangular interleaving. In diagonal interleaving the  $m$  bits in the symbol block are sent in blocks  $m+1, m+2, \dots, m+d$ , where  $d$  is the interleaving depth. Figure 2 shows an example of diagonal interleaving. The number of symbol blocks and the interleaving depth may vary from what is described here. Blocks 200, 202, 204, 206 in the receiver are regrouped in such a manner that one block on the radio channel comprises bits from two original symbol blocks and the bits in the original symbol block are sent in two regrouped blocks. Blocks 210, 212, 214 on the channel include bits from two original symbol blocks so that block 210 comprises, for example, bits from blocks 200 and 202 and the block 212 includes bits from the blocks 202 and 204. It should be noted that the first block 208 and the last block 216 must partly be filled with other bits, which is indicated in the Figure using letter  $x$ . This causes problems in the beginning and at the end of the transmission, when the first and last symbol block remain partly empty. Interleaving is removed in the receiver and the block structure is identical with the original.

**[0011]** Figure 2 illustrates a case in which a single block delay is created in the receiver, since the transmission of block 208 cannot be initiated until block 200 is completed. A delay of two symbol blocks is created in the receiver, as block 200 cannot be de-interleaved until blocks 208 and 210 are received. In total the delay lasts for three symbol blocks. It should be noted that the interleaving depth is twice the length of a single symbol block, or the same as the one shown in rectangular interleaving in Figure 1, but the delay is one symbol block shorter.

#### BRIEF DESCRIPTION OF THE INVENTION

**[0012]** It is an object of the invention to provide a method and an apparatus implementing the method so as to employ interleaving more efficiently without some blocks remaining partly empty and to simultaneously restrict the delay caused by interleaving. This is achieved with a method for improving the performance of a radio system by interleaving and de-interleaving symbol blocks including bits. The method of the invention comprises the steps of combining rectangular interleaving and diagonal interleaving, selecting the interleaving depth and the type of interleaving method specifically for each

symbol block, signalling the interleaving depth and the interleaving method type of the symbol blocks to a receiver in order to remove the interleaving and removing the interleaving of the symbol blocks using de-interleaving in the receiver.

5           **[0013]** The invention also relates to a radio system in which symbol blocks including bits are interleaved and de-interleaved in order to improve the performance of the radio system. In the system of the invention a transmitter comprises means for combining rectangular interleaving and diagonal interleaving, the transmitter comprises means for selecting the interleaving depth and the type of interleaving method specifically for each symbol block, the  
10 transmitter comprises means for signalling the symbol block-specific interleaving depth and interleaving method type to a receiver in order to remove the interleaving, and the receiver comprises means for removing the symbol block interleaving using de-interleaving.

15           **[0014]** The invention further relates to a radio transmitter in which symbol blocks including bits are interleaved in order to improve the performance of a radio system. The transmitter of the invention comprises means for combining rectangular interleaving and diagonal interleaving, the transmitter comprises means for selecting the interleaving depth and the type of interleaving  
20 method specifically for each symbol block and the transmitter comprises means for signalling the symbol block-specific interleaving depth and interleaving method type to the receiver in order to remove the interleaving.

**[0015]** The invention also relates to a radio receiver in which symbol blocks including bits are de-interleaved in order to improve the performance of a radio system. The receiver of the invention comprises means for receiving and interpreting signalling data concerning the symbol block-specific interleaving depth and interleaving method type of the received symbol blocks,  
25 and the receiver comprises means for removing the symbol block-specific interleaving of the symbol blocks using de-interleaving.

30           **[0016]** The preferred embodiments of the invention are disclosed in the dependent claims.

**[0017]** Several advantages are achieved with the method and system of the invention. In accordance with the prior art rectangular interleaving or diagonal interleaving must be selected, whereas the method of the invention provides a chance to dynamically change the type of interleaving method  
35 as well as the interleaving depth block-specifically. The interleaving thus pro-

vides an improvement to the error tolerance of the system and simultaneously allows to adjust the length of the delay caused by interleaving. The method of the invention can also be used for smoothly multiplexing several transmitters together also when diagonal interleaving is used. This occurs by selecting the interleaving method type and interleaving depth so as to provide a changing point for the interleaving set, when all the symbol blocks are entirely sent, whose transmission is initiated before the changing point. In addition, the provided changing point of the interleaving set can be used for changing the modulation method or the receiver of the transmission, for example.

## 10 BRIEF DESCRIPTION OF THE DRAWINGS

**[0018]** In the following the invention will be explained in greater detail by means of the preferred embodiments with reference to the accompanying drawings, in which

Figure 1 shows rectangular interleaving,

15 Figure 2 shows diagonal interleaving,

Figure 3 illustrates an example of a telecommunications system,

Figure 4 shows an example of a transmitter,

Figure 5 shows an example of a receiver,

20 Figure 6 is a block diagram showing the method steps required in an interleaver of the transmitter,

Figure 7 is a block diagram showing the method steps required in a de-interleaver of the receiver, and

Figures 8a to 8f illustrate an example of how interleaving methods are combined.

## 25 DETAILED DESCRIPTION OF THE INVENTION

**[0019]** The present invention may be employed in different wireless communications methods such as cellular radio systems. The multiple access method to be used is not relevant. For example, the CDMA (Code Division Multiple Access), the WCDMA (Wideband Code Division Multiple Access) and the TDMA (Time Division Multiple Access) or the hybrids thereof are all possible. It is obvious for those skilled in the art that the method of the invention can also be applied to systems using different modulation methods or air interface standards. Figure 3 illustrates in a simplified manner a digital data transmission system, to which the solution of the invention can be applied. What is  
30 concerned is a part of a cellular radio system, which comprises a base station  
35

304 having a bi-directional connection 308 and 310 with subscriber terminals 300 and 302 that may be fixedly located, vehicle mounted or portable hand-held terminals. The base station comprises, for instance, transceivers. The base station transceivers communicate with an antenna unit that allows to implement a bi-directional radio connection with the subscriber terminal. The base station also communicates with a base station controller 306 that transmits the terminal connections to other parts of the network. The base station controller controls several base stations communicating therewith in a centralized manner. The base station controller comprises a group switching field, which is used to connect speech and data and to combine signalling circuits.

[0020] The cellular radio system may also communicate with a public switched telephone network, in which case a transcoder converts different digital speech coding modes used between a public switched telephone network and a cellular radio network to suit one another, for instance, from the 64 kbit/s fixed network form to another form (such as 13 kbit/s) of the cellular radio network, and vice versa.

[0021] Figure 4 illustrates a simplified view of a radio transmitter according to the preferred embodiment of the invention. The transmitter described may be located, for example, in the network part of the radio system, such as the base station, or in the subscriber terminal or in the control part of the radio system, such as the base station controller, typically in such system solutions where network part functions are connected to the control part. The subscriber terminal may, for example, be a portable phone or a microcomputer without being restricted thereto. Information 400 may be speech, data, moving or still video image. The required control channels are formed in a control part 412 of the transmitter. The control part controls the device itself as well as the communication connection. For clarity, the Figure does not show speech or data codecs, for example. The information is channel coded in a channel codec 402. Block codes, such as a Cyclic Redundancy Check (CRC), are examples of channel codes. Another typical way to implement channel coding is convolution coding and the various modifications thereof, such as punctured convolution coding. In the WCDMA system (Wideband Code Division Multiple Access) concatenated convolution coding, or turbo coding, is also employed.

[0022] After channel coding, the information is interleaved in an interleaver 404. The control part 412 comprises an algorithm that allows to adjust the interleaving depth and to select the interleaving method. What affects

the choice of interleaving depth is typically the delay restrictions, bit-error-rate requirements or the quality (speech or data) of the symbol block load. The control part 412 comprises means for indicating the delay requirements and means for indicating the quality requirements that depend on the information  
5 to be transferred. The control part may also receive network level information.

**[0023]** Also in spread spectrum systems, such as the WCDMA, the pseudo-random noise code allows the signal spectrum to be spread in the transmitter to a broad band and to be composed in the receiver, thus attempting to increase the channel capacity. Coding can also be used for enciphering  
10 the transmission or the information therein. In addition, the apparatuses according to the GSM system (Groupe Special Mobile) typically include burst formation means that add the tail bits of the burst and the training sequence to the data arriving from the channel codec.

**[0024]** In the modulation block 406 the carrier wave is modulated  
15 using a data signal including the desired information in accordance with the selected modulation method. The modulation block may also comprise power amplifiers and filters limiting the frequency band. After modulation the signal is D/A converted in block 408. The obtained analogue signal is mixed to the desired transmission frequency and sent by means of an antenna 410 onto the  
20 radio channel. The antenna may also be a directed group antenna or the system may comprise antenna diversity. The system may also include several transmitters.

**[0025]** The transmitter can be implemented either by means of an apparatus solution, by software or as a combination thereof.

**[0026]** Figure 5 is a simplified view showing the radio receiver according to the preferred embodiment of the invention. The presented receiver may be located for example in a network part of the radio system, such as a base station, or in a subscriber terminal or in a control part of the radio system, such as base station controllers, typically in such system solutions where the  
30 network part functions are connected to the control part. The subscriber terminal may be, for example, a portable phone or a microcomputer without being restricted thereto. The coding method used, the interleaving method and interleaving depth are decided in the transmitter taking the quality requirements and delay restrictions into account. The receiver must be able to remove the  
35 codings and interleavings performed. The required information is signalled to the receiver for example together with the data blocks or on a signalling chan-



nel. A control part 514 of the receiver receives the signalling data. The receiver may comprise one or more antennas or antenna groups 500. The receiver may also be a RAKE receiver used in the WCDMA system (Wideband Code Division Multiple Access). If the system employs pilot symbols for transmitting signalling data, the pilot symbols must be indicated before the actual information symbols. Then the received symbols must be stored into a buffer memory. The symbol may comprise one or more bits.

[0027] The received signal is at first applied to radio frequency parts 502 comprising filters filtering the frequencies outside the desired frequency band. Thereafter, the signal is converted into an intermediate frequency or directly into a baseband. In a demodulator 504 the signal is demodulated, or the information signal is distinguished from the carrier. A baseband analogue signal is sampled and quantized in an A/D converter 506. If the receiver in question is a RAKE receiver, the multipath propagated signal components received by the different branches are combined, and in this way as much as possible of the sent signal energy is received. Next the signal interleaving is removed in a de-interleaver 508. Thereafter the channel coding of the signal is removed in a decoder 510, and sent data 512 can thereby be indicated. If another type of coding is used, such as coding made to encipher the information, these codings must also be removed. The convolution coded signal is typically decoded using a Viterbi detector. If the received signal is broadband, the spread signal must be composed in the receiver.

[0028] The receiver is implemented by means of an apparatus solution, by software or as a combination thereof.

[0029] In the following a preferred embodiment of the invention will be explained in more detail. The method of the invention employs interleaving and de-interleaving for improving the performance of a radio system. In the method, the interleaving depth and the type of interleaving method, generally rectangular interleaving or diagonal interleaving, can be specifically selected for each symbol block. The interleaving depth of the symbol blocks and the interleaving method type is signalled to the receiver in order to remove the interleaving.

[0030] The quality of the information to be transferred affects the choice of the interleaving method type and the interleaving depth. In order to select the interleaving method type and the interleaving depth, the transmitter, in which the interleaver is located, may obtain a command from the other units

in the system, such as the base station controller, or the transmitter can make the selection decision itself, for example, by examining the contents of the block to be interleaved. It is preferable to select diagonal interleaving for interleaving speech, since the delay caused by diagonal interleaving is smaller than that of rectangular interleaving. Rectangular interleaving providing a low interleaving depth is typically selected for packet-mode data transmission, since minimizing the block-error-rate is more important than minimizing the bit-error-rate. The quality of the transmission path substantially affects the choice of the interleaving depth: the noisier the radio channel is the more random the bits must be obtained. The performance of the system can thus be improved. The success of a data transmission in the GSM system is studied by measuring the bit-error-rate at regular intervals. A preferred embodiment of the invention is to select the interleaving depth specifically for each symbol block based on the bit-error-rate measurements.

**[0031]** Figure 6 is a block diagram showing the method steps required in a transmitter interleaver. In block 600 the incoming blocks arriving at the interleaver are divided into smaller sub-blocks. The number of sub-blocks, into which each incoming block is divided, depends on the applied system standard. The application of the invention does not restrict the number of sub-blocks in any way.

**[0032]** In block 602 new symbol blocks are formed of the sub-blocks in the interleaver by combining rectangular interleaving with diagonal interleaving. What affects the choice of the interleaving method is whether the transmitter has just received a transmission turn or whether the transmitter is about to end the transmission. It should be noted that at the final stage of the transmission the symbol blocks are filled and no transmission time needs to be wasted for sending totally or partly empty symbol blocks. The number of symbol blocks to be interleaved determines the interleaving depth. The application of the invention does not restrict the interleaving depth, instead the delay restrictions and fading properties of the radio channel affect the choice of the interleaving depth. A slower the fading channel requires a greater interleaving depth in order to make the errors as random as possible. Typically rectangular interleaving providing a small interleaving depth is selected for the data blocks of packet-mode data transmission, as the minimizing of the block-error-rate is more important than minimizing the bit-error-rate. Diagonal interleaving is typi-

cally selected for speech blocks, as the delay caused by diagonal interleaving is smaller.

5           **[0033]** In order for a transmitter to be able to remove interleaving, a used interleaving pattern is signalled to the transmitter, for example as shown in block 604, by connecting the signalling data to one or more output blocks. It is also possible to use a signalling channel according to the standard used at a particular time, a separate pilot block or a signalling block that comprise only the interleaving pattern information or other signalling data. The re-formed output blocks are sent onto the radio channel in block 606.

10           **[0034]** Figure 7 is a block diagram showing the method steps required in a receiver de-interleaver. Signalling data about the type of interleaving pattern used in the transmitter is searched for in block 700. The interleaving of the incoming blocks in the receiver is removed in block 702 by dividing the symbol blocks including information bits into sub-blocks. The interleaving cannot be removed without the information provided by the signalling data on  
15 the interleaving pattern, and therefore the signalling data can be resent in order to ensure the reception of the signalling data, if the radio channel is particularly noisy and said symbol block is very important.

20           **[0035]** Next new symbol blocks are formed of the sub-blocks in the de-interleaver in accordance with block 704, the symbol blocks being completely identical with the original symbol blocks in the transmitter except for possible bit errors created during transmission. Consequently the interleaving of the symbol blocks is removed and the information bits can be applied to the decoder.

25           **[0036]** What is characteristic for packet-data traffic is that the reception of a data-packet may fail. In such a situation the receiver requires the transmitter to resend said data-packet. When retransmitting a data-packet the modulation level is typically changed or a more efficient coding is employed in order to achieve an improved error tolerance and a successful transmission.  
30 The method of the invention can also be applied in such a situation. The interleaving depth is altered during the retransmission of data packets, thus providing a better error tolerance. The interleaving depth can also be changed for the transmission of each symbol block by measuring the transmission channel in advance, in which case the fading properties of a channel can for instance  
35 be determined.

**[0037]** Figures 8a to 8f illustrate a simple example of how an interleaving pattern is created. In this example each original symbol block is divided into three sub-blocks, which are then grouped by connecting rectangular interleaving and diagonal interleaving. Figure 8a shows the original input blocks of the transmitter. Figure 8b illustrates how the rectangular interleaved sub-blocks  $A_1$ ,  $A_2$  and  $A_3$  of symbol block A remain stationary. Then in Figure 8c the sub-blocks  $C_1$ ,  $C_2$  and  $C_3$  of symbol block C are interleaved using diagonal interleaving;  $C_1$  moves one sub-block backwards,  $C_2$  remains in position and  $C_3$  moves one sub-block forward. Figure 8d illustrates the output of the interleaver. An output block is composed of three overlapping sub-blocks in the Figure. The Figure shows how the other sub-blocks  $B_1$ ,  $B_2$  and  $B_3$  and  $D_1$ ,  $D_2$  and  $D_3$  are used to fill the remaining space. Sub-blocks  $B_2$  and  $B_3$  are diagonally grouped as well as sub-blocks  $D_1$  and  $D_2$ . The sub-triangle formed between the diagonal and the rectangular is filled with sub-block  $B_1$ . A corresponding top-triangle is filled with sub-block  $D_3$ .

**[0038]** The number of sub-blocks to be interleaved follows the formula  $2n+1$ , where  $n$  is the number of symbol blocks required to fill the space between the diagonal and the rectangular for each space to be filled, and therefore the number of sub-blocks may deviate from what is presented in the Figures. It should be noted that the sub-blocks of more than one symbol blocks can be used to fill the spaces. All blocks to be sent are typically interleaved using an interleaving method.

**[0039]** In Figure 8e, lines 800, 802, 804 indicate a point, at which a changing point is created for the interleaving group. All the symbol blocks, whose transmission is initiated before the changing point, are sent entirely at the changing point of the interleaving group. Such a changing point is created in order to be able to change, for example, the modulation method or if a cellular radio system is concerned to distribute a transmission turn for different subscriber terminals to the base station. The changing point is also provided in order to change the receiver of the transmission. The receiver of the transmission is typically changed by directing the antenna beams of the transmitter. As the receiver of the transmission is changed the transmission power can simultaneously be adjusted.

**[0040]** Figure 8f shows how a changing point can be provided between two groups using diagonal interleaving. The changing points are indicated using lines 800, 802, 804 and 806. Sub-blocks  $F_1$ ,  $F_2$  and  $F_3$  are inter-

leaved as sub-blocks  $C_1$ ,  $C_2$  and  $C_3$ , and sub-blocks  $E_1$ ,  $E_2$  and  $E_3$  are interleaved in the same way as sub-blocks  $B_1$ ,  $B_2$  and  $B_3$  and sub-blocks  $G_1$ ,  $G_2$  and  $G_3$  are interleaved in the same way as sub-blocks  $D_1$ ,  $D_2$  and  $D_3$ .

5       **[0041]** In the examples shown in Figures 8a to 8f the signalling data to be indicated in the interleaving pattern is included in the middlemost sub-block of each symbol block, which in this case is sub-block 2, as the position of said sub-block does not change and is therefore known. The interleaving pattern data can also be indicated with two bits in the interleaving data field.

10       **[0042]** A bursty transmission is typical for the GSM system. In such a system the output blocks of the interleaver are divided, for example, into four parts, each one of which being sent in a specific burst thereof.

15       **[0043]** It should be noted that in addition to the method of the invention additional interleaving can also be employed, such as additional rectangular interleaving in the input blocks of the interleaver in the transmitter and correspondingly the additional interleaving can be removed from the de-interleaver in the receiver, or additional rectangular interleaving can be used sub-block-specifically or output block-specifically.

20       **[0044]** Even though the invention has been described above with reference to the example of the accompanying drawings, it is obvious that the invention is not restricted thereto but can be modified in various ways within the scope of the inventive idea disclosed in the attached claims.

## CLAIMS

1. A method for improving the performance of a radio system by interleaving and de-interleaving symbol blocks including bits,  
**characterized** by
- 5 combining rectangular interleaving and diagonal interleaving,  
selecting the interleaving depth and the type of interleaving method specifically for each symbol block,  
signalling the interleaving depth and the interleaving method type of  
the symbol blocks to a receiver in order to remove the interleaving, and
- 10 removing the interleaving of the symbol blocks using de-interleaving in the receiver.
2. A method as claimed in claim 1, **characterized** in that the information concerning the interleaving depth and interleaving method type is signalled to the receiver as a part of a sub-block.
- 15 3. A method as claimed in claim 1, **characterized** in that the information concerning the interleaving depth and interleaving method type is signalled to the receiver in a separate information block.
4. A method as claimed in claim 1, **characterized** in that the information concerning the interleaving depth and interleaving method type is
- 20 signalled to the receiver using a separate signalling channel.
5. A method as claimed in any one of preceding claims, **characterized** in that the interleaving depth and interleaving method type are selected according to the quality of the symbol block load.
6. A method as claimed in any one of preceding claims, **characterized**
- 25 **in** that the interleaving depth and interleaving method type are changed on the basis of the measurements carried out on the transmission channel.
7. A method as claimed in any one of preceding claims, **characterized** in that the interleaving depth and interleaving method type are
- 30 changed on the basis of a coding method.
8. A method as claimed in any one of preceding claims, **characterized** in that the interleaving depth and interleaving method type are changed during retransmission of packet-mode data.
9. A method as claimed in any one of preceding claims, **characterized**
- 35 **in** that the interleaving depth and interleaving method type are se-

lected so as to provide a changing point for an interleaving set, when all the symbol blocks are entirely sent, whose transmission is initiated before said changing point of the interleaving set.

5 10. A method as claimed in claim 9, **characterized** in that a modulation method is changed at the provided changing point of the interleaving set.

11. A method as claimed in claim 9, **characterized** in that a transmission turn is transferred to a second transmitter at the provided changing point of the interleaving set.

10 12. A method as claimed in claim 9, **characterized** in that a receiver of the transmission is changed at provided the changing point of the interleaving set.

15 13. A method as claimed in claim 12, **characterized** in that the receiver of the transmission is selected by directing the antenna beams of the receiver.

14. A method as claimed in claim 12, **characterized** in that transmission power is adjusted when the receiver of the transmission changes.

20 15. A radio system in which symbol blocks including bits are interleaved and de-interleaved in order to improve the performance of the radio system,

**characterized** in that

a transmitter comprises means (404, 412) for combining rectangular interleaving and diagonal interleaving,

25 the transmitter comprises means (404, 412) for selecting the interleaving depth and the type of interleaving method specifically for each symbol block,

the transmitter comprises means (404, 410, 412) for signalling the symbol block-specific interleaving depth and interleaving method type to a receiver in order to remove the interleaving, and

30 the receiver comprises means (508, 514) for removing the symbol block interleaving using de-interleaving.

35 16. A system as claimed in claim 15, **characterized** in that the transmitter comprises means (404, 410, 412) for signalling data concerning the interleaving depth and interleaving method type to the receiver as a part of a sub-block.

17. A system as claimed in claim 15, **characterized** in that the transmitter comprises the means (404, 410, 412) for signalling the data concerning the interleaving depth and interleaving method type to the receiver in a separate information block.

5 18. A system as claimed in claim 15, **characterized** in that the transmitter comprises the means (404, 410, 412) for signalling the data concerning the interleaving depth and interleaving method type to the receiver on a separate signalling channel.

10 19. A system as claimed in any one of preceding claims, **characterized** in that the transmitter comprises means (400, 404, 412) for selecting the interleaving depth and interleaving method type according to the quality of the symbol block load.

15 20. A system as claimed in any one of preceding claims, **characterized** in that the transmitter comprises the means (404, 412) for changing the interleaving depth and interleaving method type on the basis of the measurements carried out on the transmission channel.

20 21. A system as claimed in any one of preceding claims, **characterized** in that the transmitter comprises the means (402, 404, 412) for changing the interleaving depth and interleaving method type on the basis of a coding method.

22. A system as claimed in any one of preceding claims, **characterized** in that the transmitter comprises means (402, 404, 412) for changing the interleaving depth and interleaving method type during retransmission of packet-mode data.

25 23. A system as claimed in any one of preceding claims, **characterized** in that the transmitter comprises the means (404, 412) for selecting the interleaving depth and interleaving method type so as to provide a changing point for the interleaving set, when all the symbol blocks are entirely sent whose transmission is initiated before said changing point of the interleaving set.

30 24. A system as claimed in claim 23, **characterized** in that the transmitter comprises means (404, 406, 412) for changing a modulation method at the provided changing point of the interleaving set.

35 25. A system as claimed in claim 23, **characterized** in that the transmitter comprises the means (404, 412) for creating the changing point of the interleaving set in the beginning or at the end of a transmission turn.



26. A system as claimed in claim 23, **characterized** in that the transmitter comprises means (400, 402, 404, 406, 408, 410, 412) for changing the receiver of the transmission at the provided changing point of the interleaving set.

5 27. A system as claimed in claim 26, **characterized** in that the transmitter comprises the means (410, 412) for changing the receiver by directing the antenna beams of the transmitter.

28. A system as claimed in claim 26, **characterized** in that the transmitter comprises the means (410, 412) for adjusting transmission  
10 power when the receiver of the transmission is changed.

29. A radio transmitter in which symbol blocks including bits are interleaved in order to improve the performance of a radio system,

**characterized** in that

15 the transmitter comprises means (404, 412) for combining rectangular interleaving and diagonal interleaving,

the transmitter comprises means (404, 412) for selecting the interleaving depth and the type of interleaving method specifically for each symbol block, and

20 the transmitter comprises means (404, 410, 412) for signalling the symbol block-specific interleaving depth and interleaving method type to the receiver in order to remove the interleaving.

30. A transmitter as claimed in claim 29, **characterized** in that the transmitter comprises the means (404, 410, 412) for signalling data concerning the interleaving depth and interleaving method type to the receiver  
25 as a part of a sub-block.

31. A transmitter as claimed in claim 29, **characterized** in that the transmitter comprises the means (404, 410, 412) for signalling the data concerning the interleaving depth and interleaving method type to the receiver in a separate information block.

30 32. A transmitter as claimed in claim 29, **characterized** in that the transmitter comprises the means (404, 410, 412) for signalling the data concerning the interleaving depth and interleaving method type to the receiver on a separate signalling channel.

35 33. A transmitter as claimed in any one of preceding claims, **characterized** in that the transmitter comprises means (400, 404, 412)

for selecting the interleaving depth and interleaving method type according to the quality of the symbol block load.

34. A transmitter as claimed in any one of preceding claims, **characterized** in that the transmitter comprises the means (404, 412) for changing the interleaving depth and interleaving method type on the basis of the measurements carried out on the transmission channel.

35. A transmitter as claimed in any one of preceding claims, **characterized** in that the transmitter comprises means (402, 404, 412) for changing the interleaving depth and interleaving method type on the basis of a coding method.

36. A transmitter as claimed in any one of preceding claims, **characterized** in that the transmitter comprises the means (400, 404, 412) for changing the interleaving depth and interleaving method type during retransmission of packet-mode data.

37. A transmitter as claimed in any one of preceding claims, **characterized** in that the transmitter comprises the means (404, 412) for selecting the interleaving depth and interleaving method type so as to provide a changing point for an interleaving set, when all the symbol blocks are entirely sent whose transmission is initiated before said changing point of the interleaving set.

38. A transmitter as claimed in claim 37, **characterized** in that the transmitter comprises means (404, 406, 412) for changing a modulation method at the provided changing point of the interleaving set.

39. A transmitter as claimed in claim 37, **characterized** in that the transmitter comprises the means (404, 412) for creating the changing point of the interleaving set in the beginning or at the end of a transmission turn.

40. A transmitter as claimed in claim 37, **characterized** in that the transmitter comprises means (400, 402, 404, 406, 408, 410, 412) for selecting the receiver of the transmission at the provided changing point of the interleaving set.

41. A transmitter as claimed in claim 40, **characterized** in that the transmitter comprises the means (410, 412) for changing the receiver by directing the antenna beams of the transmitter.

42. A transmitter as claimed in claim 40, **characterized** in that the transmitter comprises the means (410, 412) for adjusting transmission power when changing the receiver of the transmission.

5 43. A transmitter as claimed in claim 29, **characterized** in that the transmitter is located in a subscriber terminal.

44. A transmitter as claimed in claim 29, **characterized** in that the transmitter is located in a network part of the radio system.

45. A transmitter as claimed in claim 29, **characterized** in that the transmitter is located in a control part of the radio system.

10 46. A radio receiver in which symbol blocks including bits are de-interleaved in order to improve the performance of a radio system, **characterized** in that

15 the receiver comprises means (500, 502, 504, 506, 514) for receiving and interpreting signalling data concerning the symbol block-specific interleaving depth and interleaving method type of the received symbol blocks, and

the receiver comprises means (508, 514) for removing the symbol block-specific interleaving of the symbol blocks using de-interleaving.

47. A receiver as claimed in claim 46, **characterized** in that the receiver is located in a subscriber terminal.

20 48. A receiver as claimed in claim 46, **characterized** in that the receiver is located in a network part of the radio system.

49. A receiver as claimed in claim 46, **characterized** in that the receiver is located in a control part of the radio system.

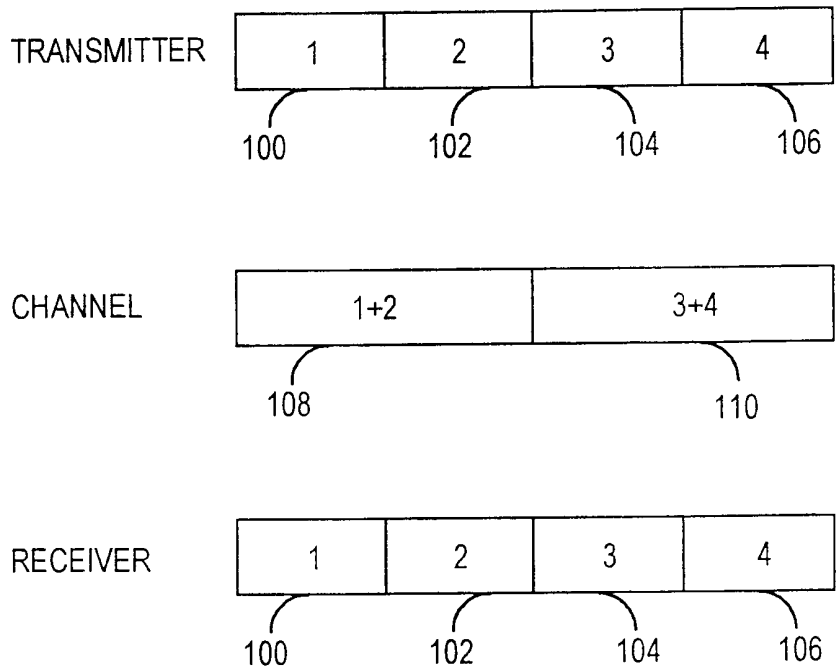


Fig. 1

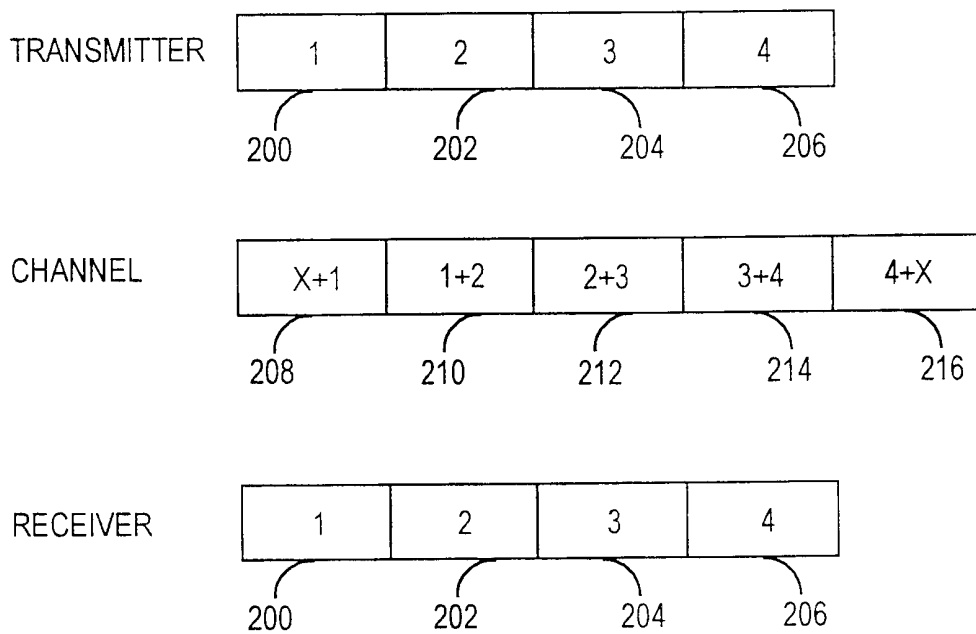


Fig. 2

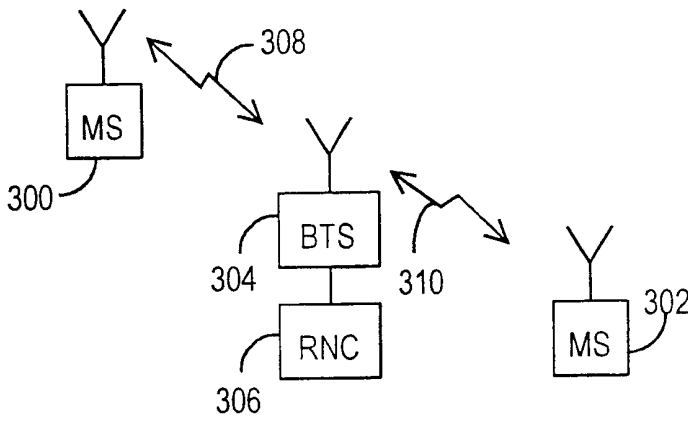


Fig. 3

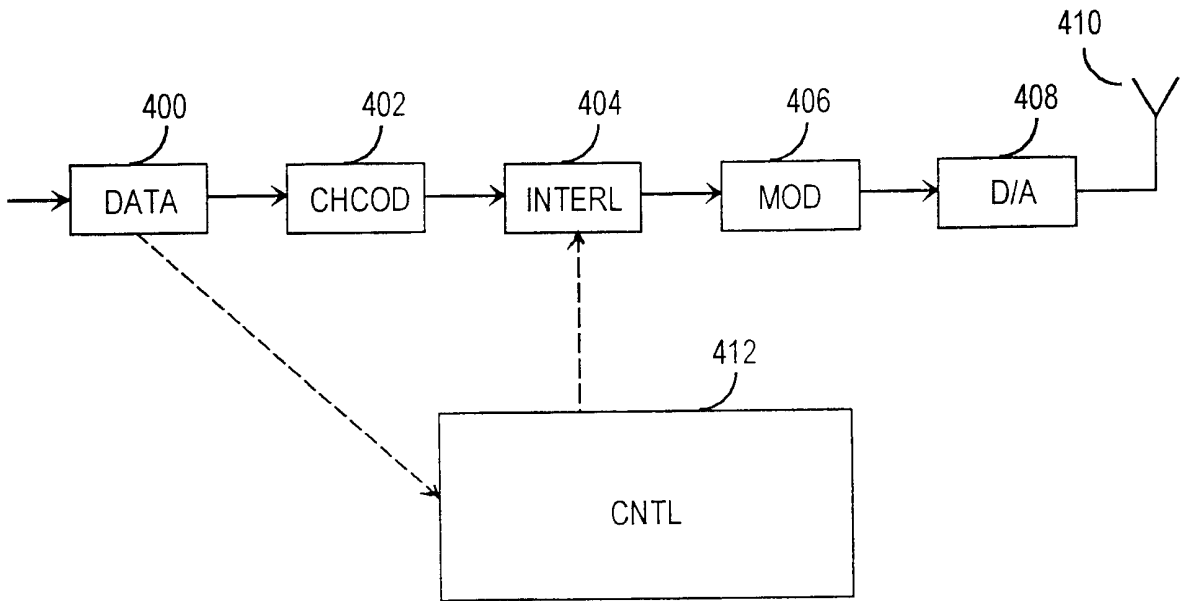


Fig. 4

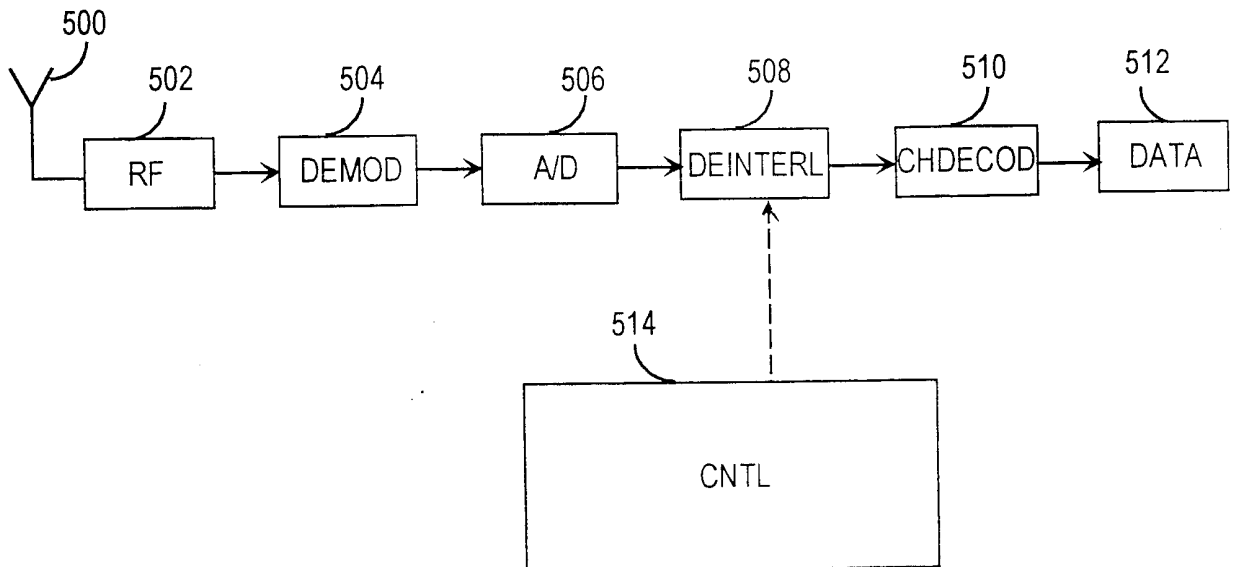


Fig. 5

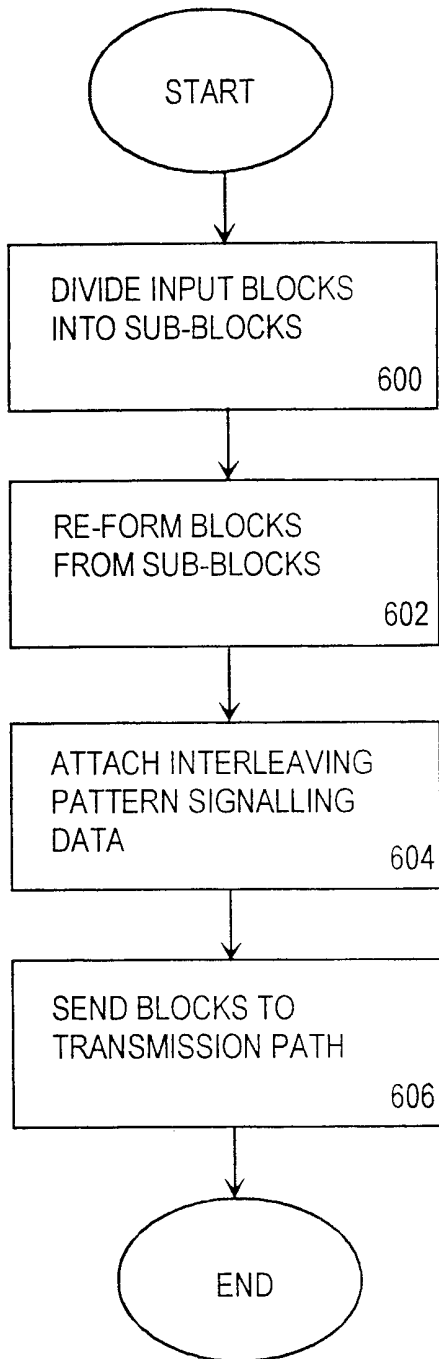


Fig. 6

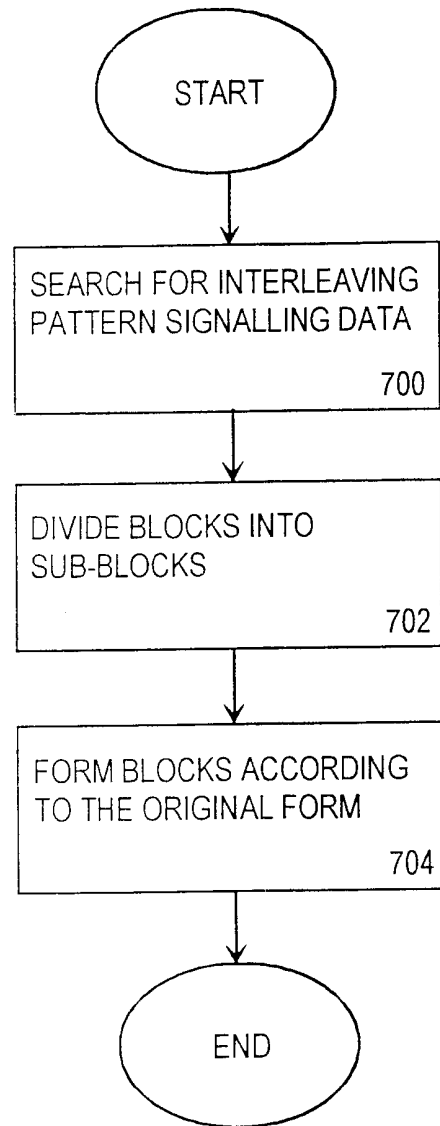


Fig. 7

A <sub>1</sub>	B <sub>1</sub>	C <sub>1</sub>	D <sub>1</sub>
A <sub>2</sub>	B <sub>2</sub>	C <sub>2</sub>	D <sub>2</sub>
A <sub>3</sub>	B <sub>3</sub>	C <sub>3</sub>	D <sub>3</sub>

Fig. 8A

A <sub>1</sub>
A <sub>2</sub>
A <sub>3</sub>

Fig. 8B

A <sub>1</sub>	C <sub>1</sub>		
A <sub>2</sub>		C <sub>2</sub>	
A <sub>3</sub>			C <sub>3</sub>

Fig. 8C

A <sub>1</sub>	C <sub>1</sub>	D <sub>1</sub>	D <sub>3</sub>
A <sub>2</sub>	B <sub>2</sub>	C <sub>2</sub>	D <sub>2</sub>
A <sub>3</sub>	B <sub>1</sub>	B <sub>3</sub>	C <sub>3</sub>

Fig. 8D

800	802	804				
	A <sub>1</sub>	C <sub>1</sub>	D <sub>1</sub>	D <sub>3</sub>		
	A <sub>2</sub>	B <sub>2</sub>	C <sub>2</sub>	D <sub>2</sub>		
	A <sub>3</sub>	B <sub>1</sub>	B <sub>3</sub>	C <sub>3</sub>		

Fig. 8E

800	802	804	806					
	A <sub>1</sub>	C <sub>1</sub>	D <sub>1</sub>	D <sub>3</sub>	F <sub>1</sub>	G <sub>1</sub>	G <sub>3</sub>	
	A <sub>2</sub>	B <sub>2</sub>	C <sub>2</sub>	D <sub>2</sub>	E <sub>2</sub>	F <sub>2</sub>	G <sub>2</sub>	
	A <sub>3</sub>	B <sub>1</sub>	B <sub>3</sub>	C <sub>3</sub>	E <sub>1</sub>	E <sub>3</sub>	F <sub>3</sub>	

Fig. 8F

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 01/00024

A. CLASSIFICATION OF SUBJECT MATTER		
IPC7: H03M 13/27 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC7: H03M		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
EPO INTERNAL, WPI DATA, PAJ		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1035660 A1 (MOTOROLA, INC.), 13 Sept 2000 (13.09.00), column 8, line 24 - line 32 --	1-49
A	US 4829526 A (A.D. CLARK ET AL.), 9 May 1989 (09.05.89), column 1, line 47 - column 2, line 19 --	1-49
A	WO 9907076 A2 (SAMSUNG ELECTRONICS, LTD.), 11 February 1999 (11.02.99), page 15, line 26 - page 16, line 4 --	1-49
P,A	WO 0031996 A2 (TELEFONAKTIEBOLAGET LM ERICSSON), 2 June 2000 (02.06.00), claims 1-2 -- -----	1-49
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
20 July 2001		23 -07- 2001
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Åsa Hällgren/AE Telephone No. +46 8 782 25 00



## INTERNATIONAL SEARCH REPORT

Information on patent family members

02/07/01

International application No.

PCT/FI 01/00024

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	1035660	A1	13/09/00	WO	0041323 A	13/07/00
US	4829526	A	09/05/89	AT	61178 T	15/03/91
				AU	595794 B	12/04/90
				AU	5519886 A	24/09/86
				CA	1265250 A	30/01/90
				DE	3677682 D	00/00/00
				DK	522286 A	31/10/86
				EP	0216813 A,B	08/04/87
				SE	0216813 T3	
				ES	552990 A	01/12/87
				ES	8800806 A	01/02/88
				GR	860606 A	07/07/86
				HK	60496 A	19/04/96
				JP	8034444 B	29/03/96
				JP	62502160 T	20/08/87
				NO	300519 B	09/06/97
				WO	8605339 A	12/09/86
WO	9907076	A2	11/02/99	BR	9811299 A	05/12/00
				CN	1264509 T	23/08/00
				EP	0997031 A	03/05/00
WO	0031996	A2	02/06/00	AU	2012300 A	13/06/00
				US	6076228 A	20/06/00