



US 20080169425A1

(19) **United States**

(12) **Patent Application Publication**
Hyde et al.

(10) **Pub. No.: US 2008/0169425 A1**

(43) **Pub. Date: Jul. 17, 2008**

(54) **MULTI-STAGE WAVEFORM DETECTOR**

(21) Appl. No.: **11/314,978**

(76) Inventors: **Roderick A. Hyde**, Livermore, CA (US); **Muriel Y. Ishikawa**, Livermore, CA (US); **Edward K.Y. Jung**, Bellevue, WA (US); **Nathan P. Myhrvold**, Medina, WA (US); **Clarence T. Tegreene**, Bellevue, WA (US); **Lowell L. Wood**, Livermore, CA (US)

(22) Filed: **Dec. 21, 2005**

Publication Classification

(51) **Int. Cl.**
G01T 1/00 (2006.01)

(52) **U.S. Cl.** **250/394**

Correspondence Address:
SEARETE LLC
CLARENCE T. TEGREENE
1756 - 114TH AVE., S.E., SUITE 110
BELLEVUE, WA 98004

(57) **ABSTRACT**

A waveform detector may include multiple stages.

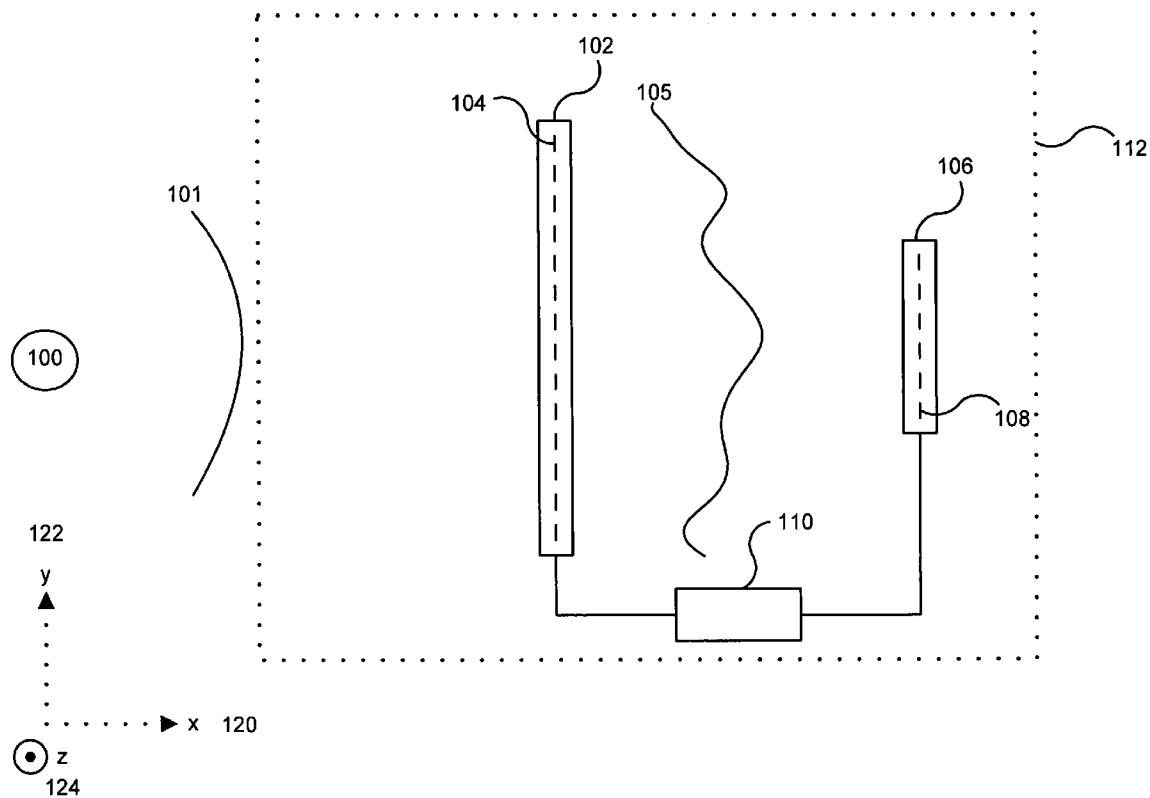


FIG.1

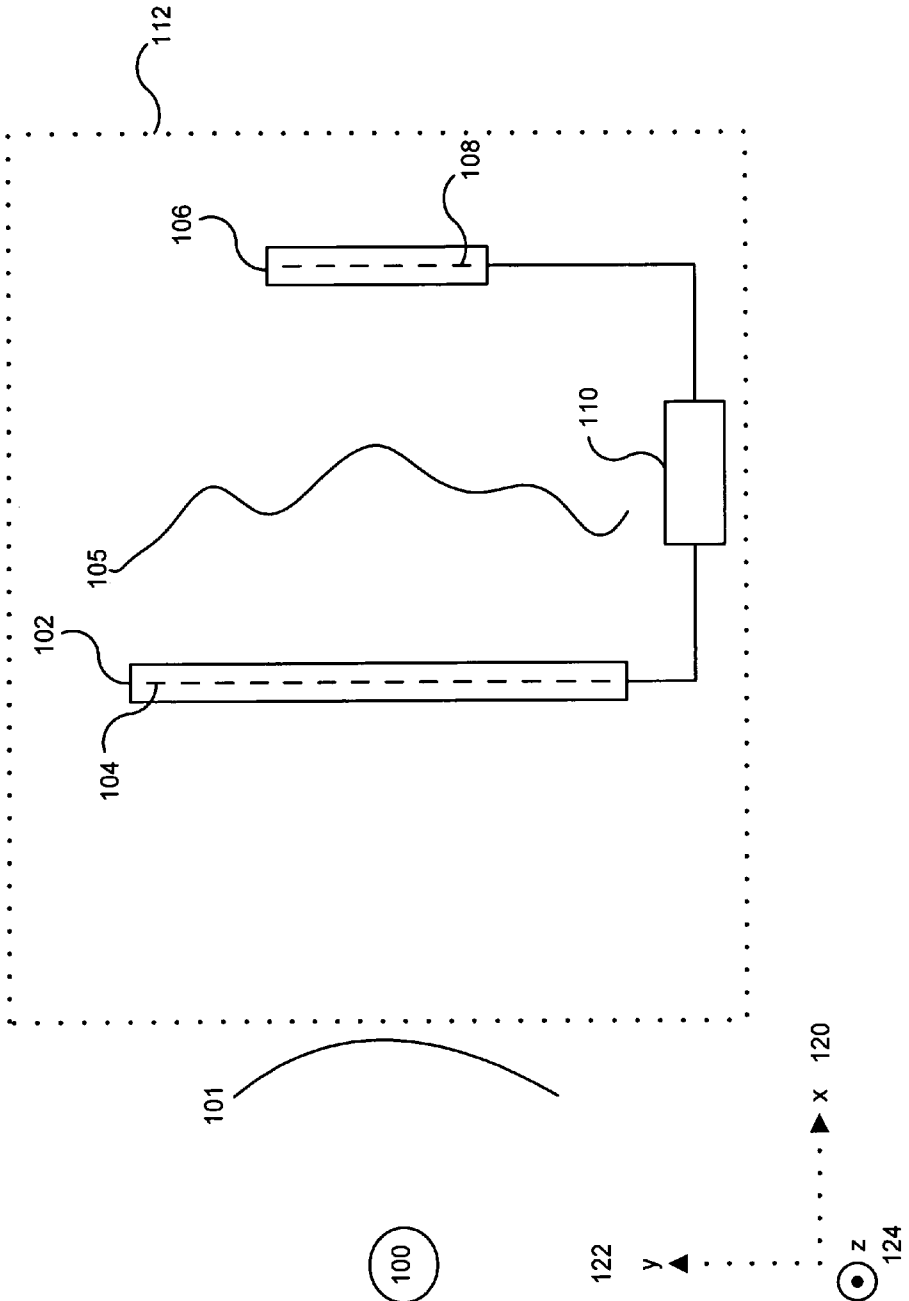


FIG. 2


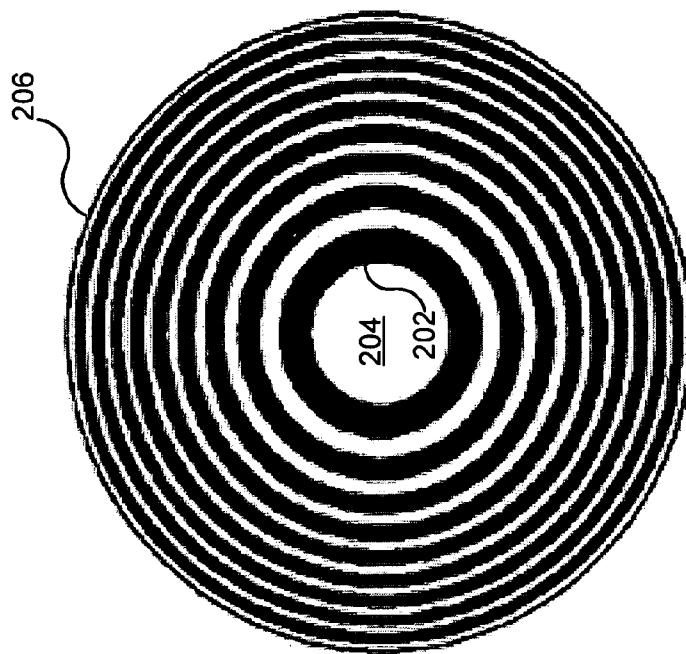


FIG. 3

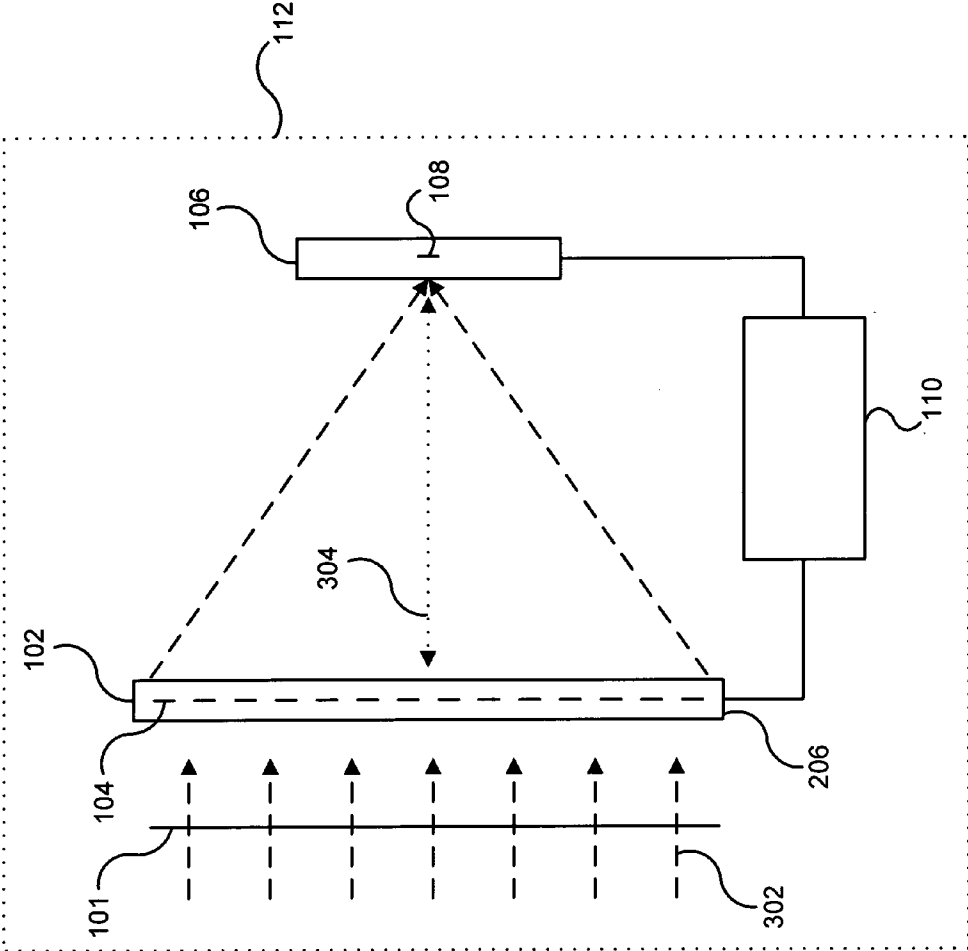


FIG. 4

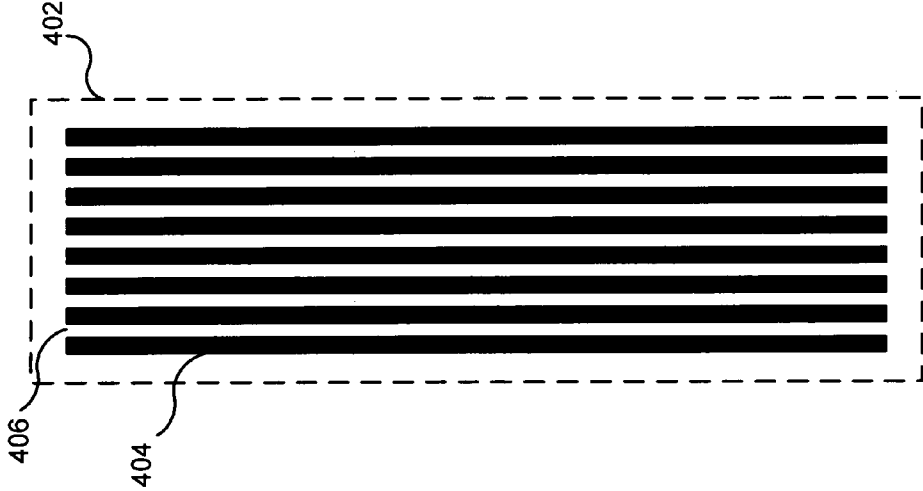


FIG. 5


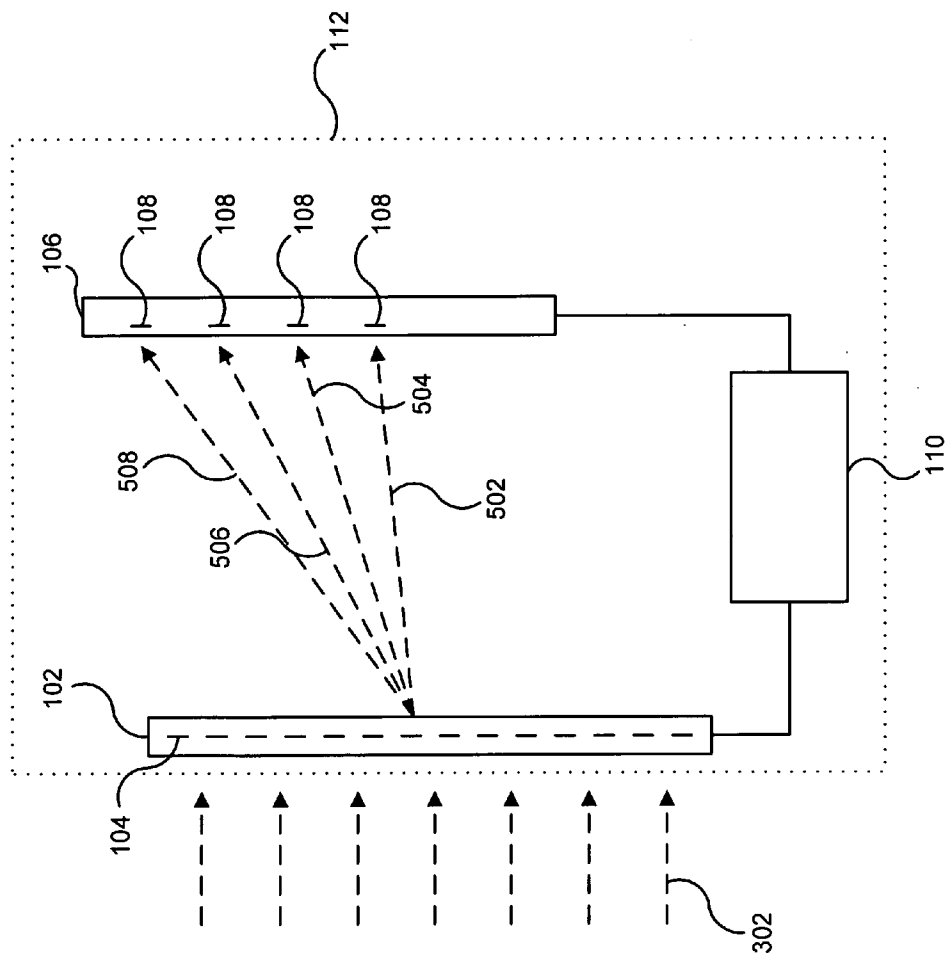


FIG. 6

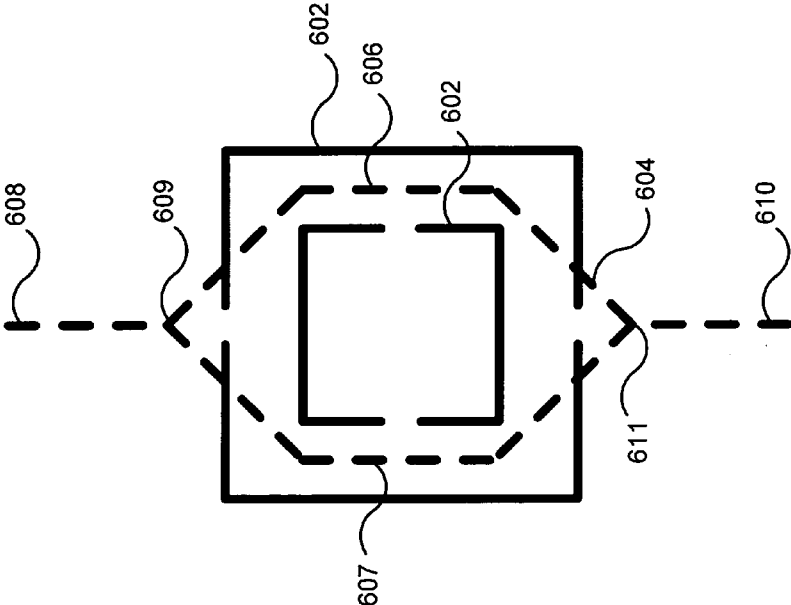

MULTI-STAGE WAVEFORM DETECTOR

TECHNICAL FIELD

[0001] The present application relates, in general, to systems, devices, and methods that interact with electromagnetic or other energy.

SUMMARY

[0002] An embodiment provides a system for interacting with electromagnetic or other energy that includes a first detector assembly arranged relative to a second detector assembly. In addition to the foregoing, other embodiments are described in the claims, drawings, and text forming a part of the present application.

BRIEF DESCRIPTION OF THE FIGURES

- [0003] FIG. 1 shows a first embodiment of a detector system.
- [0004] FIG. 2 shows a zone plate.
- [0005] FIG. 3 shows an embodiment of the detector system.
- [0006] FIG. 4 shows a diffraction grating.
- [0007] FIG. 5 shows an embodiment of the detector system.
- [0008] FIG. 6 shows a split ring resonator and an interferometer.

DETAILED DESCRIPTION

[0009] In a first embodiment, shown in FIG. 1, a source 100 provides a first wave 101 to a detector system 112, where the detector system 112 includes an array of subassemblies or detectors 104, arranged to form a first detector assembly 102. The wave 101 may be any kind of wave, including (but not limited to) an electromagnetic, acoustic, mechanical, or particle wave. The detectors 104 may include (but are not limited to) quantum dots, antennae, photo-detectors, resonant structures, or any number of devices or structures that can detect or interact with energy. The size, type, number, orientation, separation, homogeneity, and other features of the detectors 104 may be dependent on the wavelength of the energy that the array is configured to detect, the size of the source 100, the distance between the source 100 and the first detector assembly 102, relative orientations, positions, or other relative aspects of the source 100 and first detector assembly 102, polarization of the wave 101, or a variety of other design considerations.

[0010] As a portion of the energy in the wave 101 interacts with the first detector assembly 102, a second portion of the energy in the wave 101 may travel past the first detector assembly 102, and energy may be re-emitted from the first detector assembly 102, as well. The second portion and the re-emitted energy combine in whole or in part to form a second wave 105 that travels as indicated in FIG. 1. A second array of detectors 108 that forms a second detector assembly 106 is positioned to intercept the second wave 105. The detectors 108 in the second detector assembly 106 may be any of the kinds of detectors 104 that were described for the first detector assembly 102. While the detectors 108 may be substantially identical in type to the detectors 104, they may also differ in type, size, density or other aspects from the detectors 104.

[0011] The number, arrangement, orientation and other aspects of the detectors 104, 108 may vary according to design considerations. The assemblies 102, 106 may or may not include a substrate, the substrate being contiguous or

having spacings. In one approach, each detector assembly 102, 106 may comprise a single detector having characteristics such as position, size, shape and orientation selected according to the particular design. Alternatively, one or more of the detector assemblies 102, 106 may be configured with a plurality of detectors 104, 108 having a density such that the detectors 104, 108 may interact with respective portions of the waves 101, 105. While the illustrative arrangements of the detectors 104, 108 are presented with relatively simple arrangements and with a relatively small number of individual detectors 104, 108 for clarity of presentation, the detector assemblies 102, 106 may include more or fewer detectors 104, 108 and may be arranged in a variety of configurations depending on the particular design of the detector system 112. Further, although the illustrative example includes two assemblies 102, 106, the principles and structures herein can be adapted for detector systems 112 that include three or more detector assemblies 102, 106.

[0012] Responsive to the first wave 101 and the second wave 105, the detectors 104, 108 produce respective signals corresponding to the first and second waves 101, 105. In one approach, the respective signals travel to a signal processor 110. While the embodiment shows a single signal processor 110 that receives signals from detectors 104 and 108, in other configurations each of the signals may travel to a respective processor 110 or to more than one processor 110. Moreover, although the signal processor 110 is shown as separate from the detectors 104, 108, the signal processor 110 and one or more of the detectors 104, 108 may be part of a single assembly. In still another approach, other components, such as amplifiers, filters, wireless couplers, mixers, or other components may be interposed between the detectors 104, 108 and the signal processor 110 or may be integral to the signal processor 110. Further, in some applications, the signals from the detectors 104, 108 may be used directly or supplied to an external system without significant processing.

[0013] Although FIG. 1 is shown with the source 100 providing the first wave 101 directly to the first detector assembly 102, in another embodiment the first wave 101 may not travel directly from the source 100 to the first detector assembly 102. For example, the first wave 101 may encounter an object between the source 100 and the first detector assembly 102. The source 100 may, for example, be a laser, an acoustic transducer, a natural source of waves such as solar energy, or a different source of waves. The source 100 may be configured to produce coherent or incoherent radiation and may be configured to scan over an energy range or to spatially scan over the detector system 112. Further, although the embodiment in FIG. 1 is shown with a single source 100, more than one source may produce the wave 101, or the source of the wave 101 may be unknown. The wave 101, although shown having a simple curved wavefront in FIG. 1, may be any shape or form.

[0014] In one embodiment, the detectors 104 may be arranged to form the zone plate 206 shown in FIG. 2. In this case the detectors 104 may be arranged in alternating sections 202, 204 that are substantially concentric as shown in FIG. 2. The zone plate 206 may be included in the first detector assembly 102, and the second detector assembly 106 may be positioned at the focal plane of the zone plate 206 or at a different location relative to the zone plate 206. The focusing of the arrangement may be dependent on the density of the detectors 104, and in some arrangements, other material may be included in the detector assembly 102 to further define the

sections **202**, **204**. Zone plates are described in F. A. Jenkins and H. E. White, "FUNDAMENTALS OF OPTICS", Fourth Edition, McGraw-Hill, 1976, which is incorporated herein by reference.

[0015] In one case the alternating sections **202**, **204** may be substantially opaque and transparent, respectively, where the detectors **104** are effectively opaque to the energy incident on them and are positioned to form the sections **202**. Examples of such detectors **104** may include, but are not limited to, parabolic reflector antennae or photo-detectors. Although the sections **202**, **204** are described in this embodiment as being opaque or transparent, it may be the case that not every section **202** is opaque and not every section **204** is transparent, or the opaque sections **202** may not be entirely opaque and the transparent sections **204** may not be entirely transparent. One skilled in the art may recognize that an element having the desired features may still be achieved even if the design of the zone plate **206** differs from that described in Jenkins and White.

[0016] In another case the alternating sections **202**, **204** may be phase-shifting and transparent, respectively, where the detectors **104** may be resonant structures such that they absorb and re-resonate energy and are positioned to form the sections **202**. Examples of such structures may include some antennae, split ring resonators, quantum dots, or a different kind of detector. Although the sections **202**, **204** are described in this embodiment as being phase-shifting or transparent, it may be the case that not every section **202** is phase-shifting and not every section **204** is transparent, or the phase-shifting sections **202** may not be entirely phase-shifting and the transparent sections **204** may not be entirely transparent. Moreover, some of the sections **202**, **204** may be partially transmissive or have some gradation of phase, absorption or gain.

[0017] Although the zone plate **206** in FIG. 2 is shown having circular sections **202**, **204** it is not necessary for a zone plate **206** to have circular sections. For example, a square zone plate is described in F. J. González, J. Alda, B. Ilic, and G. D. Boreman, "INFRARED ANTENNAS COUPLED TO LITHOGRAPHIC FRESNEL ZONE PLATE LENSES", Applied Optics, Volume 43, Number 33, Nov. 20, 2004, which is incorporated herein by reference, and other geometries may also be possible.

[0018] The detectors **104** may be arranged to change the phase of the first wave **101** in a spatially varying manner to focus the wave, form an image, or for another purpose. For example, the detectors **104** may be arranged analogously to a Gabor zone plate or a hologram as described in F. L. Pedrotti and L. S. Pedrotti, "INTRODUCTION TO OPTICS", Second Edition, Prentice-Hall, Inc., 1993, which is incorporated herein by reference. The phase of the wave **101** may be varied by varying the density of detectors **104**, by varying the properties of the detectors **104**, or in some other way.

[0019] FIG. 3 shows the detector system **112** where the first detector assembly **102** is arranged to form a focusing element, where the focusing element may be a zone plate **206**. Parallel incoming rays **302** are incident on the first detector assembly **102** and are focused to the second detector assembly **106**, where in this embodiment the second detector assembly **106** includes a single detector **108**. Information from the detectors **104**, **108** is transmitted to the signal processor **110**. FIG. 3 is shown with a single detector **108** located a focal distance **304** away from the zone plate **206**, however the second detector assembly **106** may comprise more than one detector **108**, and the detector may not be at the focal point of the zone plate **206**.

Further, FIG. 3 is shown with parallel incoming rays **302** (where the rays **302** show the direction of propagation of the wave **101**) incoming at normal incidence to the first detector assembly **102**, however the wave **101** need not impinge on the first detector assembly **102** at normal incidence as shown in FIG. 3 and the wave **101** need not be a substantially plane wave.

[0020] In another embodiment, the detectors **104** may be arranged as a diffraction grating **402** having alternating sections **404**, **406** that are substantially parallel, as shown in FIG. 4. The diffraction grating **402** may be included in the first detector assembly **102**, and the second detector assembly **106** may be positioned to receive radiation diffracted by the grating **402**. The properties of the grating **402** may be dependent on the width of the sections **404**, **406**, the number of sections **404**, **406**, or another parameter. Diffraction gratings are described in Jenkins and White.

[0021] In one approach the alternating sections **404**, **406** may be substantially opaque and transparent, respectively, where the detectors **104** are effectively opaque to the energy incident on them and are positioned to form the sections **404**. In another case the alternating sections **404**, **406** may be phase-shifting and transparent, respectively, where the detectors **104** may be resonant structures such that they absorb and re-resonate energy and are positioned to form the sections **404**. In another case, sections **404** and **406** may both include phase-shifting detectors such that the detectors **104** in sections **404** and the detectors **104** in sections **406** phase shift by different amounts to form a diffraction grating **402**. In some arrangements, other material may be included in the diffraction grating **402** to further define the sections **404**, **406**. As described for the zone plate **206**, one skilled in the art may recognize that an element having the desired features may still be achieved even if the design of the diffraction grating **402** described in Jenkins and White is not adhered to exactly.

[0022] FIG. 5 shows the detector system **112** where the detectors **104** in the first detector assembly **102** are arranged to form a diffraction grating **402**. Parallel incoming rays **302** are incident on the first detector assembly **102** and are diffracted to the second detector assembly **106**, where the second detector assembly **106** may be positioned to receive radiation diffracted by the grating **402**. The diffraction grating **402** is configured to diffract different frequencies of radiation (represented by rays **502**, **504**, **506**, **508**) at different angles, and the second detector assembly **106** may be positioned with one or more detectors **108** positioned to receive energy of a given frequency or range of frequencies. Information from the detectors **104**, **108** is transmitted to the signal processor **110**. FIG. 5 is shown with four detectors **108** approximately equally spaced, however the second detector assembly **106** may comprise any number of detectors **108**, and the detectors **108** may be located at any place on the second detector assembly **106**. Further, FIG. 5 is shown with parallel incoming rays **302** (where the rays **302** show the direction of propagation of the wave **101**) incoming at normal incidence to the first detector assembly **102**, however the wave **101** need not impinge on the first detector assembly **102** at normal incidence as shown in FIG. 5 and the wave **101** need not be a substantially plane wave.

[0023] FIG. 5 shows both detector assemblies **102**, **106** connected to the signal processor **110**, however in some configurations it is not necessary for the detector assemblies **102**,

106 to be connected to the signal processor **110**. Or, only one of the detector assemblies **102** or **106** may be connected to the signal processor **110**.

[0024] The configuration in FIG. 5 may be such that the detector assembly **102** is arranged to detect radiation in a range of energies and incoming angles and the detector assembly **106** is configured to detect radiation in a different range of energies and incoming angles, as described for the configuration in FIG. 3. The detector(s) **108** may be positioned, as shown in FIG. 5, such that each detector **108** receives a different energy band.

[0025] Although the embodiments in FIGS. 1-6 are described as having two detector assemblies **102**, **106**, the detector system **112** may include more than two detector assemblies. In such arrangements, either or both of the detector assemblies may provide, shape or otherwise influence the first and/or second waves to produce additional waves for interaction with a third detector assembly (not shown). Similarly, as additional detector assemblies are included, each may act as both a detector assembly and as a structure that interacts with energy. Moreover, portions of energy can propagate from the additional detector assemblies in a similar fashion to the second wave.

[0026] Further, FIGS. 1, 3, and 5 show the first and second detector assemblies **102**, **106** being centered about (or substantially centered about) a common location along the y direction **122**. However, in some embodiments it may be desirable for the detector assemblies **102**, **106** to be offset from each other along the y direction **122**. Although the detector assemblies **102**, **106** are shown as being substantially planar, it is not necessary for them to be planar and they may take any shape.

[0027] The signals from the detectors **104**, **108** may be delivered to the signal processor **110** in a variety of ways. For detectors **104**, **108** that generate an electrical signal, such as many kinds of antennae, photodetectors, or acoustic transducers, the signals from the detectors **104**, **108** may be delivered to the signal processor **110** electrically. For detectors **104**, **108** that receive electromagnetic energy, the signals from the detectors **104**, **108** may be delivered to the signal processor **110** via a waveguide such as an optical fiber, via free space or in a different way. Although electrical and electromagnetic signals are presented as examples of forms that the signal may take, one skilled in the art will recognize that the type of signal may depend on the type of detector, and may adjust the signal processor **110** based on the type or types of signals input to the signal processor **110**. The signals from all of the detectors **104**, **108** may all be of the same form, for example all electrical signals or all electromagnetic signals, or different signals from the detectors **104**, **108** may be delivered to the signal processor **110** in different forms.

[0028] Although the above embodiments are described in terms of having only one kind of detector, it may be desirable in some configurations to include more than one kind of detector. For example, the first or second detector assembly **102**, **106** may include antennae of different sizes, or they may include both antennae and photodetectors. These configurations are illustrative examples of the different combinations of detectors **104**, **108** that may be configured, and many other configurations are possible.

[0029] Returning to the illustrative embodiments of FIGS. 1, 3, and 5, the first wave **101** is described as impinging on the first detector assembly **102** for simplicity of explanation. The first wave **101** is representative of energy incident on the first

detector assembly **102** and is not limited to monochromatic plane waves, and can include any kind of energy distribution, including those with a range of energies, irregular wavefronts, or distributions where the spatial and frequency range of the energy is unknown.

[0030] The detectors **104**, **108** are configured to receive energy having an energy distribution, the energy distribution including a frequency range. This frequency range may be very small such that the detectors **104**, **108** are considered to detect substantially one frequency, or the frequency response of the detectors **104**, **108** may be a function of frequency. The detectors **104**, **108** may all detect energy in substantially the same frequency range, or the detectors **104** in the first detector assembly **102** may detect energy in a first frequency range and the detectors **108** in the second detector assembly **106** may detect energy in a second frequency range, or the detector assemblies **102**, **106** may include a variety of detectors **104**, **108** that receive energy in a variety of frequency ranges.

[0031] In one embodiment, one or both of the detector assemblies **102**, **106** may include a device that receives energy and may guide the energy to detectors **104**, **108**, such as a concentrator designed to receive solar energy as described, for example, in U.S. Pat. No. 4,149,902 entitled FLUORESCENT SOLAR ENERGY CONCENTRATOR to Mauer, et al., which is incorporated herein by reference. In one embodiment, the concentrator may be formed in the shape of the zone plate **206** shown in FIG. 2, such that the first detector assembly **102** includes the zone plate **206** and the detectors **104** are configured to receive the energy from the concentrator, where the zone plate **206** is incorporated into the detector system **112** as described in FIG. 3. Although the embodiment is described with the concentrator shaped as a zone plate **206** configured to be included in the first detector assembly **102**, the concentrator may have a different shape, and may be included in the second detector assembly **106** or both the first and second detector assemblies **102**, **106**, where detectors **104**, **108** may be positioned to receive the energy collected. The device may be a solid planar device or may be shaped to focus or direct energy. Further, although a device that receives and guides solar energy is described, one skilled in the art may extend the concept to different frequency ranges or different kinds of energy.

[0032] In one embodiment the first or second detector assemblies **102**, **106** may include a metamaterial. Examples of metamaterials can be found in R. A. Shelby, D. R. Smith, and S. Schultz, "EXPERIMENTAL VERIFICATION OF A NEGATIVE INDEX OF REFRACTION", Science, Volume 292, Apr. 6, 2001; D. R. Smith, W. J. Padilla, D. C. Vier, S. C. Nemat-Nasser, and S. Schultz, "COMPOSITE MEDIUM WITH SIMULTANEOUSLY NEGATIVE PERMEABILITY AND PERMITTIVITY", Physical Review Letters, Volume 84, Number 18, May 1, 2000; D. R. Smith, J. B. Pendry, M. C. K. Wiltshire, "METAMATERIALS AND NEGATIVE REFRACTIVE INDEX", Science, Volume 305, Aug. 6, 2004; D. R. Smith and D. C. Vier, "DESIGN OF METAMATERIALS WITH NEGATIVE REFRACTIVE INDEX", Proceedings of SPIE, Volume 5359, Quantum Sensing and Nanophotonic Devices, Manijeh Razeghi, Gail J. Brown, Editors, July 2004, pp. 52-63; each of which is incorporated herein by reference. Although the above references describe metamaterials having negative index of refraction, other metamaterials may not have a negative index of refraction.

[0033] One example of a metamaterial, described in D. R. Smith, W. J. Padilla, D. C. Vier, S. C. Nemat-Nasser, and S.

Schultz, "COMPOSITE MEDIUM WITH SIMULTANEOUSLY NEGATIVE PERMEABILITY AND PERMITTIVITY", *Physical Review Letters*, Volume 84, Number 18, May 1, 2000, includes an array of split ring resonators and wires. In this case, the array may be configured to form the first detector assembly **102**, where the individual split ring resonators and wires form the detectors **104**. In one embodiment, the metamaterial may be arranged to have a gradient index of refraction as described in D. R. Smith, J. J. Mock, A. F. Starr, and D. Schurig, "A GRADIENT INDEX METAMATERIAL", available at: <http://arxiv.org/abs/physics/0407063>; and R. B. GREGOR, C. G. PARAZZOLI, J. A. NIELSEN, M. A. THOMPSON, M. H. TANIELIAN, and D. R. SMITH, "SIMULATION AND TESTING OF A GRADED NEGATIVE INDEX OF REFRACTION LENS," *Applied Physics Letters*, Volume 87, page 091114, Aug. 29, 2005, each of which is incorporated herein by reference.

[0034] The embodiment in FIG. 6 demonstrates one way of extracting a signal from an array including a split ring resonator. FIG. 6 shows a split ring resonator **602** proximate to an optical interferometer **604**, where the interferometer **604** includes an electrooptic polymer. The interferometer **604** is similar to a Mach-Zehnder interferometer, described in Jenkins and White. The interferometer **604** is configured with an input end **608**, an output end **610**, and two straight sections **606**, **607**. One or both of the straight sections **606**, **607** includes or is substantially adjacent to a region having an electrooptic polymer. The interferometer **604** is configured to receive electromagnetic energy, such as light energy, at the input end **608**, and guide the electromagnetic energy. The electromagnetic energy divides, typically into two substantially equal portions at the first branch **609**. A first portion travels through one of the straight sections **606** and the other through the other straight section **607**.

[0035] The energy from the straight sections **606**, **607** recombines at the second branch **611**, and provides an output signal at the output end **610**. When the split ring resonator **602** responds to incoming electromagnetic energy, the resonator produces localized fields, due to induced currents and/or electrical potentials in the resonator **602**. The localized fields interact with the electrooptic polymer and produce variations in the effective refractive index experienced by the guided energy. This then changes the effective path length of the arm(s) **606**, **607** of the interferometer **604** that include the electrooptic polymer. As is known for interferometric modulators and switches, the amount of light exiting the output end is a function of the relative change in effective refractive index in the legs of the interferometer, thus providing information about the current in the split ring resonator **602**. One straight section **606** or **607** of the interferometer **604** may partially or entirely comprise an electrooptic polymer, both straight sections **606**, **607** may comprise electrooptic polymer, or the entire interferometer **604** may comprise electrooptic polymer. The interferometer **604** may include waveguiding portions that are defects etched in a material, portions including waveguiding dielectric, portions that allow electromagnetic energy to propagate in free space, or other configurations. Moreover, the position of the interferometer **604** relative to the split ring resonator **602** is one illustrative example and the relative positions may be different from that shown in FIG. 6 and may still provide a signal responsive to current in the split ring resonator **602**. Further, although the split ring resonator **602** in FIG. 6 is shown having substantially rectilinear geom-

etry, this is not required and other split ring resonator geometries are known to those skilled in the art.

[0036] Another way of extracting signals from a metamaterial array is by including one or more antennae in the array. Measurements of the fields inside a metamaterial comprising split ring resonators and wires using a scannable antenna are described in J. B. Brock, A. A. Houck, and I. L. Chuang, "FOCUSING INSIDE NEGATIVE INDEX MATERIALS", *Applied Physics Letters*, Volume 85, Number 13, Sep. 27, 2004, which is incorporated herein by reference. Although an antenna is one way of extracting the signal from the metamaterial, the signals may be extracted in other approaches. For example, the signal may be sampled using one or more switched circuits coupled to the resonators. In still another example, the signal may be measured by directly or indirectly measuring the current in the split ring resonators or wires or other properties of the split ring resonators or wires.

[0037] Moreover, although the illustrative example of a metamaterial included split ring resonators, other types of materials or metamaterials may be incorporated into one or more of the detector assemblies or in addition to the detector assemblies. The selection of the structure of the metamaterial, its properties, such as its effective permittivity, permeability, principal frequency, loss, gain or other aspect is a design choice that may depend upon the intended application, cost constraints, expected input or other design constraints. Similar design considerations apply to the methods and structures for determining the properties of the energy intercepted by the detector assemblies. Further, the field of metamaterials and negative index materials is evolving rapidly and other approaches to forming such materials have been described, including those incorporating transmission lines or wires, nanorods, multiferroic materials, or other approaches to establishing an effective permittivity and/or permeability. In some applications these approaches may be incorporated into one or more of the detector assemblies **102**, **106**. Although metamaterials have been described as related to electromagnetic radiation, such materials or equivalents to such materials may be implemented for other types of waves. For example, phononic metamaterials have been reported in Suxia Yang, J. H. Page, Zhengyou Liu, M. L. Cowan, C. T. Chan, and Ping Sheng, "FOCUSING OF SOUND IN A 3D PHONONIC CRYSTAL", *Physical Review Letters*, Volume 93, Page 024301, Jul. 7, 2004, which is incorporated herein by reference.

[0038] In one embodiment, the detectors **104**, **108** may be quantum dots. One example of how quantum dots may be incorporated as a detector is described in J. L. Jimenez, L. R. C. Fonseca, D. J. Brady, J. P. Leburton, D. E. Wohlert, and K. Y. Cheng, "THE QUANTUM DOT SPECTROMETER", *Applied Physics Letters*, Volume 71, Number 24, Dec. 15, 1997, page 3558-3560, which is incorporated herein by reference. The quantum dots may be incorporated as detectors **104**, **108** in either the first detector assembly **102**, the second detector assembly **106**, or both. An assembly of quantum dots may comprise a single type of quantum dot that absorbs and re-emits in a relatively narrow wavelength band, or it may comprise more than one type of quantum dot, thus expanding the wavelength band at which the detector assemblies absorb and re-emit.

[0039] In another embodiment the detectors **104**, **108** may be antennae, where the antennae may include dipole or other types of antennae. Those skilled in the art may recognize that a multitude of different devices may form an antenna and that

an antenna may exist in a wide variety of shapes and sizes. For example, an antenna may be very small and include a nanotube, as is described in Y. Wang, K. Kempa, B. Kimball, J. B. Carlson, G. Benham, W. Z. Li, T. Kempa, J. Rybczynski, A. Herczynski, Z. F. Ren, "RECEIVING AND TRANSMITTING LIGHT-LIKE RADIO WAVES: ANTENNA EFFECT IN ARRAYS OF ALIGNED CARBON NANOTUBES", Applied Physics Letters, Volume 85, Number 13, Sep. 27, 2004, which is incorporated herein by reference. The antennae may be incorporated as detectors **104**, **108** in one or more of the first detector assembly **102** and the second detector assembly **106**. An assembly of antennae may comprise a single type of antenna that absorbs and re-emits in a relatively narrow wavelength band, or it may comprise more than one type of antenna, thus expanding the wavelength band at which the detector assemblies absorb and re-emit.

[0040] The signal processor **110** may perform a variety of functions. In one example, where the detectors **104** in the first array are antennae, the processor **110** may extract information from the respective signals from the first detector assembly **102** according to conventional antenna array techniques. Where the detectors **108** in the second array are antennae, the processor **110** may also extract information from the respective signals from the second detector assembly **106** according to conventional antenna array techniques. Alternatively, where the second detector assembly **106** includes a single antenna, the processor **110** may extract information from the respective signal from the single antenna according to conventional transceiver techniques.

[0041] While these illustrative examples involve one or more antenna arrays and application of antenna array or transceiver techniques, the signal processor **110** may apply a range of other techniques in addition to or as an alternative to the previously described techniques. For example, the signal processor **110** may perform a Fourier transform on one or more of the signals for imaging or other purposes, a correlation or autocorrelation between signals, or it may include a filter, which may be a noise filter or other type of filter, and may be low pass, high pass, or bandpass. In one embodiment the source **100** and the detector system **112** may be in motion relative to one another and the signal processor **110** may be configured to compensate for this relative motion.

[0042] In one embodiment the signal processor **110** may be configured to sample data from the detectors **104**, **108** as a function of time. Such a configuration may be desirable especially in systems where the source **100** and detector system **112** are in motion relative to each other. In this case the sampling rate may be adjustable, and may be determined by the magnitude of the relative motion between the source **100** and the detector system **112**.

[0043] In one embodiment the signal processor **110** may comprise a computer, wherein the respective signals generated by the first detector assembly **102** or the second detector assembly **106** or a signal corresponding to the respective signals from the first or second detector assemblies **102**, **106** is guided to the computer. The computer may comprise software for processing the signals received and it may include one or more devices (not shown) for interfacing the computer and the detector assemblies **102**, **106**. The computer may or may not be proximate to the first and second detector assemblies **102**, **106**.

[0044] In one embodiment, the signal processor **110** may include components for processing electromagnetic signals. In this case, the signal processor **110** may include compo-

nents for mixing, reflecting, focusing, or otherwise changing the path of electromagnetic radiation. One example of such a signal processor **110** is an arrangement for heterodyning two signals, in which case the signal processor **110** may include a nonlinear device such as a vacuum tube, transistor, or diode mixer.

[0045] Applications of the embodiments described in FIGS. **1-6** are wide ranging and may include imaging and/or image processing, x-ray spectrometry/spectroscopy, radar, medical imaging applications such as PET, CAT scans, MIR, and ultrasound, LIAR, and other applications.

[0046] Those having skill in the art will recognize that the state of the art has progressed to the point where there is little distinction left between hardware and software implementations of aspects of systems; the use of hardware or software is generally (but not always, in that in certain contexts the choice between hardware and software can become significant) a design choice representing cost vs. efficiency tradeoffs. Those having skill in the art will appreciate that there are various vehicles by which processes and/or systems and/or other technologies described herein can be effected (e.g., hardware, software, and/or firmware), and that the preferred vehicle will vary with the context in which the processes and/or systems and/or other technologies are deployed. For example, if an implementer determines that speed and accuracy are paramount, the implementer may opt for a mainly hardware and/or firmware vehicle; alternatively, if flexibility is paramount, the implementer may opt for a mainly software implementation; or, yet again alternatively, the implementer may opt for some combination of hardware, software, and/or firmware. Hence, there are several possible vehicles by which the processes and/or devices and/or other technologies described herein may be effected, none of which is inherently superior to the other in that any vehicle to be utilized is a choice dependent upon the context in which the vehicle will be deployed and the specific concerns (e.g., speed, flexibility, or predictability) of the implementer, any of which may vary. Those skilled in the art will recognize that optical aspects of implementations will typically employ optically-oriented hardware, software, and or firmware.

[0047] The foregoing detailed description has set forth various embodiments of the devices and/or processes via the use of block diagrams, diagrammatic representations, flowcharts, and/or examples. Insofar as such block diagrams, diagrammatic representations, flowcharts, and/or examples contain one or more functions and/or operations, it will be understood by those within the art that each function and/or operation within such block diagrams, diagrammatic representations, flowcharts, or examples can be implemented, individually and/or collectively, by a wide range of hardware, materials, components, software, firmware, or virtually any combination thereof. In one embodiment, several portions of the subject matter described herein may be implemented via Application Specific Integrated Circuits (ASICs), Field Programmable Gate Arrays (FPGAs), digital signal processors (DSPs), or other integrated formats. However, those skilled in the art will recognize that some aspects of the embodiments disclosed herein, in whole or in part, can be equivalently implemented in integrated circuits, as one or more computer programs running on one or more computers (e.g., as one or more programs running on one or more computer systems), as one or more programs running on one or more processors (e.g., as one or more programs running on one or more microprocessors), as firmware, or as virtually any

combination thereof, and that designing the circuitry and/or writing the code for the software and or firmware would be well within the skill of one of skill in the art in light of this disclosure. In addition, those skilled in the art will appreciate that the mechanisms of the subject matter described herein are capable of being distributed as a program product in a variety of forms, and that an illustrative embodiment of the subject matter described herein applies regardless of the particular type of signal bearing medium used to actually carry out the distribution. Examples of a signal bearing medium include, but are not limited to, the following: a recordable type medium such as a floppy disk, a hard disk drive, a Compact Disc (CD), a Digital Video Disk (DVD), a digital tape, a computer memory, etc.; and a transmission type medium such as a digital and/or an analog communication medium (e.g., a fiber optic cable, a waveguide, a wired communications link, a wireless communication link, etc.).

[0048] Those having skill in the art will recognize that a system may include one or more of a system housing or support, and may include electrical components, alignment features, one or more interaction devices, such as a touch pad or screen, control systems including feedback loops and control motors (e.g., feedback for sensing lens position and/or velocity; control motors for moving/distorting lenses to give desired focuses). Such systems may include image processing systems, image capture systems, photolithographic systems, scanning systems, or other systems employing focusing or refracting elements or processes.

[0049] While particular embodiments of the present invention have been shown and described, it will be understood by those skilled in the art that, based upon the teachings herein, changes and modifications may be made without departing from this invention and its broader aspects and, therefore, the appended claims are to encompass within their scope all such changes and modifications as are within the true spirit and scope of this invention. Furthermore, it is to be understood that the invention is solely defined by the appended claims. It will be understood by those within the art that, in general, terms used herein, and especially in the appended claims (e.g., bodies of the appended claims) are generally intended as “open” terms (e.g., the term “including” should be interpreted as “including but not limited to,” the term “having” should be interpreted as “having at least,” the term “includes” should be interpreted as “includes but is not limited to,” “comprise” and variations thereof, such as, “comprises” and “comprising” are to be construed in an open, inclusive sense, that is as “including, but not limited to,” etc.). It will be further understood by those within the art that if a specific number of an introduced claim recitation is intended, such an intent will be explicitly recited in the claim, and in the absence of such recitation no such intent is present. For example, as an aid to understanding, the following appended claims may contain usage of the introductory phrases “at least one” and “one or more” to introduce claim recitations. However, the use of such phrases should not be construed to imply that the introduction of a claim recitation by the indefinite articles “a” or “an” limits any particular claim containing such introduced claim recitation to inventions containing only one such recitation, even when the same claim includes the introductory phrases “one or more” or “at least one” and indefinite articles such as “a” or “an” (e.g., “a” and/or “an” should typically be interpreted to mean “at least one” or “one or more”); the same holds true for the use of definite articles used to introduce claim recitations. In addition, even if a specific number of an

introduced claim recitation is explicitly recited, those skilled in the art will recognize that such recitation should typically be interpreted to mean at least the recited number (e.g., the bare recitation of “two recitations,” without other modifiers, typically means at least two recitations, or two or more recitations).

1. An apparatus comprising:

a first detector assembly configured in a first pattern, said first detector assembly including a plurality of subassemblies and configured to receive a first portion of energy from a first wave having a first energy distribution and responsive to produce a first signal corresponding to the first portion of the energy;

said first detector assembly pattern further being selected to form a second portion of the energy from the first wave into a second wave having a second energy distribution; and

a second detector assembly having a second pattern arranged according to said second energy distribution and responsive to produce a second signal corresponding to the second portion of the energy;

wherein the subassemblies are configured in a first spatial distribution; and

wherein a first subassembly in the first detector assembly is configured to receive energy in a first energy band.

2. The apparatus of claim 1 wherein the first detector assembly is operably coupled to the second detector assembly.

3. The apparatus of claim 1 further including a wave source.

4. The apparatus of claim 3 wherein the wave source is configured to produce the first wave.

5. The apparatus of claim 1 wherein the first detector assembly is configured to re-radiate energy.

6. The apparatus of claim 1 wherein the first detector assembly includes a substrate, wherein said substrate is configured to hold the subassemblies.

7. The apparatus of claim 6 wherein the substrate forms a portion of the first pattern.

8. (canceled)

9. The apparatus of claim 1 wherein the first spatial distribution forms a portion of the first pattern.

10. (canceled)

11. An apparatus comprising:

a first detector assembly configured in a first pattern, said first detector assembly including a plurality of subassemblies and configured to receive a first portion of energy from a first wave having a first energy distribution and responsive to produce a first signal corresponding to the first portion of the energy;

said first detector assembly pattern further being selected to form a second portion of the energy from the first wave into a second wave having a second energy distribution; and

a second detector assembly having a second pattern arranged according to said second energy distribution and responsive to produce a second signal corresponding to the second portion of the energy;

wherein the subassemblies are configured in a first spatial distribution; and

wherein a second subassembly in the first detector assembly is configured to receive energy in a second energy band.

12. The apparatus of claim 1 wherein the second detector assembly includes a second plurality of subassemblies, said second plurality of subassemblies having a second spatial distribution.

13. The apparatus of claim 12 wherein the second spatial distribution forms a portion of the second pattern.

14. An apparatus comprising:

a first detector assembly configured in a first pattern, said first detector assembly including a plurality of subassemblies and configured to receive a first portion of energy from a first wave having a first energy distribution and responsive to produce a first signal corresponding to the first portion of the energy;

said first detector assembly pattern further being selected to form a second portion of the energy from the first wave into a second wave having a second energy distribution; and

a second detector assembly having a second pattern arranged according to said second energy distribution and responsive to produce a second signal corresponding to the second portion of the energy;

wherein the second detector assembly includes a second plurality of subassemblies, said second plurality of subassemblies having a second spatial distribution; and

wherein a first subassembly in the second plurality of subassemblies is configured to receive energy in a first energy band.

15. An apparatus comprising:

a first detector assembly configured in a first pattern, said first detector assembly including a plurality of subassemblies and configured to receive a first portion of energy from a first wave having a first energy distribution and responsive to produce a first signal corresponding to the first portion of the energy;

said first detector assembly pattern further being selected to form a second portion of the energy from the first wave into a second wave having a second energy distribution; and

a second detector assembly having a second pattern arranged according to said second energy distribution and responsive to produce a second signal corresponding to the second portion of the energy;

wherein the second detector assembly includes a second plurality of subassemblies, said second plurality of subassemblies having a second spatial distribution; and

wherein a second subassembly in the second plurality of subassemblies is configured to receive energy in a second energy band.

16. The apparatus of claim 1 wherein the first pattern forms a diffractive element.

17. The apparatus of claim 16 wherein the first pattern forms a zone plate.

18. The apparatus of claim 16 wherein the first pattern forms a diffraction grating.

19. The apparatus of claim 1 wherein the first pattern forms a refractive element.

20. The apparatus of claim 19 wherein the first pattern forms a focusing refractive element.

21. The apparatus of claim 19 wherein the first pattern forms a hologram.

22. The apparatus of claim 1 further including a signal processor.

23. The apparatus of claim 22 wherein the signal processor is operably connected to the first detector assembly.

24. The apparatus of claim 22 wherein the signal processor is operably connected to the second detector assembly.

25. The apparatus of claim 1 wherein the first wave is an electromagnetic wave.

26. The apparatus of claim 1 wherein the first wave is an acoustic wave.

27. The apparatus of claim 1 wherein the first detector assembly includes a quantum dot.

28. The apparatus of claim 1 wherein the first detector assembly includes a metamaterial.

29. The apparatus of claim 1 wherein the first detector assembly includes a split ring resonator.

30. The apparatus of claim 1 wherein the first detector assembly includes an antenna.

31. The apparatus of claim 1 wherein the first detector assembly includes a nanotube.

32. The apparatus of claim 1 wherein the first detector assembly includes a photodiode.

33. The apparatus of claim 1 wherein the first detector assembly includes a transducer.

34. The apparatus of claim 1 wherein the first detector assembly includes a piezoelectric material.

35. The apparatus of claim 1 wherein the first detector assembly includes a concentrator.

36. The apparatus of claim 35 wherein the concentrator includes a fluorophore.

37. (canceled)

38. (canceled)

39. (canceled)

40. (canceled)

41. (canceled)

42. (canceled)

43. (canceled)

44. (canceled)

45. (canceled)

46. (canceled)

47. (canceled)

48. (canceled)

49. (canceled)

50. (canceled)

* * * * *