




- (51) International Patent Classification:
G06F 19/00 (2011.01)
- (21) International Application Number:
PCT/US2012/053687
- (22) International Filing Date:
4 September 2012 (04.09.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/302,245 22 November 2011 (22.11.2011) US
- (71) Applicant (for all designated States except US): **THE BOEING COMPANY** [US/US]; 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **PELTZ, Leora** [US/US]; 1291 North Michigan Avenue, Pasadena, California 91104 (US). **PARK, Shawn Hyunsoo** [US/US]; 16611 Maurice Circle, Cerritos, California 90703 (US).
- (74) Agents: **TSUDA, Diane, M.** et al.; The Boeing Company, PO Box 2515, MC 110-SD54, Seal Beach, California 90740-1515 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

(54) Title: INFECTIOUS DISEASE DETECTION SYSTEM

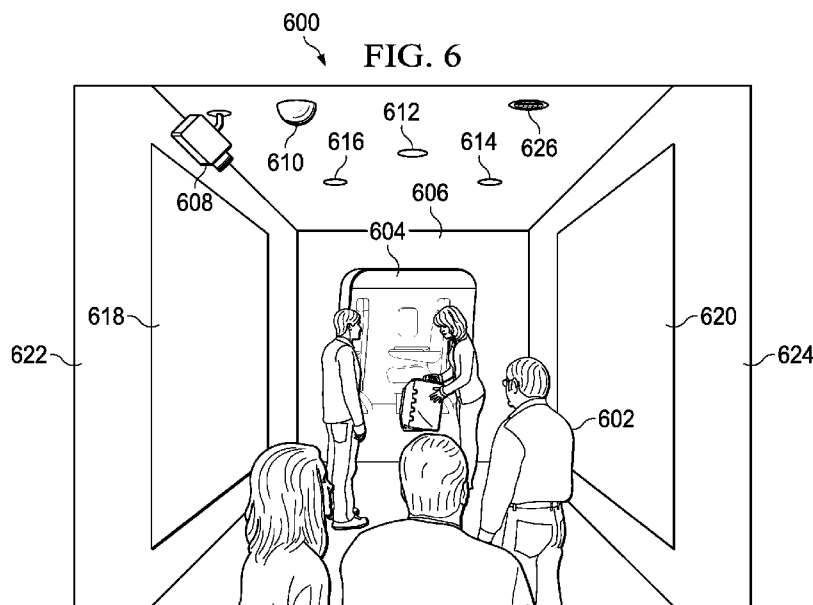

(57) Abstract: A method and apparatus for managing a zone. Information is obtained about an environment in the zone with a sensor system. A determination is made by an analyzer system as to whether a contagious condition is present in the zone using the information from the sensor system. An action is performed by a management system in response to the contagious condition being present.

WO 2013/077923 A1

INFECTIOUS DISEASE DETECTION SYSTEM

5 1. Field:

The present disclosure relates generally to passenger areas and, in particular, to detection and reduction of contagious conditions in passenger areas.

2. Background:

10 Infectious diseases may be transmitted by passengers during travel. Currently, over one billion passengers travel by air annually. With the growing mobility of people and the popularity of air travel, the potential for transmission of diseases between passengers before, during, and after flights has increased. Infectious contagious diseases may be transmitted from infected passengers to healthy passengers during air travel. These infections may arise naturally, in
15 epidemics, or by other means. The prevalence of air travel between the continents has increased the potential spread of these infections from local “hot spots” more quickly than before.

One manner in which the transmission of infectious diseases may be decreased is through managing the filters and the recirculation of air in the aircraft. Infectious diseases may be transmitted through inhalation and/or skin contact with airborne particulates, by direct physical
20 contact between people or objects, and other mechanisms. With the use of filters and increased introduction of fresh air, the transmission of infectious diseases within a passenger cabin may be reduced.

In addition, face masks are personal means for reducing the transmission of airborne particulates that also may be used to reduce the transmission of infectious diseases. Passengers
25 may wear masks at the airport as well as on the aircraft to filter the air being exchanged between people and the environment.

Although these mechanisms may be used to reduce the transmission of infectious diseases; costs, personnel issues, and social issues are present.

Therefore, it would be desirable to have a method and apparatus that takes into account at
30 least some of the issues discussed above as well as possibly other issues.

SUMMARY

According to an aspect of the present invention there is provided, a method for managing a zone is provided. Information is obtained about an environment in the zone with a sensor system. A determination is made by an analyzer system as to whether a contagious condition is present in the zone using the information from the sensor system. An action is performed by a management system in response to the contagious condition being present.

Advantageously the management system, performs an action in response to the contagious condition being present which may comprise changing a parameter in an environment. The parameter for the zone may be one of direction of airflow, type of light, temperature, passenger movement, and humidity. The management system may perform the action in response to the contagious condition being present comprising identifying a source originating the contagious condition and performing an additional examination of the source. The contagious condition may be an infectious disease.

The management system **may** cause airflow that is configured to move particles away from a person in the zone. The zone is selected from one of a corridor, a lounge, a restroom, a gate waiting area, a walkway, a security screen area, a baggage area, a passenger boarding bridge, an eating area, a check-in area, and a passenger area. The management system may collect the particles from the airflow and determine whether a contagion is present in the particles.

The management system may cause an airflow that is configured to move in a direction selected from one of towards a ceiling in the zone and towards a floor in the zone. The management system **may** present an instruction to change a pattern of movement by people in the zone on a display system. The management system may turn on an ultraviolet light in the zone.

The sensor system comprises sensors in which the sensors are selected from one of an audio sensor, a video camera, an infrared sensor, and an air analysis system.

According to a further aspect of the present invention there is provided, similar to that stated above, an apparatus for managing contagious conditions comprises a sensor system, an analyzer system, and a management system. The sensor system is configured to obtain information about an environment in a zone with a sensor system. The analyzer system is configured to determine whether a contagious condition is present in the zone using the information. The management system is configured to perform an action in response to the contagious condition being present.

The action may comprise changing a parameter in the environment that reduces the contagious condition. The parameter **may be** selected from one of a direction of airflow, a type of light, a temperature, passenger movement, and a humidity. The a action may comprise identifying a source originating the contagious condition and indicating an additional
5 examination of the source should be performed. The action may cause airflow that is configured to move particles away from a person in the zone.

The action may further comprise collecting the particles from the airflow and determining whether a contagion is present in the particles. The action may further comprise presenting an instruction to change a pattern of movement by people in the zone. The a zone **may be** selected
10 from one of a corridor, a lounge, a restroom, a gate waiting area, a walkway, a security screening area, a baggage area, a passenger boarding bridge, an eating area, a check-in area, and a passenger area.

The features, functions, and advantages can be achieved independently in various
15 embodiments of the present disclosure or may be combined in yet other embodiments in which further details can be seen with reference to the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

20 The novel features believed characteristic of the illustrative embodiments are set forth in the appended claims. The illustrative embodiments, however, as well as a preferred mode of use, further objectives, and advantages thereof will best be understood by reference to the following detailed description of an illustrative embodiment of the present disclosure when read in conjunction with the accompanying drawings, wherein:

25 **Figure 1** is an illustration of a block diagram of a contagion management environment in accordance with an illustrative embodiment;

Figure 2 is an illustration of a block diagram of a sensor system in accordance with an illustrative embodiment;

30 **Figure 3** is an illustration of a block diagram of an analyzer system in accordance with an illustrative embodiment;

Figure 4 is an illustration of a block diagram of a management system in accordance with an illustrative embodiment;

Figure 5 is an illustration of a location in which a contagion management system may be implemented in accordance with an illustrative embodiment;

Figure 6 is an illustration of a passenger boarding bridge in accordance with an illustrative embodiment;

5 **Figure 7** is an illustration of a flowchart of a process for managing a zone with a contagion management system in accordance with an illustrative embodiment;

Figure 8 is an illustration of a flowchart of a process for identifying changes to a zone in accordance with an illustrative embodiment; and

10 **Figure 9** is an illustration of a data processing system in accordance with an illustrative embodiment.

DETAILED DESCRIPTION

The different illustrative embodiments recognize and take into account one or more
15 considerations. For example, they recognize and take into account that although filters and the introduction of fresh air in the passenger cabins of an aircraft may reduce the transmission of contagions, other locations are present in which the transmission of contagions may occur. For example, they recognize and take into account that contagions also may be transmitted in other passenger areas in an airport or other places that people may congregate for a period of time.
20 Further, although the use of face masks may reduce the emission and inhalation of ventilation of airborne contagions, these face masks are not effective against pathogens that are transmitted by direct contact. This direct contact may occur with doorknobs, handles, clothing, hair, and other fomites.

The different illustrative embodiments recognize and take into account that passenger
25 areas are locations where contagions may be spread. Further, these areas are also areas in which the spread of contagions may be managed. It is recognized and taken into account that passenger areas, such as waiting areas, boarding lounges, and walkways, are areas in which passengers may spend time prior to boarding or after exiting an aircraft.

30 Currently available solutions do not take into account boarding processes, such as those for commercial air flights. Passengers may spend several minutes walking slowly or waiting in a covered walkway while moving towards the entrance to a vehicle, such as an aircraft. The different examples illustrated recognize and take into account that monitoring these and other areas may be used to reduce the spread of infectious diseases.

With the amount of time spent by passengers in these areas, mechanisms may be used to determine whether contagions may be present in the areas, and actions may be taken to reduce the spread of these contagions. As a result, it would be desirable to have a method that aids in detecting the presence of people who may be infected and can potentially become transmitters of infectious diseases.

Thus, the illustrative embodiments provide a method and apparatus for managing a zone in which people may be located. Information about people in the zone is obtained using a sensor system. A determination is made as to whether a contagious condition is present in the zone using this information. An action may be performed in response to the contagious condition being present.

With reference now to the figures and, in particular, with reference to **Figure 1**, an illustration of a block diagram of a contagion management environment is depicted in accordance with an illustrative embodiment. In this illustrative example, contagion management environment **100** includes location **102** in which persons **104** may be located. Location **102** may be, for example, without limitation, an airport, a train station, a bus station, a mall, a stadium, an office building, and other suitable types of locations in which contagion management may be desired.

As depicted, contagion management may be performed for location **102** using contagion management system **106** that may manage environment **107** in zone **108** located in location **102**. In these illustrative examples, contagion management system **106** may determine whether contagious condition **110** is present and initiate action **112** if contagious condition **110** is detected. In these illustrative examples, these different operations may be performed in real-time. In other words, the determination of whether contagious condition **110** is present and the initiation of action **112** may be performed as quickly as possible by contagion management system **106** without an intentional delay.

In these illustrative examples, contagious condition **110** is a situation in which action **112** may be needed. For example, contagious condition **110** may mean that a person or persons **104** may have symptoms indicating the presence of an infectious disease. In this example, contagious condition **110** may be verified. In another example, contagious condition **110** may be a situation in which a contagion for an infectious disease has been identified as being present in zone **108**. In other words, contagious condition **110** may or may not be present.

In this illustrative example, contagion management system **106** comprises sensor system **114**, analyzer system **116**, and management system **118**. Sensor system **114**, analyzer system

116, and management system **118** are implemented using hardware and also may include software.

Sensor system **114** is configured to collect information **120** about zone **108**. Sensor system **114** may comprise sensors selected from one of an audio sensor, a video camera, an infrared sensor, an air analysis system, and other suitable types of sensors. In particular, sensor system **114** collects information **120** about environment **107** in zone **108**. For example, sensor system **114** may collect information **120** about the condition of persons **104** in zone **108** as well as about conditions for environment **107** in zone **108**. These other conditions may include, for example, a presence of bacteria, pollen, viruses, and/or other particulates that may be present on surfaces or in the air in environment **107** within zone **108**.

Analyzer system **116** uses information **120** to determine whether contagious condition **110** is present and to identify action **112** if contagious condition **110** is present in zone **108**.

For example, analyzer system **116** may determine whether contagious condition **110** originated with person **122** in persons **104**. If person **122** is identified as originating contagious condition **110**, then action **112** may be taken to reduce contagious condition **110**.

In these illustrative examples, contagious condition **110** is an infectious disease. Analyzer system **116** also may be configured to identify specific contagious conditions. For example, analyzer system **116** may be configured to identify particular strains of the flu, the Ebola virus, tuberculosis, hemorrhagic fever, and/or any other contagion that can be transmitted from one person to another. In another illustrative example, analyzer system **116** may be configured to identify generalized symptoms of common infectious diseases without identifying a particular strain. For example, the presence of an elevated body temperature, coughing, sweating, and other symptoms may indicate the presence of an infectious disease.

As depicted, management system **118** is a hardware system and may include software. Management system **118** may change number of parameters **124** in zone **108**. A number, as used herein with reference to items, means one or more items. For example, number of parameters **124** is one or more parameters. Number of parameters **124** may be any parameters that are selected to reduce contagious condition **110**. For example, a parameter in number of parameter **124** may be a direction of airflow, a type of light, a temperature, passenger movement, humidity, and other suitable parameters.

In these illustrative examples, zone **108** may be selected as an area in location **102** in which the location of persons **104**, the movement of persons **104**, or a combination of the two is such that sensor system **114** is able to collect information **120** in a manner that allows analyzer

system **116** to determine whether contagious condition **110** is present. Further, zone **108** also may be selected as an area in location **102** that allows for action **112** to be taken. This action may be, for example, changing number of parameters **124** in a manner that reduces contagious condition **110**.

5 In these illustrative examples, zone **108** may be selected from one of a corridor, a lounge, a restroom, a gate waiting area, a walkway, a passenger boarding bridge, an eating area, a security screening area, a check-in area, a baggage area, a passenger area, and other suitable locations.

10 Thus, with the use of contagion management system **106**, a risk of contagious conditions may be reduced. In particular, a risk of disease transmission may be reduced through the use of contagion management system **106**.

15 In these illustrative examples, contagion management system **106** may be permanently or temporarily set up in location **102** about environment **107** in zone **108**. For example, sensor system **114** may be set up in different locations during different times of the year or in response to different alerts about contagious conditions that may occur. For example, sensor system **114** may be set up during flu season or in response to an outbreak of a particular type of infectious disease.

20 With reference next to **Figure 2**, an illustration of a block diagram of a sensor system is depicted in accordance with an illustrative embodiment. In this illustrative example, sensor system **114** may include at least one of camera system **200**, air sampler **202**, bio-sensor system **203**, airflow detector **204**, audio sensor **205**, as well as other components.

25 As used herein, the phrase “at least one of”, when used with a list of items, means different combinations of one or more of the listed items may be used and only one of each item in the list may be needed. For example, “at least one of item A, item B, and item C” may include, for example, without limitation, item A or item A and item B. This example also may include item A, item B, and item C, or item B and item C. In other examples, “at least one of” may be, for example, without limitation, two of item A, one of item B, and 10 of item C; four of item B and seven of item C; and other suitable combinations.

30 In other words, different types of sensors are illustrated in **Figure 2** for sensor system **114**. Multiple sensors of the same type may be used in implementing sensor system **114**.

 In this illustrative example, camera system **200** may include at least one of visible light camera **206**, infrared camera **208**, and other suitable types of cameras. Visible light camera **206**

is configured to generate images **210**. Images **210** may be still images or may be sequential images for a video.

Images **210** are used to identify actions of persons **104** in **Figure 1**, movement of persons **104**, or both. For example, visible light camera **206** may be configured to generate images **210** of a person sneezing or coughing. Infrared camera **208** is configured to generate images **210** from which information about persons **104**, such as body temperature, can be identified at different locations on the body of a person in persons **104**.

Air sampler **202** is configured to collect air samples **211** from environment **107** in zone **108** in **Figure 1**. Air samples **211** may contain particles **212**. Particles **212** may be analyzed to identify whether contagions are present and what type of contagions may be present in particles **212**.

Bio-sensor system **203** may include reader **214** and bio-sensors **216**. Bio-sensors **216** may be associated with one or more of persons **104** in zone **108**. For example, bio-sensors **216** may be on boarding passes carried by passengers in persons **104**. In other examples, bio-sensors **216** may be worn on the clothing of persons **104**. Bio-sensors **216** may generate an indication of a particular condition.

Additionally, bio-sensors **216** may be associated with other objects in zone **108** at location **102** in **Figure 1**. For example, bio-sensors **216** may be placed in locations in zone **108** where fomites might be present. These fomites may be, for example, without limitation, surfaces touched by people or other areas through which people may travel. These surfaces may be, for example, handrails, doorknobs, and other surfaces that may be considered a fomite. Bio-sensors **216** may be placed on or near these surfaces.

In this illustrative example, a bio-sensor in bio-sensors **216** may include a biological element, a transducer, and a processor. The biological element may be, for example, a biological material that is sensitive to a particular contagion or set of contagions. For example, a biological element may react with the DNA from a contagious bacteria or with the RNA from a flu virus.

The transducer may generate a signal in response to a reaction of the biological element with the contagion. The signal processor may display or send an indication of a presence of a contagion over a wireless communications link. This indication may be read by reader **214** in bio-sensor system **203**.

This indication may be a wireless signal transmitted to reader **214** in bio-sensor system **203** when reader **214** is remote to bio-sensors **216**. In other illustrative examples, the indication may be displayed on a bio-sensor in bio-sensors **216**. For example, visible light camera **206** may

generate images **210** of a bio-sensor on a boarding pass of a person or persons **104** that may be carrying contagions that pose contagious condition **110**.

In another illustrative example, the transducer and processor may not be present. For example, bio-sensors **216** may be configured to change a particular feature, such as color, when
5 in contact with a particular contagion, making the change in bio-sensors **216** visually identifiable in images generated by visible light camera **206**.

In yet another illustrative example, sensor system **114** also may include airflow detector **204**. Airflow detector **204** may provide information about airflow in zone **108**.

Audio sensor **205** is configured to detect sounds of persons **104** in zone **108**. These
10 sounds may include, for example, sounds of a person sneezing, coughing, or some other suitable sound that may indicate a presence of a contagion being spread.

Turning now to **Figure 3**, an illustration of a block diagram of an analyzer system is depicted in accordance with an illustrative embodiment. In this illustrative example, some or all of analyzer system **116** may be implemented using computer system **300**.

Computer system **300** is a number of computers. When more than one computer is
15 present in computer system **300**, those computers may be in communication with each other. The communication may be provided using a wireless communications link, a network, a shared memory, or some other suitable communication mechanism. In these illustrative examples, analyzer system **116** may include information analyzer **302**, threat assessor **304**, and action
20 initiator **306**.

Information analyzer **302** may include hardware, software, or a combination of the two. Parts of information analyzer **302** may be implemented using computer system **300**, while other parts of information analyzer **302** may be implemented using other hardware devices.

For example, image analyzer **308** in information analyzer **302** may use images **210** in
25 **Figure 2** in information **120** in **Figure 1** generated by visible light camera **206** to determine whether contagious condition **110** is present.

More specifically, image analyzer **308** may use images **210** to identify information about persons **104** in **Figure 1**. For example, image analyzer **308** may determine whether a person or persons **104** in zone **108** has coughed, sneezed, or performed some other action that may indicate
30 contagious condition **110**. As yet another example, image analyzer **308** may identify whether blood is present when a person in persons **104** coughs or sneezes. In still another example, image analyzer **308** may determine if a person is sweating.

Further, images **210** may include bio-sensors **216** in **Figure 2** worn by persons **104**. The images of bio-sensors **216** may be used to determine whether a particular contagion is present when bio-sensors **216** generate visual indications for the particular contagion. For example, bio-sensors **216** may be configured to turn red when in contact with a particular contagion. Images **210** may be used by image analyzer **308** to identify the presence of this contagion on a boarding pass or other item carried by a person in persons **104**.

Images **210** generated by infrared camera **208** in **Figure 2** may be used by image analyzer **308** to generate additional information about persons **104**. For example, image analyzer **308** may generate a temperature profile for part or all of a person. Additionally, images **210** also may be analyzed by image analyzer **308** to identify body fluid ejection patterns when a person sneezes or coughs.

Information analyzer **302** also may include particle analyzer **310**. Information analyzer **302** may perform an analysis of particles **212** in **Figure 2** to generate information about particles **212**.

Particle analyzer **310** may identify particles **212** obtained by air sampler **202** in **Figure 2**. Particle analyzer **310** may be configured to detect potential contagions in zone **108** from particles **212** collected in air samples **211** by air sampler **202** in **Figure 2**. Particle analyzer **310** may be configured to indicate the presence of a particular type of contagion. Further, particle analyzer **310** may be configured to indicate when the level of a particular contagion within zone **108** has reached a desired threshold that may make zone **108** particularly susceptible to the transmittal of infectious disease between persons **104**. This level may be measured in parts per unit of air.

Further, if deoxyribonucleic acid (DNA) is present in particles **212**, the DNA may be amplified using various techniques to provide an amount of DNA needed to identify a particle in particles **212**. This amplification of DNA may be performed using various techniques, such as polymerase chain reaction (PCR) processes and/or other suitable processes.

In these illustrative examples, real-time polymerase chain reaction processes may be used to identify particles within a desired time. In another example, kinetic polymerase chain reaction processes also may be used. These processes may detect DNA as the polymerase chain reaction process occurs rather than detecting the DNA at the end of the process. For example, particle analyzer **310** may be implemented using a BioLaz™ Real-Time Microbial Monitor, which is available from Particle Measuring Systems, Inc. The particles identified using this technique may be, for example, viruses, bacteria, fungus, organic allergens, and other particles that may have DNA.

Bio-information analyzer **312** is configured to analyze information from bio-sensor system **203** in **Figure 2**. Bio-information analyzer **312** may indicate a presence of a contagion.

Airflow analyzer **314** is configured to obtain information from airflow detector **204** in **Figure 2**. Airflow analyzer **314** may identify airflow patterns in zone **108**.

5 Audio analyzer **316** is configured to identify information received from audio sensor **205** in **Figure 2**. Audio analyzer **316** may identify body fluid ejection patterns. Audio analyzer **316** may identify these patterns in conjunction with image analyzer **308** in these depicted examples.

In these illustrative examples, the information identified about persons **104** from images **210**, airflow patterns, and the information about particles **212** forms results **318**. Results **318** are
10 sent to threat assessor **304**.

Threat assessor **304** uses results **318** to determine whether contagious condition **110** is present. In particular, threat assessor **304** may analyze results **318** using contagious condition database **320** to determine whether contagious condition **110** is present.

For example, contagious condition database **320** also may include identifications of
15 contagious conditions based on actions, temperatures, and other information gathered about persons **104** in zone **108**. This information about persons **104** may be used to identify symptoms of a contagious disease. For example, an identification of a high fever, excessive sweating, and other symptoms may indicate that a person in persons **104** has an infectious disease.

Also, contagious condition database **320** may include identifications of contagious
20 conditions based on the identification of particles **212**. The identification of particles **212** may indicate a presence of a contagion for an infectious disease.

If contagious condition **110** is present, threat assessor **304** may identify a severity of contagious condition **110**. In one illustrative example, threat assessor **304** generates threat level **322**. Threat level **322** may indicate that contagious condition **110** is absent or may indicate a
25 level of severity of contagious condition **110**. Threat level **322** may then be used by action initiator **306** to identify action **112** to be performed.

The airflow and body fluid ejection patterns may be used by threat assessor **304** to identify the projected spread of contagions in zone **108**. In these illustrative examples, the projected spread may be a factor in identifying threat level **322**.

30 Also, threat assessor **304** may identify a source originating contagious condition **110**. The source may be identified from results **318** generated by information analyzer **302**. In these illustrative examples, the source in zone **108** may be at least one of a floor surface, an object dropped by a person, a fomite, a person, a hand rail, a doorknob, and other sources.

As depicted, action initiator **306** uses threat level **322** to initiate action **112** in **Figure 1**. As described above, action **112** may include changing number of parameters **124**, generating alerts, sending reports, and other suitable types of actions for action **112**. Action **112** may be identified using contagious condition database **320**. Contagious condition database **320** may include actions that may be taken in response to a determination that contagious condition **110** is present.

In these illustrative examples, action initiator **306** may send command **317** to management system **118** in **Figure 1** to change or initiate action **112**. In this example, action **112** changes number of parameters **124** in zone **108**. The airflow pattern within zone **108** may be a factor in which parameters and the extent to which values for number of parameters **124** may be changed.

Additionally, action initiator **306** also may identify one or more persons in persons **104** suspected of carrying an infectious disease. These persons may be identified as having contagious condition **110**. Action **112** may be to separate these persons from other persons in persons **104** and indicate that an additional examination should be performed. Performing the additional examination may determine whether these persons actually carry an infectious disease. For example, action **112** may be to send an instruction to the passengers identified as having contagious condition **110** to move to another area. In another example, employees or other operators may be instructed to escort the persons identified to another area for an additional examination.

In yet another illustrative example, action **112** may include initiating cleaning of zone **108**, more frequent cleaning of zone **108**, use of different cleaning agents in zone **108**, and other suitable actions. In still another illustrative example, action **112** may include closing off zone **108** to people until environment **107** is considered to no longer have contagious condition **110**.

In still other illustrative examples, action **112** may be to perform an additional examination of the source of contagious condition **110**. This examination may involve taking samples from the source, collecting the source, or other suitable actions to examine the source.

For example, contagious condition **110** may be identified, but the actual nature of contagious condition **110** may not be known. In one example, a tissue dropped on the ground after a person sneezes in the tissue may be identified as contagious condition **110**. However, whether bacteria, a virus, or some other contaminant is present is unknown. An additional examination of this source may be made.

Action initiator **306** also may generate report **324**. Report **324** may include information about contagious condition **110**. Additionally, report **324** also may include an identification of actions that should be taken. Report **324** may be stored or sent to an airline, airport management, a government agency, or some other suitable destination. These reports may result in other
5 actions being initiated.

Additionally, analyzer system **116** also may include simulator **326**. Simulator **326** may use results **318** in simulations **328** of zone **108**. Simulation results **330** from simulations **328** may be used to identify changes to zone **108** to identify optimal parameters for number of parameters **124** in zone **108**.

10 For example, changes to airflow, lighting, temperature, and other parameters in zone **108** may be made. These changes to number of parameters **124** are changes that may be made without detecting contagious condition **110**. Instead, these changes may be made to reduce the spread of contagious condition **110** if contagious condition **110** is detected in zone **108**. For example, the airflow may be changed such that the airflow is configured to move in a direction
15 selected from one of towards a ceiling in zone **108** and towards a flow in zone **108**. The direction selected may depend on the airflow system used in zone **108**.

Simulator **326** may also be used to simulate the potential radius of infection once contagious condition **110** has been identified. Simulation results **330** from simulations **328** may be used, for example, to determine the most likely location for the spread of infectious disease,
20 the most effective route to redirect persons **104** away from the area, and what number of parameters **124** in other areas of the airport needs to be altered to neutralize contagious condition **110**.

For example, simulation results **330** from performing simulations **328** may be used to perform upgrades to ventilation systems in zone **108**. As another example, simulation results
25 **330** also may be used to change procedures for moving through zone **108**. For example, walking pace and walking patterns may be identified that reduce the possibility of a contagion being passed from one person to another person in zone **108**. These are changes to number of parameters **124** in addition to changes to number of parameters **124** made in response to detecting contagious condition **110**.

30 The actual action taken may depend on the components present in management system **118** and the configuration of zone **108**. The actions illustrated in the different depicted examples are only meant to provide illustrative examples of action **112** and are not meant to be limiting to the manner in which action **112** may be implemented.

Depending on the modularity of components in contagion management system **106** in **Figure 1**, a variety of different actions may be selected or implemented. For example, different types of sensors may be added or used in sensor system **114**. Further, analyzer system **116** may be configured to add or use different types of analysis systems to identify a contagious condition.

5 In addition, different components may be used in management system **118** to perform actions. The actions that may be selected may be based on the components used in management system **118**. In these illustrative examples, components for these different systems may be added or exchanged, depending on the particular implementation. The change of components may be selected based on the contagious condition that may be present. In other words, if a different
10 contagious condition is predicted to be present, components in contagion management system **106** may be changed to target the particular contagious condition.

Turning next to **Figure 4**, an illustration of a block diagram of a management system is depicted in accordance with an illustrative embodiment. In this illustrative example, management system **118** may include environmental system **400**, lighting system **402**, alert
15 system **404**, and delivery system **406**, as well as other types of systems, depending on the particular implementation.

Delivery system **406** may be configured to deliver items in zone **108** to reduce contagious condition **110** in **Figure 1**. For example, delivery system **406** may make anti-bacterial liquids, masks, and other items available to persons **104** in zone **108**.

20 Management system **118** may perform action **112** in **Figure 1** in response to receiving command **317** from action initiator **306** in analyzer system **116** in **Figure 3**. In particular, command **317** may be received from action initiator **306**.

Environmental system **400** may be used to change one or more parameters in number of parameters **124** in **Figure 1**. For example, environmental system **400** may change at least one of
25 temperature **408**, humidity **410**, airflow **412**, lighting **414**, and other suitable parameters. For example, changes in temperature **408** and humidity **410** may be changed to reduce the viability that a contagion may remain contagious, depending on the contagion identified. For example, the temperature may be decreased to neutralize the contagion.

Airflow **412** also may be changed to potentially move contagions away from persons **104**
30 in zone **108**. For example, upward airflow may be initiated or increased. In some examples, downward airflow may be initiated or increased.

Temperature **408**, humidity **410**, or a combination of the two may be changed to reduce the viability of a contagion in zone **108**. In this manner, transmission of a contagion may not cause a spread of an infectious disease if the contagion is rendered inert.

Lighting **414** also may be changed in zone **108**. For example, ultraviolet light may be introduced in selected locations of persons **104**. For example, persons **104** may place clothing, hands, and other articles under an ultraviolet light in zone **108** if contagious condition **110** is detected. This lighting may reduce the ability of a contagion to infect other people if spread into the air or on surfaces in zone **108**.

Alert system **404** may include display system **416** and audio system **418**. Display system **416** may comprise display devices that visually present instructions or information to persons **104** in zone **108**. For example, the instructions may instruct passengers before a certain point to halt movement. Audio system **418** may include a number of speakers. Instructions may be delivered to persons **104** in zone **108** using audio system **418**. For example, audio system **418** may instruct passengers via voice commands to halt movement.

Further, if a particular person or number of persons in persons **104** is identified as originating contagious condition **110**, at least one of display system **416** and audio system **418** may be used to instruct those people to move to another area for further testing or diagnosis.

In another illustrative example, environmental system **400**, lighting system **402**, alert system **404**, and delivery system **406** may be configured to activate periodically without analyzer system **116** detecting contagious condition **110**. For example, during heightened seasons of infectious disease, management system **118** may be configured to adjust number of parameters **124** based on time cycles, temperature fluctuations, or other suitable factors.

The illustration of contagion management environment **100** in **Figure 1**, contagion management system **106**, and other components in **Figures 1-4** are not meant to imply physical or architectural limitations to the manner in which an illustrative embodiment may be implemented. Other components in addition to or in place of the ones illustrated may be used.

Some components may be unnecessary. Also, the blocks are presented to illustrate some functional components. One or more of these blocks may be combined, divided, or combined and divided into different blocks when implemented in an illustrative embodiment.

The different components shown in **Figure 5** and **Figure 6** below may be combined with components in **Figures 1-4**, used with components in **Figures 1-4**, or a combination of the two.

Additionally, some of the components in **Figure 5** and **Figure 6** may be illustrative examples of how components shown in block form in **Figures 1-4** can be implemented as physical structures.

With reference next to **Figure 5**, an illustration of a location in which a contagion management system may be implemented is depicted in accordance with an illustrative embodiment. In this illustrative example, airport terminal **500** is an example of location **102** in which contagion management system **106** in **Figure 1** may be implemented. Contagion management system **106** may be especially useful in airport terminal **500** to reduce contagious condition **110** in **Figure 1** that may occur in airport terminal **500**.

In these illustrative examples, contagion management system **106** may be configured to manage different zones in airport terminal **500**. These zones include, for example, without limitation, preboarding lounge **502**, concourse **504**, passenger boarding bridge **506**, restroom **508**, eating area **510**, and baggage area **512**. These areas are examples of areas that may be selected as a zone in which contagion management system **106** manages contagious conditions.

These and other areas may be selected as ones in which the latency of passengers and other people are such that contagious condition **110** may be identified. For example, the latency of passengers or other people in these areas may be one in which the movement of people is slow enough such that contagious condition **110** may be identified and action **112** may be taken. Further, passenger boarding bridge **506** may be especially useful, since passengers may move slowly in the same direction towards a doorway for an aircraft. Passengers may walk slowly or stand in preboarding lounge **502** for periods of time long enough to determine whether contagious condition **110** is present and to take action **112**.

With reference now to **Figure 6**, an illustration of a passenger boarding bridge is depicted in accordance with an illustrative embodiment. In this illustrative example, passenger boarding bridge **600** is an example of an area that may be designated as zone **108** for management by contagion management system **106** in **Figure 1**. In this illustrative example, passenger boarding bridge **600** is a covered walkway in which passengers **602** may walk towards doorway **604** for aircraft **606**.

Sensors, such as visible light camera **608**, infrared camera **610**, air sampling port **612**, air sampling port **614**, and microphone **616** may be present. These sensors are examples of sensors that may be used to implement sensor system **114** in **Figure 1**. These sensors provide information **120** to analyzer system **116**.

Further, display device **618** and display device **620** may be part of alert system **404** in **Figure 4**. These display devices are examples of display devices that may be used to implement display system **416** in **Figure 4**. Display device **618** and display device **620** are located on wall **622** and wall **624**, respectively, in passenger boarding bridge **600**. Display device **618** and

display device **620** are examples of display devices in display system **416** shown in block form in **Figure 4**.

These display devices may display instructions to passengers **602** if contagious condition **110** is detected. These instructions may alter movement of passengers **602** in passenger boarding bridge **600**. Further, speaker **626** is an example of a speaker that may be used to implement audio system **418** in **Figure 4**. Speaker **626** may provide audibly instructions to passengers **602** in passenger boarding bridge **600**.

The illustration of airport terminal **500** in **Figure 5** and passenger boarding bridge **600** in **Figure 6** are not meant to limit the manner in which other illustrative embodiments may be implemented. For example, the different illustrative embodiments may be applied to other locations other than airport terminals. For example, these other locations may include a bus terminal, a subway terminal, a passenger area in a port, and other suitable locations.

The different sensors illustrated in passenger boarding bridge **600** are not meant to limit the type or number of sensors that may be used. For example, a bio-sensor system also may be implemented in passenger boarding bridge **600**.

With reference now to **Figure 7**, an illustration of a flowchart of a process for managing a zone with a contagion management system is depicted in accordance with an illustrative embodiment. This process may be implemented in contagion management system **106** to manage zone **108** in **Figure 1**.

The process begins by obtaining information about people in the zone with a sensor system (operation **700**). A determination is made as to whether a contagious condition is present in the zone using the information (operation **702**). If a contagious condition is not present, the process returns to operation **700**.

With reference again to operation **702**, if a determination is made that a contagious condition is present in the zone, the process performs an action in response (operation **704**), with the process then returning to operation **700**.

With reference now to **Figure 8**, an illustration of a flowchart of a process for identifying changes to a zone is depicted in accordance with an illustrative embodiment. The process illustrated in **Figure 8** may be implemented in contagion management system **106** in **Figure 1**. In particular, this process may be implemented in simulator **326** in **Figure 3**.

The process begins by obtaining information from a zone with a sensor system (operation **800**). This information may be obtained over a period of time. For example, the information

may be obtained over a period of time that is selected from one of a day, a week, a month, a year, or some other suitable period of time.

The process then runs simulations using the information (operation **802**). This simulation may be used to identify whether contagious conditions are present and how they may be spread
5 in the zone being simulated. The process then generates simulation results (operation **804**). These results may identify the spreading of contagions that may cause infectious diseases.

A determination is made as to whether the simulation results are satisfactory (operation **806**). If the simulation results are not satisfactory, a number of parameters for the simulation are changed (operation **808**). The process then re-runs the simulation using the information and the
10 current number of parameters (operation **810**). The process then returns to operation **806**. If the results are satisfactory, then a report is generated (operation **812**), with the process terminating thereafter.

This report may identify changes to the zone being monitored. Further, these changes may include upgrades to environmental systems, air locations, vents, and other suitable types of
15 changes. Further, these simulations also may be used to simulate a zone that is in a design phase. With the simulations, changes may be made in constructing the zone in a manner that reduces contagious conditions.

The flowcharts and block diagrams in the different depicted embodiments illustrate the architecture, functionality, and operation of some possible implementations of apparatus and
20 methods in an illustrative embodiment. In this regard, each block in the flowcharts or block diagrams may represent a module, segment, function, and/or a portion of an operation or step. For example, one or more of the blocks may be implemented as program code, in hardware, or a combination of the program code and hardware. When implemented in hardware, the hardware may, for example, take the form of integrated circuits that are manufactured or configured to
25 perform one or more operations in the flowcharts or block diagrams.

In some alternative implementations of an illustrative embodiment, the function or functions noted in the block may occur out of the order noted in the figures. For example, in some cases, two blocks shown in succession may be executed substantially concurrently, or the blocks may sometimes be performed in the reverse order, depending upon the functionality
30 involved. Also, other blocks may be added in addition to the illustrated blocks in a flowchart or block diagram.

Turning now to **Figure 9**, an illustration of a data processing system is depicted in accordance with an illustrative embodiment. Data processing system **900** may be used to

implement one or more computers in computer system **300** for analyzer system **116** in **Figure 3**. In this illustrative example, data processing system **900** includes communications framework **902**, which provides communications between processor unit **904**, memory **906**, persistent storage **908**, communications unit **910**, input/output (I/O) unit **912**, and display **914**. In this
5 example, communications framework **902** may take the form of a bus system.

Processor unit **904** serves to execute instructions for software that may be loaded into memory **906**. Processor unit **904** may be a number of processors, a multi-processor core, or some other type of processor, depending on the particular implementation.

Memory **906** and persistent storage **908** are examples of storage devices **916**. A storage
10 device is any piece of hardware that is capable of storing information, such as, for example, without limitation, data, program code in functional form, and/or other suitable information either on a temporary basis and/or a permanent basis. Storage devices **916** may also be referred to as computer readable storage devices in these illustrative examples. Memory **906**, in these
15 examples, may be, for example, a random access memory or any other suitable volatile or non-volatile storage device. Persistent storage **908** may take various forms, depending on the particular implementation.

For example, persistent storage **908** may contain one or more components or devices. For example, persistent storage **908** may be a hard drive, a flash memory, a rewritable optical disk, a rewritable magnetic tape, or some combination of the above. The media used by
20 persistent storage **908** also may be removable. For example, a removable hard drive may be used for persistent storage **908**.

Communications unit **910**, in these illustrative examples, provides for communications with other data processing systems or devices. In these illustrative examples, communications unit **910** is a network interface card.

Input/output unit **912** allows for input and output of data with other devices that may be
25 connected to data processing system **900**. For example, input/output unit **912** may provide a connection for user input through a keyboard, a mouse, and/or some other suitable input device. Further, input/output unit **912** may send output to a printer. Display **914** provides a mechanism to display information to a user.

Instructions for the operating system, applications, and/or programs may be located in
30 storage devices **916**, which are in communication with processor unit **904** through communications framework **902**. The processes of the different embodiments may be performed

by processor unit **904** using computer-implemented instructions, which may be located in a memory, such as memory **906**.

These instructions are referred to as program code, computer usable program code, or computer readable program code that may be read and executed by a processor in processor unit **904**. The program code in the different embodiments may be embodied on different physical or computer readable storage media, such as memory **906** or persistent storage **908**.

Program code **918** is located in a functional form on computer readable media **920** that is selectively removable and may be loaded onto or transferred to data processing system **900** for execution by processor unit **904**. Program code **918** and computer readable media **920** form computer program product **922** in these illustrative examples. In one example, computer readable media **920** may be computer readable storage media **924** or computer readable signal media **926**.

In these illustrative examples, computer readable storage media **924** is a physical or tangible storage device used to store program code **918** rather than a medium that propagates or transmits program code **918**.

Alternatively, program code **918** may be transferred to data processing system **900** using computer readable signal media **926**. Computer readable signal media **926** may be, for example, a propagated data signal containing program code **918**. For example, computer readable signal media **926** may be an electromagnetic signal, an optical signal, and/or any other suitable type of signal. These signals may be transmitted over communications links, such as wireless communications links, optical fiber cable, coaxial cable, a wire, and/or any other suitable type of communications link.

The different components illustrated for data processing system **900** are not meant to provide architectural limitations to the manner in which different embodiments may be implemented. The different illustrative embodiments may be implemented in a data processing system including components in addition to and/or in place of those illustrated for data processing system **900**. Other components shown in **Figure 9** can be varied from the illustrative examples shown. The different embodiments may be implemented using any hardware device or system capable of running program code **918**.

The description of the different illustrative embodiments has been presented for purposes of illustration and description and is not intended to be exhaustive or limited to the embodiments in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. Further, different illustrative embodiments may provide different features as

compared to other illustrative embodiments. The embodiment or embodiments selected are chosen and described in order to best explain the principles of the embodiments, the practical application, and to enable others of ordinary skill in the art to understand the disclosure for various embodiments with various modifications as are suited to the particular use contemplated.

5

CLAIMS:

What is claimed is:

- 5 1. A method for managing a zone **108**, the method comprising:
obtaining information **120** about an environment **107** in the zone **108** with a sensor
system **114**;
determining, by an analyzer system **116**, whether a contagious condition is present in the
zone **108** using the information **120** from the sensor system **114**; and
10 performing, by a management system **118**, an action in response to the contagious
condition **110** being present.
2. The method of claim 1, wherein performing, by the management system **118**, the action
in response to the contagious condition **110** being present comprises:
15 changing a parameter **124** in an environment **107**.
3. The method of claim 2, wherein the parameter **124** is for the zone **108** and is selected
from one of a direction of airflow, a type of light, a temperature, passenger movement, and a
humidity.
20
4. The method of claim 1 or 2, wherein performing, by the management system **118**, the
action in response to the contagious condition **110** being present comprises:
identifying a source originating the contagious condition **110**; and
performing an additional examination of the source.
25
5. The method of claim 1 or 2, wherein performing, by the management system **118**, the
action in response to the contagious condition **110** being present comprises:
causing airflow that is configured to move particles away from a person in the zone **108**.
- 30 6. The method of claim 5, wherein performing, by the management system **118**, the action
in response to the contagious condition **110** being present further comprises:
collecting the particles from the airflow; and
determining whether a contagion is present in the particles.

7. The method of claim 1 or 2, wherein performing, by the management system, the action in response to the contagious condition being present comprises:

causing an airflow that is configured to move in a direction selected from one of towards
5 a ceiling in the zone **108** and towards a floor in the zone **108**.

8. The method of claim 1, wherein performing, by the management system **118**, the action in response to the contagious condition **110** being present comprises:

presenting an instruction to change a pattern of movement by people in the zone **108** on a
10 display system **416**.

9. The method of claim 1 or 2, wherein performing, by the management system **118**, the action in response to the contagious condition **110** being present comprises:

turning on an ultraviolet light in the zone **108**.
15

10. The method of claim 1, wherein the sensor system **114** comprises sensors in which the sensors are selected from one of an audio sensor **205**, a video camera **200**, an infrared sensor **203**, and an air analysis system **204**.

20 11. An apparatus for managing contagious conditions, the apparatus comprising:
a sensor system **114** configured to obtain information about an environment **107** in a zone **108** with a sensor system **114**;

an analyzer system **116** configured to determine whether a contagious condition is present in the zone **108** using the information **120**; and

25 a management system **118** configured to perform an action in response to the contagious condition being present.


12. The apparatus of claim 11, wherein the action comprises changing a parameter **124** in the environment **107** that reduces the contagious condition.

30 13. The apparatus of claim 12, wherein the parameter is for the zone **108** and is selected from one of a direction of airflow, a type of light, a temperature, passenger movement, and a humidity.
14. The apparatus of claim 11 or 12, wherein the action comprises identifying a

source originating the contagious condition **110** and indicating an additional examination of the source should be performed.

15. The apparatus of claim 11, wherein the action comprises causing airflow that is
5 configured to move particles away from a person in the zone **108**.
16. The apparatus of claim 15, wherein the action further comprises collecting the particles from the airflow and determining whether a contagion is present in the particles.
- 10 17. The apparatus of claim 11, wherein the action comprises presenting an instruction to change a pattern of movement by people in the zone **108**.

15

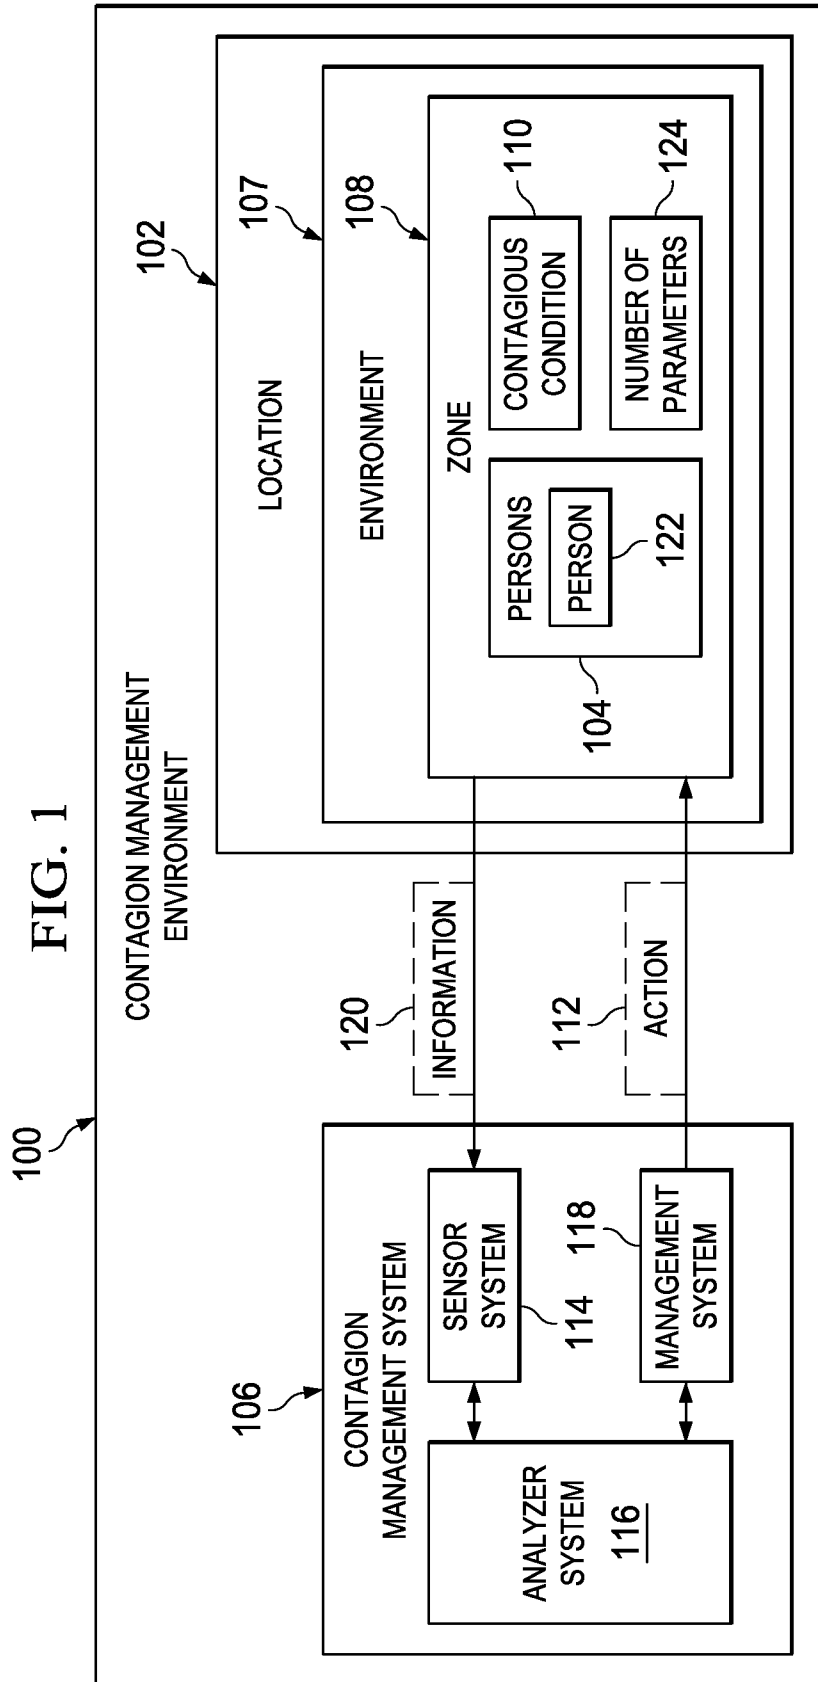

114 2/6

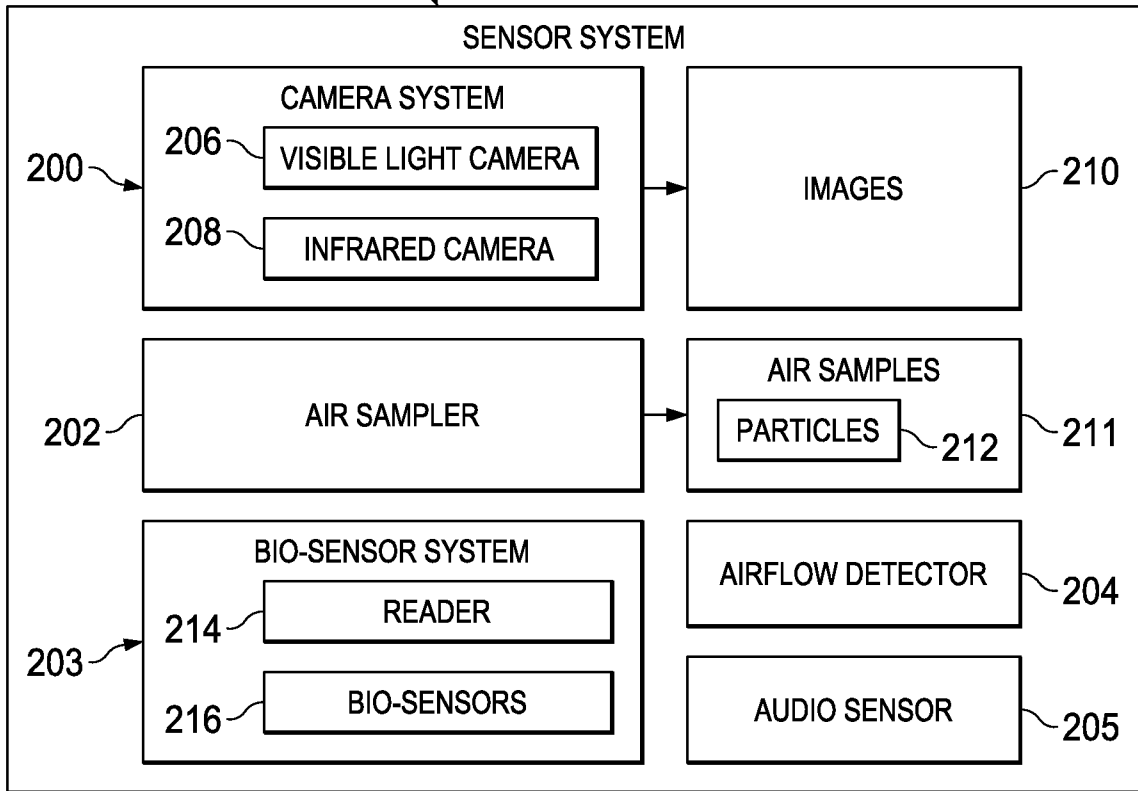


FIG. 2

118

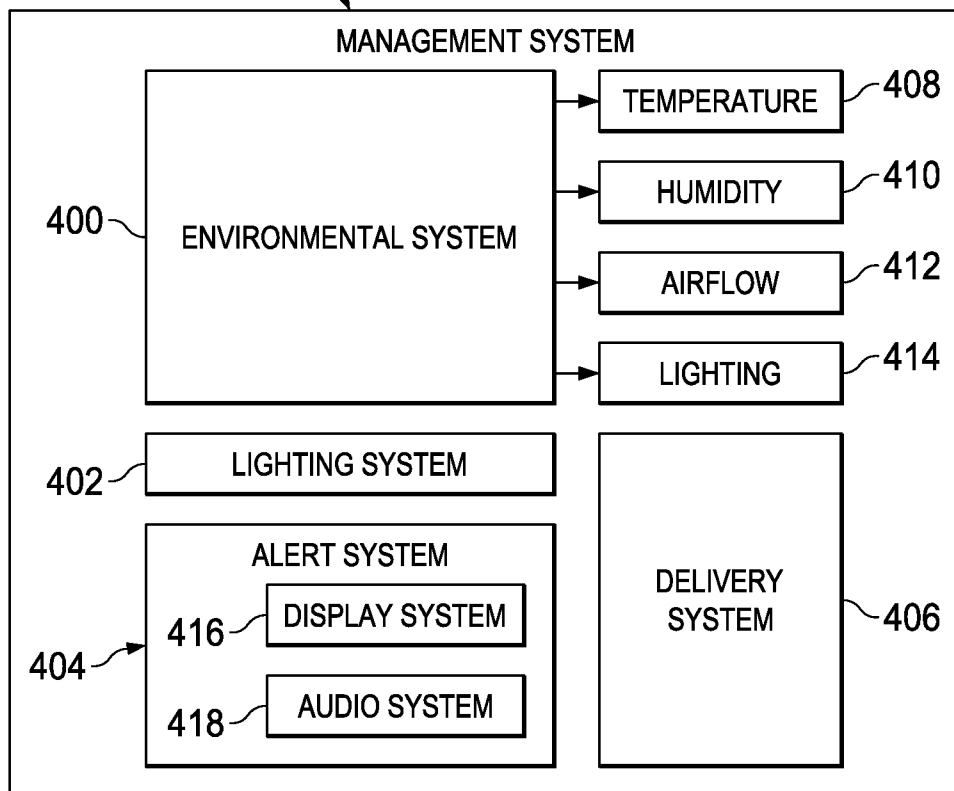


FIG. 4

FIG. 3



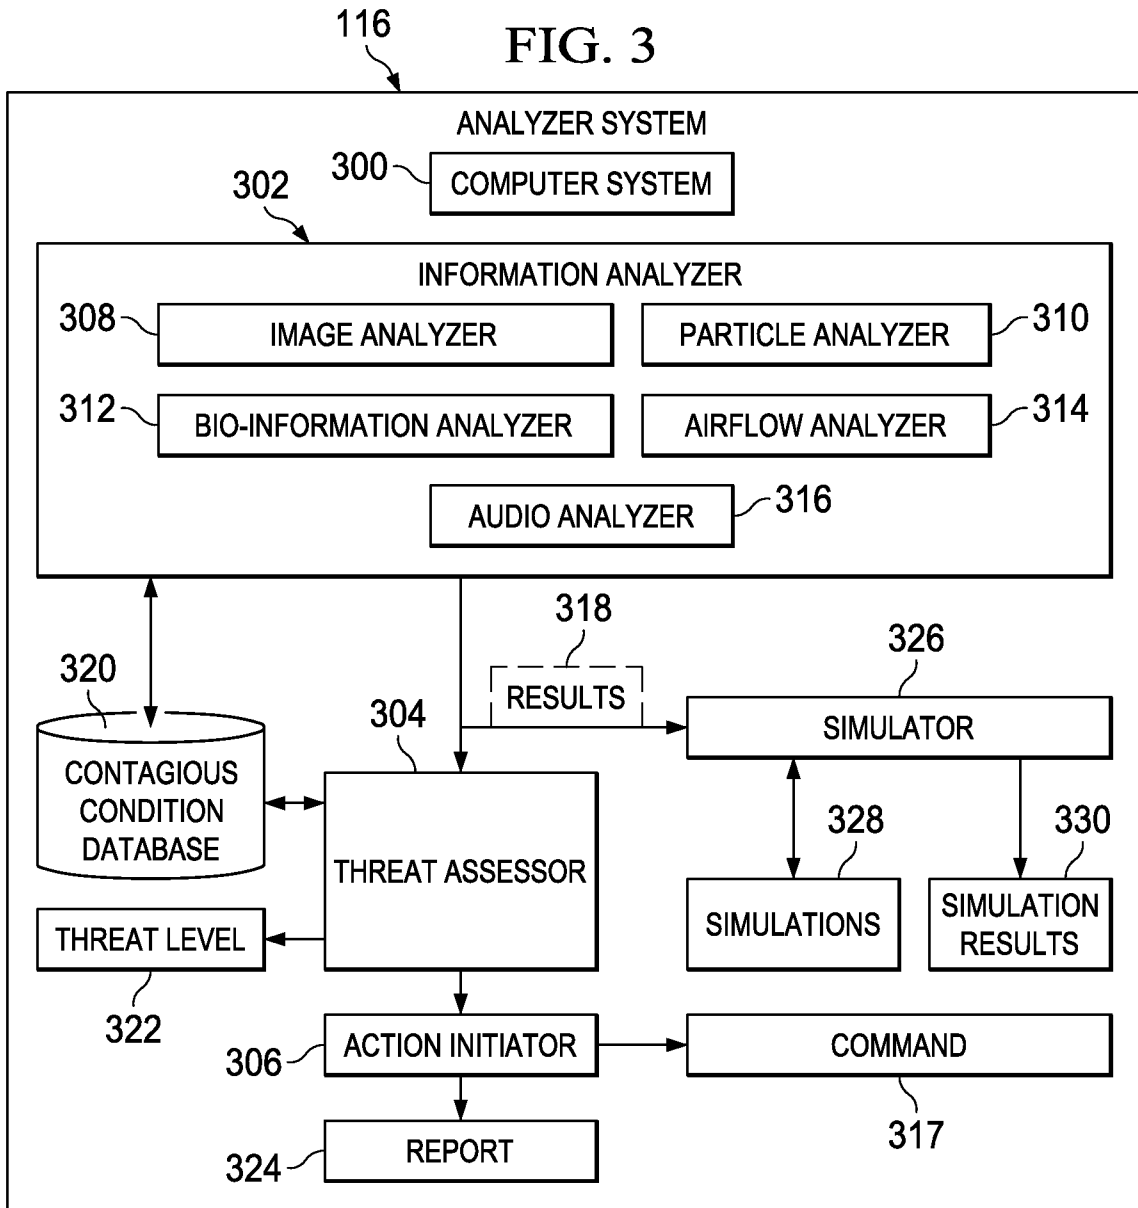


FIG. 5

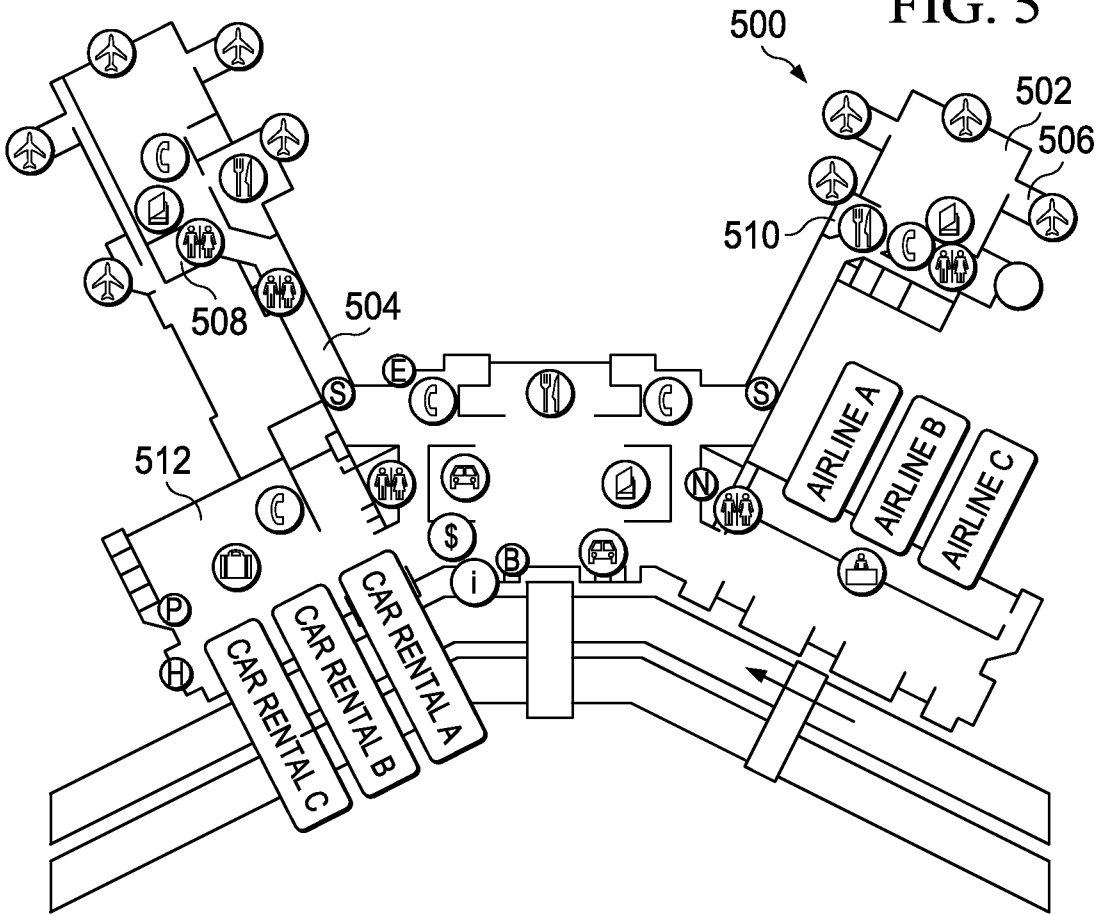

600

FIG. 6

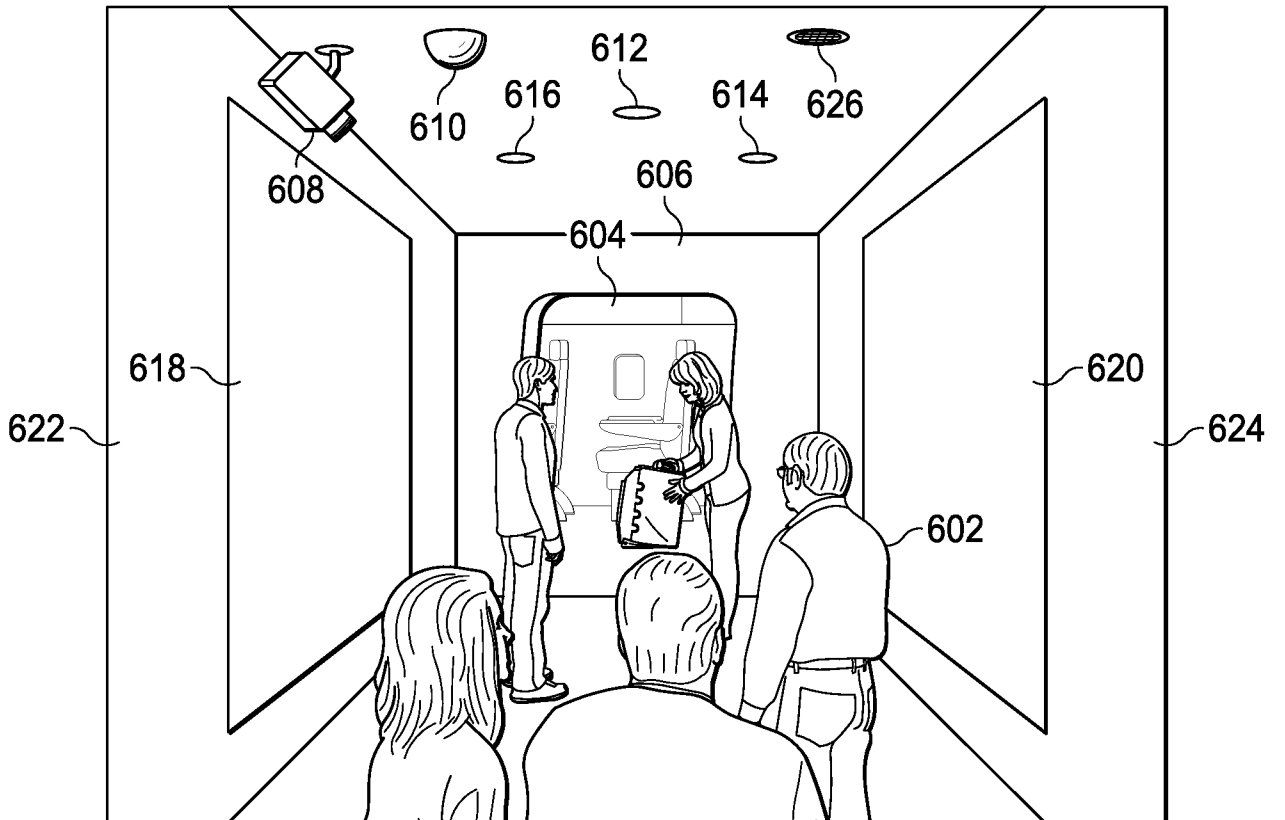

5/6

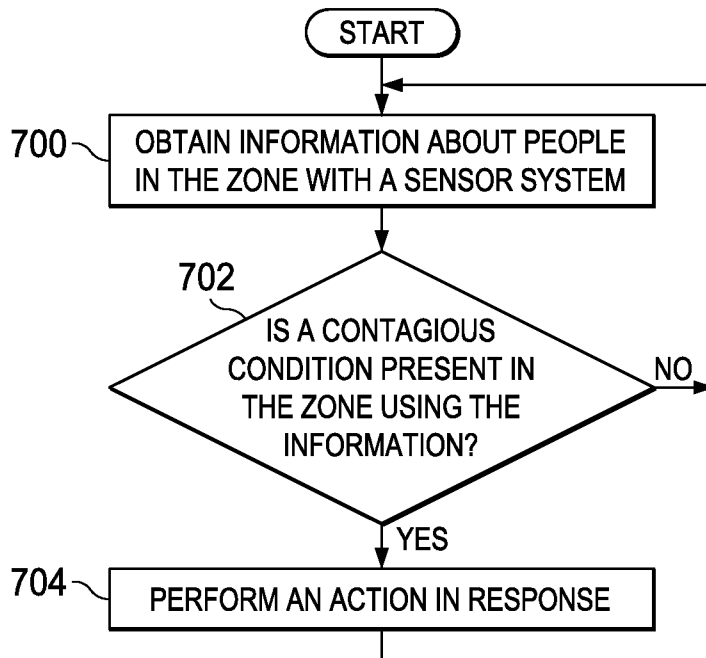


FIG. 7


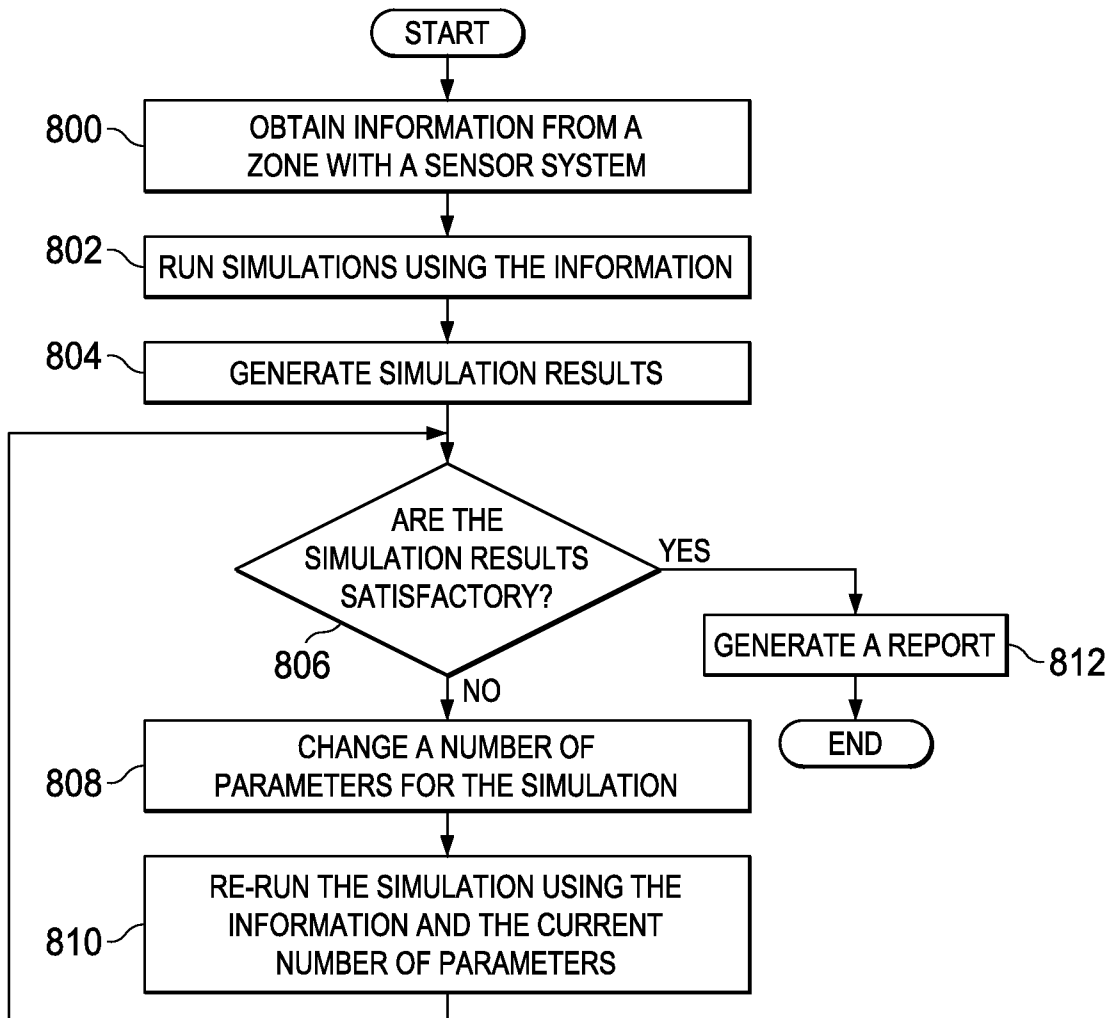


FIG. 8

FIG. 9

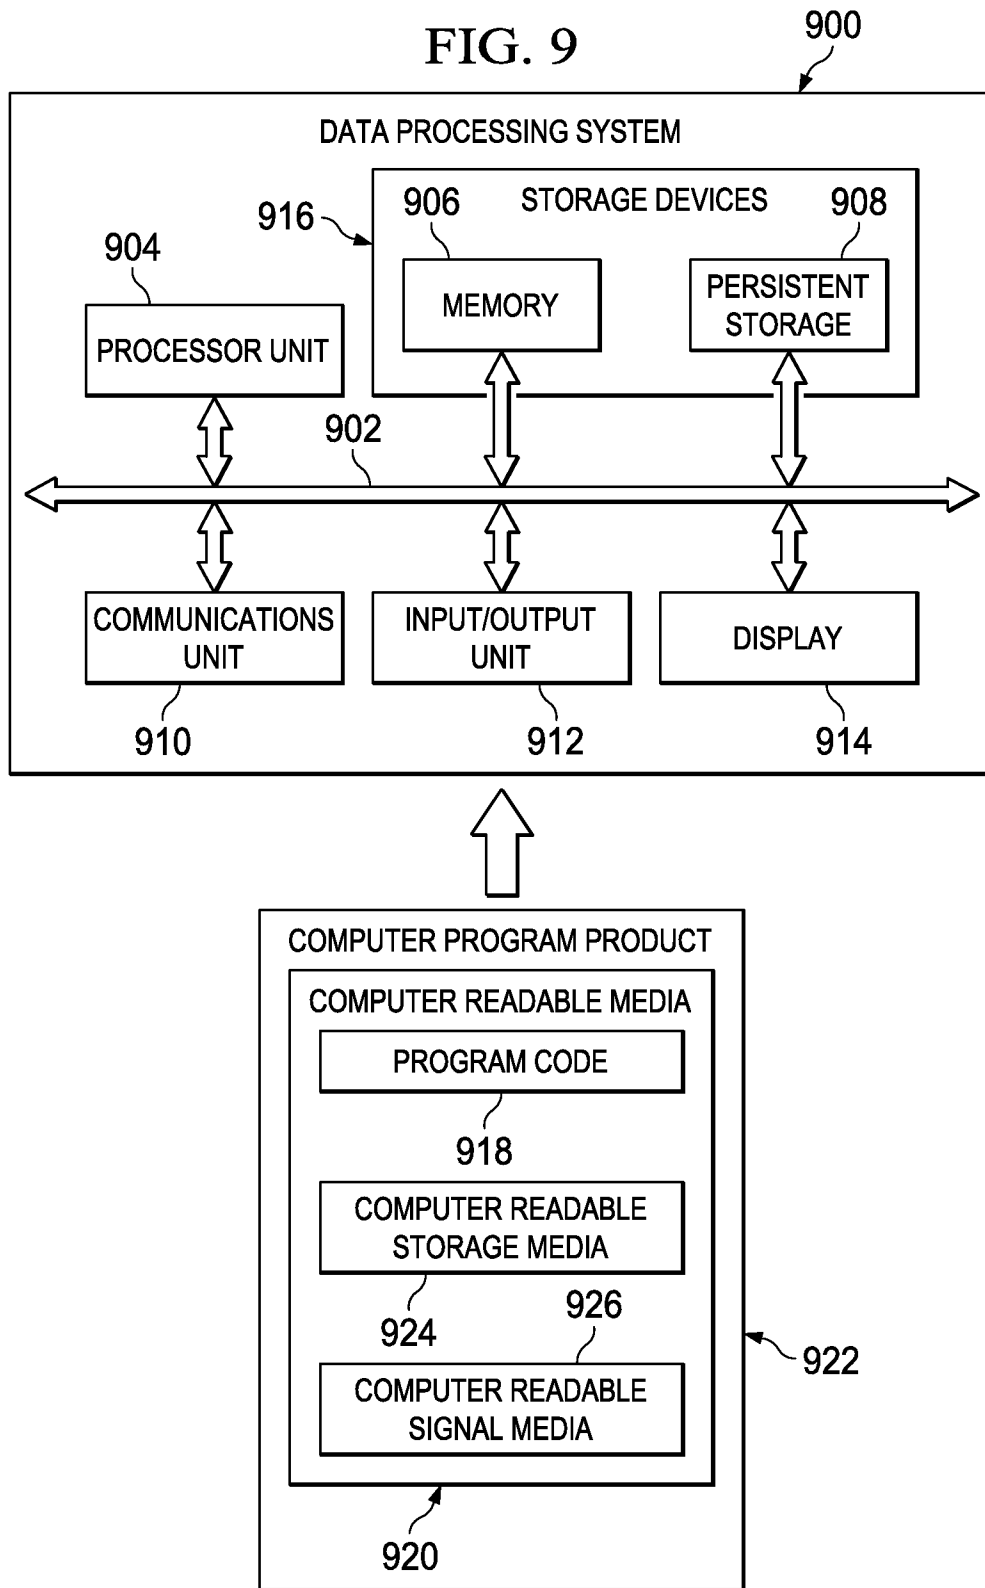

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2012/053687

A. CLASSIFICATION OF SUBJECT MATTER
INV. G06F19/30
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2004/166550 A1 (SULLIVAN BRIAN M [US] ET AL) 26 August 2004 (2004-08-26) figures 1-3 paragraph [0002] paragraph [0020] - paragraph [0037] paragraph [0060]	1-17
X	US 2008/163670 A1 (GEORGESON GARY E [US]) 10 July 2008 (2008-07-10) figures 1-5 paragraph [0007] - paragraph [0014] paragraph [0041] claims 1-13	1-17
A	US 2007/053188 A1 (NEW RICHARD D [US] ET AL) 8 March 2007 (2007-03-08) abstract paragraph [0054]	9

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

8 February 2013

Date of mailing of the international search report

14/02/2013

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Hernández Marugán, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2012/053687

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004166550	A1	26-08-2004	NONE
US 2008163670	A1	10-07-2008	CA 2668336 A1 17-07-2008
			EP 2099679 A2 16-09-2009
			US 2008163670 A1 10-07-2008
			WO 2008085651 A2 17-07-2008
US 2007053188	A1	08-03-2007	NONE