




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : H04B 7/08, H04L 1/06</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/16500</p> <p>(43) International Publication Date: 23 March 2000 (23.03.00)</p>
<p>(21) International Application Number: PCT/US99/18924</p> <p>(22) International Filing Date: 17 August 1999 (17.08.99)</p> <p>(30) Priority Data: 09/153,110 15 September 1998 (15.09.98) US</p> <p>(71) Applicant: ARRAYCOMM, INC. [US/US]; 3141 Zanker Road, San Jose, CA 95134 (US).</p> <p>(72) Inventors: PETRUS, Paul; 555 E. Washington Avenue #1503, Sunnyvale, CA 94086 (US). CHIODINI, Alain, M.; 2134 Jardin Drive, Mountain View, CA 94040 (US). TROTT, Mitchell, D.; 318 Central Avenue, Mountain View, CA 94043 (US). PARISH, David, M.; 614 Torwood Lane, Los Altos, CA 94022 (US). YOUSSEFMIR, Michael; 679 Stanford Avenue, Palo Alto, CA 94036 (US). ROSENFELD, Dov; 5566 Lawton Avenue, Oakland, CA 94618 (US).</p> <p>(74) Agents: WOODWARD, Henry, K. et al.; Townsend and Townsend and Crew LLP, 8th floor, Two Embarcadero Center, San Francisco, CA 94111-3834 (US).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: METHOD FOR REFERENCE SIGNAL GENERATION IN THE PRESENCE OF FREQUENCY OFFSETS IN A COMMUNICATIONS STATION WITH SPATIAL PROCESSING

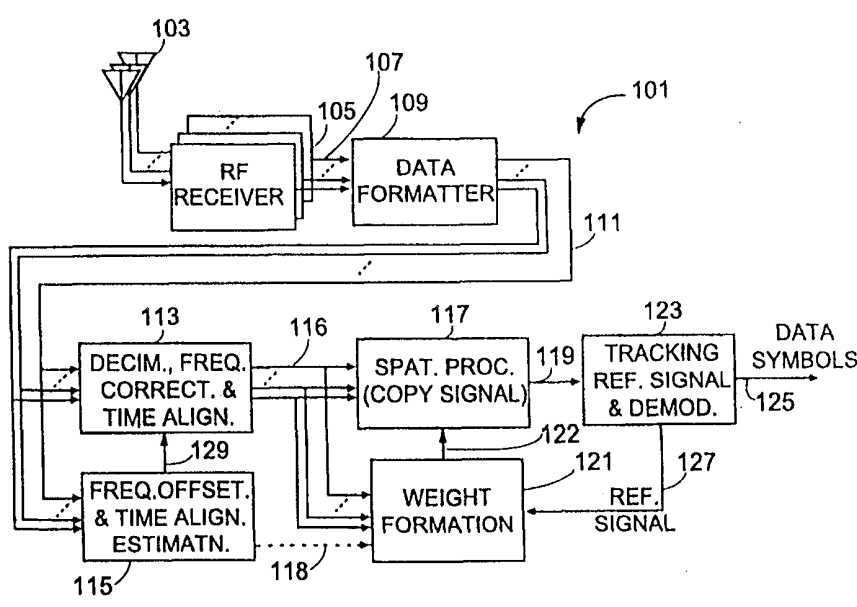

(57) Abstract

A method for generating a reference signal from a modulated signal transmitted to a communications station that includes an array of antenna elements and spatial processing means including: separating from the signals received at the antenna elements a copy signal corresponding to the signal transmitted by a particular remote station using an initial spatial weight vector corresponding to the particular remote station; determining from the terminal copy signal a reference signal having substantially the same frequency offset and time alignment as the received antenna signals; and computing a new spatial weight vector by optimizing a cost function, the cost function using the received antenna signals and the reference signal. For demodulation, the method further includes extracting the symbols of the modulated signal.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

METHOD FOR REFERENCE SIGNAL GENERATION IN THE PRESENCE OF FREQUENCY OFFSETS IN A COMMUNICATIONS STATION WITH SPATIAL PROCESSING

RELATIONSHIP TO OTHER PATENTS OR PATENT APPLICATIONS:

5 This is a continuation in part to U.S. Patent Application Serial Number 08/729,390, filed on October 11, 1996, entitled *METHOD AND APPARATUS FOR DECISION DIRECTED DEMODULATION USING ANTENNA ARRAYS AND SPATIAL PROCESSING*, Barratt *et al.*, inventors, (called the "Parent Patent" hereinunder). The Parent Patent is incorporated herein by reference in its entirety.

10 FIELD OF INVENTION

This invention relates to the field of wireless communication, and more specifically, to the generation of a reference signal useful for determining receive weights for spatial processing in the presence of frequency offsets and for demodulating a received signal in the presence of frequency offsets.

15 BACKGROUND TO THE INVENTION

Cellular wireless communications systems are known, wherein a geographical area is divided into cells, and each cell includes a base station (BS) for communicating with subscriber units (SUs) (also called remote terminals, mobile units, mobile stations, subscriber stations, or remote users) within the cell. We have previously described cellular
20 systems that have BSs that include an array of antenna elements and spatial processing means. When used as receivers, the array of antenna elements introduce multiple versions of each signal, each of these versions comprising the composite of all the co-channel signals together with interference and noise. With multiple antennas, the relationship in both amplitude and phase of a signal of interest from a particular remote user to the
25 interfering co-channel signals (*i.e.*, signals from other remote users) will be different in each of the antenna signals due, for example, to geometric considerations, both because the antennas are separated by some distance, and, in some cases, because the different remote users also are separated. Using such an antenna array, spatial processing by weighting the received signals in amplitude and phase by different weights provides many advantages,
30 including the possibility of spatial division multiple access (SDMA) techniques, in which

the same "conventional channel" (*i.e.*, the same frequency channel in a frequency division multiple access (FDMA) system, timeslot in a time division multiple access (TDMA) system, code in a code division multiple access (CDMA) system, or timeslot and frequency in a TDMA/FDMA system) may be assigned to more than one subscriber unit.

5 Some examples of a cellular system are digital systems which use variants of the Personal Handy Phone System (PHS) protocol defined by the Association of Radio Industries and Businesses (ARIB) Preliminary Standard, RCR STD-28 (Version 2) Dec. 1995, and digital systems that use the Global System for Mobile communications (GSM) protocol, including the original version, 1.8 GHz version called DCS-1800, and the North
10 American 1.9 GHz personal communications system (PCS) version called PCS-1900.

 When a signal is sent from a remote unit to a base station (*i.e.*, communication is in the uplink), the base station having a receiving antenna array (usually, and not necessarily the same antenna array as for transmission), the signals received at each element of the receiving array are each weighted, typically after downconversion (*i.e.*, in baseband), in
15 amplitude and phase by a receive weight (also called spatial demultiplexing weight), this processing called spatial demultiplexing, or spatial processing, all the receive weights determining a complex valued receive weight vector which is dependent on the receive spatial signature of the remote user transmitting to the base station. The receive spatial signature characterizes how the base station array receives signals from a particular
20 subscriber unit in the absence of any interference. This invention is described for uplink communications in a cellular system, although the techniques certainly are applicable to the design of any receiver for any digitally modulated signal where it is desired to reduce the effects of frequency offset.

 In systems that use antenna arrays, the weighting of the baseband signals either in
25 the uplink from each antenna element in an array of antennas, or in the downlink to each antenna element is called *spatial processing* herein. Spatial processing is useful even when no more than one subscriber unit is assigned to any conventional channel. Thus, the term SDMA shall be used herein to include both the true spatial multiplexing case of having more than one user per conventional channel, and the use of spatial processing with only
30 one user per conventional channel. The term channel shall refer to a communications link between a base station and a single remote user, so that the term SDMA covers both a

single channel per conventional channel, and more than one channel per conventional channel. The multiple channels within a conventional channel are called spatial channels. For a description of SDMA systems that can work with more than one spatial channel per conventional channel, see, for example, co-owned U.S. Patents 5,515,378 (issued May 7, 1996) and 5,642,353 (issued June 24, 1997) entitled *SPATIAL DIVISION MULTIPLE ACCESS WIRELESS COMMUNICATION SYSTEMS*, Roy, III, *et al.*, inventors, both incorporated herein by reference; and co-owned U.S. Patent 5,592,490 (issued January 7, 1997) entitled *SPECTRALLY EFFICIENT HIGH CAPACITY WIRELESS COMMUNICATION SYSTEMS*, Barratt, *et al.*, inventors. The Parent Patent describes demodulation in a SDMA system that has only one spatial channel per conventional channel.

SDMA systems use spatial processing as the backbone to improve system capacity and signal quality. In the Parent patent, we described generating a reference signal from the received antenna signals, and how the reference signal can then be used to determine the spatial demultiplexing weights. In such a system, the performance of the spatial processor depends on many factors, including:

- The input signal-to-noise ratio (SNR);
- The number of interferers or carrier-to-interference ratio (CIR);
- The spatial correlation between the users; and
- The quality of the reference signal.

Each of these will now be briefly explained. The input SNR at the antenna elements is determined by the transmitted power of the subscriber unit, the antenna gains, the path losses, and other RF effects.

The input CIR is determined by the transmitted power of the subscriber unit, and the powers of the other users and interferers occupying the same conventional channel (*e.g.*, same frequency band) or emitting energy in that channel.

The reference signal is the replica of the transmitted signal that is generated at the receiver to train the demultiplexing weights for the signals received by the antenna array elements. The quality of the reference signal determines the nulling ability of the array. In the uplink, the improvement in the nulling ability of the array results in an increase in the

output SINR. Therefore if the quality of the reference signal is improved, the BER performance in the uplink is improved. Improving the quality of reference signal generation and demodulation is the subject of this invention.

5 The receive (copy) weights may be determined from samples of the input signal and from the reference signal.

Thus there clearly is a need for improved demodulation and reference signal generation methods and systems for use in communication systems that include an antenna array and spatial processing.

10 The Parent Patent described the use of a demodulator/reference signal generator that tracked the frequency offset from sample to sample by relaxing the phase expected from the modulation scheme back towards the actual phase of the input signal. The present invention extends these methods.

SUMMARY

15 An object of the present invention is a reference signal generation method for use in communication systems that include an antenna array and spatial processing.

Another object of the present invention is for a demodulation method for use in communication systems that include an antenna array and spatial processing.

20 Yet another object of the present invention is for a reference signal generation method for use in an alternating projections method for determining weights for spatial processing in a communications station that includes an array of antennas and means for applying spatial processing.

Briefly, for a signal transmitted to the communications station from a remote station, the method includes weighting the signals received at the antenna elements of the antenna array of the communications station to form a copy signal corresponding to the signal from the particular remote station, the weighting using a spatial weight vector
25 corresponding to the particular remote station, and determining samples of the reference signal by, at each sample point, constructing an ideal signal sample from the copy signal at the same sample point, the ideal signal sample having a phase determined from the copy signal at the sample point, with the phase of the ideal signal sample at an initial symbol

point set to be an initial ideal signal phase, and relaxing the phase of the ideal signal sample towards the copy signal sample phase to produce the phase of the reference signal. The spatial weight vector is initially some initial weight vector and is determined from the received antenna signals and from the reference signal. The phase of the ideal is
5 determined from the phase of the reference signal at the previous sample point for which the phase is determined, and from a decision based on the copy signal. In one implementation, the reference signal is determined in the forward time direction, and in another implementation, the reference signal samples are determined in the backwards time direction. In one version, the step of relaxing the phase of the ideal signal sample
10 towards the phase of the copy signal $b_N(n)$ corresponds to adding a filtered version of the difference between the copy signal phase and ideal signal phase. In another version, the step of relaxing the phase of the ideal signal sample towards the phase of the copy signal corresponds to forming the reference signal sample by adding to the ideal signal sample a filtered version of the difference between the copy signal and ideal signal.

15 In another aspect of the invention, a method for generating a reference signal for a modulated signal transmitted from a remote station to a communications station that includes an array of antenna elements and spatial processing means is disclosed, the method including: separating from the signals received at the antenna elements a copy signal corresponding to the signal transmitted by the particular remote station, the
20 separating using an initial spatial weight vector corresponding to the particular remote station; determining from the terminal copy signal a reference signal having substantially the same frequency offset and time alignment as the received antenna signals; and computing a new spatial weight vector by optimizing a cost function, the cost function using the received antenna signals and the reference signal. For demodulation, the method
25 further includes extracting the symbols of the modulated signal. The separating step and possibly the reference generating step may be repeated at least once, using in the repetition of the separating step the new spatial weight vector previously determined in the new weight computing step instead of the initial spatial weight vector. In one implementation, the reference signal generating further includes estimating a frequency offset and a timing
30 misalignment of the copy signal; and correcting the copy signal for frequency offset and timing misalignment to form a corrected copy signal. In this, the reference signal determining step includes synthesizing a corrected reference signal that has substantially

the same frequency offset and timing alignment as the corrected copy signal; and applying frequency offset and time misalignment to the corrected reference signal to form a frequency offset and time misaligned reference signal having the same frequency offset and time misalignment as the received antenna signals.

5 In one implementation, the step of determining the reference signal includes, for each of a set of sample points, constructing an ideal signal sample from the copy signal at the same sample point, the ideal signal sample having a phase determined from the copy signal at the sample point, with the phase of the ideal signal sample at an initial symbol point set to be an initial ideal signal phase, relaxing the phase of the ideal signal sample
10 towards the copy signal sample phase to produce the phase of the reference signal; and producing the reference signal having the phase of the reference signal determined in the relaxing step.

 In another implementation, the corrected reference signal synthesizing step includes coherently demodulating the corrected copy signal to form signal symbols; and
15 re-modulating the signal symbols to form the corrected reference signal having substantially the same timing alignment and frequency offset as the corrected copy signal.

BRIEF DESCRIPTION OF THE DRAWINGS

 The present invention will be more fully understood from the detailed preferred embodiments of the invention, which, however, should not be taken to limit the invention
20 to any specific embodiment but are for explanation and better understanding only. The embodiments in turn are explained with the aid of the following figures:

 Fig. 1 is a block diagram of the first embodiment of a spatial processing receiver system that includes a reference signal generator and demodulator according to some aspects of the invention.

25 Fig. 2 is a block diagram of the second embodiment of a spatial processing receiver system that includes a reference signal generator and demodulator according to some aspects of the invention.

 Fig. 3 shows the constellation of a DQPSK signal.

Fig. 4 shows a block diagram for the tracking reference signal generator and demodulator according to some aspects of the invention.

Fig. 5 is a flow chart of the timing alignment estimation method used in the preferred embodiment of the system of Fig. 2.

5 Fig. 6 is a flow chart of the frequency offset estimation method used in the preferred embodiment of the first version of the system of Fig. 2.

Fig. 7 is a flow chart of the frequency offset estimation method used in the preferred embodiment of the first version of the system of Fig. 2.

10 Fig. 8 is a block diagram of the second version of the system of Fig. 2 with a coherent signal demodulator based reference signal generator.

Fig. 9 is a flow chart of the Viterbi and Viterbi frequency offset compensation method used in one embodiment of the second version of the system of Fig. 2.

15 Fig. 10 is a flow chart of the Maximum Likelihood DFT-based frequency offset compensation method used in another embodiment of the second version of the system of Fig. 2.

Fig. 11 is a block diagram showing a coherent demodulation scheme as used in one of the embodiments.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Base Station Architecture

20 The invention is applicable to any digital radio receiver that suffers from frequency offset effects and that includes spatial processing means. The illustrative embodiments are for use in a radio receiver that uses an array of antenna elements to receive a corresponding set of antenna signals, and spatial processing means for weighting the antenna signals in amplitude and phase. In particular, the illustrative
25 embodiments are for use in a base station of a cellular system that uses the Personal HandyPhone (PHS) air interface standard. The PHS system uses time division multiple access (TDMA) with individual timeslots corresponding to conventional channels. PHS also uses $\pi/4$ differential quaternary phase shift keying ($\pi/4$

DQPSK) modulation for the baseband signal. The baud rate is 192 kbaud (a baud is a symbol per second). In PHS as used in the preferred embodiment, a *burst* is defined as the finite duration RF signal that is transmitted or received over the air during a single timeslot. A *group* is defined as one set of 4 transmit (TX) and 4 receive (RX) timeslots. A group always begins with the first TX timeslot, and its time duration is $8 \times 0.625 = 5$ msec. In order to support half rate and quarter rate communication, the PHS standard defines a *PHS frame* as four groups, that is, four complete cycles of the eight timeslots. In the illustrative base station embodiments described herein, only full rate communication is supported, so that in this description, the term *frame* shall be synonymous with the PHS term group. That is, a frame is 4 TX and 4 RX timeslots and is 5 ms long. For any conventional channel, the bursts are one frame period apart and consist of 120 baud periods, and includes 110 samples of an actual signal and ten more samples to form a 10 baud-period long "guard time" to ensure that there are no collisions of bursts. Note that for other protocols, such as GSM, different guard times may be used. Each symbol in the PHS bursts contains two bits (a dibit) of information. A dibit is mapped onto the phase *difference* between two successive symbols, not the phase of the symbol itself. Fig. 3 shows the complex differential phase plane **301** together with the complex phase plane representation as a vector of a differential data symbol **309**, defined as the complex valued division of two successive symbols. Also shown on phase plane **301** are the four decision points **303**, **304**, **305**, and **306** at (differential) phases $\pi/4$, $3\pi/4$, $5\pi/4$ and $7\pi/4$ (that is, $\pm\pi/4$ and $\pm3\pi/4$). These make up the constellation of decisions. Any frequency offsets present may be thought of as rotations of the constellation points relative to the received differential signal **309**.

The various aspects of the present invention may be implemented on any communications station for receiving a signal from some remote station, not just a base station of a cellular system. The illustrative embodiments are base stations. How to make the modifications necessary to implement the invention on any communications station with spatial processing would be clear to one of ordinary skill in the art from the details provided herein for implementing the invention on the illustrative embodiment base stations. One such illustrative embodiment is for a base station for a low mobility PHS system. Such a base station is described in

detail in the Parent Patent, and uses an array of four antenna elements. The second illustrative base station type is for use in a PHS cellular system with subscriber units that are fixed in location. Such systems are known in the art as wireless local loop (WLL) systems because they may be used to replace the final "local" loop in a telephone network. The architecture of the second illustrative type of base station (a WLL base station) for the preferred embodiment is described in detail in co-owned US Patent application 09/020,049 (filed February 6, 1998) entitled *POWER CONTROL WITH SIGNAL QUALITY ESTIMATION FOR SMART ANTENNA COMMUNICATION SYSTEMS*, Yun, Inventor, incorporated-herein-by-reference (hereinafter "Our Power Control Patent"). Such a WLL base station may have any number of antenna elements, and the description herein will assume a 12-antenna array if no other number is explicitly mentioned for the second illustrative type of base station.

Fig. 1 summarizes the architecture of the receiving section **101** of a base station similar to the low mobility base station described in the Parent Patent, including demodulation and reference signal generation according to one aspect of the invention. In general, let the number of antenna elements (shown as **103**) be denoted by integer m . The base station includes a set of m receivers **105**, one per antenna element, that determine an oversampled set **107** of m complex valued baseband received signals. Not shown are such details as the transmit/receive switches (the illustrative base stations use the same antenna elements for reception and transmission), filters, *etc.* Receivers **105** may be analog with a final analog to digital converter at baseband, or may include one or more stages of digital downconversion. The PHS system uses TDMA with individual timeslots corresponding to conventional channels. The received signals **107** are organized into signals for individual timeslots by a data formatter **109**, and each set **111** of received signals for a particular timeslot is used by a frequency offset and timing offset estimator **115** to determine the frequency offset and timing alignment. A decimator, frequency offset estimator/corrector and timing aligner **113** determines the non-oversampled samples of the received signals closest to the baud point from the oversampled sequences. These baud-rate received signals **116** are coupled to a spatial processor **117** for determining a complex valued signal **119** (in phase I and

quadrature Q data) for a particular subscriber unit according to a set of receive weights **122** for that remote user. The receive weights **122** are determined by a weight formation processor **121** using the baud rate received signals **116**. See below and the Parent Patent for how receive weights are determined. In alternate
5 embodiments that also use TDMA, the spatial processing may be carried out for all timeslots with the same spatial processor, making data formatter **109** unnecessary, while alternate embodiments for systems that do not use TDMA would use a different receive processing architecture. The frequency offset and timing alignment is determined in block **115** in the mobile PHS preferred embodiment
10 base station as described in the Parent Patent and in co-owned U.S. patent application 08/729,386 (filed October 11, 1996) entitled *METHOD & APPARATUS FOR ESTIMATING PARAMETERS OF A COMMUNICATION SYSTEM USING ANTENNA ARRAYS & SPATIAL PROCESSING.*, Parish, *et al.*, inventors (hereinafter "Our Estimation Patent").

15 The spatial processor **117** produces a baud-rate sequence of complex valued samples **119** of the baseband signal, these samples close to the baud points. These samples are then demodulated by tracking reference signal generator and demodulator **123** to generate the data symbols **125** and a reference signal **127**. The reference signal is used by the weight determiner **121** which uses an optimization
20 method to determine the weights **122** (the set forming a weight vector) that generate a copy signal from received signals **116** which in some sense is "closest" to the reference signal **127**. To work well, this requires that the received signal **116** and the reference signal be time aligned and have the same frequency offset.

Fig. 2 is a block diagram showing an architecture for a receiving section
25 **201** of a WLL base station, which includes an alternate embodiment of the demodulation and reference signal generation according to an aspect of the invention. The m antenna elements are shown as **203**, and are coupled to a set of m receivers **205**, one per antenna element, that determine an oversampled set **207** of m complex valued baseband received signals. Again, the transmit/receive switches,
30 filters, *etc.* are not shown. The received signals **207** are organized into signals for individual timeslots by a data formatter **209**. One difference between this

embodiment and the embodiment of Fig. 1 is that a copy signal is obtained here from the oversampled data prior to any frequency offset and time alignment correction, while in Fig. 1, frequency offset and time alignment correction, decimation, and baud-point estimation occurs before the main copy signal operation. Thus, each set **211** of received signals for a particular timeslot is weighted by spatial processor **213** to determine a complex valued signal **215** (in phase *I* and quadrature *Q* data) for a particular subscriber unit according to a set of receive weights **239** for that remote user. The receive weights **239** are determined by a weight formation processor **237** using the received signals **211**. In the preferred embodiment, to save signal processor device processing cycles, the spatial processing block **213** carries out the weighting operation on input data **211** which has first been decimated by two. That is, not on the three-times oversampled data **211**, but on one and one-half times oversampled data. The result is then interpolated back to three-times oversampled data **215**. Of course other methods may be used. Note also that signal **215** contains frequency offsets and timing misalignment. As in the embodiment of Fig. 1, weight formation processor **237** minimizes a cost function that compares the copy signal to a reference signal. This cost function optimization preferably uses a least squares procedure by comparing the copy signal to a reference signal. However, since the received signal **211** has possibly gross frequency offset and time misalignment, the reference signal used has the appropriate frequency offset and time misalignment included. In the preferred embodiment, the reference signal is baud-rate sampled. Since signals **211** are oversampled, weight formation unit **237** decimates input data burst **211** by the oversampling factor (preferably three). The time misalignment is applied to the phase adjusted reference signal by a timing adjustment filter **242** to produce phase and timing adjusted reference signal **245**, the timing adjustment using timing information **241**. This timing information is determined in a timing recovery and interpolation unit **217** that also time aligns and interpolates signal **215** to output a baud rate signal **219** which comprises baud-point aligned samples of the received signal. Since this signal **219** still has frequency offset, it is input into a frequency offset estimator and corrector **221**. One output is a frequency corrected, baud-point aligned received signal **223**. A second output is an estimate **233** of the frequency

offset which is used in block **231** to apply frequency offset to a reference signal **229** to produce the phase adjusted reference signal **235** for the timing adjustment filter **242** and ultimately the reference signal **245** for the weight determiner **237**. Frequency corrected, baud-point aligned received signal **223** is demodulated by the demodulator and reference signal generator **225** to produce the data symbols **227**, and also to produce the reference signal **229**. Two versions of the demodulator/reference signal generator **225** are used with this architecture, corresponding to different aspects of the invention, the first version a tracking reference signal generator and demodulator, and the second version a synchronous (coherent) demodulator together with a re-modulator used to form the reference signal **229**.

Note that the word demodulation as used herein means either determining the data bits of the message, or determining the symbols only for the purpose of forming a reference signal. Thus demodulation as used herein includes what sometimes is called *detection* in the art. Note also that when one tracks the phase of a signal, for example by using a tracking reference signal generator or tracking demodulator, the resulting signal may be assumed to have the same frequency offset as the input to the generator or demodulator. Note also that the term timing alignment includes any decimation or time shifting or both to correct for timing misalignment.

Note also that while in the preferred embodiments, weight formation processor **237** uses a least squares cost function that compares the copy signal to a reference signal, weight formation processor **237** may be designed to optimize many different cost functions, and one even can use a different cost function burst to burst. The invention is not limited to optimizing any particular type of cost function nor to having a cost function that remains the same.

In both the illustrative base stations of Figs. 1 and 2, the spatial processing, frequency offset correction, timing alignment, baud point decimation and the reference signal generation and demodulation are carried out by running a set of programming instructions in a single digital signal processing (DSP) device coupled to a DSP memory. There is one such receive DSP (RX DSP) and one

associated receive DSP memory per timeslot. The timeslot RX DSPs are controlled by a general purpose microprocessor (in the illustrative WLL PHS base station) or another DSP (in the illustrative mobile PHS base station).

Spatial Processing and Frequency Offset and Timing Correction: First Embodiment

5 Fig. 5 summarizes the preferred embodiment spatial processing, frequency offset correction, timing alignment, and baud point decimation of blocks **113**, **117**, and **121**, and the reference signal generation/demodulation of block **123** of Fig. 1. The processing for a signal from a particular subscriber unit is described. Two modes of operation during reception are SYNCH mode where an initial estimate of the receive weights, (denoted by the complex valued column vector w_r of the m receive weights) and of the alignment and frequency offset are obtained. Normal mode is the spatial processing and demodulation of bursts of PHS data, for example, traffic channel data. Normal mode processing is carried out burst-by-burst and the first time the loop is entered, it is entered from SYNCH mode with starting estimate of the receive weight vector w_r and of the time alignment and frequency offset. Then on an ongoing basis, the processing starts with estimates of the receive weights, the alignment and the frequency offset obtained from the processing of the same signal on the previous burst for the timeslot. The initial weights (from the last burst or from SYNCH mode) are shown as weight vector

10 **502**. The data to be processed consists of the downconverted oversampled baseband signals **111** from receivers **105** and data formatter **109**. Using the starting value **502** of the weight vector, an estimate **505** of the signal from the user of interest is produced by an initial signal copy operation **503**. Denoting the downconverted received signals **111** by m -vector $z(t)$, and the signal estimate by $\hat{s}(t)$, the estimate **505** may be expressed as the weighted sum of the m individual received signals in vector notation as $\hat{s}(t) = w_r^H z(t)$, where the superscript H indicates the Hermitian transpose, which is the complex conjugate transpose, and t is the time index of the (oversampled) signal samples. Block **507** corrects initial copy signal **505** for frequency offset using the frequency offset from the last burst, or from the SYNCH mode if this is the first burst. The frequency corrected initial copy signal **509** is now used in block **511** to compute a new frequency offset

15

20

25

30

difference estimate and an alignment estimate. The resulting frequency offset difference and alignment estimates **513** are combined in an estimate filter **517** with estimates **515** from previous frames, or with the SYNCH mode estimate if this is the first frame, to produce the updated frequency offset and alignment estimates

5 **129**. The purpose of filter operation **517** is to constrain the change in frequency offset and alignment from frame to frame so that the presence of a strong interfering signal does not upset the estimates of these quantities. Block **113** uses the frequency offset and alignment estimates to correct the input signal data $\mathbf{z}(t)$ to produce a corrected and decimated version of $\mathbf{z}(t)$, denoted as $\mathbf{z}_N(t)$, and labeled

10 **116** on Fig. 1 and the flowchart of Fig. 5 for the illustrative mobile PHS base station embodiment. Since the signal for the mobile PHS embodiment is eight times oversampled, the decimation is by a factor of eight to give one $\mathbf{z}_N(t)$ sample per symbol, which is 120 samples per burst. Note that incrementing index t moves one sample period in signal **116** and 1/8 of a sample period for signals **111**, **505**,

15 and **509**.

The decimation part of the decimation and frequency correction unit **113** consists of preserving only those points that are closest in alignment to the exact symbol times. The frequency correction consists of multiplying in time with the appropriate phase to adjust the residual frequency within the accuracy of the

20 estimate.

These $\mathbf{z}_N(t)$ samples are now used in a recursive loop **515** to demodulate the signal and to estimate the weight vector to use for the other bursts or as \mathbf{w}_{T0} for the next frame.

In block **117**, an intermediate copy signal **119** is produced from $\mathbf{z}_N(t)$ with

25 the best estimate **122** of \mathbf{w}_r which initially is the value **502** used in the initial copy operation **503**. As updates **122** are obtained to \mathbf{w}_r , such updates, denoted by \mathbf{w}_{rN} , are used in block **117** to produce the decimated and corrected copy signal **119**, denoted by $\hat{\mathbf{s}}_N(t)$. Note that the real (*i.e.*, *I*-data) and imaginary (*i.e.*, *Q*-data) parts of signal **119** are the outputs **119** of spatial processor **117** of Fig. 1. Thus block

30 **117**'s operation is

$$\hat{s}_N(t) = \mathbf{w}_{rN}^H \mathbf{z}_N(t),$$

with initially $\mathbf{w}_{rN} = \mathbf{w}_r$. This signal copy operation **117** can be carried out more efficiently than the initial copy operation **503** because now, after decimation, only an eighth of the original 960 signal samples are involved for each burst.

5 The corrected copy signal **119** is demodulated in block **123** to produce the demodulated bitstream **125** and a reference signal **127** denoted as $s_R(t)$. Block **123** uses the finite alphabet properties of the corrected copy signal and of the known modulation format to produce the reference signal $s_R(t)$ which is frequency matched to $\mathbf{z}_N(t)$. By definition, $s_R(t)$, the reference signal **127**, has the required finite alphabet property. Because reference
10 signal **127** does not suffer from such problems as uncertain residual frequency offset and uncertain alignment, it can now be used together with $\mathbf{z}_N(t)$ to determine \mathbf{w}_{rN} , a better estimate of \mathbf{w}_r . This is carried out in block **121**. Many methods are well known in the prior art for thus projecting onto the \mathbf{w}_r plane. The goal is to solve for \mathbf{w}_{rN} such that $\mathbf{w}_{rN}^H \mathbf{z}_N(t)$ is as close as possible to reference signal $s_R(t)$. The preferred embodiment uses a least
15 squares optimization method, and a constraint on the norm of \mathbf{w}_r is added.

The loop may now be repeated, this repeating leading to a new value **122** of \mathbf{w}_{rN} which is used for block **117** to determine a new copy signal for then determining a new reference signal. In general, this loop is repeated *Num* times, and in the preferred embodiment, *Num* = 2. After *Num* iterations, the demodulated signal **125** is used as the
20 received symbol stream for the particular signal of interest for that burst, and \mathbf{w}_{rN} , the weight vector **122** is used for the next frame's initial value **502** and the time and frequency offsets are filtered with the previous estimates and supplied to blocks **507** and the filter **517** for the next frame.

The weight estimate **122** produced from the received bursts can be used also for
25 determining the transmit weights to use for transmitting to the same subscriber unit with the array of antennas.

Note that while in this embodiment (and those described below), the loop is repeated a number of times for a single burst, other embodiments are possible within the scope of the invention. For example, the demodulation may not be repeated but determined from the copy signal using the initial weights. Also, the reference signal generated initially from the copy signal using the initial weights may be used to determine the weight only for
5 some future burst, say the *next* burst. That is, no repetition is used. Other combinations also are possible within the scope.

Demodulation Step: First Version

The Demodulation step **123** in Fig. 1 is now described. This also is used in one
10 version of the system shown in Fig. 2. In one aspect of the invention, the particular method used is that of a *tracking* demodulator which tracks the phase from symbol to symbol. While the discussion here will use $\pi/4$ DQPSK modulation, the invention is applicable to any modulation technique involving phase modulation. For the example, for non-differential phase modulation techniques, the part of the invention that determines
15 differential phase is not used. Rather, the actual phase is used.

One prior-art technique for DQPSK demodulation is to produce the differential phase signal or the ratio signal between subsequent samples, and to identify the quadrant of the phase difference between subsequent symbols. The quadrant of these phase differences determines the transmitted symbol. Such a prior-art technique has two main
20 deficiencies. The first is that the forming the differential signals by taking ratios between subsequent symbols or by some other way is carried out in reality for signals that have noise and distortion, and the ratios thus have more distortion and noise than the original signal. The second deficiency is the making of a "hard" (*i.e.*, irrevocable) decision about the symbol transmitted. Producing a $\pi/4$ DQPSK reference signal based on that hard
25 decision leads to a reference signal that does not include residual frequency offset, which can be visualized as a (typically slow) rotation of the signal constellation, and such a reference signal may not be useable for many purposes, including, for example, re-projection into weight vector space in alternating projection weight vector determinations, such as the step of block **121** or **237**.

One aspect of the present invention is a method that solves these two problems simultaneously. The method generates a reference signal (such as signal **127 or 229**) that both has the required known modulation (finite alphabet) properties, and that tracks the (typically slow) rotation of the constellation due to residual frequency offset. Demodulation decisions are then made by examining the phase difference between subsequent samples of the actual signal and the reference signal which reduces the noise amplification which occurs with prior art techniques. The method can be conceptualized as generating a reference signal that is advanced first by the ideal phase shift of the decided upon $\pi/4$ DQPSK signal. Then this ideal signal, that has been advanced ideally, is filtered towards the actual signal, so as to keep it from accumulating significant phase (*i.e.*, frequency) offsets.

Consider a complex valued signal train (*e.g.*, signal **119 or 223**) denoted as $\hat{s}_N(t)$, and let complex valued sequence $\{b_N(n)\}$ be the complex values of $\hat{s}_N(t)$ at or close to the equally spaced symbol points. Define the *differential* stream, $\{d(n)\}$ as the sequence formed by dividing $b_N(n)$ by previous sample $b_N(n-1)$, or multiplying $b_N(n)$ by the complex conjugate $b_N^*(n-1)$ of the previous sample. This produces a signal sequence whose phase is the phase shift from one signal sample to the next. That is,

$$\angle d(n) = \angle b_N(n) - \angle b_N(n-1),$$

where \angle is the phase. Note that since only the *phase* is important, an expression of the phase is determined rather than the actual differential sequence $\{d(n)\}$. In prior art $\pi/4$ DQPSK demodulation, the quadrant of complex valued $d(n)$ at the ideal differential constellation points is the demodulation decision. Denoting the four quadrants of the complex plane as Φ_1 , Φ_2 , Φ_3 , and Φ_4 for the first, second, third, and fourth quadrants, respectively, prior-art hard decision demodulation can be characterized by statement that

$$d(n) \in \Phi_i \Rightarrow \angle d(n) = (2i - 1)\pi/4, i = 1, 2, 3, \text{ or } 4.$$

That the quadrant is sufficient for demodulation is the main consequence of the finite alphabet property of the $\pi/4$ DQPSK signals, and in the *ideal* case of no residual frequency offset, at an *ideal* differential constellation point, $\angle d(n)$ would indeed be equal to $\pm\pi/4$ or $\pm3\pi/4$ as obtained by simple prior art techniques.

The main goal of step **123** or **225** is to produce a reference signal. A secondary goal is producing the data bits. Let the reference signal have symbols denoted by $b_R(n)$ at the baud (symbol) points $t = nT$, where T is the baud period (1/192 ms for the illustrative PHS embodiments). To produce such a reference

5 signal one starts with a reference signal whose phase at the starting point is some initial phase. A convenient choice is choosing the initial phase to be the same as the phase of $b_N(n)$, the symbols of signal **119** at the starting point. The starting time index t is set to zero for convenience. That is,

$$\angle b_R(0) = \angle b_N(0).$$

10 Note that in the preferred embodiment of the present invention, all of the burst data is available for the processor (the DSP device), and the demodulation and reference signal generation is carried out backwards starting from the last sample in the sequence, so that the phase of the last symbol is determined as a starting point. This is not a restriction, and the invention may also be applied sample by sample when

15 the whole burst is not available. The method, however, is best understood when described using forward determination, so forward determination is assumed below unless otherwise stated explicitly. It would be straightforward for one of ordinary skill in the art to modify this description for running backwards, and to having, and to not having the whole burst available.

20 For each subsequent decision, an *idealized* reference signal is defined. In such a idealized signal, the phase is advanced by exactly $\pm\pi/4$ or $\pm3\pi/4$ from the phase of the previous reference signal, $\angle b_R(n)$, as required by the $\pi/4$ DQPSK scheme. Conventional schemes use this idealized reference signal as the reference signal $s_R(t)$. The problem with this is that the $d(n)$ are relatively insensitive to the

25 slow phase rotation caused by any small frequency offsets in $\hat{s}_N(t)$. Constructing $b_R(n)$ (and hence $s_R(t)$, the reference signal **127** or **229**) in this simple manner would cause the phase of $s_R(t)$ to rotate slowly compared to the phase of $\hat{s}_N(t)$, and after some number of symbols, $s_R(t)$ and $\hat{s}_N(t)$ will be completely out of phase. Thus, one might have a cumulative error problem known as phase windup. A

30 reference signal which suffers from phase windup in general is not desirable and

certainly not suitable for estimating the weight vector in an alternating projection loop.

The method and apparatus of this invention avoids the phase windup problem by modifying the above "conventional" demodulation method. The phase windup is slow, and hence, assuming the system has done a good job demodulating so far, the phase difference between $b_R(n)$ and $b_N(n)$ is small at any particular point in time (*i.e.*, at a particular value of n). One inventive aspect is that at any point in time, a filter is applied to move the phase of the idealized reference signal a little towards the phase of $b_N(n)$ to form the phase of the required reference signal symbol $\angle b_R(n)$. Let

$$b_{\text{ideal}}(0) = b_R(0) = b_N(0),$$

and define $\angle d_{\text{ideal}}(n)$ as

$$\angle d_{\text{ideal}}(n) = \angle b_N(n) - \angle b_R(n-1) = \angle b_N(n) b_R^*(n-1).$$

A conventional demodulation decision based on $d_{\text{ideal}}(n)$ is made and this decision is then used to the phase of $\angle b_{\text{ideal}}(n)$ as follows: if $\angle d_{\text{ideal}}(n) \in \Phi_i$, one sets

$$\angle b_{\text{ideal}}(n) = \angle b_R(n-1) + (2i-1)\pi/4.$$

The phase of $b_{\text{ideal}}(n)$ is now relaxed towards the phase of $b_N(n)$ by filtering the quantity $(\angle b_N(n) - \angle b_{\text{ideal}}(n))$, the phase error between $b_N(n)$ and $b_{\text{ideal}}(n)$, and adding the filtered quantity to the phase of $b_{\text{ideal}}(n)$. An alternate embodiment filters the quantity $(b_N(n) - b_{\text{ideal}}(n))$ rather than the phase error. In the Parent Patent, the filter is a constant of proportionality. That is, in one embodiment,

$$\angle b_R(n) = \angle b_{\text{ideal}}(n) + \text{filter}\{\angle b_N(n) - \angle b_{\text{ideal}}(n)\}.$$

Note that the quantity $\angle d_{\text{ideal}}(n)$ should be in the range $-\pi$ to $+\pi$ and the phase error $\angle b_N(n) - \angle b_{\text{ideal}}(n)$ should also be in the range $-\pi$ to $+\pi$ or unwrapped to ensure no sudden jumps of 2π . In an improved embodiment, to ensure no such jumps, the phase error is either unwrapped, or confined to be in the correct range.

When the filter consists of multiplication by γ , it can be written as

$$\angle b_R(n) = \angle b_{\text{ideal}}(n) + \gamma(\angle b_N(n) - \angle b_{\text{ideal}}(n)),$$

with γ a parameter. In an improvement, the phase error is again either confined to be in the range $-\pi$ to $+\pi$, or else unwrapped.

In an alternate embodiment,

$$b_R(n) = b_{\text{ideal}}(n) + \text{filter}\{b_N(n) - b_{\text{ideal}}(n)\},$$

5 which, when the filter is multiplication by a constant, can be rewritten as

$$b_R(n) = b_{\text{ideal}}(n) + \gamma(b_N(n) - b_{\text{ideal}}(n)),$$

where γ is a parameter. With some manipulation, this can be written as

$$b_R(n) = \alpha b_{\text{ideal}}(n) + (1-\alpha)b_N(n),$$

where $\alpha = 1-\gamma$ is a parameter which typically is close to 1. In the first preferred
10 embodiment, the mobile PHS system, $\alpha = 0.8$, while for the WLL system, the preferred value for α is 0.5.

In another aspect of this invention, other more complex filters are used. The difference in phase between the real signal and the ideal signal is corrupted by zero mean noise, and the part due to frequency offset represents a DC offset to this
15 noisy difference signal, and is the desired difference signal. The general principal in implementing the invention is to lowpass filter this difference signal to generate the DC offset.

Fig. 4 describes one architecture for the tracking demodulator and reference signal generator in one aspect of the invention. Phase detector Unit **403** detects the phase
20 difference **405** between signal **119** (or **223**) and the previous reference signal **417**. The phase difference signal **405** is fed to a slicer **407** to generate the decision phase difference **419**. The correct phase difference for $\pi/4$ DQPSK is $(2i-1)\pi/4$, $i = 1, 2, 3, \text{ or } 4$, and is the phase difference between the previous reference signal sample and the ideal signal. This is subtracted in block **409** from the actual phase difference **405** to generate error signal **411**.
25 This error signal is filtered in filter **413** to generate filtered error signal **415**. It is this filtered error signal that is used to adjust the phase difference **419** closer to the actual phase difference **405**. The corrected phase difference **421** is then used in a frequency synthesizer/phase accumulator **423** to generate the reference signal **127** (or **229**). It is the previous sample value **417** of the reference signal **127** (or **229**) that is used by phase

detector 403, so a unit time delay 425 is shown between these signals. The symbols 125 (or 227) are determined by block 427.

Mathematically, the input to phase accumulator 423, $\angle b_R(n) - \angle b_R(n-1)$, is

$$\text{filter}\{\angle d_{\text{ideal}}(n) - \text{decide}\{\angle d_{\text{ideal}}(n)\} + \text{decide}\{\angle d_{\text{ideal}}(n)\},$$

5 where $\text{decide}\{\angle d_{\text{ideal}}(n)\}$ is the output of slicer 407 and equals $(2i - 1)\pi/4$, $i=1, 2, 3$ or 4 for $\pi/4$ DQPSK.

The phase detector 403 uses the fact that $\angle d(n) = \angle [b_N(n)b_N^*(n-1)]$. Let $x_{\text{Re}}(n) = \text{Real}[b_N(n)b_R^*(n-1)]$ and $x_{\text{Im}}(n) = \text{Imag}[b_N(n)b_R^*(n-1)]$ for $n > 0$. Then signal $|x_{\text{Re}}(n)| + j|x_{\text{Im}}(n)| \in \Phi_1$, the first quadrant, in which case, $d_{\text{Nideal}}(n)$, when normalized,
10 would be $1/\sqrt{2} + j 1/\sqrt{2}$.

The architecture of Fig. 4 may be modified slightly to use

$b_R(n) = b_{\text{ideal}}(n) + \text{filter}\{b_N(n) - b_{\text{ideal}}(n)\}$. In the preferred embodiment, such a tracking reference signal generator is implemented as a set of instructions for a signal processor device. Note again that $\angle d_{\text{ideal}}(n) = \angle [b_N(n)b_R^*(n-1)]$.

15 Normalize so that $b_R(0) = b_N(0)/|b_N(0)|$ and let $x_{\text{Re}}(n) = \text{Real}[b_N(n)b_R^*(n-1)]$ and $x_{\text{Im}}(n) = \text{Imag}[b_N(n)b_R^*(n-1)]$ for $n > 0$. The implementation for generating the reference signal for the method described in the Parent Patent can be summarized by the following program (for $\alpha = 0.8$):

```

20 for (n > 0) {
    x_Re(n) = REAL [b_N(n) b_R^*(n-1)];
    x_Im(n) = IMAG [b_N(n) b_R^*(n-1)];
    K = 2 (x_Im(n) < 0) + (x_Re(n) < 0);
    b_R(n) = b_R(n-1) exp j{(2K'-1)π/4};
    if (|b_N(n)| > 0) b_R(n) = 0.8 b_R(n) + 0.2 b_N(n) / |b_N(n)| ;
25 b_R(n) = b_R(n) / |b_R(n)| ;
}

```

In the above, K' is the phase corresponding to the bits K . The data stream (demodulation) can be extracted from $x_{\text{Re}}(n)$ and $x_{\text{Im}}(n)$ as calculated above.

In the above code, the complex exponential term is implemented using a look-up table. In an alternate implementation, the complex exponential function implementing the frequency synthesizer is implemented using a low order Taylor series expansion. Also, the "b_N(n)/|b_N(n)|" term requires a square root operation which in the preferred embodiments is implemented using a Newton Raphson method for the mobile PHS implementation, and a lookup table with 9 bit accuracy for the WLL implementation.

The simplest filter is a multiplicative filter γ . That is, a filter with a zero order transfer function

$$H(z) = \gamma.$$

A demodulator with such a zero order filter is called a first order tracking demodulator herein. Better performance is expected by using higher order filters. When a n^{th} order filter is used, the demodulator is called a $(n+1)^{\text{th}}$ order tracking demodulator. The phase difference between the input and the previous reference signal (for example 405 in Fig. 4) is theoretically expected to vary within $-\pi$ and $+\pi$ so that the error signal varies between $-\pi/4$ and $+\pi/4$. When a first-order demodulator is implemented, its distribution over this interval is theoretically close to uniform. Implementing the frequency synthesizer which uses the accumulated phase to build a signal is computationally intensive because a sin/cosine (complex exponential) needs to be calculated. For computational simplicity, a low order Taylor series expansion preferably is used. With a first order tracking demodulator, such a Taylor series expansion may become inaccurate for phase error values with magnitude between $\pi/4$ and 0.5. Symbol errors also may cause the phase difference between the input and the previous reference signal (for example 405 in Fig. 4) to be out of the $-\pi$ to $+\pi$ range because of the resulting phase skips. For this reason, in an alternate implementation, two improvements are added:

In one improvement, a higher order filter is used. In one implementation, this is a first order filter defined in the Z-domain by the transfer function

$$H(z) = \frac{\gamma + \beta z^{-1}}{1 - \delta z^{-1}},$$

where γ , β , and δ are parameters. Note that when β , and δ are zero, this reduces to the zero order filter. Parameters used in simulations were $\gamma=0.25$, $\beta=0.125$, and $\delta=0.125$.

Note that a tracking reference signal demodulator with higher order terms can be constructed in architectures other than that of Fig. 4. Two examples are described. First, consider as a starting point the architecture of Fig. 4. For example, in Fig. 4, the reference signal

$$\begin{aligned} \angle b_R(n) &= \angle b_R(n-1) + \text{decide}\{\angle d_{\text{ideal}}(n)\} + \text{filter}\{\angle d_{\text{ideal}}(n) - \text{decide}\{\angle d_{\text{ideal}}(n)\}\} \\ &= \angle b_{\text{ideal}}(n) + \text{filter}\{\angle d_{\text{ideal}}(n) - \text{decide}\{\angle d_{\text{ideal}}(n)\}\}. \end{aligned}$$

The first term is the ideal signal $b_{\text{ideal}}(n)$ and the second the phase correction to relax $\angle b_R(n)$ towards $\angle b_N(n)$. Suppose that the filter is the zero order filter consisting of multiplication by γ . A higher order system can be constructed by adding a second correction term which is a function of the difference between the *previous* input and the *previous* reference signal. That is,

$$\begin{aligned} \angle b_R(n) &= \angle b_{\text{ideal}}(n) + \gamma\{\angle d_{\text{ideal}}(n) - \text{decide}\{\angle d_{\text{ideal}}(n)\}\} \\ &\quad + \gamma\{\angle b_N(n-1) - \angle b_R(n-1)\}. \end{aligned}$$

Even higher order terms can be similarly added.

The second example has already been mentioned. Rather than the phase difference between two signals being filtered, the difference between the complex valued signals is filtered. That is, for example,

$$b_R(n) = b_{\text{ideal}}(n) + \text{filter}\{b_N(n) - b_{\text{ideal}}(n)\}.$$

In another improvement, the phase difference **405** is continually checked to maintain it in the range $-\pi$ to $+\pi$, and if a wind-up is found (by the phase error jumping out of the expected range), the phase detector output **405** is changed accordingly by a multiple of 2π .

It often is the case that the beginning of a burst has distortion due, for example, to hardware settling effects. This could lead to a large sequence or errors at the beginning of the burst. A second problem is to select the correct framing information – that is, the actual data symbols from all the symbols in the burst. For example, in the preferred

embodiment the PHS protocol is used where the acquired signal which includes each burst is larger than the burst. In particular, the acquired signal has 120 samples (at baud-rate) per burst, of which the burst itself consists of 110 symbols (*i.e.*, 110 baud-rate samples). Many methods are known in the art for determining the beginning of a burst, including, for
5 example, using a known bit sequence. It was observed that in actual data, the amplitude — shape of actual bursts seem to show an asymmetry. The burst begins with a ramp up, and ends in a sharp manner with no discernible ramp down. In PHS (an also in GSM and other standards) there may be some power ramp (applied by some power control mechanism) at the beginning of bursts. However, in PHS, there always is some valid data at the end of a
10 burst—the CRC data. It was observed that the end of a PHS burst has an abrupt drop of amplitudes with no power ramp down. Thus, we concluded that the end of the burst is better defined than the beginning of the burst.

Another aspect of the invention solves the framing problem (of choosing the actual data in the burst) and the problems due to the beginning of the burst
15 having high distortion by running the demodulation/reference signal generator (for example, that of Fig. 4) *backwards*. The last symbol is detected using an adaptive threshold method. The thresholding method proceeds as follows. A rough burst energy estimate is made by selecting a contiguous number of samples from the center of a burst. In the preferred embodiment, 64 samples are taken. The average
20 amplitude of these is obtained. The threshold is set to a fraction, preferably 50% of the average magnitude. In implementation, the sum of 64 samples is obtained, and this is divided by 128 to obtain the threshold value. One scans the burst from the end towards the beginning and selects as the last sample in the burst the first
sample encountered (going backwards) that is above the threshold value.

25 The (absolute) phase of that last sample is determined, and this forms the reference phase for demodulating and generating the reference sequence for the burst. The absolute phase may be determined either from knowing the frequency offset from the previous burst, from estimating, say with a fourth order power estimator, or, in the case of the system of Fig. 2, from frequency offset estimate
30 **233**. Note that when going backwards, a positive frequency offset looks like a negative offset.

Note that since the processing occurs in the reverse, the demodulation should take this into account when determining the correct symbols. That is, the constellation points do not have the same meaning. The backwards $-\pi/4$ point acts the same as the forward $+\pi/4$ point, *etc.* For example, if the normal differential constellation point are that $+\pi/4$ represents dibit 00, $+3\pi/4$ represents 01, $-3\pi/4$ represents 11, and $-\pi/4$ represents 10, then in the backwards running case, one flips the plane around the *I* axis so that $+\pi/4$ represents dibit 10, $+3\pi/4$ represents 11, $-3\pi/4$ represents 01, and $-\pi/4$ represents 00.

Timing and Frequency Offset Estimation

Any reasonable timing and frequency offset estimation methods may be used in the embodiment of Fig. 2 as would be clear to one of ordinary skill in the art. As seen in Fig. 2, the reference signal obtained from the demodulator/reference signal generator 225 is given a frequency offset in block 231 equal to the one estimated in block 221 after the alignment in block 217. The frequency shifted reference signal 235 is then time-aligned with signal 211 in the weight calculation unit 237.

Improved Version of the Second Embodiment

An improved version of using the architecture of Fig. 2 improves the weight calculation by improving the quality of the reference signal. Any improvement in the weight calculation improves the system performance, because it has a better ability to null undesired users. This version replaces the tracking demodulator/reference signal generator with a coherent demodulator to determine the data symbols and a re-modulator to determine the reference signal. Thus, the block diagram of Fig. 2 is modified and shown in Fig. 8. To implement the coherent demodulator 824, the frequency offset in the input to demodulator 824 should be pretty much removed and the initial phase pretty much correctly estimated, otherwise coherent demodulator 824 will have a poor performance. The tracking demodulator/reference signal generator by its nature is tolerant of some frequency offset. Therefore, a good frequency offset estimation method is needed for this improved version using coherent demodulation. Such a frequency offset estimation and correction unit is shown as 821 in Fig. 8. The coherent demodulator 824 provides the data bits 827 which are then re-modulated in re-modulator 826 to obtain the reference signal

835. The reference signal 835 is applied a frequency offset 833 equal to the one estimated after the alignment. Then the frequency shifted reference signal 835 is time-adjusted using timing information 841 in timing adjustment filter 842 to produce a reference signal 845 that has timing that correspond to the misalignment in the received signal 211. The timing adjusted reference signal 845 is then used in weight determining block 237 which carries out the weight calculation as in the first version of the second embodiment.

Timing Estimation

A block-based non-decision aided timing estimator preferably is used in the preferred implementation of the embodiment of Figs. 2 and 8. The data 215 is three-times oversampled in the preferred embodiment. Many methods would work here. For one method, see for example D'Andrea, Morelli and Mengali, "Feedforward ML-based timing estimation with PSK signals," *IEEE Communications Letters*, Vol. 1, No. 1, pp. 80-82, May 1997. See also Order and Meyr, "Digital filter and square timing recovery," *IEEE Trans. on Communications*, Vol. 36, No. 5, pp. 605-612, May 1988. In the preferred embodiments, the time alignment estimation is done in two steps. In the first step, the samples closest to the baud points are selected. The next step is fine timing alignment. The preferred fine timing estimation method is based on the classical clock recovery technique using a nonlinear operation on the input signal. The flow of operations involved in the estimation of timing is illustrated in Fig. 6. The oversampled copy signal 215, denoted $s(t)$, is passed through a non-linear operation $F\{\}$ in step 607, and the first coefficient of a baud-rate DFT is taken in step 611 to form output 613 denoted x_m . This is equivalent to passing signal $x(t)$ through a narrow band filter to extract a complex baud-rate sinusoid. After correlation with a sinusoid, the angle of the correlation 613 gives the timing offset, this corresponding to step 615.

A common form for nonlinearity $F\{\}$ which can be used is a power law, described as

$$F\{s(t)\} = |s(t)|^m,$$

where $m = 1$ (absolute value), 2 (square-law) or 4 (fourth-law). For our system, the square law nonlinearity is preferred. While it performs slightly worse than the absolute nonlinearity, it produces significant savings in computation.

The timing estimate, τ , is obtained as follows

$$\tau = -\frac{T}{2\pi} \arg \left(\sum_{k=0}^{NL-1} F \left\{ x \left(\frac{kT}{N} \right) \right\} e^{-j2\pi k/N} \right)$$

where $F\{\}$ is the non-linear operation, $x(t)$, $t=0, 1, \dots, NL-1$ is the input signal at time t , $\arg()$ is the argument function, T is the symbol duration, L is the number of samples per
 5 baud, and N is the number of symbols used in the estimation process.

The interpolation part is determining the baud point sample from the oversampled copy signal using τ . Any interpolation method would work here. In the preferred embodiment, a bank of eight finite impulse response (FIR) digital interpolation filters are used with the input being the three-times oversampled data. This provides a time shift in
 10 units of $1/24$ of a baud (the number of filters times the oversampling factor). The value of τ expressed as a fraction of the baud period determines which filter output to use for the time aligned signal 219. Other implementations are clearly possible.

Frequency Offset Compensation Method

While any accurate offset estimation method may be used, including decision-
 15 directed methods and non-decision directed methods, the preferred frequency estimation method is a non-decision directed method that is based on using a power law nonlinearity. The phase of the signal is for an M -PSK signal (including differential M -PSK signal) is passed through an M -power law, and the amplitude through a general (say m th) power law. Thus, if the signal is of the form $s(n) = \rho(n)e^{j\phi(n)}$ at any discrete time instant n , the
 20 nonlinear transformation is of the form

$$\gamma(n) = F(\rho(n))e^{jM\phi(n)},$$

where M is the number of possible symbols per baud and $F()$ is of the form

$F(\rho(n)) = |\rho(n)|^m$. By thus multiplying the phase by M , the phase of $\gamma(n)$ is reduced to the interval $-\pi$ to $+\pi$. To avoid sign errors, in the preferred embodiment using a $\pi/4$ -DQPSK
 25 modulated signal, the $\pi/4$ phase shift in every other symbol is first removed (for example by a rotation achieved by multiplying by $1+j$) and then the nonlinear operation is applied

on the resulting signal. Denoting any frequency offset present by f_0 , the time aligned signal **219** may be modeled as

$$s(n) = \rho(n)e^{j\phi(n)}e^{j2\pi n f_0 / f_s},$$

where f_s is the sampling frequency. After the nonlinear operation,

5
$$\gamma(n) = |\rho(n)|^m e^{jM 2\pi n f_0 / f_s}.$$

Viterbi and Viterbi, "Nonlinear estimation of PSK-modulated carrier phase with application to burst digital transmission," *IEEE Trans. on Information Theory*, Vol. IT-29, No. 4, pp. 543-551, July 1983, compares using different nonlinearities, $m = 1, 2$ and 4 in such a method. $m = 2$ is used in the preferred implementation. After the nonlinear
 10 operation, the frequency estimation or the phase tracking can be done in different ways. One method is proposed in the Viterbi and Viterbi reference and tracks the phase trajectory directly after the nonlinear operation. A version of this method is shown in the flow chart of Fig. 9. Starting with the baud aligned signal **219**, the $\pi/4$ rotation of every second symbol is carried out in step **903** (e.g. by multiplying by $1+j$). The nonlinear function is
 15 then applied in step **907** to generate $\gamma(n)$. The basis of the method is that the carrier phase estimate denoted $\hat{\theta}$ is determined as

$$\hat{\theta} = \frac{1}{M} \arg \left(\sum_{k=-N'}^{k=N'} \gamma(n+k) \right),$$

where the summation is over $2N'+1$ samples and centered on the current (say n th) sample. The summation is thus an averaging operation over $2N'+1$ samples. Thus, in step **911**, the
 20 moving average **913** denoted $y(n)$ is obtained, this moving average being of all the complex samples in a window of $2N'+1$ samples centered around the sample n . The last step **915** determines $\frac{1}{M} \arg \left(\sum_{k=-N'}^{k=N'} \gamma(n+k) \right)$ and is equivalent to taking an arctangent
 operation and dividing by $1/M$. For non-differentially encoded data, this in theory gives an
 25 M -fold ambiguity in the phase estimate, which is avoided when differential encoding is used.

The preferred frequency offset estimation method is based on a Discrete Fourier Transform (DFT). This method estimates the frequency offset and constructs a phase for tracking. The method works best when the frequency offset in the received signal is substantially constant over a single burst. The method is summarized by the flow chart of Fig. 10. In step **1005**, every other symbol of the time aligned copy signal **219** is first rotated in phase by $\pi/4$ (e.g. by multiplying by $1+j$). The nonlinear operation is then applied in step **1009**. The resulting signal **1011** has a regenerated sinusoid at M times the frequency offset for M -PSK modulation. Thus, in the preferred embodiment using DQPSK, this would be a four times the frequency offset. Thus, the DFT of a block of N samples, in the absence of noise, after the nonlinear operation will have a sinc pulse centered at M -times the frequency offset for M -PSK. Thus, in the preferred embodiment, a DFT operation is carried out on the nonlinearly transformed signal **1011** in step **1013**, this DFT calculated with a frequency interval of $1/T_{\text{burst}}$, where T_{burst} is the burst duration. The number of DFT coefficients depends on the search range of the frequencies. To scan a frequency range of +2 kHz to -2 kHz (not in the fourth power domain), the method should use six DFT coefficients to be calculated for a burst length of 120 symbols. The number of DFT coefficients scales directly with the search range and the length of the burst. In step **1017**, a finely sampled sinc function with a period of T_{burst} is fit to DFT coefficients **1015**. The fit may be accomplished various ways. In our implementation, sampled sinc functions having various shifts are correlated with the DFT coefficients. The sinc function shift producing the maximum correlation peak is determined in step **1021**. The shift producing the correlation peak corresponds to four times the frequency offset. With the coherent demodulator, initial phase needs to be determined, and for this, a complex sinusoid is generated with the frequency being that of the estimated frequency offset. This is correlated with the input to extract the initial phase.

The DFT-based frequency estimator was found to perform much better than the system of Fig. 7. At a signal-to-noise ratio of 15 dB, the standard deviation of the DFT-based frequency estimator was 16.73 Hz, while that of the estimator of Fig. 7, 134.16 dB.

Coherent Demodulation

The above described demodulation methods for a signal that has been differentially encoded (*e.g.*, using $\pi/4$ -DQPSK) use differential demodulation in that changes in phase from one symbol to the other are used for the decision, with correction added for tracking.

5 A coherent demodulation scheme does not simply look at phase differences symbol to symbol, but rather attempts to learn and track the absolute phase of the received signal as illustrated in Fig. 11. Note again that as used herein, the term demodulation includes detection, thus the architecture of Fig. 11 may sometimes be called coherent detection. Suppose the input signal samples to the demodulator are

$$10 \quad s(nT) = \exp -j[\phi(nT)+\theta(nT)] + v(nT).$$

where $\phi(nT)$ is the symbol phase at time nT , n is a time index, T is the sampling (and preferably symbol) period, $v(nT)$ is complex valued additive noise and $\theta(nT)$ is some unknown phase rotation (the ambiguity). For the coherent demodulator, we can assume that the frequency estimation is accurate so that we accurately track, and thus we can

15 assume that ideally the phase rotation ambiguity $\theta(nT_s) = \theta$ where θ assumes certain discrete phases (*e.g.*, any multiple of $\pi/4$ for the case of $\pi/4$ DQPSK) that allow a slicer to work properly. As seen in Fig 11, input **1105** denoted $s(nT_s)$ is applied to a conventional slicer **1115** designed for the phases of $\phi(nT_s)$, and it is assumed that the slicer estimates $\phi(nT_s)+\theta$. After the slicer, a difference operation **1121** with a unit delay **1119** forms an

20 estimate **1123** $\Delta\phi'(nT_s)$, independent of $\theta(nT_s)$, that directly represents the information bits.

Because the coherent demodulator described herein requires tracking the channel phase so that the input is frequency offset corrected, which is a challenge in high mobility systems, the coherent demodulator described herein is preferably used for the wireless

25 local loop systems where the subscriber units are fixed. For mobile systems, the tracking demodulator of Fig. 4 is preferred.

We expect that in a channel that can be modeled as an additive Gaussian white noise channel, in order to maintain a BER of 10^{-3} , a coherent demodulator should perform approximately 1dB better than demodulator of Fig. 4, with a zero-order filter consisting of

30 multiplication by 0.5.

Other implementations

Referring for example to the architecture of Fig. 2, the scope of this invention includes combining one or more of blocks **217**, **221**, **225**, **231**, and **241**. Consider first combining all these blocks. In such a case, the invention includes estimating from the copy
5 signal **215** a reference signal **245** having the same modulation scheme as the transmitted signal and the substantially the same frequency offset and timing misalignment as the received signals **211**, the estimating using the known finite alphabet modulation scheme of the transmitted signal. Another aspect is using the frequency offset and timing alignment adjusted reference signal **245** and received signals **211** to determine the receive weights
10 **239**.

As one example, blocks **217**, **221**, and **225** can be combined by performing a joint optimization over timing, frequency, offset, and symbols to minimize the deviations from the known finite symbol alphabet of the modulated signal. Many methods known in the art may be adapted to performing this optimization efficiently. One method for example is
15 described in Ascheid, Oerder, Stahl and Meyer: "An all digital receiver architecture for bandwidth efficient transmission at high data rates, *IEEE Transactions on Communications*, vol. 37, no. 8, pp. 804–813, Aug. 1989, and includes combining a grid search over the parameter space with a descent method. Alternatively, one may use an extended Kalman filter to track the evolution of timing, frequency, and phase during the
20 course of transmission. See for example, Itlis and Fuxjaeger: "A digital DS spread spectrum receiver with joint channel and Doppler shift estimation," *IEEE Transactions of Communications*, vol. 39, no. 8, pp. 1255–1267, Aug. 1991, for a description of an extended Kalman filter which may be modified to be used in the present invention.

If the sequence transmitted to the communications station includes error protection,
25 for example in the form of parity symbols, error correction can be included in the reference signal generation to ensure that the ideal signal has valid parity.

As will be understood by those skilled in the art, the skilled practitioner may make many changes in the methods and apparatuses as described above without departing from the spirit and scope of the invention. For example, the communication station in which the
30 method is implemented may use one of many protocols. In addition, several architectures of these stations are possible. Also, the architectures described produce reference signals

that consist of on-baud samples. It would be clear to one of ordinary skill in the art how to modify the embodiments to produce reference signal samples that are off baud points, and that include on-baud and off-baud samples. Many more variations are possible. The true spirit and scope of the invention should be limited only as set forth in the claims that

5 follow.

CLAIMS

What is claimed is:

- 1 1. In a **communications station**, the communications station including an **array of**
2 **antennas** and **spatial processing means**, the spatial processing means including
3 means for weighting a **set of antenna signals** by a **set of corresponding receive**
4 **weights**, each distinct antenna signal derived from the signal received at a
5 **corresponding antenna** of the array, a **method** for producing a **reference signal**
6 from a **modulated signal** transmitted to the communications station by a **particular**
7 **remote station**, the modulated signal modulated at symbol points by a **modulation**
8 **scheme** that has a **finite symbol alphabet**, the alphabet including **symbols** that have
9 different phases, the method comprising:
- 10 (a) **weighting** the received antenna signals to form a **copy signal** corresponding
11 to the particular remote station, the weighting using a **spatial weight vector**
12 corresponding to the particular remote station, the copy signal being in the form
13 of **copy signal samples**; and
- 14 (b) **determining** samples of the reference signal by, for each of a **set of sample**
15 **points**:
- 16 (i) **constructing** an **ideal signal sample** from the copy signal at the same
17 sample point, the ideal signal sample having a phase determined from the
18 copy signal at the sample point, with the phase of the ideal signal sample at
19 an **initial symbol point** set to be an **initial ideal signal phase**;
- 20 (ii) **relaxing** the phase of the ideal signal sample towards the copy signal
21 sample phase to produce the phase of the reference signal; and
- 22 (iii) **producing** the reference signal having the phase of the reference signal
23 determined in relaxing step (b)(ii),
- 24 wherein the spatial weight vector is determined from the received antenna
25 signals and from the reference signal.

- 1 2. The method of claim 1 wherein the phase of the ideal signal is determined in the
2 ideal signal constructing step (b)(i) sample by sample, the phase of the ideal signal
3 sample at any sample point being determined:
4 from the phase of the reference signal at the previous sample point
5 for which said phase is determined, and
6 from a decision based on the copy signal.
- 1 3. The method of claim 1 wherein the initial symbol point is the first valid symbol
2 point in a **burst of samples** of received antenna signals, and the reference signal
3 sample determining step (b) determines the samples of the reference signal in the
4 forward time direction.
- 1 4. The method of claim 1 wherein the initial symbol point is the **last valid symbol**
2 **point** in a **burst of samples** of received antenna signals, and the reference signal
3 sample determining step (b) determines the samples of the reference signal in the
4 **backwards** time direction.
- 1 5. The method of claim 1 wherein the step of relaxing the phase $\angle b_{\text{ideal}}(n)$ of the
2 ideal signal sample $b_{\text{ideal}}(n)$ towards the phase $\angle b_{\text{N}}(n)$ of the copy signal $b_{\text{N}}(n)$
3 corresponds to adding a **filtered version** of the difference between the copy signal
4 phase and ideal signal phase.
- 1 6. The method of claim 1 wherein the step of relaxing the phase $\angle b_{\text{ideal}}(n)$ of the
2 ideal signal sample $b_{\text{ideal}}(n)$ towards the phase $\angle b_{\text{N}}(n)$ of the copy signal $b_{\text{N}}(n)$
3 corresponds to forming the reference signal sample $b_{\text{R}}(n)$ by adding to the ideal
4 signal sample $b_{\text{ideal}}(n)$ a **filtered version** of the difference between the copy signal
5 and ideal signal.
- 1 7. The method of claim 5 wherein the filter is a **zero order filter** consisting of
2 **multiplication** by a **constant** and wherein the phase $\angle b_{\text{R}}(n)$ of the reference signal
3 sample $b_{\text{R}}(n)$ is computed as

4
$$\angle b_R(n) = \angle b_{\text{ideal}}(n) + \gamma\{\angle b_N(n) - \angle b_{\text{ideal}}(n)\},$$

5 where γ denotes the constant.

1 8. The method of claim 5 wherein the filter is a **linear discrete time filter** with a
2 **transfer function** denoted $H(z)$ in the Z-domain with input to the filter being the
3 sequence $\{\angle b_N(n) - \angle b_{\text{ideal}}(n)\}$.

1 9. The method of claim 7 wherein the quantity $\angle b_N(n) - \angle b_{\text{ideal}}(n)$ is phase
2 unwrapped

1 10. The method of claim 7 wherein the quantity $\angle b_N(n) - \angle b_{\text{ideal}}(n)$ is constrained
2 to be in the range $-\pi$ to $+\pi$.

1 11. The method of claim 8 wherein the quantity $\angle b_N(n) - \angle b_{\text{ideal}}(n)$ is phase
2 unwrapped

1 12. The method of claim 8 wherein the quantity $\angle b_N(n) - \angle b_{\text{ideal}}(n)$ is constrained
2 to be in the range $-\pi$ to $+\pi$.

1 13. The method of claim 6 wherein the filter is a **zero order filter** consisting of
2 multiplication by a **constant** so that the reference signal sample $b_R(n)$ is computed
3 as

4
$$b_R(n) = b_{\text{ideal}}(n) + \gamma\{b_N(n) - b_{\text{ideal}}(n)\},$$

5 where γ denotes the constant.

1 14. The method of claim 6 wherein the filter is a **linear discrete time filter** with a
2 **transfer function** denoted $H(z)$ in the Z-domain with input to the filter being the
3 sequence
4 $\{b_N(n) - b_{\text{ideal}}(n)\}$.

1 15. The method of claim 8 wherein the filter is a **first order filter** having a transfer
2 function

3
$$H(z) = \frac{\gamma + \beta z^{-1}}{1 - \delta z^{-1}}$$

4 where γ , β , and δ are parameters.

1 16. The method of claim 14 wherein the filter is a **first order filter** having a transfer-
2 function

3
$$H(z) = \frac{\gamma + \beta z^{-1}}{1 - \delta z^{-1}}$$

4 where γ , β , and δ are parameters.

1 17. The method of claim 7 wherein reference signal determining step (b) further
2 includes prior to producing step (b)(iii) **correcting** the phase of the reference signal
3 sample by an **amount** dependent on the difference in phase between the previously
4 determined reference signal sample and the previously determined copy signal
5 sample.

1 18. The method of claim 13 wherein reference signal determining step (b) further
2 includes prior to producing step (b)(iii) **correcting** the phase of the reference signal
3 sample by an **amount** dependent on the difference between the previously
4 determined reference signal sample and the previously determined copy signal
5 sample.

1 19. The method of claim 1 wherein the modulation scheme is **phase shift keying**.

1 20. The method of claim 19 wherein the modulation scheme is **differential phase**
2 **shift keying**.

1 21. The method of claim 1 wherein the modulation scheme is **QAM**.

1 22. In a **communications station** including an **array of antennas** and **spatial**
2 **processing means**, the spatial processing means including means for weighting a set
3 **of received antenna signals** by a set of **corresponding receive weights**, each
4 distinct received antenna signal derived from the signal received at a **corresponding**
5 **antenna** of the array, a **method** for generating a **reference signal** from a **modulated**
6 **signal** transmitted to the communications station by a **particular remote station**,

7 the modulated signal modulated at symbol points by a **modulation scheme** that has
8 a **finite symbol alphabet**, the alphabet including **symbols** that have different
9 phases, the method comprising:

10 (a) **separating** from the received antenna signals a **copy signal** corresponding to _
11 the particular remote station by using an **initial spatial weight vector**
12 corresponding to the particular remote station;

13 (b) **determining** from the terminal copy signal a **reference signal** having
14 substantially the same frequency offset and time alignment as the received
15 antenna signals; and

16 (c) **computing a new spatial weight vector** by **optimizing a cost function**, the
17 cost function using the received antenna signals and the reference signal.

1 23. The method of claim 22 further including **extracting** the symbols of the
2 modulated signal.

1 24. The method of claim 22 further including **performing timing alignment** on the
2 received antenna signals, said step (a) of separating and said step (c) of new spatial
3 weight computing using the time aligned received antenna signals.

1 25. The method of claim 22 further including **performing frequency offset**
2 **correction** on the received antenna signals, said step (a) of separating and said step
3 (c) of new spatial weight computing using the frequency-offset corrected received
4 antenna signals.

1 26. The method of claim 24 further including performing **frequency offset**
2 **correction** on the received antenna signals, said step (a) of separating and said step
3 (c) of new spatial weight computing using the frequency-offset corrected and time
4 aligned received antenna signals.

1 27. The method of claim 22 further comprising **repeating said separating step** (a) at
2 least once, using in the repetition of said separating step (a) the new spatial weight
3 vector previously determined in said new weight computing step (c) instead of the
4 initial spatial weight vector.

1 28. The method of claim 22 further comprising **repeating said reference signal**
2 **determining step (b)** at least once.

1 29. The method of claim 22 further including:

2 **estimating a frequency offset** and a **timing misalignment** of the copy
3 signal; and

4 **correcting** the copy signal for frequency offset and timing misalignment to
5 form a **corrected copy signal**,

6 wherein the reference signal determining step (b) includes

7 **synthesizing a corrected reference signal** that has substantially the same
8 frequency offset and timing alignment as the corrected copy signal; and

9 **applying frequency offset and time misalignment** to the corrected
10 reference signal to form a **frequency offset and time misaligned reference**
11 **signal** having the same frequency offset and time misalignment as the received
12 antenna signals.

1 30. The method of claim 22 further including:

2 **estimating a timing misalignment** of the copy signal; and

3 **correcting** the copy signal for timing misalignment to form a **timing aligned**
4 **copy signal**,

5 wherein the reference signal determining step (b) includes

6 **synthesizing a timing aligned reference signal** that has substantially the
7 same timing alignment as the timing-aligned copy signal; and

8 **applying time misalignment** to the corrected reference signal to form a
9 **timing misaligned reference signal** having substantially the same time
10 alignment as the received antenna signals.

1 31. The method of claim 22 further including:

2 **estimating** the frequency offset of **the copy signal**, and

3 **correcting** the copy signal for frequency offset to form a **frequency offset**
4 **corrected copy signal**,

5 wherein the reference signal determining step (b) includes

6 **synthesizing** a **frequency offset corrected reference signal** that has
7 substantially the same frequency offset as the frequency offset corrected copy
8 signal; and

9 **applying frequency offset** to the frequency offset corrected reference signal
10 to form a **frequency offset reference signal** having substantially the same
11 frequency offset as the received antenna signals.

1 32. The method of claim 22 wherein said step (b) of determining the reference signal
2 includes, for each of a **set of sample points**:

3 (i) **constructing** an **ideal signal sample** from the copy signal at the same
4 sample point, the ideal signal sample having a phase determined from the
5 copy signal at the sample point, with the phase of the ideal signal sample at
6 an **initial symbol point** set to be an **initial ideal signal phase**;

7 (ii) **relaxing** the phase of the ideal signal sample towards the copy signal
8 sample phase to produce the phase of the reference signal; and

9 (iii) **producing** the reference signal having the phase of the reference signal
10 determined in said relaxing step (b)(ii).

1 33. The method of claim 32 wherein the phase of the ideal signal is determined in the
2 ideal signal constructing step (b)(i) sample by sample, the phase of the ideal signal
3 sample at any sample point being determined:

4 from the phase of the reference signal at the previous sample point for which

5 said phase is determined, and

6 from a decision based on the copy signal.

1 34. The method of claim 32 wherein the step of relaxing the phase $\angle b_{\text{ideal}}(n)$ of the
2 ideal signal sample $b_{\text{ideal}}(n)$ towards the phase $\angle b_{\text{N}}(n)$ of the copy signal $b_{\text{N}}(n)$ —
3 corresponds to adding a filtered version of the difference between the copy signal
4 phase and ideal signal phase.

1 35. The method of claim 32 wherein the step of relaxing the phase $\angle b_{\text{ideal}}(n)$ of the
2 ideal signal sample $b_{\text{ideal}}(n)$ towards the phase $\angle b_{\text{N}}(n)$ of the copy signal $b_{\text{N}}(n)$
3 corresponds to forming the reference signal sample $b_{\text{R}}(n)$ by adding to the ideal
4 signal sample $b_{\text{ideal}}(n)$ a filtered version of the difference between the copy signal
5 and ideal signal.

1 36. The method of claim 31 wherein the frequency offset corrected reference signal
2 synthesizing step includes, for each of a **set of sample points**:

3 (i) **constructing** an **ideal signal sample** from the frequency offset corrected
4 copy signal at the same sample point, the ideal signal sample having a phase
5 determined from the frequency offset corrected copy signal at the sample
6 point, with the phase of the ideal signal sample at an **initial symbol point** set
7 to be an **initial ideal signal phase**;

8 (ii) **relaxing** the phase of the ideal signal sample towards the frequency offset
9 corrected copy signal sample phase to produce the phase of the frequency
10 offset corrected reference signal; and

11 (iii) **producing** the frequency offset corrected reference signal having the
12 phase of the frequency offset corrected reference signal determined in said
13 relaxing step (ii).

1 37. The method of claim 36 wherein the phase of the ideal signal is determined in the
2 ideal signal constructing step (i) sample by sample, the phase of the ideal signal
3 sample at any sample point being determined:

4 from the phase of the frequency offset corrected reference signal at the previous
5 sample point for which said phase is determined, and
6 from a decision based on the frequency offset corrected copy signal.

1 38. The method of claim 36 wherein the step of relaxing the phase $\angle b_{\text{ideal}}(n)$ of the
2 ideal signal sample $b_{\text{ideal}}(n)$ towards the phase $\angle b_{\text{N}}(n)$ of the frequency offset
3 corrected copy signal $b_{\text{N}}(n)$ corresponds to adding a filtered version of the difference
4 between the frequency offset corrected copy signal phase and ideal signal phase.

1 39. The method of claim 36 wherein the step of relaxing the phase $\angle b_{\text{ideal}}(n)$ of the
2 ideal signal sample $b_{\text{ideal}}(n)$ towards the phase $\angle b_{\text{N}}(n)$ of the frequency offset
3 corrected copy signal $b_{\text{N}}(n)$ corresponds to forming the reference signal sample
4 $b_{\text{R}}(n)$ by adding to the ideal signal sample $b_{\text{ideal}}(n)$ a filtered version of the
5 difference between the frequency offset corrected copy signal and ideal signal.

1 40. The method of claim 29 wherein the timing aligned reference signal synthesizing
2 step includes, for each of a **set of sample points**:

3 (i) **constructing** an **ideal signal sample** from the timing aligned copy signal
4 at the same sample point, the ideal signal sample having a phase determined
5 from the timing aligned copy signal at the sample point, with the phase of the
6 ideal signal sample at an **initial symbol point** set to be an **initial ideal signal**
7 **phase**;

8 (ii) **relaxing** the phase of the ideal signal sample towards the timing aligned
9 copy signal sample phase to produce the phase of the timing aligned
10 reference signal; and

11 (iii) **producing** the timing aligned reference signal having the phase of the
12 timing aligned reference signal determined in relaxing step (ii).

1 41. The method of claim 40 wherein the phase of the ideal signal is determined in the
2 ideal signal constructing step (i) sample by sample, the phase of the ideal signal
3 sample at any sample point being determined:

4 from the phase of the timing aligned reference signal at the previous sample
5 point for which said phase is determined, and
6 from a **decision** based on the timing aligned copy signal.

1 42. The method of claim 40 wherein said step of relaxing the phase $\angle b_{\text{ideal}}(n)$ of the
2 ideal signal sample $b_{\text{ideal}}(n)$ towards the phase $\angle b_{\text{N}}(n)$ of the timing aligned copy
3 signal $b_{\text{N}}(n)$ corresponds to adding a **filtered version** of the difference between the
4 timing aligned copy signal phase and ideal signal phase.

1 43. The method of claim 40 wherein said step of relaxing the phase $\angle b_{\text{ideal}}(n)$ of the
2 ideal signal sample $b_{\text{ideal}}(n)$ towards the phase $\angle b_{\text{N}}(n)$ of the timing aligned copy
3 signal $b_{\text{N}}(n)$ corresponds to forming the reference signal sample $b_{\text{R}}(n)$ by adding to
4 the ideal signal sample $b_{\text{ideal}}(n)$ a **filtered version** of the difference between the
5 timing aligned copy signal and ideal signal.

1 44. The method of claim 29 wherein the corrected reference signal synthesizing step
2 includes:

3 **coherently demodulating** the corrected copy signal to form **signal symbols**;
4 and

5 **re-modulating** the signal symbols to form the corrected reference signal
6 having substantially the same timing alignment and frequency offset as the
7 corrected copy signal.

1 45. The method of claim 31 wherein the frequency offset corrected reference signal
2 synthesizing step includes:

3 **coherently demodulating** the frequency offset corrected copy signal to form
4 **signal symbols**; and

5 **re-modulating** the signal symbols to form the frequency offset corrected
6 reference signal having substantially the same frequency offset as the frequency
7 offset corrected copy signal.

1 46. The method of claim 29 wherein estimating the frequency offset includes:

2 **applying a nonlinearity** to a **set of samples** determined from the copy
3 signal;

4 **taking a DFT**; and

5 **determining** the shift that when applied to an interpolation function causes
6 the shifted interpolation function to best fit the DFT result, the resulting
7 determined shift being a **multiple** of the estimated frequency offset.

1 47. The method of claim 31 wherein estimating the frequency offset includes:

2 **applying a nonlinearity** to a **set of samples** determined from the copy signal;

3 **taking a DFT**; and

4 **determining** the shift that when applied to an interpolation function causes the
5 shifted interpolation function to best fit the DFT result, the resulting determined
6 shift being a **multiple** of the estimated frequency offset.

1/8

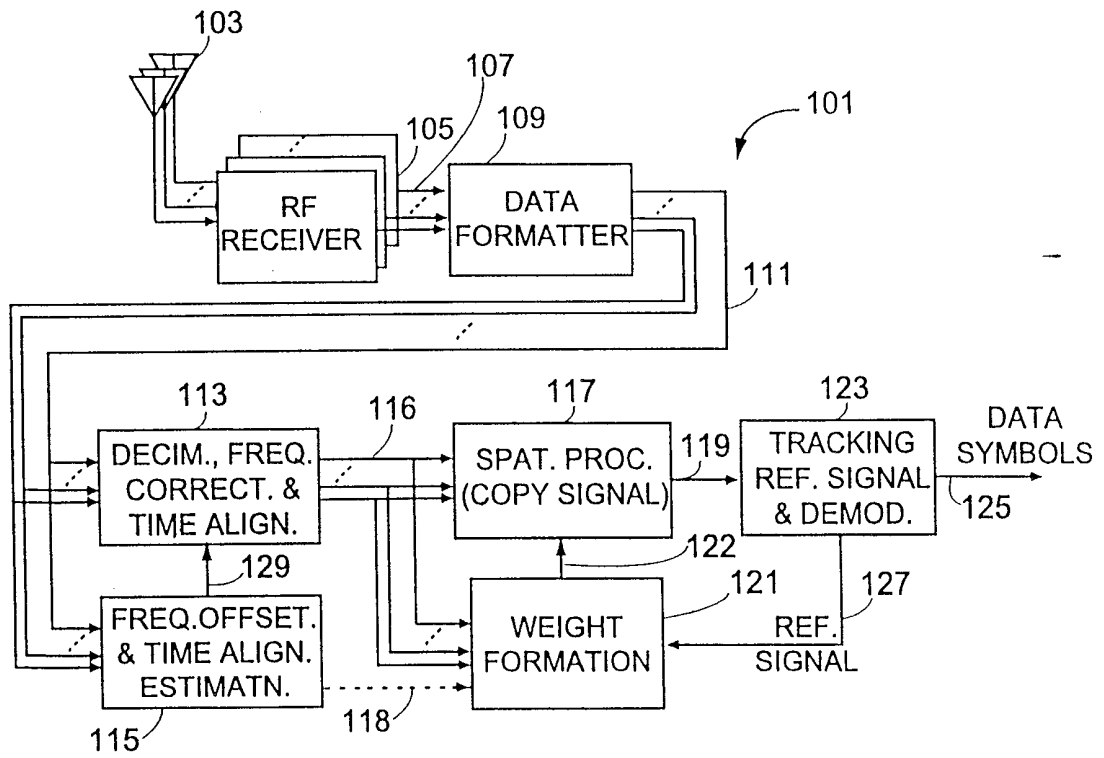


Fig. 1

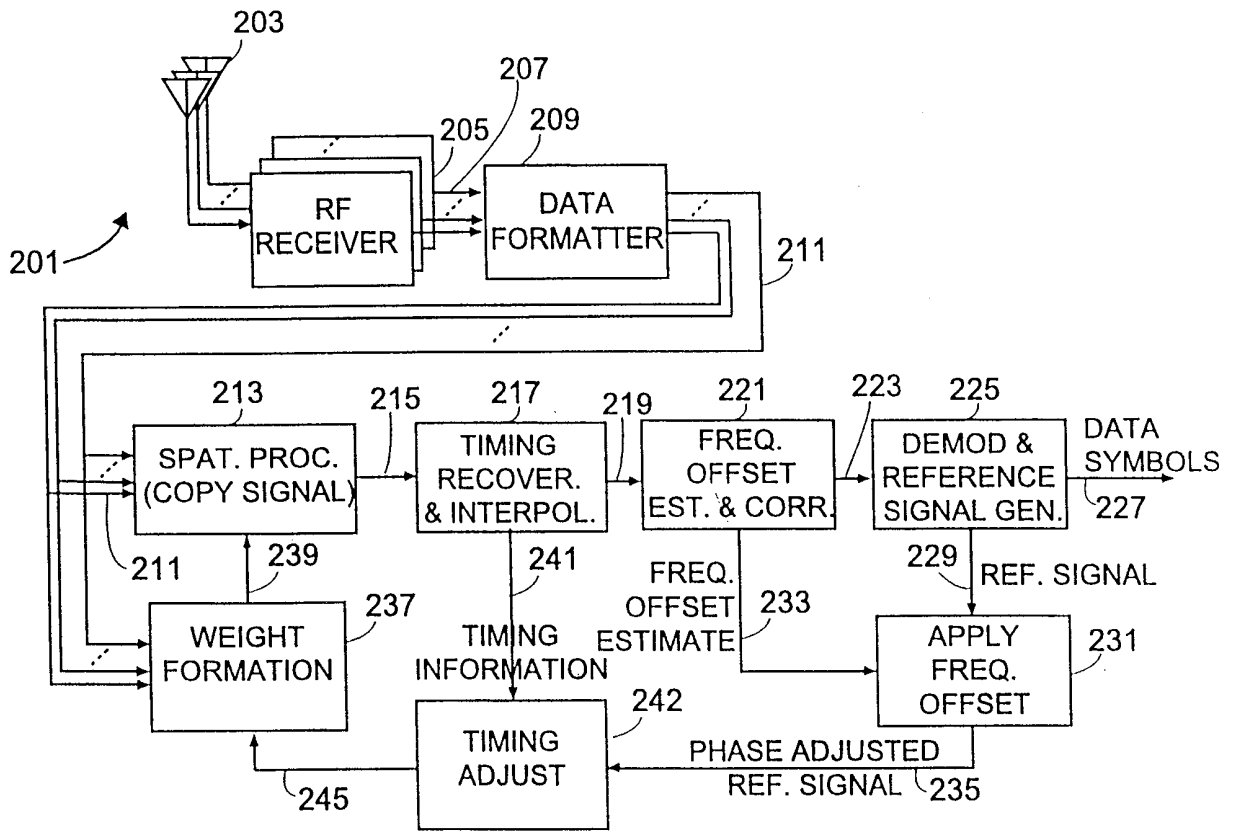


Fig. 2

2/8

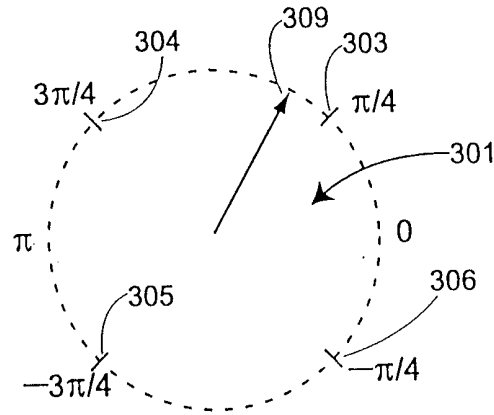


Fig. 3

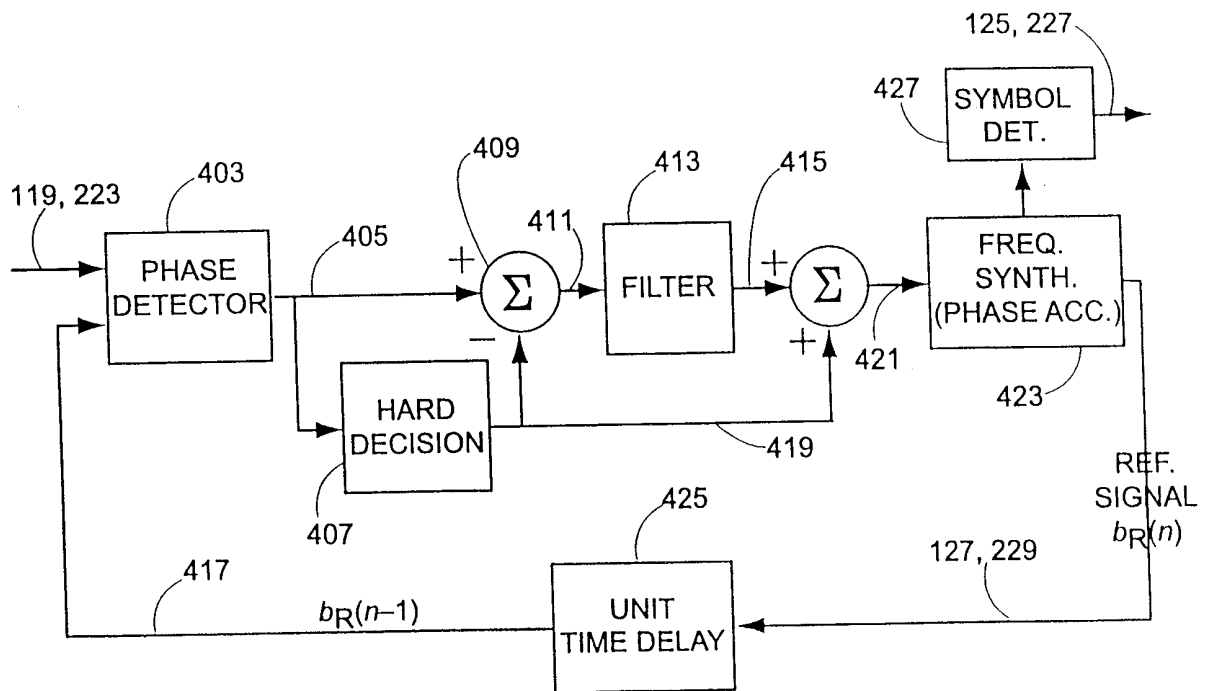


Fig. 4

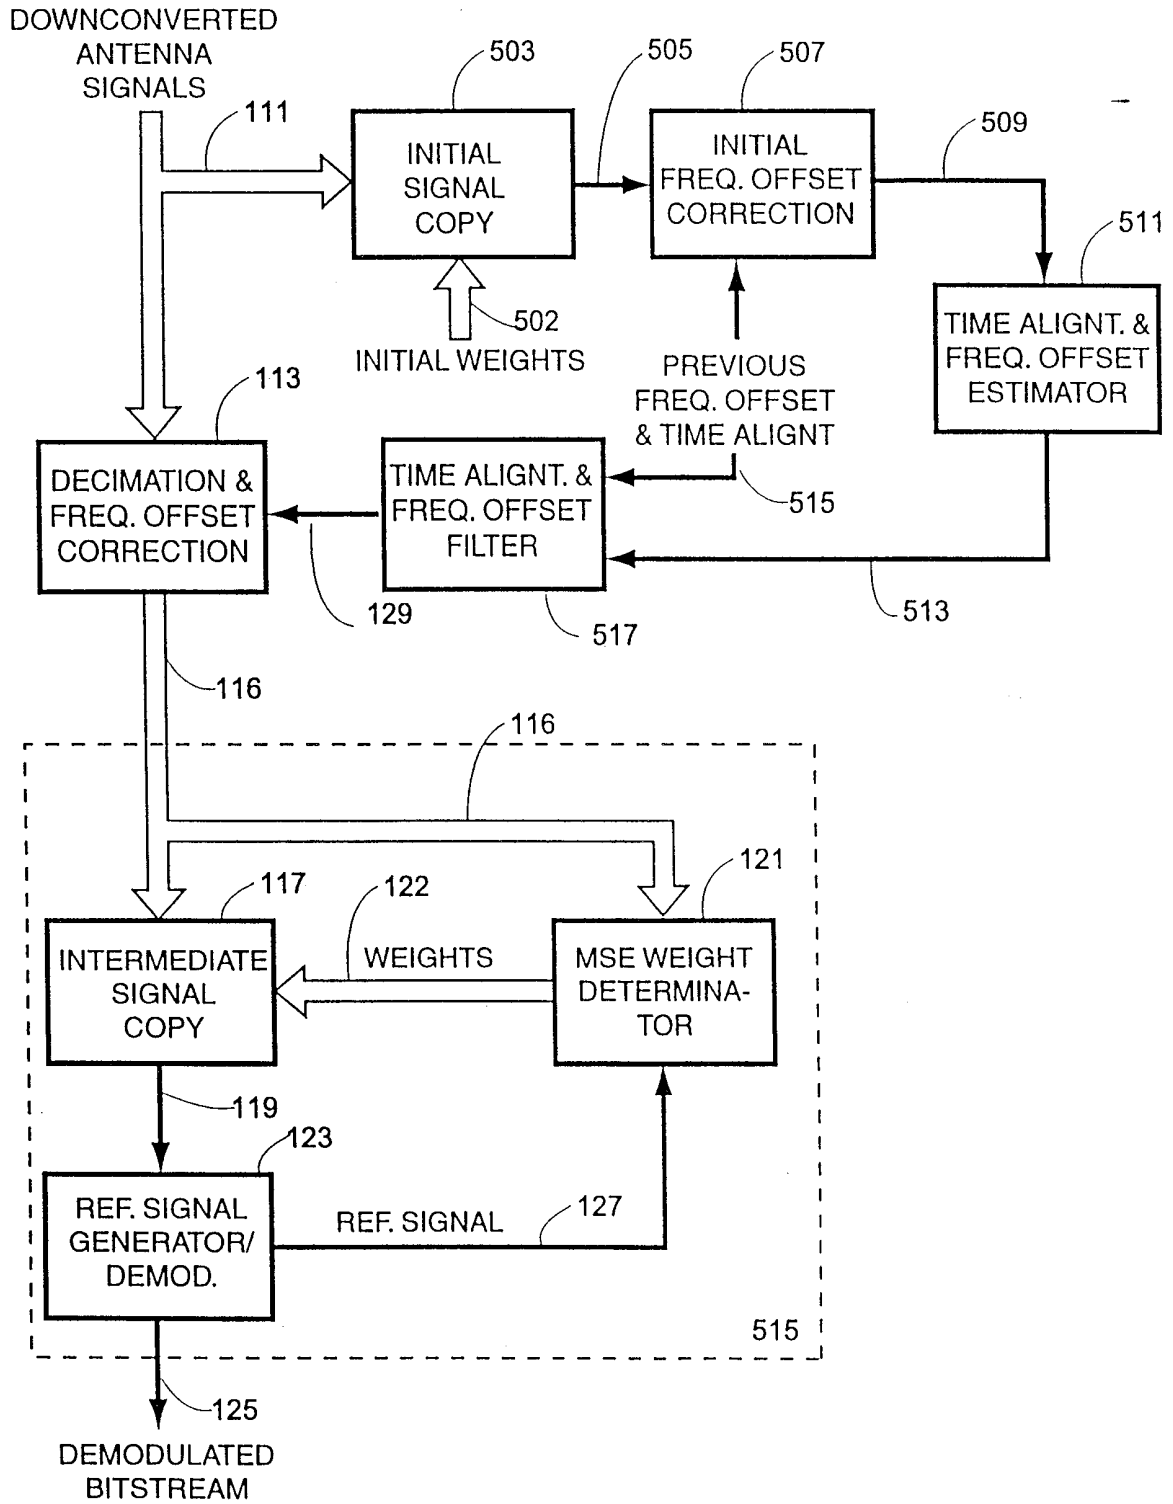


Fig. 5

4/8

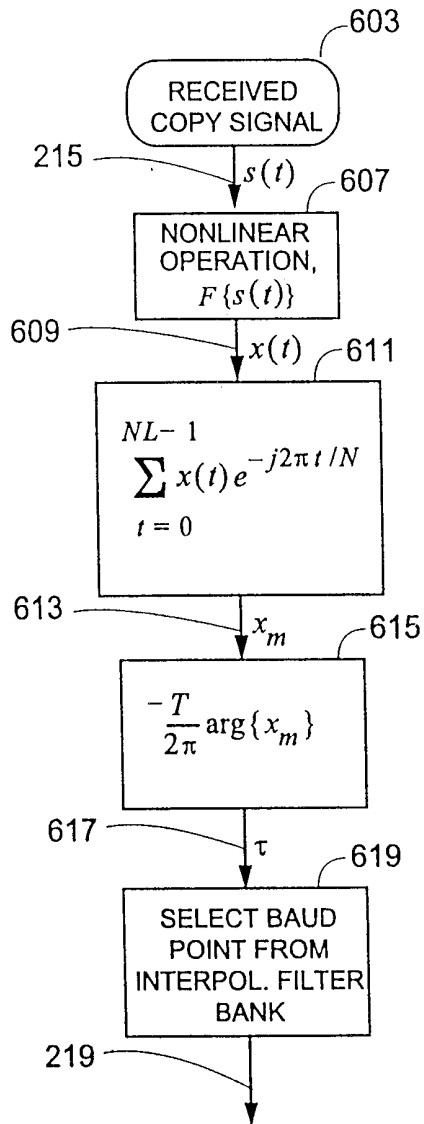


Fig. 6

5/8

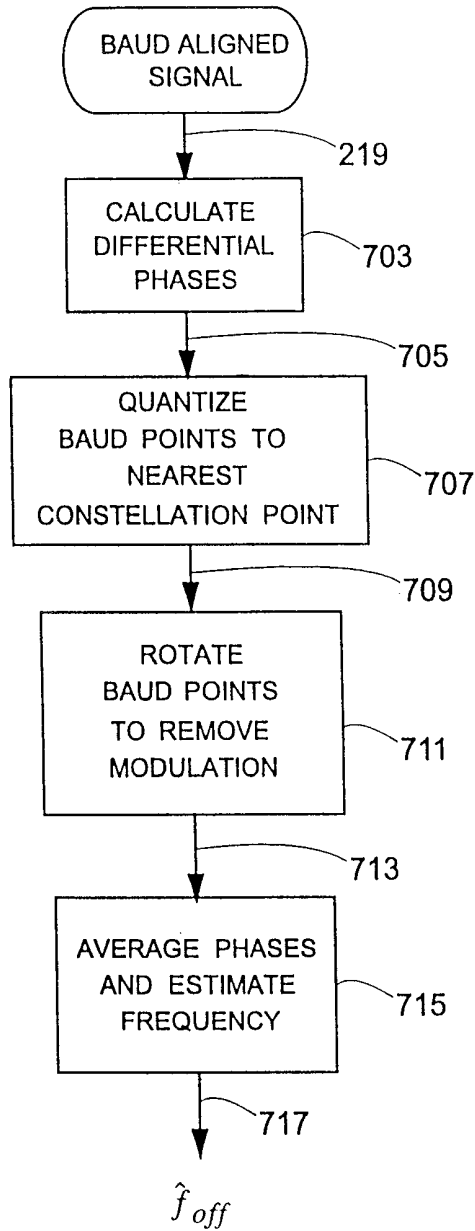


Fig. 7

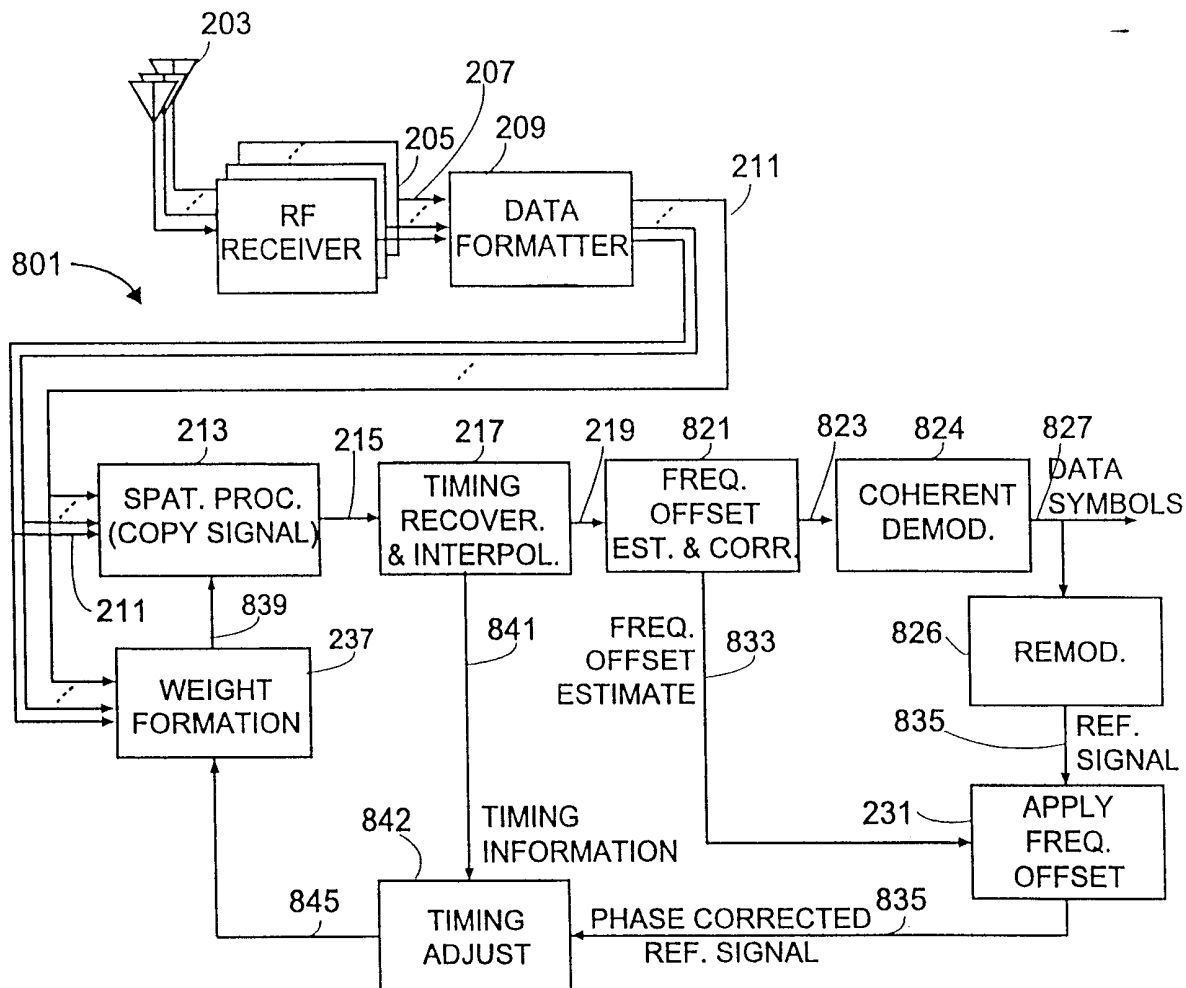


Fig.8

7/8

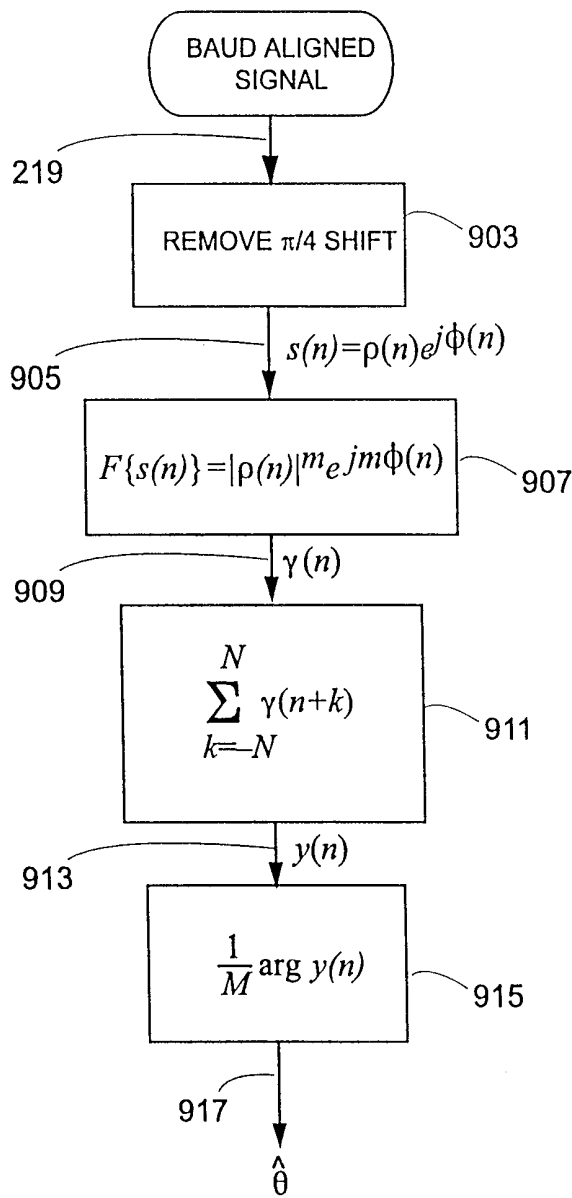


Fig. 9

8/8

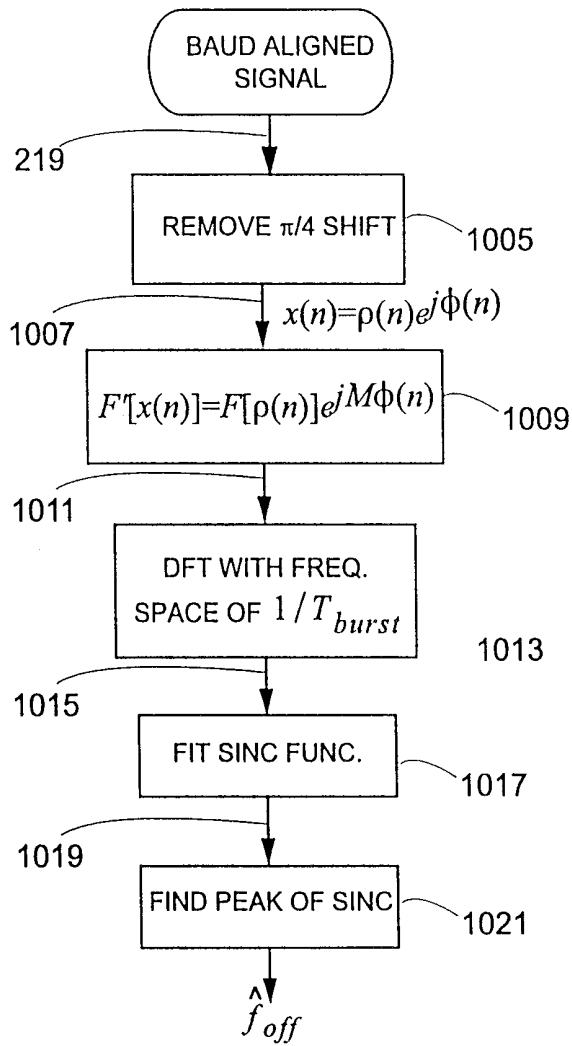


Fig. 10

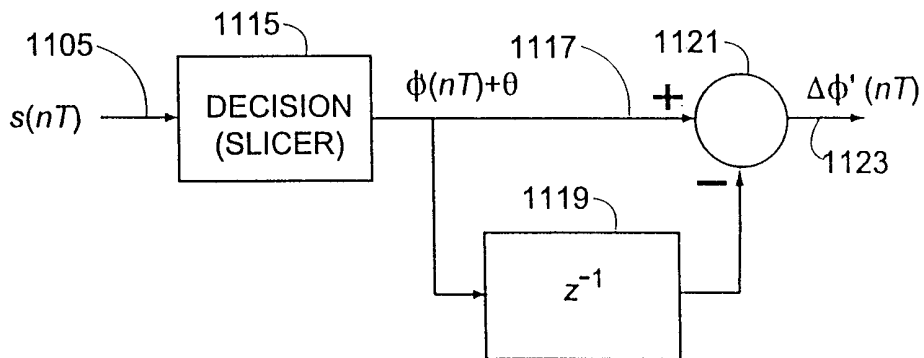


Fig. 11

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/18924

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04B7/08 H04L1/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 17037 A (ARRAYCOMM INC ;BARRATT CRAIG (US); FARZANEH FARHAD (US); PARISH DA) 23 April 1998 (1998-04-23) abstract page 11, line 2 -page 12, line 20 page 37, line 20 -page 41, line 27 figure 6 ---	1-7, 19-28, 31-39
A	WO 98 17071 A (KARUPPIAH KAMARAJ ;ARRAYCOMM INC (US); BARRATT CRAIG H (US); PARIS) 23 April 1998 (1998-04-23) abstract page 7, line 3 -page 9, line 4 page 15, line 5 -page 16, line 14 --- -/--	1-47

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

18 January 2000

Date of mailing of the international search report

25/01/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Lustrini, D

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/18924

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 01963 A (NORTHERN TELECOM LTD) 15 January 1998 (1998-01-15) abstract page 2, line 2 -page 4, line 21 figure 1 -----	1-6, 19-32

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/18924

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9817037 A	23-04-1998	US 5909470 A AU 4906697 A EP 0951770 A	01-06-1999 11-05-1998 27-10-1999
WO 9817071 A	23-04-1998	US 5930243 A AU 4756497 A EP 0947107 A	27-07-1999 11-05-1998 06-10-1999
WO 9801963 A	15-01-1998	CA 2180924 A US 5838742 A	11-01-1998 17-11-1998