




- (51) International Patent Classification: **H04B 7/26** (2006.01)
 - (21) International Application Number: PCT/KR2013/006065
 - (22) International Filing Date: 8 July 2013 (08.07.2013)
 - (25) Filing Language: English
 - (26) Publication Language: English
 - (30) Priority Data: 61/670,137 11 July 2012 (11.07.2012) US
 - (71) Applicant: **LG ELECTRONICS INC.** [KR/KR]; 20 Yeouido-dong, Yeongdeungpo-gu, Seoul, 150-721 (KR).
 - (72) Inventors: **LEE, Sun Young**; LG Electronics Inc., Convergence R&D Lab., 221, Yangjae-dong, Seocho-gu, Seoul 137-130 (KR). **PARK, Sung Jun**; LG Electronics Inc., Convergence R&D Lab., 221, Yangjae-dong, Seocho-gu, Seoul 137-130 (KR). **JUNG, Sung Hoon**; LG Electronics Inc., Convergence R&D Lab., 221, Yangjae-dong, Seocho-gu, Seoul 137-130 (KR). **LEE, Young Dae**; LG Electronics Inc., Convergence R&D Lab., 221, Yangjae-dong, Seocho-gu, Seoul 137-130 (KR). **YI, Seung June**; LG Electronics Inc., Convergence R&D Lab., 221, Yangjae-dong, Seocho-gu, Seoul 137-130 (KR).
 - (74) Agent: **S&IP PATENT & LAW FIRM**; (2F. Samheung Yeoksam Bldg., Yeoksam-dong), 5 Teheran-ro 14-gil, Gangnam-gu, Seoul 135-080 (KR).
 - (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
 - (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report (Art. 21(3))

(54) Title: METHOD AND APPARATUS FOR CHANGING DISCONTINUOUS RECEPTION CYCLE IN WIRELESS COMMUNICATION SYSTEM

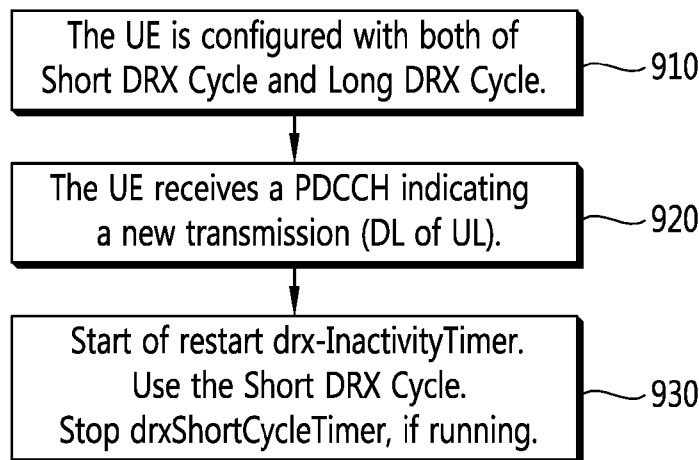

(57) Abstract: A method and apparatus for changing a Discontinuous Reception (DRX) cycle in a wireless communication system is provided. A wireless device configures a short DRX cycle and a long DRX cycle. When the wireless device receives a PDCCH indicating a new data transmission, it determines that the short DRX cycle is used and a running drxShortCycleTimer is stopped for the DRX operation. Discontinuous reception (DRX) cycle can be configured flexibly according to the new data transmission and a CSI report between the UE and the eNB can be complied with accurately and frequently.



Description

Title of Invention: METHOD AND APPARATUS FOR CHANGING DISCONTINUOUS RECEPTION CYCLE IN WIRELESS COMMUNICATION SYSTEM

Technical Field

- [1] The present invention relates to wireless communications, and more particularly, to a method and apparatus for changing a DRX cycle in a wireless communication system.

Background Art

- [2] 3rd generation partnership project (3GPP) long term evolution (LTE) is an improved version of a universal mobile telecommunication system (UMTS) and a 3GPP release 8. The 3GPP LTE uses orthogonal frequency division multiple access (OFDMA) in a downlink, and uses single carrier-frequency division multiple access (SC-FDMA) in an uplink. The 3GPP LTE employs multiple input multiple output (MIMO) having up to four antennas. In recent years, there is an ongoing discussion on 3GPP LTE-advanced (LTE-A) that is an evolution of the 3GPP LTE.
- [3] Discontinuous reception (DRX) is a method for reducing battery consumption by allowing a user equipment (UE) to discontinuously monitor a downlink channel. When the DRX is configured, the UE discontinuously monitors the downlink channel. Otherwise, the UE continuously monitors the downlink channel.
- [4] Recently, many applications require an always-on characteristic. Always-on is a characteristic in which the UE is always connected to a network so as to directly transmit data whenever necessary.
- [5] However, since battery consumption is great when the UE continuously maintains the network connection, a proper DRX is configured in a corresponding application to guarantee the always-on characteristic while reducing battery consumption.
- [6] Recently, several various applications are running in parallel in one UE, and thus it is not easy to configure one DRX suitable for all of the applications. This is because, even if an optimal DRX is configured for a specific application, it may be a not proper DRX configuration with respect to other applications which are running in parallel.
- [7] There is a need for a method for operating the DRX in a more flexible manner.

Disclosure of Invention

Technical Problem

- [8] The present invention provides a method and apparatus for changing a DRX cycle in a wireless communication system.
- [9] The present invention also provides a method and apparatus for changing a DRX

cycle in consideration of a new data transmission in a wireless communication system.

- [10] The present invention also provides a method and apparatus for controlling to not use a long DRX cycle with restriction on DRX operation in a wireless communication system.

Solution to Problem

- [11] In an aspect, a method for changing a DRX (Discontinuous Reception) cycle in a wireless communication system is provided. The method includes configuring a short DRX cycle and a long DRX cycle; receiving a physical downlink control channel (PDCCH) indicating a new data transmission; and using the short DRX cycle if the received PDCCH indicates the new data transmission.

- [12] The method may further include stopping a drxShortCycleTimer if the drxShortCycleTimer is running.

- [13] The method may further include using the long DRX cycle if the received PDCCH does not indicate the new data transmission..

- [14] In another aspect, a wireless device for changing DRX (Discontinuous Reception) cycle in a wireless communication system is provided. The wireless device includes a radio frequency unit for receiving a radio signal; and a processor, operatively coupled with the radio frequency unit, configured to configure a short DRX cycle and a long DRX cycle, receive a physical downlink control channel (PDCCH) indicating a new data transmission, and use the short DRX cycle if the received PDCCH indicates the new data transmission.

Advantageous Effects of Invention

- [15] Discontinuous reception (DRX) cycle can be configured flexibly and a changing a DRX cycle in consideration of a new data transmission between the UE and the eNB can be complied with accurately. More details, the UE may not use a long DRX cycle when the new data transmission is expected. It can be advantaged that a CSI reporting can performed in consideration of data traffic when a DRX operation is configured for the UE.

Brief Description of Drawings

- [16] FIG. 1 shows a wireless communication system to which the present invention is applied.

- [17] FIG. 2 is a diagram showing a radio protocol architecture for a user plane to which the present invention is applied.

- [18] FIG. 3 is a diagram showing a radio protocol architecture for a control plane to which the present invention is applied to which the present invention is applied

- [19] FIG. 4 shows a DRX cycle to which the present invention is applied.

- [20] FIG. 5 shows active time for DRX operation to which the present invention is

applied.

[21] FIG. 6 shows an example of a transition of a DRX cycle to which the present invention is applied.

[22] FIG. 7 shows an example of DRX operation with a Long DRX cycle which the wireless communication system is applied.

[23] FIG. 8 shows an example of DRX operation with a short DRX cycle according to an exemplary embodiment of the present invention.

[24] FIG. 9 shows a flowchart for changing a DRX cycle according to an exemplary embodiment of the present invention.

[25] FIG. 10 shows a block diagram showing a wireless communication system according to an exemplary embodiment of the present invention.

Mode for the Invention

[26] FIG. 1 shows a wireless communication system to which the present invention is applied. The wireless communication system may also be referred to as an evolved-UMTS terrestrial radio access network (E-UTRAN) or a long term evolution (LTE)/LTE-A system.

[27] The E-UTRAN includes at least one base station (BS) 20 which provides a control plane and a user plane to a user equipment (UE) 10. The UE 10 may be fixed or mobile, and may be referred to as another terminology, such as a mobile station (MS), a user terminal (UT), a subscriber station (SS), a mobile terminal (MT), a wireless device, etc. The BS 20 is generally a fixed station that communicates with the UE 10 and may be referred to as another terminology, such as an evolved node-B (eNB), a base transceiver system (BTS), an access point, etc.

[28] The BSs 20 are interconnected by means of an X2 interface. The BSs 20 are also connected by means of an S1 interface to an evolved packet core (EPC) 30, more specifically, to a mobility management entity (MME) through S1-MME and to a serving gateway (S-GW) through S1-U.

[29] The EPC 30 includes an MME, an S-GW, and a packet data network-gateway (P-GW). The MME has access information of the UE or capability information of the UE, and such information is generally used for mobility management of the UE. The S-GW is a gateway having an E-UTRAN as an end point. The P-GW is a gateway having a PDN as an end point.

[30] Layers of a radio interface protocol between the UE and the network can be classified into a first layer (L1), a second layer (L2), and a third layer (L3) based on the lower three layers of the open system interconnection (OSI) model that is well-known in the communication system. Among them, a physical (PHY) layer belonging to the first layer provides an information transfer service by using a physical channel, and a

radio resource control (RRC) layer belonging to the third layer serves to control a radio resource between the UE and the network. For this, the RRC layer exchanges an RRC message between the UE and the BS.

[31] FIG. 2 is a diagram showing a radio protocol architecture for a user plane. FIG. 3 is a diagram showing a radio protocol architecture for a control plane. The user plane is a protocol stack for user data transmission. The control plane is a protocol stack for control signal transmission.

[32] Referring to FIGs. 2 and 3, a PHY layer provides an upper layer with an information transfer service through a physical channel. The PHY layer is connected to a medium access control (MAC) layer which is an upper layer of the PHY layer through a transport channel. Data is transferred between the MAC layer and the PHY layer through the transport channel. The transport channel is classified according to how and with what characteristics data is transferred through a radio interface.

[33] Between different PHY layers, i.e., a PHY layer of a transmitter and a PHY layer of a receiver, data is transferred through the physical channel. The physical channel may be modulated using an orthogonal frequency division multiplexing (OFDM) scheme, and may utilize time and frequency as a radio resource.

[34] Functions of the MAC layer include mapping between a logical channel and a transport channel and multiplexing/de-multiplexing on a transport block provided to a physical channel over a transport channel of a MAC service data unit (SDU) belonging to the logical channel. The MAC layer provides a service to a radio link control (RLC) layer through the logical channel.

[35] Functions of the RLC layer include RLC SDU concatenation, segmentation, and re-assembly. To ensure a variety of quality of service (QoS) required by a radio bearer (RB), the RLC layer provides three operation modes, i.e., a transparent mode (TM), an unacknowledged mode (UM), and an acknowledged mode (AM). The AM RLC provides error correction by using an automatic repeat request (ARQ).

[36] Functions of a packet data convergence protocol (PDCP) layer in the user plane include user data delivery, header compression, and ciphering. Functions of a PDCP layer in the control plane include control-plane data delivery and ciphering/integrity protection.

[37] A radio resource control (RRC) layer is defined only in the control plane. The RRC layer serves to control the logical channel, the transport channel, and the physical channel in association with configuration, reconfiguration and release of radio bearers (RBs). An RB is a logical path provided by the first layer (i.e., the PHY layer) and the second layer (i.e., the MAC layer, the RLC layer, and the PDCP layer) for data delivery between the UE and the network.

[38] The setup of the RB implies a process for specifying a radio protocol layer and

channel properties to provide a particular service and for determining respective detailed parameters and operations. The RB can be classified into two types, i.e., a signaling RB (SRB) and a data RB (DRB). The SRB is used as a path for transmitting an RRC message in the control plane. The DRB is used as a path for transmitting user data in the user plane.

- [39] When an RRC connection is established between an RRC layer of the UE and an RRC layer of the network, the UE is in an RRC connected state (also may be referred to as an RRC connected mode), and otherwise the UE is in an RRC idle state (also may be referred to as an RRC idle mode).
- [40] Data is transmitted from the network to the UE through a downlink transport channel. Examples of the downlink transport channel include a broadcast channel (BCH) for transmitting system information and a downlink-shared channel (SCH) for transmitting user traffic or control messages. The user traffic of downlink multicast or broadcast services or the control messages can be transmitted on the downlink-SCH or an additional downlink multicast channel (MCH). Data is transmitted from the UE to the network through an uplink transport channel. Examples of the uplink transport channel include a random access channel (RACH) for transmitting an initial control message and an uplink SCH for transmitting user traffic or control messages.
- [41] Examples of logical channels belonging to a higher channel of the transport channel and mapped onto the transport channels include a broadcast channel (BCCH), a paging control channel (PCCH), a common control channel (CCCH), a multicast control channel (MCCH), a multicast traffic channel (MTCH), etc.
- [42] The physical channel includes several OFDM symbols in a time domain and several subcarriers in a frequency domain. One subframe includes a plurality of OFDM symbols in the time domain. A resource block is a resource allocation unit, and includes a plurality of OFDM symbols and a plurality of subcarriers. Further, each subframe may use particular subcarriers of particular OFDM symbols (e.g., a first OFDM symbol) of a corresponding subframe for a physical downlink control channel (PDCCH), i.e., an L1/L2 control channel. A transmission time interval (TTI) is a unit time of subframe transmission.
- [43] The 3GPP LTE classifies a physical channel into a data channel, i.e., a physical downlink shared channel (PDSCH) and a physical uplink shared channel (PUSCH), and a control channel, i.e., a physical downlink control channel (PDCCH), a physical control format indicator channel (PCFICH) and a physical hybrid-ARQ indicator channel (PHICH), and a physical uplink control channel (PUCCH).
- [44] The PCFICH transmitted in a 1st OFDM symbol of the subframe carries a control format indicator (CFI) regarding the number of OFDM symbols (i.e., a size of the control region) used for transmission of control channels in the subframe. The UE first

receives the CFI on the PCFICH, and thereafter monitors the PDCCH.

[45] The PDCCH is a downlink control channel, and is also called a scheduling channel in a sense that it carries scheduling information. Control information transmitted through the PDCCH is referred to as downlink control information (DCI). The DCI may include resource allocation of the PDSCH (this is referred to as a downlink (DL) grant), resource allocation of a PUSCH (this is referred to as an uplink (UL) grant), a set of transmit power control commands for individual UEs in any UE group and/or activation of a voice over Internet protocol (VoIP).

[46] The wireless communication system as 3GPP LTE of the present invention uses blind decoding for PDCCH detection. The blind decoding is a scheme in which a desired identifier is de-masked from a CRC of a PDCCH (referred to as a candidate PDCCH) to determine whether the PDCCH is its own channel by performing CRC error checking.

[47] A BS determines a PDCCH format according to DCI to be transmitted to a UE. Thereafter, the BS attaches a cyclic redundancy check (CRC) to the DCI, and masks a unique identifier (referred to as a radio network temporary identifier (RNTI)) to the CRC according to an owner or usage of the PDCCH.

[48] Now, discontinuous reception (DRX) in a wireless communication system, as example, 3GPP LTE will be described.

[49] The DRX is a method for reducing battery consumption of a UE by allowing the UE to discontinuously monitor a downlink channel.

[50] FIG. 4 shows a DRX cycle to which the present invention is applied.

[51] A DRX cycle specifies the periodic repetition of the on-duration followed by a possible period of inactivity. The DRX cyclic includes an on-duration and an off-duration. The on-duration is a duration in which a UE monitors a PDCCH within the DRX cycle. The DRX cycle has two types, i.e., a long DRX cycle and a short DRX cycle. The long DRX cycle which has a long period can minimize battery consumption of the UE. The short DRX cyclic which has a short period can minimize a data transmission delay.

[52] When the DRX is configured, the UE may monitor the PDCCH only in the on-duration and may not monitor the PDCCH in the off-duration.

[53] An onDuration timer is used to define the on-duration. The on-duration can be defined as a duration in which the onDuration timer is running. The onDuration timer may specify the number of consecutive PDCCH-subframe(s) at the beginning of a DRX Cycle. The PDCCH-subframe specifies a subframe in which the PDCCH is monitored.

[54] In addition to the DRX cycle, a duration in which the PDCCH is monitored can be further defined. A duration in which the PDCCH is monitored is collectively referred

to as an active time.

- [55] A drx-Inactivity timer deactivates the DRX. If the drx-Inactivity timer is running, the UE continuously monitors the PDCCH irrespective of the DRX cycle. The drx-Inactivity timer starts upon receiving an initial UL grant or DL grant on the PDCCH. The drx-Inactivity timer may specify the number of consecutive PDCCH-subframe(s) after successfully decoding a PDCCH indicating an initial UL or DL user data transmission for this UE.
- [56] A HARQ RTT timer defines a minimum duration in which the UE expects HARQ retransmission. The HARQ RTT timer may specify the minimum amount of subframe(s) before a DL HARQ retransmission is expected by the UE.
- [57] A drx-Retransmission timer defines a duration in which the UE monitors the PDCCH while expecting DL retransmission. The drx-Retransmission timer may specify the maximum number of consecutive PDCCH-subframe(s) for as soon as a DL retransmission is expected by the UE. After initial DL transmission, the UE starts the HARQ RTT timer. When an error is detected for the initial DL transmission, the UE transmits NACK to a BS, stops the HARQ RTT timer, and runs the drx-Retransmission timer. The UE monitors the PDCCH for DL retransmission from the BS while the drx-Retransmission timer is running.
- [58] An Active Time can include an on-duration in which the PDCCH is periodically monitored and a duration in which the PDCCH is monitored due to an event occurrence.
- [59] When a DRX cycle is configured, the Active Time includes the time while:
- [60] - onDuration timer or drx-Inactivity timer or drx-Retransmission timer or mac-ContentionResolution timer is running; or
- [61] - a Scheduling Request is sent on PUCCH and is pending; or
- [62] - an uplink grant for a pending HARQ retransmission can occur and there is data in the corresponding HARQ buffer; or
- [63] - a PDCCH indicating a new transmission addressed to the C-RNTI of the UE has not been received after successful reception of a Random Access Response for the preamble not selected by the UE.
- [64] FIG. 5 shows active time for DRX operation to which the present invention is applied.
- [65] When DRX is configured, the UE shall for each subframe:
- [66] - if a HARQ RTT Timer expires in this subframe and the data of the corresponding HARQ process was not successfully decoded:
- [67] - start the drx-Retransmission timer for the corresponding HARQ process.
- [68] - if a DRX Command MAC CE (control element) is received:
- [69] - stop onDuration timer and drx-Inactivity timer.

- [70] - if drx-InactivityTimer expires or a DRX Command MAC CE is received in this subframe:
- [71] - if the Short DRX cycle is configured:
- [72] - start or restart drx-ShortCycle timer and use the Short DRX Cycle.
- [73] - else:
- [74] - use the Long DRX cycle.
- [75] - if drx-ShortCycle timer expires in this subframe:
- [76] - use the Long DRX cycle.
- [77] - If the Short DRX Cycle is used and $[(SFN * 10) + \text{subframe number}] \bmod (\text{shortDRX-Cycle}) = (\text{drxStartOffset}) \bmod (\text{shortDRX-Cycle})$; or
- [78] - if the Long DRX Cycle is used and $[(SFN * 10) + \text{subframe number}] \bmod (\text{longDRX-Cycle}) = \text{drxStartOffset}$:
- [79] - start onDuration timer.
- [80] - during the Active Time, for a PDCCH-subframe, if the subframe is not required for uplink transmission for half-duplex FDD UE operation and if the subframe is not part of a configured measurement gap:
- [81] - monitor the PDCCH;
- [82] - if the PDCCH indicates a DL transmission or if a DL assignment has been configured for this subframe:
- [83] - start the HARQ RTT timer for the corresponding HARQ process;
- [84] - stop the drx-Retransmission timer for the corresponding HARQ process.
- [85] - if the PDCCH indicates a new transmission (DL or UL):
- [86] - start or restart drx-Inactivity timer.
- [87] - when not in Active Time, type-0-triggered SRS shall not be reported.
- [88] - if CQI masking (cqi-Mask) is setup by upper layers:
- [89] - when onDurationTimer is not running, CQI/PMI/RI/PTI on PUCCH shall not be reported.
- [90] - else:
- [91] - when not in Active Time, CQI/PMI/RI/PTI on PUCCH shall not be reported.
- [92] As mentioned, the active-time is defined a total duration that the UE is awake. This includes the on-duration of the DRX cycle, the time UE is performing continuous reception while the inactivity timer has not expired and the time UE is performing continuous reception while waiting for a DL retransmission after one HARQ RTT. Based on the above the minimum active time is of length equal to on-duration, and the maximum is undefined (infinite).
- [93] FIG. 6 shows an example of a transition of a DRX cycle to which the present invention is applied.
- [94] Upon receiving initial transmission from an eNB, a drx-Inactivity timer (also referred

to as a first timer or an inactivity timer) starts (step S610). A UE continuously monitors a PDCCH while the drx-Inactivity timer is running.

[95] If the drx-Inactivity timer expires or if a DRX command is received from the eNB, the UE transitions to a short DRX cycle (step S620). Then, the drx-ShortCycle timer (also referred to as a second timer or a DRX cycle timer) starts.

[96] The DRX command can be transmitted as a MAC CE, and can be called a DRX indicator that indicates a transition to the DRX. The DRX command MAC CE is identified through a long channel ID (LCID) of a MAC PDU subheader.

[97] While the drx-ShortCycle timer is running, the UE operates in the short DRX cycle. If the drx-ShortCycle timer expires, the UE transitions to a long DRX cycle.

[98] If the short DRX cyclic is pre-set, the UE transitions to the short DRX cycle. If the short DRX cyclic is not pre-set, the UE can transition to the long DRX cycle.

[99] A value of HARQ RTT timer is fixed to 8ms (or 8 subframes). Other timer values (i.e., an onDuration timer, a drx-Inactivity timer, a drx-Retransmission timer, a mac-ContentionResolution timer, etc.) can be determined by the eNB through an RRC message. The eNB can configure the long DRX cycle and the short DRX cycle through the RRC message.

[100] FIG. 7 shows a situation of DRX operation to which a wireless communication system is applied, i.e., the situation where the UE uses the long DRX cycle while receiving at least one PDCCH including information on radio resource allocation from the BS.

[101] Referring to FIG.7, the UE with DRX operation can be configured to transmit CSI report and periodical SRS to the BS according to a CSI configuration of the BS.

[102] This means that the UE is configured to preform CSI and SRS transmission only at the subframe corresponding to the On Duration of the DRX cycle according to the DRX and CSI configuration of the BS. At this step, the BS transmits a RRC signal to set the UE to the configuration for a DRX operation and the configuration for CSI/SRS transmission. Also, the CSI transmission and SRS transmission are set by the BS, which are limited to the operation of the UE related to the CSI transmission with CQI masking (cqi-Mask) scheme and periodic SRS transmission. The CSI transmission includes a transmission of CQI/PMI/RI/PTI on a PUCCH, which is the configuration sets to transmit at On Duration of the DRX cycle. Also, the UE provides an uplink state by periodically sending a Sounding Reference Signal (SRS), and this periodic SRS transmission is called a type-0-triggered SRS. The SRS transmission according to the present invention includes the limitation to type-0-triggered SRS.

[103] When the UE is configured to use both Short DRX Cycle (700) and Long DRX cycle(760) for the DRX operation, the UE starts a drx-shortCycle timer(720) when a drx-Inactivity timer expires(730), and the UE starts using the Long DRX cycle(760) if

the drx-ShortCycle timer expires(720).

[104] When the drx-ShortCycle timer is running, the UE will continuously resume the drx-Inactivity timer if the UE which uses the Short DRX cycle continuously receives at least one PDCCH including information on new radio resource allocation from the BS at the subframe in which the drx-Inactivity timer is running. However, since the drx-Inactivity timer does not expire because of the receiving at least one PDCCH continuously, the running the drx-ShortCycle timer expires after predetermined time, and the UE finally transits from a Short DRX cycle to the long DRX cycle.

[105] As a result, the UE transits the short DRX cycle to Long DRX cycle and uses the Long DRX cycle although it has to perform data transmission/reception by receiving radio resource allocation information continuously from the BS, it is caused the problem of not being able to perform the CSI transmission with sufficient frequency even if the UE is configured to transmit the CSI and SRS reports at the subframe corresponding to On Duration.

[106] In addition, this problem causes difficulties with allocating radio resources correctly for the UE and making a low system performance in view of the BS. Therefore, this operation of the DRX is not proper and the DRX operation needs to be modified.

[107] In consideration of this problem and in order to perform the CSI report and the SRS transmission with sufficient and correct frequency, the present invention is disclosed a solution for controlling to not use the Long DRX cycle by stopping the running the drx-ShortCycle timer when new data transmissions on at least one PDCCH are expected. In other words, the present invention discloses a controlling scheme about a change of DRX cycle by stopping the drxShortCycle timer.FIG. 8 shows an example of change DRX cycle according to an exemplary embodiment of the present invention. For example, the present invention includes a use of the Long DRX cycle is prohibited especially when a PDCCH indicating transmission of new data is received from the BS.

[108] Referring to FIG. 8, the UE is configured to use both the Short DRX Cycle and the long DRX cycle. If the UE which uses the Short DRX cycle continuously receives at least one PDCCH including information on a new radio resource allocation from the BS, herein the PDCCH includes a new data transmission, at the subframe in which a drx-Inactivity timer is running while the drx-ShortCycle timer is running, the UE continuously resumes the drx-Inactivity timer, and the UE starts to use the Short DRX cycle (800).

[109] If the drxShortCycle timer is running at this step, the UE controls that the running drxShortCycle timer is stopped (825).

[110] In other words, in the present invention, if the UE using the Short DRX cycle determines to continuously perform the new data transmission with the BS, the UE de-

termines to use the Short DRX cycle by not applying the Long DRX cycle with restriction. The DRX cycle change is restricted by stopping of the drxShortCycle timer, in order to bar the conventional DRX operation of changing the Long DRX cycle when the drxShortCycle timer expired.

- [111] In relation to this situation, the operation of changing a DRX cycle will be described with reference to FIG. 9.
- [112] FIG. 9 shows an example on the operation process of the UE according to the present invention, in which the DRX cycle is changed in consideration of the stop of drxShortCycle timer when the UE operates to be expected to receive the new data transmission.
- [113] Referring to FIG. 9, the UE sets configurations related to a DRX configuration and a CSI reporting transmission. At this step, the UE can be configured to use the Short DRX cycle and the long DRX cycle with the DRX configuration (910). In order to set these configurations related to the DRX configuration and CSI transmission, the UE can receive a RRC signaling from the BS. In other words, the BS transmits the RRC signal to the UE in order to configure to use two types of DRX cycles such as the Short DRX cycle and the Long DRX cycle.
- [114] At this step, the UE can receive information on radio resource allocation from the BS through the PDCCH during the On Duration predetermined according to the DRX configuration (920). Herein the PDCCH includes a new data transmission, At this step, the UE receives, from the base station, the PDCCH indicating a new data transmission (920). The reception of the PDCCH includes monitoring of the PDCCH at On Duration predetermined with the Short DRX cycle. The UE determines whether the new data transmission is existed or not by checking a New Data Indicator (NDI) in the received PDCCH.
- [115] For example, if initial transmission(new data transmission) is set, the UE can receive a PDCCH including the NDI with 0 of value(bit) for indicating the initial transmission(or new data transmission), so the UE determines the data transmission is new or retransmitted by the NDI value(bit). Herein the data transmission includes uplink from the UE to BS, and downlink from the BS to the UE. This invention includes the NDI is applied for the uplink data transmission or the downlink data transmission.
- [116] Then, the UE starts or resumes the drx-Inactivity timer is operated with a predetermined length of subframe by receiving the PDCCH. At the same time, the UE starts to use the Short DRX cycle, and stops the running the drxShortCycle timer if the drxShortCycle timer is running (930). That is the UE controls to not use the Long DRX cycle when the UE determines that the PDCCH including the new data transmission is received. Therefore, the UE can bar a transition to the Long DRX cycle when the

PDCCH indicating NDI is existed from the BS.

[117] The present invention, as described above, provides the advantages of using the Short DRX cycle by not using the change to the Long DRX cycle when the UE performing DRX operation continuously performs data transmission with the BS. It is the advantage of performing CSI transmission and SRS transmission at the subframe corresponding to predetermined On Duration with sufficient frequency by performing DRX operation according to Short DRX cycle. Therefore, the present invention allows the BS to correctly acquire the information for performing radio resource allocation, thereby enhancing the performance of the entire system.

[118] Although the aforementioned embodiment shows the DRX operation of the UE for example, the proposed invention is applicable to a DRX operation of a machine to machine (M2M) device or a machine-type communication (MTC) device. MTC is one type of data communication including one or more entities not requiring human interactions. That is, the MTC refers to the concept of communication performed by a machine device, not a terminal used by a human user, by using the existing wireless communication network. The machine device used in the MTC can be called an MTC device. There are various MTC devices such as a vending machine, a machine of measuring a water level at a dam, etc.

[119] FIG. 10 is a block diagram showing a wireless communication system according to an embodiment of the present invention.

[120] A BS 1050 includes a processor 1051, a memory 1052, and a radio frequency (RF) unit 1053. The memory 1052 is coupled to the processor 1051, and stores a variety of information for driving the processor 1051. The RF unit 1053 is coupled to the processor 51, and transmits and/or receives a radio signal. The processor 1051 implements the proposed functions, procedures, and/or methods. In the embodiments of FIG. 8 to FIG. 10, the operation of the BS can be implemented by the processor 51.

[121] Especially, the processor 1051 configures and sets the DRX configuration and CSI transmission configuration with CQI masking on the UE. Herein, the DRX configuration is included to set to UE with both the Short DRX cycle and the Long DRX cycle. This processor 1051 controls CSI transmission configuration to UE in order to correctly perform CSI report at specific subframe during On Duration configured for the CSI transmission configuration with CQI masking under the environment of performing the DRX operation,

[122] The processor 1051 also estimates that the UE performs the DRX cycle using with the Short cycle not to use of the Long DRX cycle by stopping the drx-ShortCycle timer of the UE while the new transmission/reception is occurred, so that the processor 1051 also estimates the CSI report at the specific subframe On Duration with the DRX cycle estimated in consideration of the data transmission of the initial transmission or re-

transmission. In addition to, the processor 1051 configures the PDCCH with NDI set to indicate the initial data transmission. Therefore, more proper and clear DRX operation is suggested in consideration of the data transmission between the UE and BS,

- [123] A wireless device 1060 includes a processor 1061, a memory 1062, and an RF unit 1063. The memory 1062 is coupled to the processor 1061, and stores a variety of information for driving the processor 1061. The RF unit 1063 is coupled to the processor 1061, and transmits and/or receives a radio signal. The processor 1061 implements the proposed functions, procedures, and/or methods. In the embodiments of the FIG. 8 to FIG. 10, the operation of the UE can be implemented by the processor 1061.
- [124] Especially, the processor 1061 configures the DRX configuration and the CSI transmission configuration by checking a RRC signaling received by the RF unit 1063. Herein, the DRX configuration is included the state where both the Short DRX cycle and the Long DRX cycle are configured. This processor 1061, in order to correctly perform CSI report at On Duration configured for transmission under the environment of performing the DRX operation, i.e., configured with CQI masking, can selectively control transition of DRX cycle in consideration that the drx-Inactivity timer is running or not if the drx-ShortCycle timer which has been running by using the Short DRX cycle expires.
- [125] The processor 1051 controls to use the Short DRX cycle, not to use the Long DRX cycle by checking that the PDCCH indicating the new data transmission from the BS is received, and the PDCCH is checked to indicate the new data transmission. the processor 1061 checks the NDI in the PDCCH is set to indicate 0 of value(bit) for indicating the initial transmission(or new data transmission).
- [126] The processor 1061 controls a change of the DRX cycle selectively for more clear DRX operation by stopping of the drx-ShortCycle timer in order to not to use the Long DRX cycle when the drx-ShortCycle timer expires, and checking the NDI in the PDCCH . Meanwhile, the processor 1061 determines to keep the use the Short DRX cycle if radio resource allocation information for the new data transmission via at least one PDCCH from the BS is received, and restriction of the use to the Long DRX cycle is made.
- [127] The processor 1061 also determines to CSI report at the specific subframe On Duration determined according to the maintained DRX cycle. Therefore, the processor 1061 controls to perform CSI transmission at the On Duration interval determined with the Short DRX cycle in order to provide channel state reports to the BS to when it is need to receive radio resource allocation information for the new data transmission/reception with effect.
- [128] Therefore, more clear and correct DRX operation in consideration of the new data traffic is provided, in addition to more frequent CSI reports to be allocated radio

resource allocation information with more proper.

[129] The technical concept of the present invention is based on provisional documents as described in the below.

[130] <start of priority document>

[131] In this invention, to send sufficiently frequent CQI/PMI/PTI/RI reports during the drx-Inactivity timer is running, the UE forbids the DRX Cycle transition from the Short DRX Cycle to the Long DRX Cycle when there is on-going data transmission.

[132] Invention 3.1: Selective DRX Cycle change.

[133] The eNB configures to the UE,

[134] - the DRX functionality including the Short DRX cycle and the Long DRX Cycle,

[135] - CQI reports including CQI masking

[136] When the UE is configured with the DRX functionality,

[137] - The UE uses the short DRX cycle;

[138] - The UE starts drx-ShortCycle timer .

[139] - The UE uses the long DRX cycle at the expiry of drx-ShortCycle timer .

[140] If the UE receives the PDCCH indicating a new transmission in UL or DL,

[141] * The UE starts or restarts drx-Inactivity timer.

[142] * When drx-ShortCycle timer expires,

[143] o The UE checks if drx-Inactivity timer is running

[144] . If drx-Inactivity timer is running, the UE uses the Short DRX Cycle

[145] . Else, the UE uses the Long DRX Cycle.

[146] * The UE applies the CQI masking configuration.

[147] o The UE applies the CQI masking and reports CQI/PMI/RI/PTI on PUCCH when onDurationTimer is running.

[148] * When the drx-Inactivity timer expires,

[149] o The UE starts drx-ShortCycle timer .

[150] o The UE uses Short DRX Cycle.

[151] o Then, when drx-ShortCycle timer expires, the UE uses the Long DRX Cycle.

[152]

[153] Invention 3.2: The UE stops drx-ShortCycle timer .

[154] The eNB configures to the UE,

[155] - the DRX functionality including the Short DRX cycle and the Long DRX Cycle,

[156] - CQI reports including CQI masking

[157] When the UE is configured with the DRX functionality,

[158] - The UE uses the short DRX cycle;

[159] - The UE starts drx-ShortCycle timer .

[160] - The UE uses the long DRX cycle at the expiry of drx-ShortCycle timer .

[161] If the UE receives the PDCCH indicating a new transmission in UL or DL,

- [162] * The UE starts or restarts drx-Inactivity timer.
- [163] * The UE uses the Short DRX Cycle.
- [164] * The UE stops drx-ShortCycle timer , if running;
- [165] * The UE applies the CQI masking configuration.
- [166] o The UE applies the CQI masking and reports CQI/PMI/RI/PTI on PUCCH when onDurationTimer is running.
- [167] * When the drx-Inactivity timer expires,
- [168] o The UE uses Short DRX Cycle.
- [169] o The UE starts drx-ShortCycle timer .
- [170] o Then, when drx-ShortCycle timer expires, the UE uses the Long DRX Cycle.
- [171]
- [172] Text Proposal: TS36.321
- [173] For invention 1:
- [174] When DRX is configured, the UE shall for each subframe:
- [175] - if a HARQ RTT Timer expires in this subframe and the data of the corresponding HARQ process was not successfully decoded:
- [176] - start the drx-RetransmissionTimer for the corresponding HARQ process.
- [177] - if a DRX Command MAC control element is received:
- [178] - stop onDurationTimer;
- [179] - stop drx-Inactivity timer.
- [180] - if drx-Inactivity timer expires or a DRX Command MAC control element is received in this subframe:
- [181] - if the Short DRX cycle is configured:
- [182] - start or restart drx-ShortCycle timer ;
- [183] - use the Short DRX Cycle.
- [184] - else:
- [185] - use the Long DRX cycle.
- [186] - if drx-ShortCycle timer expires in this subframe and if the drx-Inactivity timer is not running:
- [187] - use the Long DRX cycle.
- [188] - If the Short DRX Cycle is used and $[(SFN * 10) + \text{subframe number}] \bmod \text{shortDRX-Cycle} = (\text{drxStartOffset}) \bmod \text{shortDRX-Cycle}$; or
- [189] - if the Long DRX Cycle is used and $[(SFN * 10) + \text{subframe number}] \bmod \text{longDRX-Cycle} = \text{drxStartOffset}$:
- [190] - start onDurationTimer.
- [191] - during the Active Time, for a PDCCH-subframe, if the subframe is not required for uplink transmission for half-duplex FDD UE operation and if the subframe is not part of a configured measurement gap:

- [192] - monitor the PDCCH;
- [193] - if the PDCCH indicates a DL transmission or if a DL assignment has been configured for this subframe:
- [194] - start the HARQ RTT Timer for the corresponding HARQ process;
- [195] - stop the drx-RetransmissionTimer for the corresponding HARQ process.
- [196] - if the PDCCH indicates a new transmission (DL or UL):
- [197] - start or restart drx-Inactivity timer.
- [198] - when not in Active Time, type-0-triggered SRS [2] shall not be reported.
- [199] - if CQI masking (cqi-Mask) is setup by upper layers:
- [200] - when onDurationTimer is not running, CQI/PMI/RI/PTI on PUCCH shall not be reported.
- [201] - else:
- [202] - when not in Active Time, CQI/PMI/RI/PTI on PUCCH shall not be reported.
- [203]
- [204] For invention 2:
- [205] When DRX is configured, the UE shall for each subframe:
- [206] - if a HARQ RTT Timer expires in this subframe and the data of the corresponding HARQ process was not successfully decoded:
- [207] - start the drx-RetransmissionTimer for the corresponding HARQ process.
- [208] - if a DRX Command MAC control element is received:
- [209] - stop onDurationTimer;
- [210] - stop drx-Inactivity timer.
- [211] - if drx-Inactivity timer expires or a DRX Command MAC control element is received in this subframe:
- [212] - if the Short DRX cycle is configured:
- [213] - start or restart drx-ShortCycle timer ;
- [214] - use the Short DRX Cycle.
- [215] - else:
- [216] - use the Long DRX cycle.
- [217] - if drx-ShortCycle timer expires in this subframe:
- [218] - use the Long DRX cycle.
- [219] - If the Short DRX Cycle is used and $[(SFN * 10) + \text{subframe number}] \bmod (\text{shortDRX-Cycle}) = (\text{drxStartOffset}) \bmod (\text{shortDRX-Cycle})$; or
- [220] - if the Long DRX Cycle is used and $[(SFN * 10) + \text{subframe number}] \bmod (\text{longDRX-Cycle}) = \text{drxStartOffset}$:
- [221] - start onDurationTimer.
- [222] - during the Active Time, for a PDCCH-subframe, if the subframe is not required for uplink transmission for half-duplex FDD UE operation and if the subframe is not part

of a configured measurement gap:

- [223] - monitor the PDCCH;
- [224] - if the PDCCH indicates a DL transmission or if a DL assignment has been configured for this subframe:
 - [225] - start the HARQ RTT Timer for the corresponding HARQ process;
 - [226] - stop the drx-RetransmissionTimer for the corresponding HARQ process.
 - [227] - if the PDCCH indicates a new transmission (DL or UL):
 - [228] - start or restart drx-Inactivity timer.
 - [229] - use the Short DRX Cycle.
 - [230] - stop drx-ShortCycle timer .
 - [231] - when not in Active Time, type-0-triggered SRS [2] shall not be reported.
 - [232] - if CQI masking (cqi-Mask) is setup by upper layers:
 - [233] - when onDurationTimer is not running, CQI/PMI/RI/PTI on PUCCH shall not be reported.
 - [234] - else:
 - [235] - when not in Active Time, CQI/PMI/RI/PTI on PUCCH shall not be reported.
 - [236] <end of priority document>

[237] The processor may include application-specific integrated circuit (ASIC), other chipset, logic circuit and/or data processing device. The memory may include read-only memory (ROM), random access memory (RAM), flash memory, memory card, storage medium and/or other storage device. The RF unit may include baseband circuitry to process radio frequency signals. When the embodiments are implemented in software, the techniques described herein can be implemented with modules (e.g., procedures, functions, and so on) that perform the functions described herein. The modules can be stored in memory and executed by processor. The memory can be implemented within the processor or external to the processor in which case those can be communicatively coupled to the processor via various means as is known in the art.

[238] In view of the exemplary systems described herein, methodologies that may be implemented in accordance with the disclosed subject matter have been described with reference to several flow diagrams. While for purposes of simplicity, the methodologies are shown and described as a series of steps or blocks, it is to be understood and appreciated that the claimed subject matter is not limited by the order of the steps or blocks, as some steps may occur in different orders or concurrently with other steps from what is depicted and described herein. Moreover, one skilled in the art would understand that the steps illustrated in the flow diagram are not exclusive and other steps may be included or one or more of the steps in the example flow diagram may be deleted without affecting the scope and spirit of the present disclosure.

Claims

- [Claim 1] A method for changing a Discontinuous Reception (DRX) cycle in a wireless communication system, performed by a wireless device, the method comprising:
configuring a short DRX cycle and a long DRX cycle;
receiving a physical downlink control channel (PDCCH) indicating a new data transmission; and
using the short DRX cycle if the received PDCCH indicates the new data transmission.
- [Claim 2] The method of claim 1, further comprising:
stopping a drxShortCycleTimer if the drxShortCycleTimer is running.
- [Claim 3] The method of claim 1, wherein the using further comprising:
choosing that at least one of a Channel Quality Indicator (CQI), a Precoding Matrix Index (PMI), a Rank Indicator (RI) and a Precoding Type Indicator (PTI) on a Physical Uplink Control Channel (PUCCH) is reported at an On Duration predetermined with the short DRX cycle.
- [Claim 4] The method of claim 1, wherein the receiving further comprising:
checking whether a new data indicator in the PDCCH is a bit setup for a new data transmission or not.
- [Claim 5] The method of claim 1, wherein the receiving comprising:
monitoring the PDCCH at an On Duration predetermined with the short cycle.
- [Claim 6] A wireless device configured for changing a Discontinuous Reception (DRX) cycle in a wireless communication system, comprising:
a radio frequency unit configured to receive a radio signal; and
a processor operatively coupled with the radio frequency unit and configured to:
configure a short DRX cycle and a long DRX cycle;
receive a physical downlink control channel (PDCCH) indicating a new data transmission;
use the short DRX cycle if the received PDCCH indicates the new data transmission.
- [Claim 7] The wireless device of claim 6, wherein the processor is configured to:
stop a drxShortCycleTimer if the drxShortCycleTimer is running.
- [Claim 8] The wireless device of claim 6, the processor is configured to:
choose that at least one of a Channel Quality Indicator (CQI), a Precoding Matrix Index (PMI), a Rank Indicator (RI) and a Precoding

Type Indicator (PTI) on a Physical Uplink Control Channel (PUCCH) is reported at an On Duration predetermined with the short DRX cycle.


[Claim 9]

The wireless device of claim 6, the processor is configured to: check whether a new data indicator in the PDCCH is a bit setup for a new data transmission or not.


[Claim 10]

The wireless device of claim 6, the processor is configured to: monitor the PDCCH at an On Duration predetermined with the short cycle.


[Fig. 1]

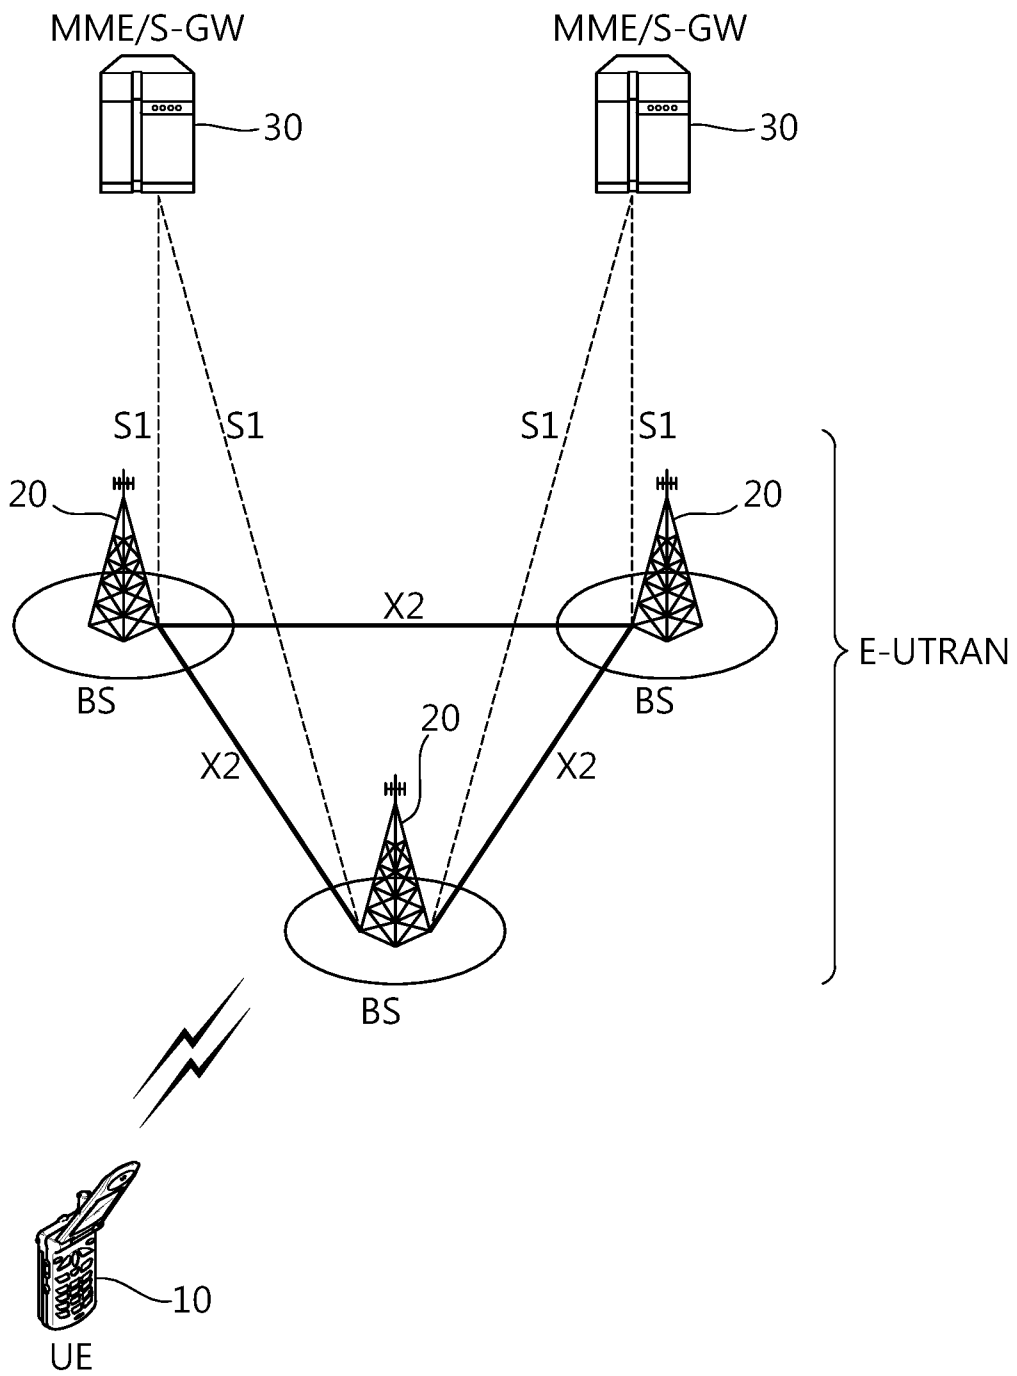


[Fig. 2]

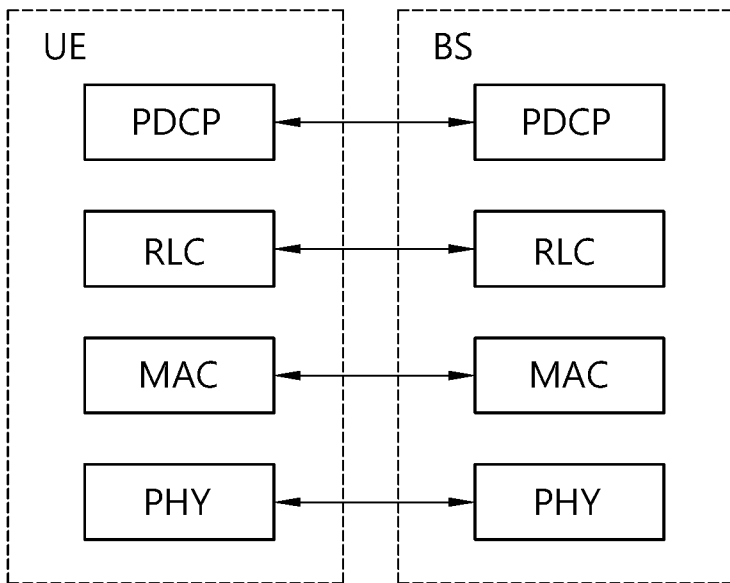


[Fig. 3]

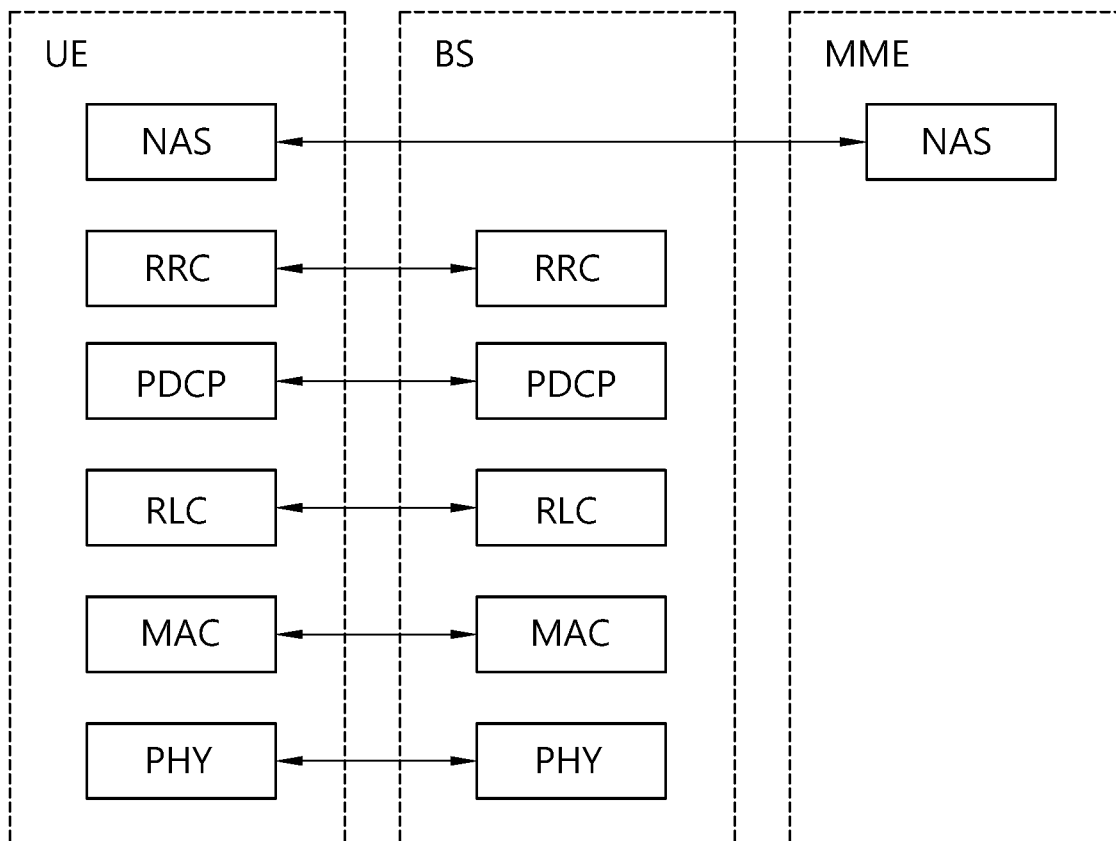


[Fig. 4]

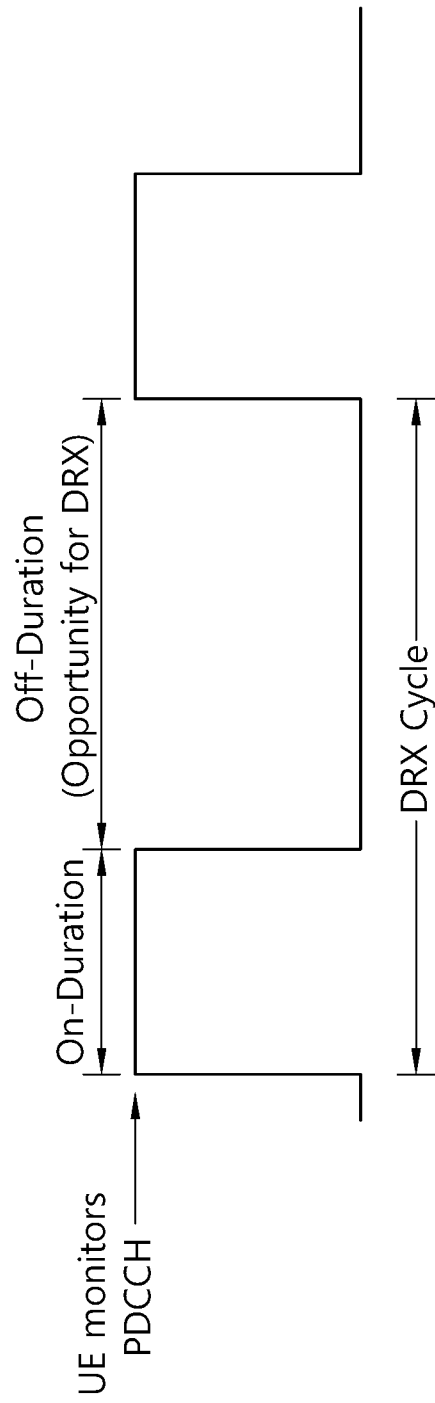


[Fig. 5]

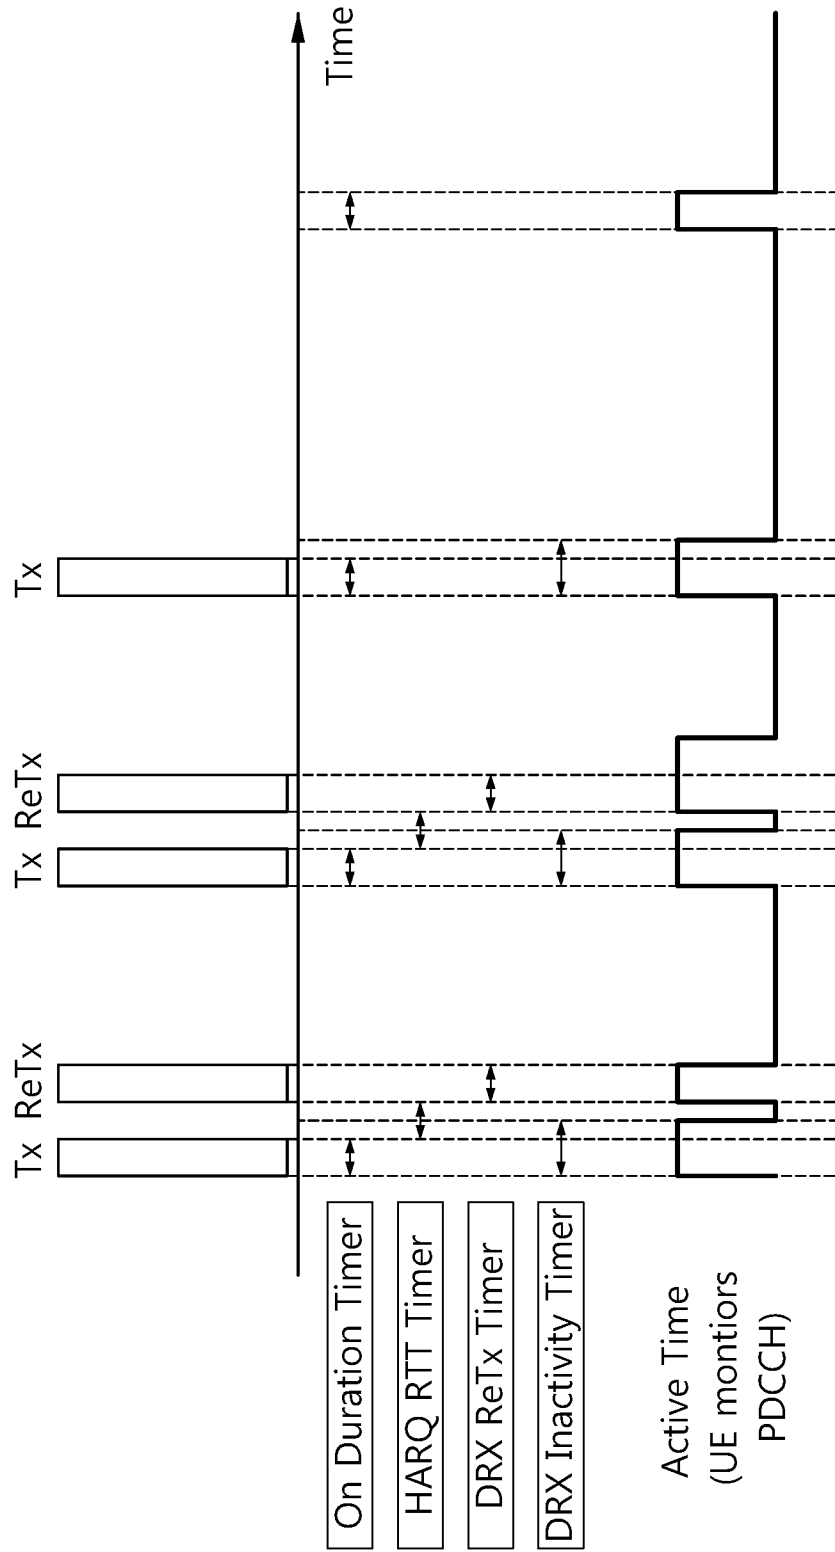


[Fig. 6]

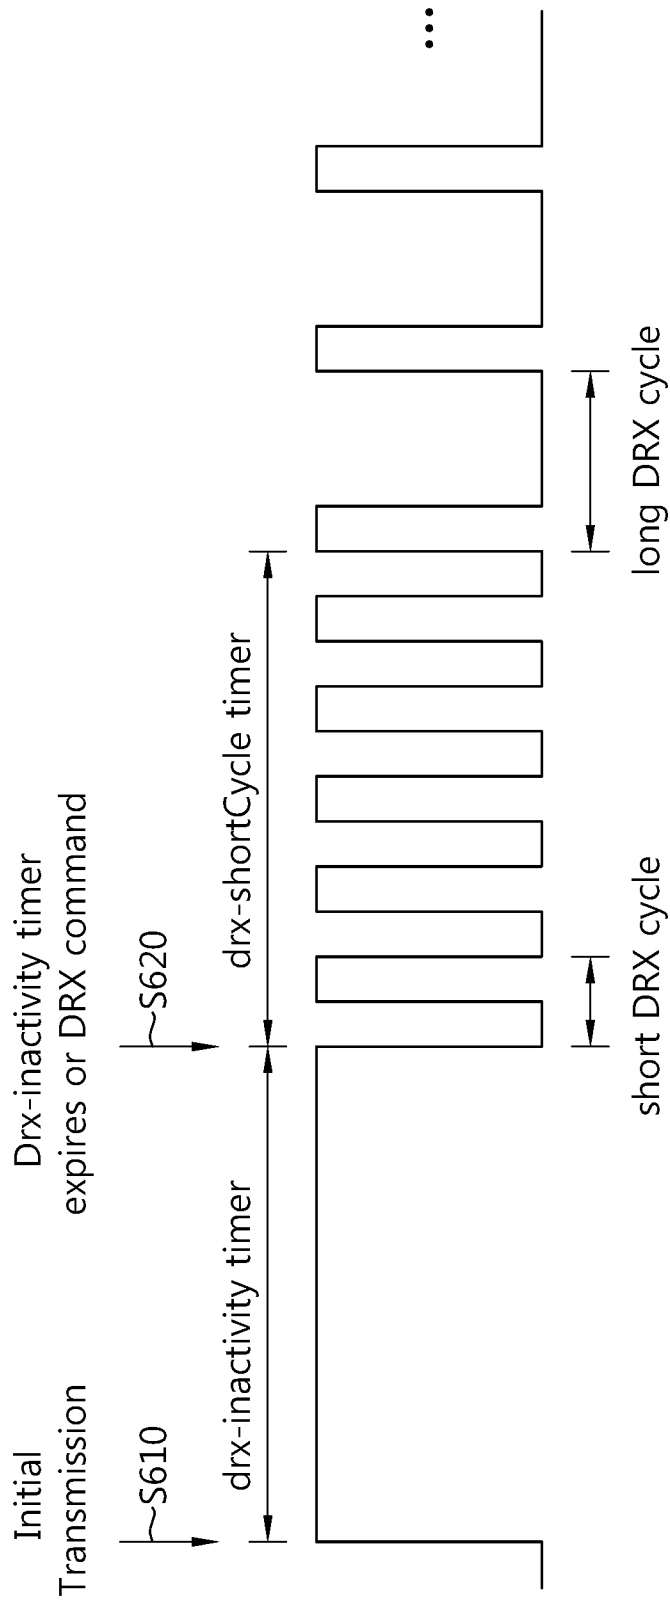


[Fig. 7]

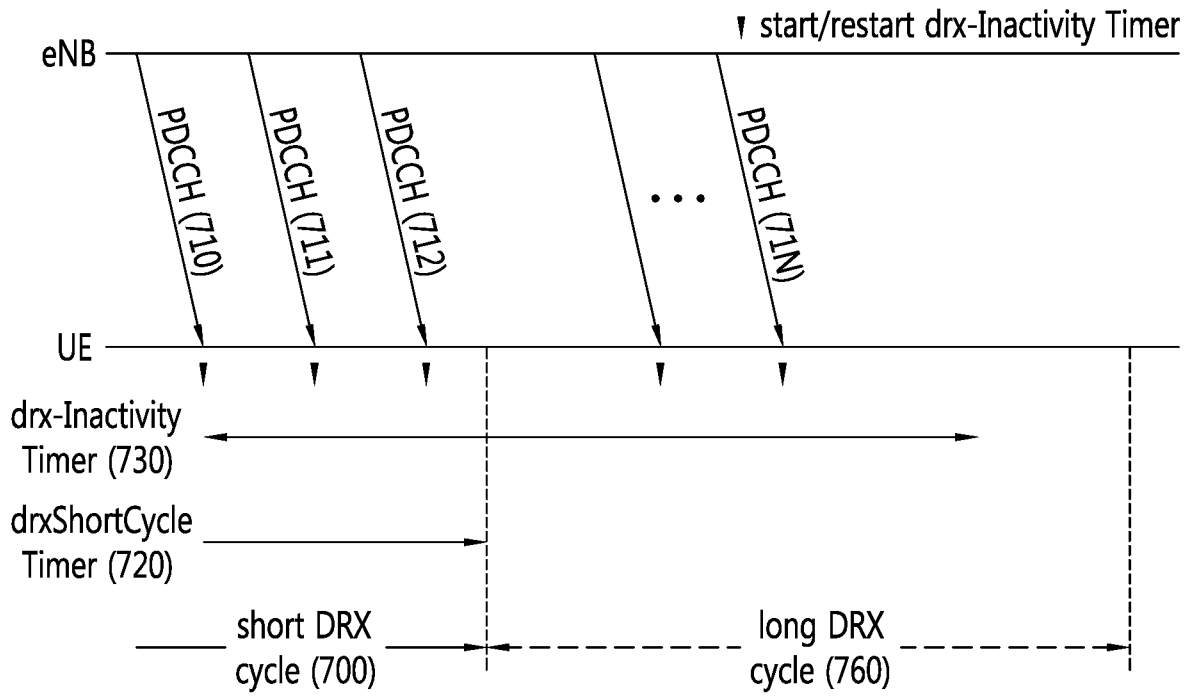


[Fig. 8]

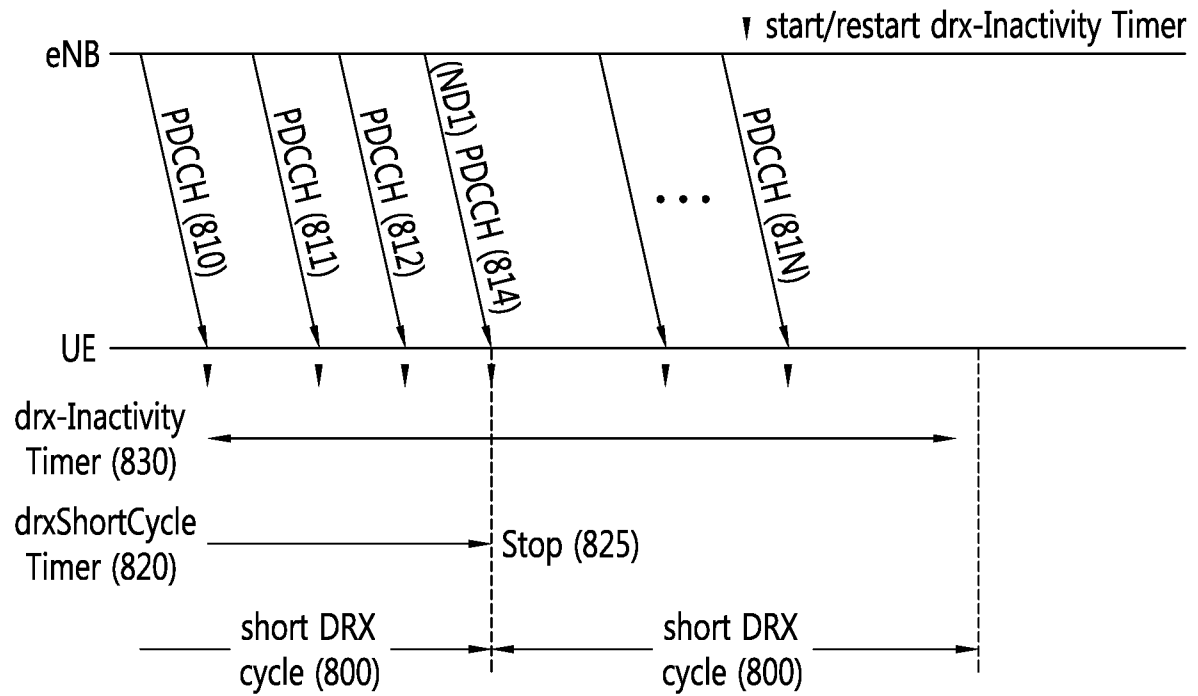

[Fig. 9]

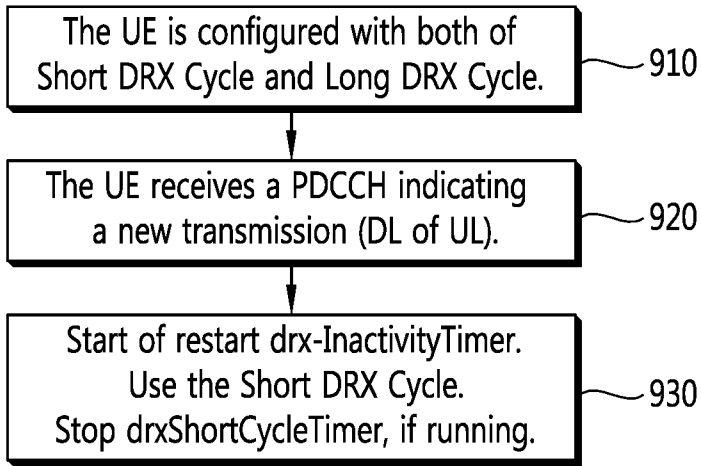

[Fig. 10]

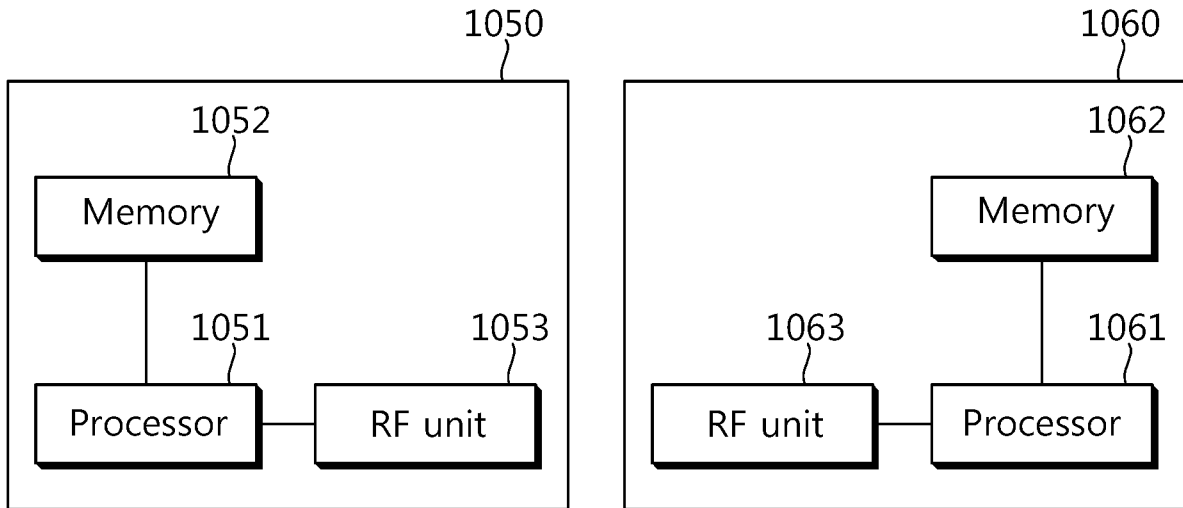

A. CLASSIFICATION OF SUBJECT MATTER**H04B 7/26(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
H04B 7/26; H04L 12/26; H04W 56/00; H04W 4/00; H04W 72/00; H04W 36/00; H04W 40/00Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: discontinuous reception, DRX, LTE, physical downlink control channel**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2009-0181670 A1 (LI-CHIH TSENG) 16 July 2009 See abstract, claims 1-10, and figure 4.	1-10
A	US 2009-0232054 A1 (JIN WANG et al.) 17 September 2009 See abstract, claims 1-10, and figures 5-7.	1-10
A	US 2008-0181127 A1 (STEPHEN E. TERRY et al.) 31 July 2008 See abstract, claims 1-43, and figures 4-7.	1-10
A	US 2010-0035624 A1 (LI-CHIH TSENG) 11 February 2010 See abstract, claims 1-12, and figure 4.	1-10
A	US 2011-0176513 A1 (SEUNG-JUNE YI et al.) 21 July 2011 See abstract, claims 1-20, and figure 9.	1-10

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family


Date of the actual completion of the international search

27 September 2013 (27.09.2013)

Date of mailing of the international search report

27 September 2013 (27.09.2013)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City,
302-701, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

OH Eung Gie

Telephone No. +82-42-481-8744



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2013/006065

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009-0181670 A1	16/07/2009	CN 101483884 A	15/07/2009
		CN 101483884 B	08/02/2012
		EP 2079264 A1	15/07/2009
		JP 04902676 B2	21/03/2012
		JP 2009-171580 A	30/07/2009
		KR 10-1053842 B1	03/08/2011
		KR 2009-0077704 A	15/07/2009
		TW 200931870 A	16/07/2009
US 2009-0232054 A1	17/09/2009	AU 2009-223261 A1	17/09/2009
		CN 102017726 A	13/04/2011
		EP 2263406 A1	22/12/2010
		JP 2011-514787 A	06/05/2011
		KR 10-2010-0137507 A	30/12/2010
		KR 10-2013-0016385 A	14/02/2013
		MX 2010010030 A	15/12/2010
		TW 200939852 A	16/09/2009
		US 8488521 B2	16/07/2013
		WO 2009-114802 A1	17/09/2009
US 2008-0181127 A1	31/07/2008	AR 065086 A1	13/05/2009
		AU 2008-210980 A1	07/08/2008
		BR PI0806385 A2	06/09/2011
		CA 2677074 A1	07/08/2008
		CN 101682888 A	24/03/2010
		EP 2127420 A1	02/12/2009
		EP 2568762 A1	13/03/2013
		EP 2574136 A1	27/03/2013
		IL 200180 A	27/06/2013
		IL 200180 D0	15/04/2010
		JP 2010-517481 A	20/05/2010
		KR 2009-0115180 A	04/11/2009
		KR 2010-0017411 A	16/02/2010
		KR 2013-0028786 A	19/03/2013
		MX 2009008111 A	28/08/2009
		RU 2009132517 A	10/03/2011
		RU 2011128099 A	20/01/2013
		RU 2433567 C2	10/11/2011
		SG 177986 A1	28/02/2012
		TW 200833139 A	01/08/2008
		TW 201208419 A	16/02/2012
		US 2012-263088 A1	18/10/2012
		US 8238260 B2	07/08/2012
WO 2008-094681 A1	07/08/2008		
US 2010-0035624 A1	11/02/2010	AT 495644 T	15/01/2011
		DE 602009000563 D1	24/02/2011
		EP 2152040 A1	10/02/2010
		EP 2152040 B1	12/01/2011

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2013/006065

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		ES 2359194 T3	19/05/2011
		TW 201008343 A	16/02/2010
		US 8374617 B2	12/02/2013
US 2011-0176513 A1	21/07/2011	AU 2006-282195 A1	01/03/2007
		AU 2006-282195 B2	10/12/2009
		AU 2007-203852 A1	12/07/2007
		AU 2007-203852 B2	26/08/2010
		AU 2007-203861 A1	12/07/2007
		AU 2007-203861 B2	26/11/2009
		AU 2007-212916 A1	16/08/2007
		AU 2007-212916 B2	11/03/2010
		AU 2007-212923 A1	16/08/2007
		AU 2007-212923 B2	21/01/2010
		AU 2007-288600 A1	28/02/2008
		AU 2007-288600 B2	16/09/2010
		AU 2007-314859 A1	08/05/2008
		AU 2007-314859 B2	18/11/2010
		AU 2009-209739 A1	06/08/2009
		AU 2009-209739 B2	02/06/2011
		AU 2009-224137 A1	17/09/2009
		AU 2009-261045 A1	23/12/2009
		AU 2009-329561 A1	27/08/2009
		AU 2009-329562 A1	27/08/2009
		AU 2010-203154 A1	08/07/2010
		CA 2664586 A1	08/05/2008
		CA 2664586 C	28/05/2013
		CA 2715075 A1	27/08/2009
		CA 2715099 A1	27/08/2009
		CA 2715986 A1	24/09/2009
		CA 2717368 A1	17/09/2009
		CA 2722058 A1	07/01/2010
		CA 2722781 A1	23/12/2009
		CA 2724595 A1	23/12/2009
		CA 2725771 A1	23/12/2009
		CA 2748799 A1	08/07/2010
		CN 101248699 A	20/08/2008
		CN 101248699 B	03/10/2012
		CN 101248699 C0	20/08/2008
		CN 101300755 A	05/11/2008
		CN 101300755 B	02/01/2013
		CN 101300755 C0	05/11/2008
		CN 101300756 A	05/11/2008
		CN 101300756 C0	05/11/2008
		CN 101361299 A	04/02/2009
		CN 101361299 B	18/07/2012
		CN 101361300 A	04/02/2009
		CN 101361300 B	30/01/2013
		CN 101361309 A	04/02/2009
		CN 101361309 B	27/06/2012

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2013/006065

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 101366204 A	11/02/2009
		CN 101366204 B	17/07/2013
		CN 101366206 A	11/02/2009
		CN 101366206 B	20/06/2012
		CN 101366207 A	11/02/2009
		CN 101366207 B	23/05/2012
		CN 101379723 A	04/03/2009
		CN 101379723 B	10/10/2012
		CN 101379730 A	04/03/2009
		CN 101379730 B	20/06/2012
		CN 101379731 A	04/03/2009
		CN 101379731 B	22/05/2013
		CN 101379732 A	04/03/2009
		CN 101379732 B	05/09/2012
		CN 101379733 A	04/03/2009
		CN 101379734 A	04/03/2009
		CN 101379734 B	30/01/2013
		CN 101405987 A	08/04/2009
		CN 101405987 B	28/09/2011
		CN 101406024 A	08/04/2009
		CN 101433008 A	13/05/2009
		CN 101473565 A	01/07/2009
		CN 101473565 B	07/11/2012
		CN 101473567 A	01/07/2009
		CN 101529748 A	09/09/2009
		CN 101529748 B	27/03/2013
		CN 101536578 A	16/09/2009
		CN 101536578 B	28/08/2013
		CN 101554082 A	07/10/2009
		CN 101554082 B	17/08/2011
		CN 101569148 A	28/10/2009
		CN 101569148 B	11/07/2012
		CN 101578783 A	11/11/2009
		CN 101589566 A	25/11/2009
		CN 101589566 B	12/06/2013
		CN 101601208 A	09/12/2009
		CN 101601225 A	09/12/2009
		CN 101601225 B	20/06/2012
		CN 101621832 A	06/01/2010
		CN 101621832 B	09/01/2013
		CN 101675610 A	17/03/2010
		CN 101675610 B	29/08/2012
		CN 101675611 A	17/03/2010
		CN 101675611 B	17/10/2012
		CN 101675618 A	17/03/2010
		CN 101682418 A	24/03/2010
		CN 101682418 B	31/07/2013
		CN 101682557 A	24/03/2010
		CN 101682558 A	24/03/2010
		CN 101682558 B	17/07/2013

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2013/006065

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 101682591 A	24/03/2010
		CN 101682591 B	26/09/2012
		CN 101682916 A	24/03/2010
		CN 101682926 A	24/03/2010
		CN 101689924 A	31/03/2010
		CN 101689924 B	03/04/2013
		CN 101690361 A	31/03/2010
		CN 101690361 B	04/07/2012
		CN 101690374 A	31/03/2010
		CN 101690374 B	26/12/2012
		CN 101690375 A	31/03/2010
		CN 101690375 B	19/09/2012
		CN 101779389 A	14/07/2010
		CN 101779389 B	27/03/2013
		CN 101779408 A	14/07/2010
		CN 101785218 A	21/07/2010
		CN 101803237 A	11/08/2010
		CN 101803237 B	10/07/2013
		CN 101803245 A	11/08/2010
		CN 101803245 B	17/07/2013
		CN 101803333 A	11/08/2010
		CN 101803333 B	15/05/2013
		CN 101809948 A	18/08/2010
		CN 101828344 A	08/09/2010
		CN 101828344 B	05/12/2012
		CN 101836374 A	15/09/2010
		CN 101836374 B	03/10/2012
		CN 101868932 A	20/10/2010
		CN 101933280 A	29/12/2010
		CN 101933281 A	29/12/2010
		CN 101933281 B	12/06/2013
		CN 101933364 A	29/12/2010
		CN 101946446 A	12/01/2011
		CN 101946446 B	26/06/2013
		CN 101953095 A	19/01/2011
		CN 101953095 B	05/06/2013
		CN 101953096 A	19/01/2011
		CN 101953096 B	27/02/2013
		CN 101971548 A	09/02/2011
		CN 101978620 A	16/02/2011
		CN 101978637 A	16/02/2011
		CN 101978743 A	16/02/2011
		CN 101999219 A	30/03/2011
		CN 102067479 A	18/05/2011
		CN 102067480 A	18/05/2011
		CN 102067481 A	18/05/2011
		CN 102067704 A	18/05/2011
		CN 102067705 A	18/05/2011
		CN 102106181 A	22/06/2011
		CN 102197669 A	21/09/2011

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2013/006065

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		CN 102265700 A	30/11/2011
		CN 102333521 A	25/01/2012
		CN 102342167 A	01/02/2012
		CN 102349327 A	08/02/2012
		CN 102355343 A	15/02/2012
		CN 102625463 A	01/08/2012
		CN 102647264 A	22/08/2012
		CN 102685919 A	19/09/2012
		EP 1917824 A1	07/05/2008
		EP 1949565 A1	30/07/2008
		EP 1949566 A1	30/07/2008
		EP 1969738 A1	17/09/2008
		EP 1969739 A1	17/09/2008
		EP 1969753 A1	17/09/2008
		EP 1969784 A2	17/09/2008
		EP 1969879 A2	17/09/2008
		EP 1969892 A2	17/09/2008
		EP 1969893 A2	17/09/2008
		EP 1972081 A1	24/09/2008
		EP 1980062 A2	15/10/2008
		EP 1982438 A1	22/10/2008
		EP 1982550 A2	22/10/2008
		EP 1985037 A1	29/10/2008
		EP 1987602 A1	05/11/2008
		EP 1987605 A1	05/11/2008
		EP 1987606 A1	05/11/2008
		EP 1987607 A1	05/11/2008
		EP 1987608 A1	05/11/2008
		EP 1987609 A1	05/11/2008
		EP 1987610 A1	05/11/2008
		EP 1997244 A1	03/12/2008
		EP 1997269 A1	03/12/2008
		EP 1997294 A1	03/12/2008
		EP 2005781 A2	24/12/2008
		EP 2007087 A2	24/12/2008
		EP 2007087 A3	09/01/2013
		EP 2015478 A2	14/01/2009
		EP 2015478 A3	22/12/2010
		EP 2015478 B1	31/07/2013
		EP 2030359 A2	04/03/2009
		EP 2033339 A1	11/03/2009
		EP 2033340 A1	11/03/2009
		EP 2033341 A1	11/03/2009
		EP 2036222 A1	18/03/2009
		EP 2040408 A2	25/03/2009
		EP 2048904 A1	15/04/2009
		EP 2057862 A2	13/05/2009
		EP 2060031 A1	20/05/2009
		EP 2060138 A2	20/05/2009
		EP 2070368 A2	17/06/2009

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2013/006065

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 2077639 A2	08/07/2009
		EP 2077690 A2	08/07/2009
		EP 2078342 A2	15/07/2009
		EP 2080295 A1	22/07/2009
		EP 2084865 A1	05/08/2009
		EP 2084928 A2	05/08/2009
		EP 2086148 A2	05/08/2009
		EP 2086150 A2	05/08/2009
		EP 2136592 A1	23/12/2009