



(51) International Patent Classification:
G03F 7/20 (2006.01)

(21) International Application Number:

PCT/EP2015/072985

(22) International Filing Date:

6 October 2015 (06.10.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10 2014 223 453.0

18 November 2014 (18.11.2014)

DE

10 2014 223 452.2

18 November 2014 (18.11.2014)

DE

(71) Applicant: **CARL ZEISS SMT GMBH** [DE/DE];
Rudolf-Eber-Strasse 2, 73447 Oberkochen (DE).

(72) Inventors: **ENDRES, Martin**; Wollenbergstrasse 7, 89551
Königsbronn (DE). **MÜLLER, Ralf**; Dr.-Bosch-Strasse 6,
73430 Aalen (DE). **BIELING, Stig**; Albatrosweg 46,
73434 Aalen (DE).


(74) Agent: **RAU, SCHNECK & HÜBNER PATENTAN-
WÄLTE RECHTSANWÄLTE PARTGMBB**; König-
strasse 2, 90402 Nürnberg (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ILLUMINATION OPTICAL UNIT FOR EUV PROJECTION LITHOGRAPHY

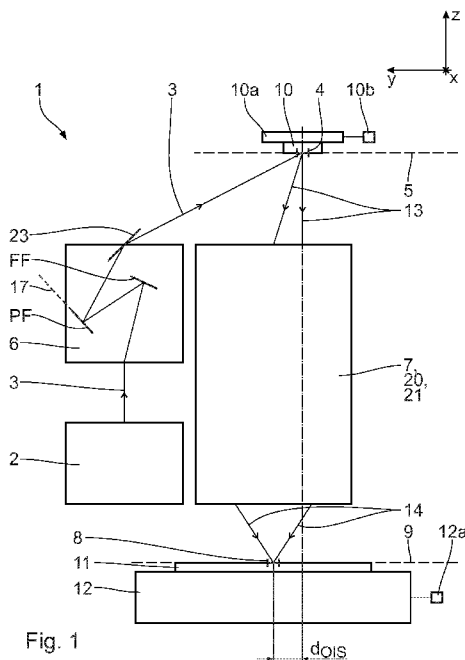

(57) Abstract: An illumination optical unit (7) for EUV projection lithography serves to illuminate an object field (8) with illumination light (3). An object (19) to be imaged, which is displaceable in an object displacement direction (y), is arrangeable in the object field (8). A transmission optical unit (14) images field facets of a field facet mirror (5) in a manner superposed on one another into the object field (8) by way of illumination channels, which each have assigned to them one of the field facets and one pupil facet of a pupil facet mirror (10). The superposition optical unit (14) has at least two mirrors (12, 13) for grazing incidence, which are arranged downstream of the pupil facet mirror (10). The mirrors (12, 13) for grazing incidence produce an illumination angle bandwidth of an illumination light overall beam (3G), composed of the illumination channels, in the object field (8), which bandwidth is smaller for a plane of incidence (yz) parallel to the object displacement direction (y) than for a plane (xz) perpendicular thereto. What emerges is an illumination optical unit, by means of which a projection optical unit can be adapted to a configuration of an EUV light source for the illumination light.

WO 2016/078819 A1

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

Illumination optical unit for EUV projection lithography

The present application claims priority of German patent applications DE 10 2014 223 452.2 and DE 10 2014 223 453.0 the contents of which are incorporated herein by reference.

5
The invention relates to an illumination optical unit for EUV projection lithography. Furthermore, the invention relates to an illumination system comprising such an illumination optical unit and a projection optical unit, a projection exposure apparatus comprising such an illumination system, a method for producing a microstructured or nanostructured component using such a
10 projection exposure apparatus and a microstructured or nanostructured component produced by means of the method.

Illumination optical units of the type set forth at the outset for illuminating an object field with illumination light, wherein an object to be imaged is arrangeable in the object field, are known
15 from US 6,507,440 B1, US 6,438,199 B1, US 2011/0318696 A1, US 2011/0001947 A1 and WO 2012/ 034995 A2.

It is an object of the present invention to develop an illumination optical unit of the type set forth at the outset in such a way that, by way thereof, a projection optical unit can be adapted to a con-
20 figuration of an EUV light source for the illumination light.

According to the invention, this object is achieved by an illumination optical unit comprising the features specified in Claim 1.

25 What was identified according to the invention was that an arrangement of at least two mirrors for grazing incidence between a pupil facet mirror and an object field to be illuminated leads to the possibility of influencing a ratio of an illumination angle bandwidth of an illumination light overall beam at the object field, firstly in a plane of incidence parallel to the object displacement
30 direction and secondly perpendicular thereto, and hence of influencing a dimension ratio of assigned pupil dimensions (σ_{\max} , σ_{\min}) of an illumination pupil of the illumination optical unit. This renders it possible to satisfy requirements of such an illumination angle bandwidth ratio, which arise from the design of a subsequent projection optical unit, with the aid of the at

least two mirrors for grazing incidence. An x/y-aspect ratio of the angle bandwidth of the illumination light overall beam is a measure for the numerical apertures thereof, firstly in the plane of incidence parallel to the object displacement direction and secondly perpendicular thereto. This x/y-aspect ratio of the angle bandwidth is greater than 1 and, in particular, lies in the range between 1.1 and 4, for example in the range between 1.5 and 3 or in the range between 1.8 and 2.5. In particular, the x/y-aspect ratio of the angle bandwidth can lie at 2. In particular, the illumination optical unit can be adapted to an anamorphic projection optical unit which images the object field, without major changes in a configuration of the field facet mirror and of the pupil facet mirror being necessary. The different illumination angle bandwidths in the planes of incidence parallel and perpendicular to the object displacement direction, which are caused by the at least two mirrors for grazing incidence, can then be adapted to different object-side numerical apertures of the anamorphic projection optical unit. The field facets of the field facet mirror can be constructed monolithically. Alternatively, the field facets of the field facet mirror can also be constructed from a plurality and from a multiplicity of micro-mirrors. Field facets of the field facet mirror can be configured to be switchable between at least two angle positions. Pupil facets of the pupil facet mirror can be configured to be fixed, i.e. not switchable, but, alternatively, also to be switchable between at least two angle positions. The illumination optical unit can have exactly two mirrors for grazing incidence. Alternatively, the illumination optical unit can also have a larger number of mirrors, e.g. three, four or five, for grazing incidence, with it then being possible to distribute an effect of these mirrors for grazing incidence on the aspect ratio of the illumination angle bandwidth of the illumination light overall angle at the object field among the individual mirrors.

The at least two mirrors for grazing incidence can moreover have such an imaging effect that a pupil plane of a projection optical unit, disposed downstream of the object field, for the pupil facet mirror is made accessible. To this end, the at least two mirrors for grazing incidence can image an arrangement plane of the pupil facet mirror and, in particular, the illumination pupil into an entry pupil plane of the projection optical unit disposed downstream.

An arrangement of the mirrors for grazing incidence according to Claim 2 was found to be advantageous in relation to the effect of these mirrors on an intensity distribution over the cross section of the illumination light overall beam. Then, an intensity attenuation caused by reflection

losses at the respective mirrors for grazing incidence, which intensity attenuation is generally dependent on the angle of incidence, is compensated in the case of the reflection at the various mirrors for grazing incidence which add up in terms of their deflective effect.

5 An edge contour of the pupil facet mirror according to Claim 3 can be adapted to a desired illumination angle bandwidth ratio, which is intended to be caused by the at least two mirrors for grazing incidence. This x/y-aspect ratio of the edge contour of the pupil facet mirror is less than an x/y illumination angle bandwidth ratio of the illumination light overall beam caused by the at least two mirrors for grazing incidence. This x/y illumination angle bandwidth ratio equals the
10 aspect ratio $\sigma_{\max}/\sigma_{\min}$ of the illumination pupil dimensions. By way of example, the x/y-aspect ratio of the edge contour of the pupil facet mirror can be 4/3. Alternatively, the x/y-aspect ratio of the edge contour of the pupil facet mirror can also be smaller and, in particular, equal 1. By reducing the x/y-aspect ratio of the pupil facet mirror edge contour, a design of the pupil facet mirror is achieved, in which a minimization of necessary switching angles of field facets of
15 the field facet mirror, which are required for changing illumination angle distribution, can be brought about.

A design of the field facets according to Claim 4 enables a flexible grouping of the micro-mirrors into field facets, which are respectively imaged into the object field by way of an associated pupil facet. In principle, such a design of the field facets made of micro-mirrors is known
20 from US 2011/0001947 A1 and US 2011/0318696 A1.

An x/y-aspect ratio of field facets according to Claim 5 enables an adaptation to imaging variations, which can be caused by way of the at least two mirrors for grazing incidence. Unwanted
25 overexposure of the object field along the object displacement direction can be avoided.

In the case of an illumination optical unit according to Claim 6, a pupil of a projection optical unit lying in the beam path downstream of the object field can be imaged by illumination-optical components into an accessible installation space in the beam path upstream of the object field.
30 Projection optical units with a pupil lying downstream of the object field in the beam path of the imaging light, in particular with an entry pupil lying downstream of the object field in the beam path of the imaging light, can be used with small transmission loss of the illumination light or

imaging light. The illumination-optical components, which image an arrangement plane in an accessible installation space in the beam path upstream of the object field into a pupil of a projection optical unit lying downstream of the object field in the beam path, can deflect the illumination light only in a grazing manner, i.e. only with mirrors for grazing incidence (grazing incidence, GI mirrors), wherein, in the case of grazing deflection, the illumination light with angles of incidence of greater than 60° is reflected. This leads to a corresponding improvement in the reflectivity and an increase in the throughput, resulting therefrom, compared to previously used imaging optical subunits for imaging an arrangement plane in the beam path upstream of the object field into the pupil plane in the beam path downstream of the object field. Imaging optical subunits previously used to this end have, from an illumination-optical point of view, at least one mirror which reflects the illumination light near perpendicular incidence, i.e. with angles of incidence less than 45° (NI mirror). The optical subsystem can have a catoptric embodiment. The imaging optical subunit can fold the imaging light in a plane, which contains an object displacement direction of the object to be imaged. Alternatively or additionally, the imaging optical subunit can fold the illumination light in a plane perpendicular to the object displacement direction. In order to image the arrangement plane lying upstream of the object field in the beam path into the pupil of the projection optical unit lying downstream of the object field in the beam path, the imaging optical subunit can also have a mirror arranged downstream of the object field in the beam path, i.e. a mirror of the projection optical unit, in addition to the at least one mirror arranged upstream of the object field in the beam path and only deflecting the imaging light in a grazing fashion. This mirror of the projection optical unit, which is part of the imaging optical subunit, can be an NI mirror or a GI mirror. It is also possible for a plurality of mirrors of the projection optical unit to belong to the imaging optical subunit.

The pupil of the projection optical unit arranged downstream of the object field in the beam path of the imaging light generally constitutes an entry pupil of the projection optical unit. This pupil may be arranged in a pupil plane. However, this is not mandatory. The pupil may also be arranged on a three-dimensional, e.g. curved, surface. It is also possible for the pupil for individual rays of the imaging light, which extend through the projection optical unit in a first plane of extent, e.g. in a common folding or meridional plane, to lie at a different point in the projection optical unit than in a second plane of extent perpendicular thereto.

The imaging optical subunit of the illumination optical unit can be part of an optical subsystem for projection lithography. This optical subsystem can include the projection optical unit for imaging the object field, in which the object to be imaged is arrangeable, into the image field. The projection optical unit can comprise a plurality of mirrors for guiding the imaging light from the object field to the image field and a pupil which is arranged downstream of the object field in the beam path of the imaging light.

The imaging optical subunit can have exactly one GI mirror. Exactly one such GI mirror of the imaging optical subunit enables an embodiment of the imaging optical subunit with a particularly high reflection for the illumination or imaging light.

The imaging optical subunit can have at least two GI mirrors. Such an imaging optical subunit improves an imaging effect when imaging the arrangement plane into the pupil plane of the projection optical unit. The imaging optical subunit can have exactly two GI mirrors, exactly three, exactly four, exactly five GI mirrors or it can have an even greater number of GI mirrors.

Two GI mirrors of the imaging optical subunit can be arranged directly in succession in the beam path of the imaging light. Such a GI mirror pair can be arranged in such a way that a deflecting effect of the GI mirrors for the illumination light adds up. Alternatively, an opposite or subtractive deflecting effect of the GI mirrors is also possible. By way of such deflecting overall effects, it is possible to predetermine a position of the arrangement plane and/or an angle between the arrangement plane and the object plane, which can be used to satisfy specific installation space requirements for illumination-optical components of a projection exposure apparatus.

The imaging optical subunit can comprise at least one mirror of the projection optical unit. Such a design of the imaging optical subunit elegantly uses the imaging effect of at least one mirror of the projection optical unit. The imaging optical subunit can contain exactly one mirror of the projection optical unit. Alternatively, the imaging optical subunit can also contain a plurality of mirrors of the projection optical unit.

The imaging optical subunit can have at least one reflecting free-form surface. By way of such a free-form surface design of at least one mirror of the imaging optical subunit, it is possible to

precisely predetermine an imaging effect of the imaging optical subunit. A sufficiently aberration-free imaging effect when imaging the arrangement plane into the pupil plane of the projection optical unit can also be ensured when using exactly one mirror for grazing incidence, i.e. exactly one GI mirror.

5

Firstly, a first illumination-side imaging light partial beam upstream of the last GI mirror in the beam path upstream of the object field can cross with, secondly, a second, imaging-side imaging light partial beam between the object field and the first mirror of the projection optical unit in the beam path downstream of the object field. The imaging-side imaging light partial beam can be
10 arranged spatially between the last GI mirror in the beam path upstream of the object field and a second mirror of the projection optical unit in the beam path downstream of the object field. Alternatively, the last GI mirror in the beam path upstream of the object field can be arranged spatially between the imaging-side imaging light partial beam and a second mirror of the projection
15 optical unit in the beam path downstream of the object field. Such crossing imaging light partial beams take account of corresponding installation space conditions, firstly for the illumination-optical components and secondly for the components of the projection optical unit. In particular, a distance between, firstly, the last GI mirror of the imaging optical subunit and, secondly, the imaging-side imaging light partial beam can have an advantageously large embodiment in the case of such crossing arrangements.

20

An optical system comprising an illumination optical unit for projection lithography for illuminating an object field, in which an object to be imaged is arrangeable, can have an optical subsystem or an imaging optical subunit with the features explained above.

25 The imaging optical subunit explained above, as a component of the illumination optical unit, can have all features which were already explained above in conjunction with the optical subsystem containing the projection optical unit. Conversely, the optical subsystem can have all features which were explained above in conjunction with the imaging optical subunit.

30 The advantages of an illumination system according to Claim 7, a projection exposure apparatus according to Claim 10, a production method according to Claim 11 and a component according

to Claim 12 correspond to those which were already explained above with reference to the illumination optical unit according to the invention or the optical subsystem.

5 In particular, an anamorphic illumination optical unit according to Claim 8 can be configured in such a way that the object-side numerical aperture thereof in a plane of incidence parallel to the object displacement direction is half the size compared to in a plane perpendicular thereto. By way of example, such a projection optical unit is known from WO 2012/034995 A2. The projection optical unit can have a plurality of mirrors for guiding illumination light or imaging light from the object field to the image field. A pupil of the projection optical unit can be arranged in
10 the beam path of the imaging light downstream of the object field.

The EUV light source can have an illumination light wavelength in the range between 5 nm and 30 nm.

15 The produced microstructured or nanostructured component can be a semiconductor chip, for example a memory chip.

Exemplary embodiments of the invention are explained in more detail below on the basis of the drawing. In detail:

- 20
- Figure 1 schematically shows a projection exposure apparatus for EUV microlithography;
- Figure 2 shows, in a meridional section, an embodiment of an optical subsystem with an imaging optical unit, which is usable as a projection lens in the projection exposure apparatus according to Figure 1, wherein an imaging beam path for chief rays and for respectively an upper and a lower coma ray from two selected field points is depicted;
- 25
- Figure 3 shows, in an illustration similar to Figure 2, a further embodiment of an optical subsystem, which is usable in place of the optical subsystem according to Figure 1;
- 30

- Figure 4 shows a view of the optical subsystem according to Figure 3, as seen from the viewing direction IV in Figure 3;
- 5 Figures 5 to 10 show, in illustrations similar to Figures 3 and 4 in each case, further embodiments of an optical subsystem;
- 10 Figures 11 and 12 show variants of a folding effect of a mirror for grazing incidence, which, as part of an imaging optical subunit of the optical subsystem, has the last mirror in the beam path upstream of the object field, wherein the folding plane thereof contains an object displacement direction of an object to be imaged with the imaging optical unit;
- 15 Figure 13 schematically shows a folding effect of the mirror for grazing incidence of the imaging optical subunit, which constitutes the last mirror in the beam path upstream of the object field, wherein a folding plane of this mirror is perpendicular to the object displacement direction of the object to be imaged by the imaging optical unit;
- 20 Figure 14 shows the beam path in the region of the mirror for grazing incidence according to Figure 13, as seen from the viewing direction XIV in Figure 13;
- 25 Figures 15 and 16 show, in an illustration similar to Figures 13 and 14, a folding effect of two mirrors for grazing incidence of a further variant of an imaging optical subunit of the optical subsystem, wherein the folding plane of the last mirror of the imaging optical subunit in the beam path upstream of the object field is arranged perpendicular to the object displacement direction and the folding plane of the penultimate mirror in the beam path upstream of the object field contains the object displacement direction, i.e. is arranged perpendicular to
- 30 the folding plane of the last mirror in the beam path upstream of the object field;

- Figure 17 shows very schematically, in a meridional section, a further embodiment of a projection exposure apparatus for EUV projection lithography, comprising a light source, an illumination optical unit and a projection optical unit;
- 5
- Figure 18 shows xz-section lines, which reproduce sections through a reflection surface of a first mirror for grazing incidence of the illumination optical unit downstream of a pupil facet mirror, wherein sections are shown perpendicular to a plane of incidence in mutually spaced apart, parallel sectional
- 10
- Figure 19 shows, in a sectional line illustration similar to Figure 18, corresponding sections through a reflection surface of a second mirror for grazing incidence, which is arranged between the first mirror for grazing incidence and an object field illuminated by way of the illumination optical unit; and
- 15
- Figures 20 to 23 show, in illustrations similar to Figure 17, further embodiments of an illumination optical unit within the projection exposure apparatus.
- 20
- A microlithographic projection exposure apparatus 1 has a light source 2 for illumination light or imaging light 3. The light source 2 is an EUV light source, which produces light in a wavelength range of e.g. between 5 nm and 30 nm, in particular between 5 nm and 15 nm. In particular, the light source 2 can be a light source with a wavelength of 13.5 nm or a light source with a wavelength of 6.9 nm. Other EUV wavelengths are also possible. Use can be made of a light source as
- 25
- described below in conjunction with Figures 17 et seq. In general, even arbitrary wavelengths are possible for the illumination light 3 guided in the projection exposure apparatus 1, for example visible wavelengths or else other wavelengths which may find use in microlithography (e.g. DUV, deep ultraviolet) and for which suitable laser light sources and/or LED light sources are available (e.g. 365 nm, 248 nm, 193 nm, 157 nm, 129 nm, 109 nm). A beam path of the illumination
- 30
- light 3 is depicted very schematically in Figure 1.

An illumination optical unit 6 serves to guide the illumination light 3 from the light source 2 to an object field 4 in an object plane 5. Using a projection optical unit or imaging optical unit 7, the object field 4 is imaged into an image field 8 in an image plane 9 with a predetermined reduction scale.

5

In order to facilitate the description of the projection exposure apparatus 1 and the various embodiments of the projection optical unit 7, a Cartesian xyz-coordinate system is indicated in the drawing, from which system the respective positional relationship of the components illustrated in the figures is evident. In Figure 1, the x-direction runs perpendicular to the plane of the drawing into the latter. The y-direction runs toward the left, and the z-direction runs upward. The object plane 5 extends parallel to the xy-plane.

The object field 4 and the image field 8 are rectangular. Alternatively, it is also possible for the object field 4 and the image field 8 to have a bent or curved embodiment, that is to say, in particular, a partial ring shape. The object field 4 and the image field 8 have an x/y-aspect ratio of greater than 1. Therefore, the object field 4 has a longer object field dimension in the x-direction and a shorter object field dimension in the y-direction. These object field dimensions extend along the field coordinates x and y.

One of the exemplary embodiments depicted in Figures 2 et seq. can be used for the projection optical unit 7. The projection optical unit 7 has a reducing imaging scale of $8\times$ in the yz-plane and a reducing imaging scale of $4\times$ in the xz-plane. Therefore, the projection optical unit 7 is anamorphic. An illumination angle bandwidth of an illumination light overall beam 3_G composed of the illumination channels is smaller for a plane of incidence yz (plane of the drawing in Figure 2) of the illumination light 3 on the object field 4 parallel to the object displacement direction y than for an xz-plane extending perpendicular thereto. Alternatively, an isomorphic projection optical unit is also possible. Other reduction scales are also possible, for example $4\times$, $5\times$ or even reduction scales which are greater than $8\times$. When an anamorphic projection optical unit is used, the values specified above apply to the reduction scales for the xz-plane or for the yz-plane. In the embodiments of the projection optical unit 7 according to Figures 2 and 5 et seq., the image plane 9 is arranged parallel to the object plane 5. What is imaged in this case is a section of a reflection mask 10, also referred to as reticle, coinciding with the object field 4. The reticle 10 is

carried by a reticle holder 10a. The reticle holder 10a is displaced by a reticle displacement drive 10b.

5 The imaging by way of the projection optical unit 7 is implemented on the surface of a substrate 11 in the form of a wafer, which is carried by a substrate holder 12. The substrate holder 12 is displaced by a wafer or substrate displacement drive 12a.

10 Figure 1 schematically illustrates, between the reticle 10 and the projection optical unit 7, a ray beam 13 of the illumination light 3 that enters into said projection optical unit and, between the projection optical unit 7 and the substrate 11, a ray beam 14 of the illumination light 3 that emerges from the projection optical unit 7. An image field-side numerical aperture (NA) of the projection optical unit 7 is not reproduced to scale in Figure 1.

15 The projection exposure apparatus 1 is of the scanner type. Both the reticle 10 and the substrate 11 are scanned in the y-direction during the operation of the projection exposure apparatus 1. A stepper type of the projection exposure apparatus 1, in which a stepwise displacement of the reticle 10 and of the substrate 11 in the y-direction is effected between individual exposures of the substrate 11, is also possible. These displacements are effected synchronously to one another by an appropriate actuation of the displacement drives 10b and 12a.

20 Figure 2 shows the optical design of a first embodiment of an optical subsystem 15, which also includes an imaging optical subunit 16 in addition to the projection optical unit 7, which imaging optical subunit images an arrangement plane 17 lying upstream of the object field 4 in the beam path of the imaging light 3 into an entry pupil or entry pupil plane 18 of the projection optical unit 7. The entry pupil need not lie in one plane. Alternatively, the entry pupil can also be configured as a surface lying in a non-planar three-dimensional manner in space. Furthermore, in respect of the beams of the imaging light 3 extending in the yz-plane, the entry pupil can also lie at a different position than in respect of the plane of extent of the beams of the imaging light 3 perpendicular thereto. Thus, it is not necessarily possible to provide a closed surface description
25 of an extent of the entry pupil for all beams of the imaging light 3.
30

The location of the entry pupil plane 18 is indicated very schematically in Figure 2. For rays of the imaging light 3 which extend in planes perpendicular to the plane of the drawing in Figure 2, the entry pupil of the projection optical unit 7 lies offset to the location of the pupil plane 18 between the mirrors M1 and M2, which is plotted in Figure 2 and predetermined there by the position of intersections of the chief rays and coma rays of the imaging light. The spacing of the entry pupils, firstly for rays of the imaging light 3 in the yz-plane and, secondly, in a plane of extent perpendicular thereto, may be significant and can differ along the beam path of the imaging light 3 by several 100 mm and even by an even larger value, for example by several 1000 mm. Proceeding from the object plane 5 in the beam direction of chief rays of the imaging light 3, a position of the entry pupils EPy (location in the yz-plane) and EPx (position in the plane of extent of the imaging light 3 perpendicular thereto) may, independently of one another, lie in the range between 300 mm and infinity. Here, the value "infinity" denotes an object-side telecentric configuration of the projection optical unit 7.

15 The imaging optical subunit 16 deflects imaging light 3 in the beam path upstream of the object field 4 only in a grazing manner, i.e. with angles of incidence of greater than 60° .

Figure 2 depicts the beam path of in each case three individual rays 19 emanating from two object field points which are spaced apart from one another in the y-direction in Figure 2. Depicted here are chief rays 20, i.e. individual rays 19 which extend through the centre of the pupil 18 of the projection optical unit 7, and, in each case, an upper and a lower coma ray of these two object field points. Proceeding from the object field 4, the chief rays 20 include an angle CRAO of 5.5° with a normal of the object plane 5.

25 The object plane 5 lies parallel to the image plane 9.

The projection optical unit 7 has an image-side numerical aperture of 0.55.

30 The projection optical unit 7 according to Figure 2 has a total of eight mirrors, which, proceeding from the object field 4, are numbered M1 to M8 in the sequence of the beam path of the individual rays 19. A variant of the imaging optical unit 7 may also have a different number of mirrors,

for example four mirrors or six mirrors. Depending on the embodiment, the projection optical unit 7 can have an isomorphic or anamorphic configuration.

5 Figure 2 depicts the calculated reflection surfaces of the mirrors M1 to M8. What can be identified in the illustration according to Figure 2 is that only a portion of these calculated reflection surfaces is used. Only this actually used region of the reflection surfaces is actually present in the real mirrors M1 to M8. These used reflection surfaces are carried in a known manner by mirror bodies.

10 In the projection optical unit 7 according to Figure 2, the mirrors M1, M4, M7 and M8 are configured as mirrors for normal incidence, that is to say as mirrors onto which the imaging light 3 impinges with an angle of incidence that is smaller than 45° . Thus, overall, the projection optical unit 7 according to Figure 2 has four mirrors M1, M4, M7 and M8 for normal incidence.

15 The mirrors M2, M3, M5 and M6 are mirrors for grazing incidence of the illumination light 3, that is to say mirrors onto which the illumination light 3 impinges with angles of incidence that are greater than 60° . A typical angle of incidence of the individual rays 19 of the imaging light 3 on the mirrors M2, M3 and M5, M6 for grazing incidence lies in the region of 80° . Overall, the projection optical unit 7 according to Figure 2 has exactly four mirrors M2, M3, M5 and M6 for
20 grazing incidence.

The mirrors M2 and M3 form a mirror pair arranged directly in succession in the beam path of the imaging light 3. The mirrors M5 and M6 also form a mirror pair arranged directly in succession in the beam path of the imaging light 3.

25

The mirror pairs M2, M3 on the one hand and M5, M6 on the other hand reflect the imaging light 3 in such a way that the angles of reflection of the individual rays 19 add up at the respective mirrors M2, M3 and M5, M6 of these two mirror pairs. Thus, the respective second mirror M3 and M6 of the respective mirror pair M2, M3 and M5, M6 increases a deflecting effect
30 which the respective first mirror M2, M5 exerts on the respective individual ray 19. This arrangement of the mirrors of the mirror pairs M2, M3 and M5, M6 corresponds to that described in DE 10 2009 045 096 A1 for an illumination optical unit.

The mirrors M2, M3, M5 and M6 for grazing incidence each have very large absolute values for the radius, that is to say they have a relatively small deviation from a planar surface. These mirrors M2, M3, M5 and M6 for grazing incidence thus have practically no refractive power, that is to say practically no overall beam-forming effect like a concave or convex mirror, but rather contribute to specific and, in particular, local aberration correction.

The mirrors M1 to M8 carry a coating optimizing the reflectivity of the mirrors M1 to M8 for the imaging light 3. This can be a ruthenium coating, a molybdenum coating or a molybdenum coating with an uppermost layer of ruthenium. In the mirrors M2, M3, M5 and M6 for grazing incidence, use can be made of a coating with e.g. one ply of molybdenum or ruthenium. These highly reflecting layers, in particular of the mirrors M1, M4, M7 and M8 for normal incidence, can be configured as multi-ply layers, wherein successive layers can be manufactured from different materials. Alternating material layers can also be used. A typical multi-ply layer can have fifty bilayers, respectively made of a layer of molybdenum and a layer of silicon.

The mirror M8, that is to say the last mirror upstream of the image field 8 in the imaging beam path, has a passage opening 21 for the passage of imaging light 3 which is reflected from the antepenultimate mirror M6 toward the penultimate mirror M7. The mirror M8 is used in a reflective manner around the passage opening 21. All other mirrors M1 to M7 do not have a passage opening and are used in a reflective manner in a region connected in a gap-free manner.

The imaging optical subunit 16 deflects imaging light 3 in the beam path upstream of the object field 4 only in a grazing manner. In the embodiment according to Figure 2, the imaging optical subunit 16 comprises exactly two mirrors for grazing incidence (GI mirrors) 22 and 23. These two mirrors 22 and 23 are in turn configured as a mirror pair in such a way that the imaging light 3 is reflected with angles of reflections that add at the GI mirrors 22 and 23. What was explained above in relation to the mirror pairs M2, M3 and M5, M6 also applies here. The GI mirrors 22, 23 of the imaging optical subunit 16 deflect the illumination light 3 in the clockwise direction in the view according to Figure 2.

Overall, imaging of the arrangement plane 17 into the pupil plane 18 of the entry pupil is brought about by the two GI mirrors 22, 23 of the imaging optical subunit 16 and by the mirror M1 of the projection optical unit 7.

5 The mirror M1 alone also has an imaging effect in relation to the entry pupil of the projection optical unit 7, which, in the plane of the drawing depicted e.g. in Figure 2, lies in the pupil plane 18. The mirror M1 produces a virtual image of this entry pupil, which, proceeding from the object field 4 in the beam path of the imaging light 3, lies at a distance of 7275 mm from the object field 4 in view of the entry pupil position in the yz-plane and lies at a distance of 4565 mm from
10 the object field 4 in the plane of extent of the imaging light 3 perpendicular thereto. The two mirrors 22, 23 for grazing incidence image this virtual location of the entry pupil, which is produced by way of the mirror M1, into the arrangement plane 17.

The optical subsystem 15 is configured as catoptric optical unit.

15

The two GI mirrors 22, 23 are arranged directly in succession in the beam path of the imaging light 3.

A folding plane of the two GI mirrors 22, 23 lies in the yz-plane. The two GI mirrors 22, 23 be-
20 long to the illumination optical unit 6.

A pupil facet mirror of the illumination optical unit 6 is arranged in the arrangement plane 17. In Figure 1, the pupil facet mirror is indicated schematically at PF and a field facet mirror is indicated schematically at FF within the illumination optical unit 6. The pupil facet mirror PF lies in
25 the arrangement plane 17.

Moreover, the two GI mirrors 22, 23, together with the pupil facet mirror PF, are part of a transmission optical unit, which images the field facets of the field facet mirror FF superposed on one another in the object field 4 by way of illumination channels, which each have assigned to them
30 one of the field facets and one of the pupil facets.

5 Illumination optical units with a field facet mirror and a pupil facet mirror are known from the prior art. An illumination angle distribution in the case of an object field illumination can be pre-determined by way of illuminating pupil facets of the pupil facet mirror. The pupil facet mirror is part of an imaging optical unit, which images field facets of the field facet mirror in a mutually superposed manner onto the object field. The GI mirrors 22 and 23 are then also part of this imaging optical unit for the field facets. The field facets can each be constructed from a plurality of micro-mirrors. The field facets can have an x/y-aspect ratio that is greater than an x/y-aspect ratio of the object field 4.

10 A totality of the pupil facets on the pupil facet mirror PF has an edge contour with an aspect ratio x/y between an extent x perpendicular to the object displacement direction y and an extent y parallel to the object displacement direction, which is less than an aspect ratio $\sigma_{\max}/\sigma_{\min}$ between dimensions of an illumination pupil of the illumination optical unit 6 in the arrangement plane 17. These dimensions σ_{\max} and σ_{\min} are assigned to the extents x and y of the edge contour perpendicular and parallel to the object displacement direction y.

15 The mirrors 22, 23 and the mirrors M1 to M8 are embodied as free-form surfaces which are not describable by a rotationally symmetric function. Other embodiments of the optical subsystem 15, in which at least one of the mirrors 22, 23, M1 to M8 is embodied as a rotationally symmetric sphere, are also possible. All mirrors 22, 23, M1 to M8 can also be embodied as such aspheres.

A free-form surface can be described by the following free-form surface equation (equation 1):

$$\begin{aligned}
 Z = & \frac{c_x x^2 + c_y y^2}{1 + \sqrt{1 - (1 + k_x)(c_x x)^2 - (1 + k_y)(c_y y)^2}} \\
 & + C_1 x + C_2 y \\
 & + C_3 x^2 + C_4 xy + C_5 y^2 \\
 & + C_6 x^3 + \dots + C_9 y^3 \\
 & + C_{10} x^4 + \dots + C_{12} x^2 y^2 + \dots + C_{14} y^4 \\
 & + C_{15} x^5 + \dots + C_{20} y^5 \\
 & + C_{21} x^6 + \dots + C_{24} x^3 y^3 + \dots + C_{27} y^6 \\
 & + \dots
 \end{aligned}$$

(1)

The following applies to the parameters of this equation (1):

- 5 Z is the sag of the free-form surface at the point x, y, where $x^2 + y^2 = r^2$. Here, r is the distance from the reference axis of the free-form surface equation ($x = 0; y = 0$).

10 In the free-form surface equation (1), $C_1, C_2, C_3 \dots$ denote the coefficients of the free-form surface series expansion in powers of x and y.

15 In the case of a conical base area, c_x, c_y is a constant corresponding to the vertex curvature of a corresponding asphere. Thus, $c_x = 1/R_x$ and $c_y = 1/R_y$ applies. k_x and k_y each correspond to a conical constant of a corresponding asphere. Thus, equation (1) describes a bi-conical free-form surface.

20 An alternative possible free-form surface can be generated from a rotationally symmetric reference surface. Such free-form surfaces for reflection surfaces of the mirrors of projection optical units of microlithographic projection exposure apparatuses are known from US 2007-0058269 A1. Such free-form surfaces can also be used for the two GI mirrors 22, 23.

Alternatively, free-form surfaces can also be described with the aid of two-dimensional spline surfaces. Examples for this are Bezier curves or non-uniform rational basis splines (NURBS). By

way of example, two-dimensional spline surfaces can be described by a grid of points in an xy-plane and associated z-values, or by these points and the gradients associated therewith. Depending on the respective type of the spline surface, the complete surface is obtained by interpolation between the grid points using e.g. polynomials or functions which have specific properties in respect of the continuity and the differentiability thereof. Examples for this are analytical functions.

The optical design data of the reflection surfaces of the mirrors 22, 23, M1 to M8 of the projection optical unit 7 can be gathered from the following tables. Here, the GI mirror 23 is denoted by R1 and the GI mirror 22 is denoted by R2. These optical design data in each case proceed from the image plane 9, i.e. describe the respective projection optical unit in the reverse propagation direction of the imaging light 3 between the image plane 9 and the object plane 5 and onward to the arrangement plane 17, which is denoted by "EP" in the tables.

The first one of these tables specifies vertex radii Radius_x and Radius_y , firstly in the xy-plane and secondly in the yz-plane, for the optical surfaces of the optical components. Moreover, this Table 1 specifies refractive power values Power_x and Power_y . Here, the following applies:

$$\text{Power} = -2 \cos(\text{AOI})/\text{radius}$$

20

Here, AOI denotes an angle of incidence of a chief ray of a central field point on the respective mirror.

"inf" denotes "infinity".

25

The second table specifies, for the mirrors M1 to M8 in mm, the conical constants k_x and k_y , the vertex radius R_x possibly deviating from the value R ($= R_y$) and the free-form surface coefficients C_n . Coefficients C_n not listed here are zero.

The third table still specifies the magnitude along which the respective functional component of the projection optical unit 7, i.e. the respective mirror, the respective field, the stop AS and the arrangement plane EP, proceeding from a reference surface, was decentred (DCY) in the y-

direction, and displaced (DCZ) and tilted (TLA, TLC) in the z-direction. This corresponds to a parallel displacement and a tilt when carrying out the free-form surface design method. Here, a displacement is carried out in the y-direction and in the z-direction in mm, and tilting is carried out about the x-axis and about the z-axis. Here, the tilt angle is specified in degrees. Decentering is carried out first, followed by tilting. The reference surface during decentering is in each case the first surface of the specified optical design data. Decentering in the y-direction and in the z-direction is also specified for the object field 4.

The fourth table still specifies the transmission data of the mirrors and of the reflecting reticle 10 in the object field 4, namely the reflectivity thereof for the angle of incidence of an illumination light ray incident centrally on the respective mirror. The overall transmission is specified as a proportional factor remaining from an incident intensity after reflection at all mirrors in the projection optical unit.

The fifth table specifies the x-coordinates and the y-coordinates of a polygonal chain, which describes a beam-delimiting edge contour of an aperture stop AS which is arranged in a pupil within the projection optical unit 7.

The sixth table accordingly specifies the x-coordinates and the y-coordinates of a polygonal chain, which describes a beam-delimiting edge contour of a pupil EP which lies in the arrangement plane 17.

Surface	Radius_x[mm]	Power_x[1/mm]	Radius_y[mm]	Power_y[1/mm]	Operating mode
M8	-1086.4611611	0.0018289	-972.4519818	0.0020701	REFL
M7	3808.6422450	-0.0005251	653.5434149	-0.0030606	REFL
M6	6571.6881729	-0.0000698	4255202.7145080	-0.0000020	REFL
M5	16343.8812076	-0.0000267	8842.9581526	-0.0010356	REFL
M4	-2801.5176799	0.0007060	-2883.9121273	0.0007013	REFL
M3	-7809.8432518	0.0000540	-13643.9333936	0.0006949	REFL
M2	-4671.3804369	0.0000926	5516.8925603	-0.0016768	REFL
M1	-5373.8188638	0.0003535	-1892.3506778	0.0011127	REFL
Object field	0.0000000	-inf	0.0000000	-inf	REFL
R1	-810.4757019	0.0005551	-22084.4193732	0.0004026	REFL
R2	-685.0690764	0.0006567	-14611.5384624	0.0006085	REFL

Table 1 for Figure 2

Coefficient	M8	M7	M6
KY	0.00000000	0.00000000	0.00000000
KX	0.00000000	0.00000000	0.00000000

- 20 -

Coefficient	M8	M7	M6
RX	-1086.46116100	3808.64224500	6571.68817300
C7	-1.1078969e-08	6.1425387e-08	1.82371233e-08
C9	-1.17534229e-08	-3.42808539e-07	-5.80964859e-08
C10	-8.37241187e-12	3.61372227e-10	5.3783797e-11
C12	-3.1970363e-11	1.47484546e-09	-4.24496085e-11
C14	-8.21547285e-12	1.188668e-09	-1.04978605e-10
C16	-1.04304709e-14	-2.38048085e-13	-2.29871256e-13
C18	-1.34057223e-14	-7.2303484e-13	-4.2481412e-16
C20	-8.89787775e-15	-2.12104825e-12	-2.3111532e-13
C21	-1.30253203e-17	1.04740546e-16	-9.22997742e-16
C23	-5.19021194e-17	4.08871039e-15	5.59688799e-16
C25	-4.71651147e-17	9.01468915e-15	-5.10271963e-17
C27	-1.19961306e-17	9.82559639e-15	-5.48583806e-16
C29	-6.48351789e-21	7.08629717e-19	6.00807204e-19
C31	-1.36884382e-20	1.61371795e-18	-1.7656167e-18
C33	-1.87761592e-20	-1.14613155e-17	-8.36203437e-20
C35	-8.27081439e-21	-2.8051096e-17	-1.37212193e-18
C36	-1.02979374e-23	2.25551389e-21	-2.12910658e-21
C38	-6.46837561e-23	1.534741e-20	-2.43916278e-20
C40	-9.82548812e-23	3.25407025e-20	-1.36924303e-20
C42	-6.44090314e-23	1.0558405e-19	-2.29029353e-21
C44	-1.45370812e-23	1.51958388e-19	-3.30322739e-21
C46	-1.39270495e-26	-4.35161084e-24	1.06285855e-21
C48	-1.39387737e-26	-1.92794968e-23	4.00306806e-22
C50	-2.97964394e-26	-2.03709958e-23	1.49782759e-23
C52	-2.72575255e-26	-3.68483462e-22	-1.10193538e-23
C54	-8.6352343e-27	-6.37462023e-22	-6.88052798e-24
C55	-1.32830438e-29	-1.50026844e-26	-8.1823714e-25
C57	-5.96071984e-29	-4.04299032e-26	-2.15991524e-24
C59	-1.68890534e-28	2.12934794e-26	1.69146506e-24
C61	-1.79122165e-28	2.09943794e-25	6.14483729e-25
C63	-8.48827493e-29	8.25710247e-25	1.01264754e-26
C65	-1.40437102e-29	7.4409807e-25	-1.80606728e-26
C67	4.70318894e-33	3.06925048e-29	-8.92185705e-26
C69	-2.46712869e-32	1.2632953e-28	-4.16014097e-26
C71	-5.57262985e-32	-6.12012733e-28	-8.88184517e-27
C73	-6.66391594e-32	-3.99345995e-27	6.81045792e-28
C75	-3.47802661e-32	7.76870707e-28	1.73773844e-28
C77	-8.35519554e-33	9.09418801e-27	-8.93448769e-29
C78	-1.6465196e-35	1.46055139e-31	1.37466252e-28
C80	-1.30360856e-34	7.02584253e-31	3.63314891e-28
C82	-2.28008125e-34	2.60497458e-30	-5.77785744e-29
C84	-2.54506452e-34	8.67596903e-30	-6.27407486e-29
C86	-2.2597282e-34	3.76767639e-29	-8.27779072e-30
C88	-1.25508542e-34	6.52262748e-29	2.416286e-31
C90	-2.82929706e-35	2.11073828e-29	-3.5146899e-31
C92	-4.02238973e-39	-1.85734874e-34	2.55717195e-30
C94	1.19294193e-38	9.57693001e-35	1.68168588e-30
C96	3.27086695e-38	3.27223066e-33	6.05704826e-31
C98	2.06145244e-38	1.29986711e-32	5.57919846e-32
C100	-1.83126486e-38	-1.44171657e-31	-2.19408614e-32
C102	-2.15511115e-38	-6.37837969e-31	-6.75987802e-34
C104	2.36907018e-39	-4.7170814e-31	-7.13753861e-34
C105	1.81526514e-41	-6.02453793e-37	-4.70636081e-33

Coefficient	M8	M7	M6
C107	1.43676376e-40	-2.24384261e-36	-1.47641125e-32
C109	5.03160264e-41	-1.1200142e-35	-2.52005625e-33
C111	-4.25097822e-40	-3.63684011e-35	1.32282749e-33
C113	-5.26473813e-40	-6.09102975e-35	5.94007824e-34
C115	-2.11919681e-40	3.90152954e-34	-1.19939381e-35
C117	8.97051887e-42	1.70870476e-33	-1.52993377e-36
C119	1.75055128e-41	1.1650811e-33	-5.68798769e-37
C121	-2.93350402e-44	0	0
C123	-1.05094157e-43	0	0
C125	-3.14894595e-43	0	0
C127	-5.48359932e-43	0	0
C129	-6.25681403e-43	0	0
C131	-4.39064004e-43	0	0
C133	-1.80703271e-43	0	0
C135	-4.37968799e-44	0	0
C136	-3.93005436e-47	0	0
C138	-4.54687333e-46	0	0
C140	-1.34704138e-45	0	0
C142	-2.04150203e-45	0	0
C144	-2.45288315e-45	0	0
C146	-2.37914112e-45	0	0
C148	-1.50410101e-45	0	0
C150	-5.52739987e-46	0	0
C152	-8.512091e-47	0	0

Table 2a for Figure 2

Coefficient	M5	M4	M3
KY	0.00000000	0.00000000	0.00000000
KX	0.00000000	0.00000000	0.00000000
RX	16343.88121000	-2801.51768000	-7809.84325200
C7	-1.10965457e-07	-5.49348726e-08	-7.87828654e-09
C9	-1.25907335e-07	-4.12933208e-07	2.4781076e-09
C10	-3.92110745e-11	6.07658201e-12	-1.91079829e-11
C12	5.23014109e-11	1.64514883e-10	-6.30824537e-12
C14	2.50093533e-10	1.29540533e-09	-5.20694636e-12
C16	1.86498832e-13	-1.81127137e-14	1.73742328e-14
C18	-6.31762116e-14	-1.00403595e-12	-3.63759365e-15
C20	-6.98868586e-13	-6.72836127e-12	1.14564832e-15
C21	1.72966192e-17	2.59789654e-18	-8.02993793e-18
C23	-5.90331771e-16	2.01564306e-16	-9.20462505e-18
C25	-1.29145765e-16	5.15763711e-15	-6.00142744e-19
C27	2.06203595e-15	3.63161954e-14	-1.8520942e-18
C29	-3.95281132e-19	-2.68183719e-20	-7.40920328e-21
C31	1.714981e-18	-1.28423127e-18	3.5968728e-21
C33	1.80327017e-18	-3.02419058e-17	-2.74416133e-21
C35	-7.67656461e-18	-1.98861785e-16	6.72718889e-22
C36	9.82111585e-23	1.14480689e-24	1.00234478e-23
C38	4.16328299e-21	2.58889105e-22	1.97817878e-24
C40	1.57117119e-20	1.47324398e-20	-1.16696762e-24
C42	-3.12592724e-21	2.38594079e-19	1.33781597e-24
C44	-3.40161379e-21	1.07030744e-18	-8.35673902e-25
C46	-2.14506084e-24	-2.7999629e-26	2.73246982e-26
C48	-2.34381906e-23	-3.19631053e-24	4.79306206e-26
C50	-1.597377e-22	-2.01786673e-22	6.2452675e-27

Coefficient	M5	M4	M3
C52	-1.96985726e-22	-3.82500804e-21	8.14481514e-28
C54	4.42267894e-22	-2.05070226e-20	8.93396572e-28
C55	-8.63735394e-28	-6.79542983e-31	-2.79803878e-29
C57	-4.91461419e-26	-2.95814636e-28	-2.72787531e-29
C59	-1.05919827e-24	1.77272076e-27	-9.25850169e-29
C61	-1.38814922e-24	8.30985264e-25	-2.14557337e-29
C63	1.03640803e-24	3.0972763e-23	-3.89172059e-30
C65	6.34506914e-24	1.13974595e-22	-1.18044099e-30
C67	5.18048446e-29	8.21614495e-32	-2.64094328e-31
C69	3.03900291e-28	6.35950317e-30	-3.32079144e-31
C71	5.92229453e-27	7.18315191e-28	-1.14334021e-32
C73	9.72207365e-27	3.19512409e-26	-2.1934315e-32
C75	2.29485906e-26	6.05206622e-25	-1.19878684e-32
C77	-8.57374765e-26	2.58134735e-24	-8.98158904e-35
C78	-1.67738796e-32	1.99989011e-35	8.03048239e-35
C80	4.12176147e-31	1.45861471e-33	5.91901438e-34
C82	2.27271195e-29	1.58451766e-32	7.10230235e-34
C84	9.28512559e-29	-8.69815659e-31	1.81300953e-34
C86	-5.39439677e-29	-3.49997695e-28	7.70334498e-35
C88	2.02810667e-28	-5.38965698e-27	2.00479637e-35
C90	-1.12387699e-27	-1.30743871e-26	8.90718756e-37
C92	-4.82330886e-35	1.5386021e-37	1.20714309e-36
C94	-3.40595694e-34	-2.14696562e-35	1.0968559e-36
C96	-5.75090617e-32	-2.7796024e-33	9.91575934e-38
C98	-2.69060475e-31	-1.7826322e-31	8.6586438e-38
C100	8.31565611e-32	-5.72702642e-30	6.22618467e-38
C102	-1.96771836e-30	-6.84918847e-29	1.57883694e-38
C104	5.50536999e-30	-2.429736e-28	5.09552446e-40
C105	4.8600456e-38	9.98338016e-42	-8.16439035e-40
C107	-3.57700431e-36	-1.77499185e-39	-2.47232953e-39
C109	-1.70010401e-34	3.44595544e-37	-2.3863755e-39
C111	-1.2526717e-33	1.40384441e-35	-6.59437112e-40
C113	-1.87215464e-33	2.19468935e-33	-3.48407985e-40
C115	5.40678903e-33	6.10947816e-32	-1.50248317e-40
C117	-2.43438871e-32	5.78093221e-31	-2.75106593e-41
C119	7.26755941e-32	2.06443218e-30	-1.07946235e-42

Table 2b for Figure 2

Coefficient	M2	M1	Object field
C107	2.66086801e-37	2.2582854e-37	0
C109	8.24327535e-37	1.14971623e-36	0
C111	1.23182119e-36	8.08113624e-36	0
C113	1.15154156e-36	2.83554362e-35	0
C115	6.62471095e-37	6.69318428e-35	0
C117	1.96902426e-37	1.14634943e-34	0
C119	1.16401567e-38	1.12393619e-34	0

Table 2c for Figure 2

Coefficient	R1	R2
KY	0.00000000	0.00000000
KX	0.00000000	0.00000000
RX	-810.47570190	-685.06907640
C7	-2.10212477e-07	-3.34892309e-07
C9	6.16621119e-09	-2.23123792e-08

Coefficient	R1	R2
C10	-9.5360015e-11	1.92924322e-10
C12	1.02133113e-10	-4.00432374e-10
C14	2.12492853e-11	-2.93206249e-11

Table 2d for Figure 2

Surface	DCX	DCY	DCZ
Image field	0.00000000	0.00000000	0.00000000
M8	0.00000000	0.00000000	883.01010398
M7	0.00000000	-177.89017059	116.87680237
M6	-0.00000000	83.63075268	1423.22180879
M5	-0.00000000	408.52790285	1841.36054162
M4	0.00000000	937.33840609	2109.89445971
M3	0.00000000	-577.89935653	1846.86407552
M2	0.00000000	-1785.41125401	1026.16189129
AS	0.00000000	-1923.74254884	794.34985948
M1	0.00000000	-2297.47393643	168.06039680
Object field	0.00000000	-2474.44854338	1968.30324862
R1	0.00000000	-2546.30347262	1272.00096574
R2	0.00000000	-2916.12508547	677.66774720
EP	0.00000000	-3763.17079749	146.14769889

Table 3a for Figure 2

Surface	TLA[deg]	TLB[deg]	TLC[deg]
Image field	-0.00000000	0.00000000	-0.00000000
M8	-6.53600000	0.00000000	-0.00000000
M7	167.80372184	0.00000000	-0.00000000
M6	65.41597514	0.00000000	0.00000000
M5	39.53715330	0.00000000	-0.00000000
M4	-71.61517505	-0.00000000	0.00000000
M3	22.02518991	0.00000000	-0.00000000
M2	46.68817593	0.00000000	0.00000000
AS	26.73600574	180.00000000	-0.00000000
M1	167.39414943	-0.00000000	-0.00000000
Object field	-0.13865353	0.00000000	0.00000000
R1	71.10821601	180.00000000	0.00000000
R2	225.10821601	-0.00000000	-0.00000000
EP	-57.89178399	180.00000000	-0.00000000

Table 3b for Figure 2

Surface	AOI[deg]	Reflectivity
M8	6.53600000	0.66118877
M7	0.87572184	0.66562486
M6	76.73653145	0.83201657
M5	77.38464670	0.84182272
M4	8.53697505	0.65781123
M3	77.82265999	0.84825953
M2	77.51435400	0.84374430
M1	18.22032750	0.62403410
RET	5.75313046	0.66224263
R1	77.00000000	0.83604493
R2	77.00000000	0.83604493
Overall transmission		0.0419

Table 4 for Figure 2

X[mm]	Y[mm]	Z[mm]
-------	-------	-------

X[mm]	Y[mm]	Z[mm]
0.00000000	-140.70627088	0.00000000
42.06645921	-138.67828550	0.00000000
83.29373531	-132.66199893	0.00000000
122.85149629	-122.85886356	0.00000000
159.92516689	-109.59845855	0.00000000
193.71997126	-93.32713663	0.00000000
223.46302830	-74.58977226	0.00000000
248.40636574	-54.00526307	0.00000000
267.83549770	-32.23694377	0.00000000
281.08924758	-9.95662831	0.00000000
287.59506690	12.19496306	0.00000000
286.91965708	33.64165594	0.00000000
278.82733089	53.89055750	0.00000000
263.33049358	72.53361583	0.00000000
240.71526695	89.23810123	0.00000000
211.53430161	103.73531175	0.00000000
176.57192324	115.81429443	0.00000000
136.79505585	125.32086704	0.00000000
93.30387089	132.15676822	0.00000000
47.28956547	136.27122002	0.00000000
0.00000000	137.64420761	0.00000000
-47.28956547	136.27122002	0.00000000
-93.30387089	132.15676822	0.00000000
-136.79505585	125.32086704	0.00000000
-176.57192324	115.81429443	0.00000000
-211.53430161	103.73531175	0.00000000
-240.71526695	89.23810123	0.00000000
-263.33049358	72.53361583	0.00000000
-278.82733089	53.89055750	0.00000000
-286.91965708	33.64165594	0.00000000
-287.59506690	12.19496306	0.00000000
-281.08924758	-9.95662831	0.00000000
-267.83549770	-32.23694377	0.00000000
-248.40636574	-54.00526307	0.00000000
-223.46302830	-74.58977226	0.00000000
-193.71997126	-93.32713663	0.00000000
-159.92516689	-109.59845855	0.00000000
-122.85149629	-122.85886356	-0.00000000
-83.29373531	-132.66199893	0.00000000
-42.06645921	-138.67828550	0.00000000
0.00000000	60.86400238	0.00000000
-21.87104444	59.24605219	0.00000000
-43.05958708	54.54074614	0.00000000
-62.94892446	47.16610535	0.00000000
-81.02923110	37.73565917	0.00000000
-96.90526492	26.95859963	0.00000000
-110.27862576	15.53558598	0.00000000
-120.91931056	4.06854295	0.00000000
-128.64027726	-7.00096903	0.00000000
-133.28450320	-17.41593015	0.00000000
-134.72873359	-27.08827008	0.00000000
-132.90215523	-36.04901788	0.00000000
-127.81216995	-44.37895226	0.00000000
-119.56564139	-52.14020001	0.00000000

X[mm]	Y[mm]	Z[mm]
-108.37512929	-59.32883980	0.00000000
-94.54631592	-65.85976094	0.00000000
-78.45206004	-71.58117993	0.00000000
-60.50514312	-76.30572164	0.00000000
-41.14123364	-79.84497755	0.00000000
-20.81480821	-82.03981922	0.00000000
0.00000000	-82.78388680	0.00000000
20.81480821	-82.03981922	0.00000000
41.14123364	-79.84497755	0.00000000
60.50514312	-76.30572164	0.00000000
78.45206004	-71.58117993	0.00000000
94.54631592	-65.85976094	0.00000000
108.37512929	-59.32883980	0.00000000
119.56564139	-52.14020001	0.00000000
127.81216995	-44.37895226	0.00000000
132.90215523	-36.04901788	0.00000000
134.72873359	-27.08827008	0.00000000
133.28450320	-17.41593015	0.00000000
128.64027726	-7.00096903	0.00000000
120.91931056	4.06854295	0.00000000
110.27862576	15.53558598	0.00000000
96.90526492	26.95859963	0.00000000
81.02923110	37.73565917	0.00000000
62.94892446	47.16610535	0.00000000
43.05958708	54.54074614	0.00000000
21.87104444	59.24605219	0.00000000

Table 5 for Figure 2

X[mm]	Y[mm]	Z[mm]
0.00000000	60.86400238	0.00000000
-21.87104444	59.24605219	0.00000000
-43.05958708	54.54074614	0.00000000
-62.94892446	47.16610535	0.00000000
-81.02923110	37.73565917	0.00000000
-96.90526492	26.95859963	0.00000000
-110.27862576	15.53558598	0.00000000
-120.91931056	4.06854295	0.00000000
-128.64027726	-7.00096903	0.00000000
-133.28450320	-17.41593015	0.00000000
-134.72873359	-27.08827008	0.00000000
-132.90215523	-36.04901788	0.00000000
-127.81216995	-44.37895226	0.00000000
-119.56564139	-52.14020001	0.00000000
-108.37512929	-59.32883980	0.00000000
-94.54631592	-65.85976094	0.00000000
-78.45206004	-71.58117993	0.00000000
-60.50514312	-76.30572164	0.00000000
-41.14123364	-79.84497755	0.00000000
-20.81480821	-82.03981922	0.00000000
0.00000000	-82.78388680	0.00000000
20.81480821	-82.03981922	0.00000000
41.14123364	-79.84497755	0.00000000
60.50514312	-76.30572164	0.00000000

X[mm]	Y[mm]	Z[mm]
78.45206004	-71.58117993	0.00000000
94.54631592	-65.85976094	0.00000000
108.37512929	-59.32883980	0.00000000
119.56564139	-52.14020001	0.00000000
127.81216995	-44.37895226	0.00000000
132.90215523	-36.04901788	0.00000000
134.72873359	-27.08827008	0.00000000
133.28450320	-17.41593015	0.00000000
128.64027726	-7.00096903	0.00000000
120.91931056	4.06854295	0.00000000
110.27862576	15.53558598	0.00000000
96.90526492	26.95859963	0.00000000
81.02923110	37.73565917	0.00000000
62.94892446	47.16610535	0.00000000
43.05958708	54.54074614	0.00000000
21.87104444	59.24605219	0.00000000

Table 6 for Figure 2

An overall reflectivity of the projection optical unit 7 is 4.19%.

- 5 The axes of rotation symmetry of the aspherical mirrors are generally tilted with respect to a normal of the image plane 9, as is made clear by the tilt values in the tables.

10 The mirrors 22, 23, M1, M3, M4 and M8 have negative values for the radius, i.e. are, in principle, concave mirrors. The mirrors M5, M6 and M7 have positive values for the radius, i.e. are, in principle, convex mirrors. The mirror M2 has a negative value for the radius in the xz-plane and a positive value for the radius in the yz-plane, i.e. it represents a mirror with a toric surface area or a saddle surface.

15 The image field 8 has an x-extent of 26.0 mm and a y-extent of 1.2 mm. The projection optical unit 7 is optimized for an operating wavelength of the illumination light 3 of 13.5 nm. A field curvature is 0.012578 mm⁻¹.

20 The arrangement plane 17 is perpendicular to the yz-plane and tilted in relation to the xz-plane by an angle α of approximately 32°. This corresponds to the TLA value of the “EP” surface in Table 3b of -57.89°, which was measured proceeding from the xy-plane.

The entry pupil plane 18 is arranged between the mirrors M1 and M2 in the beam path of the imaging light 3. The first pupil plane 18 is tilted relative to the chief ray of a central field point, i.e. it includes an angle $\neq 90^\circ$ with said chief ray. Between the mirrors M1 and M2, the whole beam of the imaging light 3 is accessible from all sides in the region of the pupil plane 18 .

5 Therefore, the aperture stop can be arranged in the region of the pupil plane 18. Below, this stop is also denoted by the reference sign 18 and denoted by "AS" in the design data tables.

10 An edge of a stop surface of the stop 18 emerges from intersection points on the stop surface of all rays of the illumination light 3 which, on the image side, propagate at the field center point in the direction of the stop surface with a complete image-side telecentric aperture. When the stop 18 is embodied as an aperture stop, the edge is an inner edge.

15 In accordance with the polygon representation of Table 5, the stop 18 can lie in one plane or else have a three-dimensional embodiment. The extent of the stop 18 can be smaller in the scanning direction (y) than in the cross scanning direction (x).

An intermediate image 24 of the projection optical unit 7 is arranged in the imaging beam path in the region of the mirror M5.

20 A further pupil plane of the projection optical unit 7 is arranged in the region of the reflection of the imaging light 3 at the mirrors M7 and M8. Aperture stops in the region of the mirrors M7 and M8 can be arranged distributed for the x-dimension, on the one hand, and for the y-dimension, on the other hand, at two positions in the imaging beam path, for example there can be an aperture stop for primarily providing a restriction along the y-dimension on the mirror M8 and an
25 aperture stop for primarily providing a restriction along the x-dimension on the mirror M7.

30 An installation length of the projection optical unit 7 in the z-direction, i.e. a distance between the object plane 5 and the image plane 9, is approximately 2000 mm. A y-distance d_{OIS} between a central object field point and a central image field point is more than 2000 mm.

The projection optical unit 7 is approximately telecentric on the image side.

A further embodiment of an optical subsystem 25, which can be used in the projection exposure apparatus 1 according to Figure 1 in place of the optical subsystem 15, is explained below on the basis of Figures 3 and 4. Components and functions which were already explained above in the context of Figures 1 and 2 optionally have the same reference signs and are not once again discussed in detail. Figure 3 shows a meridional section through the optical subsystem 25. Figure 4 shows a sagittal view of the optical subsystem 25. In addition to the projection optical unit 7, which is unchanged in relation to the projection optical unit 7 according to Figure 2, the optical subsystem 25 contains a variant of an imaging optical subunit 26, which images the arrangement plane 19 lying upstream of the object field 4 in the beam path of the imaging light 3 into the entry pupil plane 18.

The imaging optical subunit 26 also has two GI mirrors 22, 23, which are also denoted as R2 and R1 below.

Compared to the orientation of deflecting effects of the mirrors of the projection optical unit, a deflecting effect of the mirrors 22, 23 of the imaging optical subunit 26 is oriented precisely in the opposite direction to the deflecting effect in the case of the optical subunit 16.

In the optical subunit 26, the GI mirrors 22, 23 are also configured as a pair of mirrors deflecting the illumination light 3 in the same sense. In the illustration according to Figure 3, the GI mirrors 22, 23 both deflect the illumination light in an anticlockwise direction. Folding planes of the GI mirrors 22, 23 of the imaging optical subunit 26 once again lie in the yz-plane.

A first, illumination-side imaging light partial beam 27 is present in the beam path upstream of the last mirror 23 in the beam path upstream of the object field 4. This first, illumination-side imaging light partial beam 27 lies between the two GI mirrors 22, 23 of the imaging optical subunit 26. A further, imaging-side imaging light partial beam 28 is present between the object field 4 and the first mirror M1 of the projection optical unit 7 in the beam path downstream of the object field 4. The two imaging light partial beams 27 and 28 cross in a crossing region 29.

Spatially, the imaging-side imaging light partial beam 28 lies between the GI mirror 23 and the mirror M2.

The imaging light partial beam 27 crosses with a further imaging light partial beam 31 in a further crossing region 30 between the mirrors M1 and M2 of the projection optical unit 7.

- 5 Coupling in the illumination light 3 via the crossing region 29 and the last GI mirror 23 upstream of the object field 4 leads to the possibility of creating a relatively large distance (free board) between a reflection used region on the GI mirror 23 and the imaging light partial beam 28 passing thereby. In Figure 3, this distance is denoted by FB.
- 10 The arrangement plane 17 is perpendicular to the yz-plane and tilted in relation to the xz-plane by an angle α of approximately 27.9° . This corresponds to the TLA value of the "EP" surface in Table 3b for Figures 3 and 4 of 62.1° , which was measured proceeding from the xy-plane.

The mirrors 22 (R2), 23 (R1) and M1 to M8 of the optical subsystem 25 are once again configured as free-form surface mirrors, to which the free-form surface equation (1), specified above, applies. The optical design data of the optical subsystem 25 can accordingly be gathered from the following tables, which, in terms of the structure thereof, correspond to the tables for the optical subsystem 15 according to Figure 2. Since the data of the mirrors M1 to M8 of the projection optical unit 7 in the optical subsystem 25 are identical to these data of the mirrors M1 to M8 of the optical subsystem 15 according to Figure 2, which were already put into a table above, the data in relation to mirrors M1 to M8 have been omitted below.

Table 5 has been omitted since the positioning and the edge contour of the aperture stop in the embodiment according to Figures 3/4 are identical to those in the embodiment according to Figure 2. The subsequent table, which describes the polygonal chain of the beam-delimiting edge contour of the pupil EP in the arrangement plane 17, is still denoted as Table 6 in accordance with the tabulation of the design data in relation to the embodiment according to Figure 2.

The GI mirror 23 (R1) has a negative value for the radius in the xz-plane and a positive value for the radius in the yz-plane, i.e. it has a toric basic shape or a basic shape in the style of a saddle surface. The further GI mirror 22 (R2) has negative values for the radius in both planes, i.e. it is, in principle, a concave mirror. The R_y values for the radius of both GI mirrors 22, 23 are large in

terms of the absolute values thereof, and so the GI mirrors 22, 23 have approximately planar reflection surfaces in the xz-plane.

Surface	Radius_x[mm]	Power_x[1/mm]	Radius_y[mm]	Power_y[1/mm]	Operating mode
R1	-1647.3319728	0.0003752	29234.0114589	-0.0002214	REFL
R2	-1432.2897164	0.0003849	-10221.5972337	0.0007099	REFL

Table 1 for Figures 3/4

Coefficient	R1	R2
KY	0.00000000	0.00000000
KX	0.00000000	0.00000000
RX	-1647.33197300	-1432.28971600
C7	1.15012945e-07	4.73688125e-08
C9	1.54084479e-08	2.80308388e-09
C10	-2.45708461e-11	1.78200552e-11
C12	1.05165435e-10	-2.71844186e-11
C14	-7.21907913e-13	-4.0195376e-12

5 Table 2 for Figures 3/4

Surface	DCX	DCY	DCZ
R1	0.00000000	-2546.30347262	1272.00096574
R2	-0.00000000	-1543.03388938	-458.15802792
EP	-0.00000000	224.63155154	-1393.76418917

Table 3a for Figures 3/4

Surface	TLA[deg]	TLB[deg]	TLC[deg]
R1	-77.89178399	180.00000000	-0.00000000
R2	136.10821601	0.00000000	-0.00000000
EP	62.10821601	180.00000000	-0.00000000

Table 3b for Figures 3/4

Surface	AOI[deg]	Reflectivity
R1	72.00000000	0.74756124
R2	74.00000000	0.78628908
Overall transmission		0.0353

Table 4 for Figures 3/4

X[mm]	Y[mm]	Z[mm]
0.00000000	82.12364914	0.00000000
-42.39404327	81.90547687	0.00000000
-83.70570586	81.27203369	0.00000000
-122.88096926	80.27285660	0.00000000
-158.92177914	78.94919704	0.00000000
-190.91392604	77.28721454	0.00000000
-218.05674249	75.17869236	0.00000000
-239.69346217	72.40404561	0.00000000
-255.33729472	68.64421501	0.00000000
-264.68604697	63.52027707	0.00000000
-267.61897957	56.65754341	0.00000000
-264.17435930	47.76876424	0.00000000
-254.51339394	36.74460250	0.00000000

X[mm]	Y[mm]	Z[mm]
-238.88269936	23.73404640	0.00000000
-217.58952309	9.19546237	0.00000000
-191.00056642	-6.09727921	0.00000000
-159.56772515	-21.10167702	0.00000000
-123.87497486	-34.60647908	0.00000000
-84.69109669	-45.37813563	0.00000000
-43.00285281	-52.33886287	0.00000000
0.00000000	-54.74738713	0.00000000
43.00285281	-52.33886287	0.00000000
84.69109669	-45.37813563	0.00000000
123.87497486	-34.60647908	0.00000000
159.56772515	-21.10167702	0.00000000
191.00056642	-6.09727921	0.00000000
217.58952309	9.19546237	0.00000000
238.88269936	23.73404640	0.00000000
254.51339394	36.74460250	0.00000000
264.17435930	47.76876424	0.00000000
267.61897957	56.65754341	0.00000000
264.68604697	63.52027707	0.00000000
255.33729472	68.64421501	0.00000000
239.69346217	72.40404561	0.00000000
218.05674249	75.17869236	0.00000000
190.91392604	77.28721454	0.00000000
158.92177914	78.94919704	0.00000000
122.88096926	80.27285660	0.00000000
83.70570586	81.27203369	0.00000000
42.39404327	81.90547687	0.00000000

Table 6 for Figures 3/4

An overall reflectivity of the optical subsystem 25 is 3.53%.

- 5 A further embodiment of an optical subsystem 32, which can be used in the projection exposure apparatus 1 according to Figure 1 in place of the optical subsystem 15, is explained below on the basis of Figures 5 and 6. Components and functions which were already explained above in the context of Figures 1 and 2 optionally have the same reference signs and are not once again discussed in detail. Figure 5 shows a meridional section through the optical subsystem 32. Figure 6
- 10 shows a sagittal view of the optical subsystem 32. In addition to the projection optical unit 7, the optical subsystem 32 contains a variant of an imaging optical subunit 33, which images the arrangement plane 17 lying upstream of the object field 4 in the beam path of the imaging light 3 into the entry pupil plane 18.
- 15 The imaging optical subunit 33 also has two GI mirrors 22, 23, which are also denoted as R2 and R1 below.

The mirrors 22 (R2), 23 (R1) and M1 to M8 of the optical subsystem 32 are once again configured as free-form surface mirrors, to which the free-form surface equation (1), specified above, applies. The optical design data of the optical subsystem 32 can accordingly be gathered from the following tables, which, in terms of the structure thereof, correspond to the tables for the optical subsystem 15 according to Figure 2. Since the data of the mirrors M1 to M8 of the projection optical unit 7 in the optical subsystem 32 are identical to these data of the mirrors M1 to M8 of the optical subsystem 15 according to Figure 2, which were already put into a table above, the data in relation to mirrors M1 to M8 have been omitted below.

10

Table 5 has been omitted since the positioning and the edge contour of the aperture stop in the embodiment according to Figures 5/6 are identical to those in the embodiment according to Figure 2.

15

Surface	Radius_x[mm]	Po- wer_x[1/mm]	Radius_y[mm]	Power_y[1/mm]	Operating mode
R1	-53909.1399450	0.0000115	-9263.7910409	0.0006986	REFL
R2	-458.8171635	0.0012015	13829.3040346	-0.0005247	REFL

Table 1 for Figures 5/6

Coefficient	R1	R2
KY	0.00000000	0.00000000
KX	0.00000000	0.00000000
RX	-53909.13995000	-458.81716350
C7	-7.45510762e-07	5.65832667e-07
C9	-7.8174184e-08	1.82754455e-07
C10	-9.81683422e-09	2.90061882e-09
C12	1.01545647e-09	-5.45747402e-10
C14	-2.50276712e-10	8.9058981e-11
C16	1.0516081e-11	5.30630477e-12
C18	5.06846087e-12	-6.02347856e-13
C20	1.04928376e-12	-8.41527425e-13
C21	2.50981125e-13	6.15659956e-15
C23	-1.26450389e-14	-6.35582907e-15
C25	-8.11830834e-15	4.98756661e-15
C27	3.88924097e-15	-5.40926967e-16
C29	-2.75693831e-16	-5.98616547e-17
C31	-7.77059012e-17	-6.01249257e-17
C33	-6.09748058e-17	-9.39730555e-19
C35	-5.90051055e-18	5.70967053e-19
C36	-3.02770829e-18	-2.64153877e-20
C38	-7.38146964e-19	2.53674164e-19
C40	-3.2497283e-21	5.90924901e-20
C42	-2.85220735e-20	1.61003857e-20

Coefficient	R1	R2
C44	-2.29704682e-20	3.15946526e-21

Table 2 for Figures 5/6

Surface	DCX	DCY	DCZ
R1	0.00000000	-2546.30347262	1272.00096574
R2	0.00000000	-3214.02928961	527.59366237
EP	0.00000000	-3385.81712698	-457.54030768

Table 3a for Figures 5/6

Surface	TLA[deg]	TLB[deg]	TLC[deg]
R1	66.10821601	180.00000000	-0.00000000
R2	64.10821601	0.00000000	0.00000000
EP	-24.89178399	180.00000000	-0.00000000

Table 3b for Figures 5/6

Surface	AOI[deg]	Reflectivity
R1	72.00000000	0.74756124
R2	74.00000000	0.78628908
Overall transmission		0.0353

Table 4 for Figures 5/6

5

X[mm]	Y[mm]	Z[mm]
0.00000000	212.96044398	0.00000000
-4.00933149	214.47606638	0.00000000
-8.82954329	218.57920215	0.00000000
-15.11166492	224.03736840	0.00000000
-23.23234208	229.08127943	0.00000000
-33.24663174	231.71720779	0.00000000
-44.89427972	230.04113731	0.00000000
-57.61328051	222.56120909	0.00000000
-70.52756522	208.52110220	0.00000000
-82.46059896	188.10946335	0.00000000
-92.11107544	162.37275926	0.00000000
-98.45235948	132.75461407	0.00000000
-101.12677642	100.47456687	0.00000000
-100.43181028	66.20316519	0.00000000
-96.87080504	30.26720832	0.00000000
-90.70754678	-6.90395289	0.00000000
-81.74827244	-44.43882329	0.00000000
-69.21978919	-80.76288731	0.00000000
-51.79422090	-113.15953808	0.00000000
-28.31870891	-136.98072937	0.00000000
0.00000000	-146.02429559	0.00000000
28.31870891	-136.98072937	0.00000000
51.79422090	-113.15953808	0.00000000
69.21978919	-80.76288731	0.00000000
81.74827244	-44.43882329	0.00000000
90.70754678	-6.90395289	0.00000000
96.87080504	30.26720832	0.00000000
100.43181028	66.20316519	0.00000000
101.12677642	100.47456687	0.00000000
98.45235948	132.75461407	0.00000000
92.11107544	162.37275926	0.00000000
82.46059896	188.10946335	0.00000000

X[mm]	Y[mm]	Z[mm]
70.52756522	208.52110220	0.00000000
57.61328051	222.56120909	0.00000000
44.89427972	230.04113731	0.00000000
33.24663174	231.71720779	0.00000000
23.23234208	229.08127943	0.00000000
15.11166492	224.03736840	0.00000000
8.82954329	218.57920215	0.00000000
4.00933149	214.47606638	0.00000000

Table 6 for Figures 5/6

An overall reflectivity of the optical subsystem 32 is 3.53%.

5 The imaging optical subunit 33 once again has two GI mirrors 22 (R2) and 23 (R1). In the meridional section according to Figure 5, the first GI mirror 22 deflects in an anticlockwise manner in the beam path of the illumination light 3 and the second GI mirror 23 (R1) deflects in a clockwise manner. Thus, the two GI mirrors 22, 23 have effects deflecting in the opposite sense. Folding planes of the GI mirrors 22, 23 of the imaging optical subunit 33 once again lie in the yz-
 10 plane.

The arrangement plane 17 is perpendicular to the yz-plane and tilted in relation to the xz-plane by an angle α of approximately 65.1°. This corresponds to the TLA value of the “EP” surface in Table 3b for Figures 5 and 6 of -24.89°, which was measured proceeding from the xy-plane.

15 The GI mirror 23 (R1) has negative values for the radius, i.e. it is, in principle, a concave mirror. The GI mirror 22 (R2) has values for the radius with different signs, i.e. it has a basic form of a toric surface or a saddle surface. The mirror 23 (R1) has, in absolute terms, very large values for the radius, i.e. it is approximately a planar mirror. This applies correspondingly to the value R_y
 20 of the radius of the mirror 22 (R2).

A further embodiment of an optical subsystem 34, which can be used in the projection exposure apparatus 1 according to Figure 1 in place of the optical subsystem 15, is explained below on the basis of Figures 7 and 8. Components and functions which were already explained above in the
 25 context of Figures 1 and 2 optionally have the same reference signs and are not once again discussed in detail. Figure 7 shows a meridional section through the optical subsystem 34. Figure 8 shows a sagittal view of the optical subsystem 34. In addition to the projection optical unit 7, the

optical subsystem 34 contains a variant of an imaging optical subunit 35, which images the arrangement plane 17 lying upstream of the object field 4 in the beam path of the imaging light 3 into the entry pupil plane 18.

5 The imaging optical subunit 35 also has two GI mirrors 22, 23, which are also denoted as R2 and R1 below.

Folding planes of the GI mirrors 22, 23 of the imaging optical subunit 35 once again lie in the yz-plane.

10

The mirrors 22 (R2), 23 (R1) and M1 to M8 of the optical subsystem 34 are once again configured as free-form surface mirrors, to which the free-form surface equation (1), specified above, applies. The optical design data of the optical subsystem 34 can accordingly be gathered from the following tables, which, in terms of the structure thereof, correspond to the tables for the optical subsystem 15 according to Figure 2. Since the data of the mirrors M1 to M8 of the projection optical unit 7 in the optical subsystem 34 are identical to these data of the mirrors M1 to M8 of the optical subsystem 15 according to Figure 2, which were already put into a table above, the data in relation to mirrors M1 to M8 have been omitted below.

15

20 Table 5 has been omitted since the positioning and the edge contour of the aperture stop in the embodiment according to Figures 3/4 are identical to those in the embodiment according to Figure 2.

In principle, the imaging optical subunit 35 according to Figures 7 and 8 corresponds to the imaging optical subunit 33 according to Figures 5 and 6. A difference lies in the location of the arrangement plane 17 and, in particular, the tilt thereof, for example in relation to the xz-plane.

25

The associated tilt angle α is 95.1° , corresponding to a TLA value of the arrangement plane 17 (EP) of 5.108° in Table 3b for Figures 7/8.

30

Surface	Radius_x[mm]	Power_x[1/mm]	Radius_y[mm]	Power_y[1/mm]	Operating mode
R1	-26828.7909274	0.0000230	-9640.3904371	0.0006714	REFL
R2	-462.7288275	0.0011914	16206.7233500	-0.0004477	REFL

Table 1 for Figures 7/8

Coefficient	R1	R2
KY	0.00000000	0.00000000
KX	0.00000000	0.00000000
RX	-26828.79093000	-462.72882750
C7	-6.47379803e-07	4.02868952e-07
C9	-8.01899251e-08	1.70263561e-07
C10	-8.52973241e-09	2.14983864e-09
C12	6.90568892e-10	-5.40877795e-10
C14	-2.68242886e-10	9.60513448e-11
C16	6.05988157e-12	6.13023115e-12
C18	5.4718542e-12	-2.72299907e-13
C20	1.04029647e-12	-7.56204446e-13
C21	2.05800845e-13	7.91570138e-15
C23	-5.7453685e-15	-3.76960152e-15
C25	-2.94199596e-15	4.87911576e-15
C27	3.96865264e-15	-6.64820247e-16
C29	-1.94766675e-16	-6.31041619e-17
C31	-8.83090075e-17	-6.62425818e-17
C33	-6.40200785e-17	-2.08141153e-18
C35	-5.7788035e-18	5.50795181e-19
C36	-2.42041806e-18	-2.64561455e-20
C38	-6.81182337e-19	2.46023563e-19
C40	-1.06265144e-19	6.17407297e-20
C42	-7.23343428e-20	1.60452591e-20
C44	-2.26448099e-20	3.21609068e-21

Table 2 for Figures 7/8

Surface	DCX	DCY	DCZ
R1	0.00000000	-2546.30347262	1272.00096574
R2	0.00000000	-3214.02928961	527.59366237
EP	0.00000000	-3385.81712698	-457.54030768

Table 3a for Figures 7/8

Surface	TLA[deg]	TLB[deg]	TLC[deg]
R1	66.10821601	180.00000000	-0.00000000
R2	64.10821601	0.00000000	0.00000000
EP	5.10821601	180.00000000	-0.00000000

Table 3b for Figures 7/8

Surface	AOI[deg]	Reflectivity
R1	72.00000000	0.74756124
R2	74.00000000	0.78628908
Overall transmission		0.0353

5 Table 4 for Figures 7/8

X[mm]	Y[mm]	Z[mm]
0.00000000	195.16615681	0.00000000
-5.20873081	196.35071605	0.00000000
-11.05000040	199.55273759	0.00000000
-18.01958857	203.78592994	0.00000000
-26.39025738	207.61088649	0.00000000

X[mm]	Y[mm]	Z[mm]
-36.19058461	209.37392731	0.00000000
-47.22081667	207.46143615	0.00000000
-59.05591880	200.56466734	0.00000000
-71.01028026	187.94097174	0.00000000
-82.11551803	169.58962680	0.00000000
-91.23481202	146.21828682	0.00000000
-97.38433612	118.93600323	0.00000000
-100.09805940	88.78736032	0.00000000
-99.49391154	56.44023263	0.00000000
-95.94483322	22.26756214	0.00000000
-89.66321019	-13.29044539	0.00000000
-80.44706100	-49.34148842	0.00000000
-67.58776186	-84.21860665	0.00000000
-50.02106452	-115.13839368	0.00000000
-27.05444127	-137.67134146	0.00000000
0.00000000	-146.17118635	0.00000000
27.05444127	-137.67134146	0.00000000
50.02106452	-115.13839368	0.00000000
67.58776186	-84.21860665	0.00000000
80.44706100	-49.34148842	0.00000000
89.66321019	-13.29044539	0.00000000
95.94483322	22.26756214	0.00000000
99.49391154	56.44023263	0.00000000
100.09805940	88.78736032	0.00000000
97.38433612	118.93600323	0.00000000
91.23481202	146.21828682	0.00000000
82.11551803	169.58962680	0.00000000
71.01028026	187.94097174	0.00000000
59.05591880	200.56466734	0.00000000
47.22081667	207.46143615	0.00000000
36.19058461	209.37392731	0.00000000
26.39025738	207.61088649	0.00000000
18.01958857	203.78592994	0.00000000
11.05000040	199.55273759	0.00000000
5.20873081	196.35071605	0.00000000

Table 6 for Figures 7/8

An overall reflectivity of the optical subsystem 34 is 3.53%.

- 5 By way of the respective tilt of the arrangement plane 17, it is possible to take account of installation space requirements, in particular of a pupil facet mirror which is intended to be housed there.

10 A further embodiment of an optical subsystem 36, which can be used in the projection exposure apparatus 1 according to Figure 1 in place of the optical subsystem 15, is explained below on the basis of Figures 9 and 10. Components and functions which were already explained above in the

context of Figures 1 and 2 optionally have the same reference signs and are not once again discussed in detail. Figure 9 shows a meridional section through the optical subsystem 36. Figure 10 shows a sagittal view of the optical subsystem 36. In addition to the projection optical unit 7, the optical subsystem 36 contains a variant of an imaging optical subunit 37, which images the arrangement plane 17 lying upstream of the object field 4 in the beam path of the imaging light 3 into the entry pupil plane 18.

A folding plane of the GI mirror 23 of the imaging optical subunit 37 once again lies in the yz-plane.

The mirrors 23 (R1) and M1 to M8 of the optical subsystem 36 are once again configured as free-form surface mirrors, to which the free-form surface equation (1), specified above, applies. The optical design data of the optical subsystem 36 can accordingly be gathered from the following tables, which, in terms of the structure thereof, correspond to the tables for the optical subsystem 15 according to Figure 2. Since the data of the mirrors M1 to M8 of the projection optical unit 7 in the optical subsystem 36 are identical to these data of the mirrors M1 to M8 of the optical subsystem 15 according to Figure 2, which were already put into a table above, the data in relation to mirrors M1 to M8 have been omitted below.

Table 5 has been omitted since the positioning and the edge contour of the aperture stop in the embodiment according to Figures 7/8 are identical to those in the embodiment according to Figure 2.

The imaging optical subunit 37 of the embodiments according to Figures 9 and 10 has precisely one GI mirror, namely the GI mirror 23 (R1). Together with the mirror M1 of the projection optical unit 7, this GI mirror 23 images the arrangement plane 17 into the entry pupil plane 18. The GI mirror 23 of the imaging optical subunit 37 is once again part of the illumination optical unit 6.

Surface	Radius_x[mm]	Power_x[1/mm]	Radius_y[mm]	Power_y[1/mm]	Operating mode
R1	-722.7146652	0.0008552	-9309.0147398	0.0006953	REFL

Table 1 for Figures 9/10

Coefficient	R1
KY	0.00000000
KX	0.00000000
RX	-722.71466520
C7	-1.83397908e-07
C9	-1.88234497e-07
C10	3.55703915e-09
C12	2.03980855e-09
C14	-3.36454918e-10
C16	1.82772737e-11
C18	1.80631197e-11
C20	1.21277706e-11
C21	-4.27577512e-13
C23	-3.30632389e-13
C25	-1.23592191e-13
C27	3.44355285e-14
C29	-1.65585763e-15
C31	-1.32949496e-15
C33	-9.07085299e-16
C35	-4.90548076e-16
C36	2.58691773e-17
C38	2.21674441e-17
C40	1.5494506e-17
C42	4.12390251e-18
C44	-1.65514093e-18
C46	7.6864918e-20
C48	7.02243733e-20
C50	3.71431085e-20
C52	2.3060754e-20
C54	1.03787394e-20
C55	-8.34258157e-22
C57	-7.85819376e-22
C59	-5.41427279e-22
C61	-4.07515716e-22
C63	-5.81608728e-23
C65	3.82259433e-23
C67	-1.35941026e-24
C69	-1.553163e-24
C71	-7.75500817e-25
C73	-4.38081168e-25
C75	-2.21787324e-25
C77	-8.80082775e-26
C78	1.09725771e-26
C80	1.24315432e-26
C82	7.03173348e-27
C84	6.7026547e-27
C86	3.86679665e-27
C88	2.29279073e-28
C90	-3.42313922e-28

Table 2 for Figures 9/10

Surface	DCX	DCY	DCZ
R1	0.00000000	-2546.30347262	1272.00096574
EP	0.00000000	-3748.20994321	-67.93218033

Table 3a for Figures 9/10

Surface	TLA[deg]	TLB[deg]	TLC[deg]
R1	66.10821601	180.00000000	-0.00000000
EP	123.10821601	0.00000000	-0.00000000

Table 3b for Figures 9/10

Surface	AOI[deg]	Reflectivity
R1	72.00000000	0.74756124
Overall transmission		0.0448

Table 4 for Figures 9/10

X[mm]	Y[mm]	Z[mm]
-0.00000000	111.94107511	0.00000000
30.21941758	111.53491310	0.00000000
59.72125099	110.23387230	0.00000000
87.78528523	107.82806117	0.00000000
113.69960356	104.06837684	0.00000000
136.79291898	98.75175594	0.00000000
156.48520093	91.75986373	0.00000000
172.33997060	83.02742979	0.00000000
184.09205811	72.42866209	0.00000000
191.62365228	59.62993643	0.00000000
194.87560438	44.11643905	0.00000000
193.73211589	25.64021335	0.00000000
187.99793841	4.84811452	0.00000000
177.56309924	-16.83156478	0.00000000
162.58690131	-38.28747907	0.00000000
143.38995723	-59.08801236	0.00000000
120.25473448	-78.30108806	0.00000000
93.59131919	-94.40029272	0.00000000
64.09356099	-106.55372702	0.00000000
32.58315266	-114.27730772	0.00000000
-0.00000000	-116.93391821	0.00000000
-32.58315266	-114.27730772	0.00000000
-64.09356099	-106.55372702	0.00000000
-93.59131919	-94.40029272	0.00000000
-120.25473448	-78.30108806	0.00000000
-143.38995723	-59.08801236	0.00000000
-162.58690131	-38.28747907	0.00000000
-177.56309924	-16.83156478	0.00000000
-187.99793841	4.84811452	0.00000000
-193.73211589	25.64021335	0.00000000
-194.87560438	44.11643905	0.00000000
-191.62365228	59.62993643	0.00000000
-184.09205811	72.42866209	0.00000000
-172.33997060	83.02742979	0.00000000
-156.48520093	91.75986373	0.00000000
-136.79291898	98.75175594	0.00000000
-113.69960356	104.06837684	0.00000000
-87.78528523	107.82806117	0.00000000
-59.72125099	110.23387230	0.00000000
-30.21941758	111.53491310	0.00000000

An overall reflectivity of the optical subsystem 36 is 4.48%.

The mirror 23 (R1) has negative values for the radius, i.e. it is, in principle, a concave mirror.

- 5 The value R_y is very large in absolute terms for the mirror 23, and so said mirror only deviates slightly from a planar reflection surface in the associated plane.

The arrangement plane 17 is perpendicular to the yz-plane and tilted in relation to the xz-plane by an angle α of approximately 24° . This corresponds to the TLA value of the "EP" surface in

- 10 Table 3b for Figures 9 and 10 of 66.108° , which was measured proceeding from the xy-plane.

On the basis of Figures 11 and 12, two different coupling-in variants by way of the last GI mirror 23 (R1) for coupling the illumination light 3 into the object field 4 with folding in the yz-plane are considered in more detail.

15

Components and functions corresponding to those which were already explained above with respect to Figures 1 to 10 have the same reference signs and are not once again discussed in detail.

- 20 Figure 11 shows a section on the beam path of an optical subsystem 38 between the arrangement plane 17 and the deflection at the mirror M2 of the projection optical unit 7.

In respect of coupling-in the illumination light 3 into the object field 4 by way of the GI mirror 23, the optical subsystem 38 is similar to the optical subsystem 25 according to Figures 3 and 4.

- 25 In contrast thereto, an imaging optical subunit 39 of the optical subsystem 38 has exactly one GI mirror, namely the GI mirror 23 (R1). In this respect, the imaging optical subunit 39 corresponds to the imaging optical subunit 37 according to Figures 9 and 10.

- 30 In the optical subsystem 38, the crossing conditions of the illumination or imaging light 3 correspond to those in the optical subsystem 25 in the region of coupling the illumination or imaging light 3 into the object field 4. In the optical subsystem 38, folding is also only carried out in the yz-plane.

The illumination-side imaging light partial beam 27, which extends toward the GI mirror 23 (R1), also crosses the imaging-side imaging light partial beam 28 in a crossing region 29 in the coupling-in variant according to Figure 12. In the coupling-in variant according to Figure 12, the last GI mirror 23 (R1) lies between the imaging-side imaging light partial beam 28 and the mirror M2, i.e., in relation to this imaging-side imaging light partial beam 28, it lies precisely opposite the arrangement of the last GI mirror 23 (R1) in the coupling-in variant according to Figure 11. In the optical subsystem 40 according to Figure 12 with the imaging optical subunit 41, which in turn has exactly one GI mirror 23, there is a corresponding displacement of the arrangement plane 17, which can take into account corresponding installation space requirements for a pupil facet mirror of the illumination optical unit 6 of the projection exposure unit 1. Moreover, respectively different installation space possibilities emerge in the vicinity of the object field 4.

As an alternative or in addition to folding the illumination light 3 in the imaging optical subunit in the yz-plane, as explained above in conjunction with the embodiments according to Figures 2 to 12, there can also be folding in the xz-plane, as will be subsequently explained on the basis of Figures 13 to 16.

Components and functions corresponding to those which were already explained above with respect to Figures 1 to 12 have the same reference signs and are not once again discussed in detail.

Figures 13 and 14 show such alternative coupling-in via the last GI mirror 23 (R1) of an imaging optical subunit 42 with the folding plane in the xz-plane.

Figure 14 shows a view corresponding to that of e.g. Figures 11 and 12, i.e. with a viewing direction on the yz-plane, in which the object displacement also takes place. Figure 13 shows a view of the xz-plane perpendicular thereto. The illumination light 3 is therefore coupled-in with the imaging optical subunit 42 with a folding effect in the xz-plane. The GI mirror 23 can simultaneously be used to fold the imaging light 3, once again in the xz-plane, which light extends from the object field 4 in the imaging light partial beam 28 to the first mirror of the projection optical

unit. This is indicated in Figure 14, where the GI mirror 23 also reflects this imaging-side imaging light partial beam 28.

5 A combination of an xz-fold according to Figures 13 and 14 with an additional yz-fold is explained on the basis of Figures 15 and 16. Figure 16 shows the embodiment from the viewing direction XVI in Figure 15. Components and functions corresponding to those which were explained above with respect to Figures 1 to 14 have the same reference signs and are not once again discussed in detail.

10 In addition to the last GI mirror 23 (R1) upstream of the object field 4, which GI mirror folds in the xz-plane, an imaging optical subunit 43 according to Figures 15 and 16 has a further GI mirror 22 (R2), which folds in the yz-plane. The illumination light 3 is therefore initially folded in the yz-plane by the GI mirror 22 (R2) and subsequently folded in the xz-plane by the further GI mirror 23 (R1), before it impinges on the object field 4.

15 Depending on the folding effects of the GI mirror 23 (R1) or GI mirrors 22 (R2) and 23 (R1) in the embodiments according to Figures 13 to 16, different spatial positions of the arrangement plane 17 for the pupil facet mirror of the illumination optical unit 6 emerge in each case, which can in turn take account of corresponding installation space requirements of the illumination optical unit 6.

20

Below, a further embodiment of a microlithographic projection exposure apparatus 1, depicted very schematically and in the meridional section, is described on the basis of Figure 17. Components and

25 functions corresponding to those which were already explained above with respect to Figures 1 to 16 have the same reference signs and are not once again discussed in detail. The light source 2 of this projection exposure apparatus 1 according to Figure 17 can correspond to the one which is already explained above. It can be an LPP (laser produced plasma) light source or a DPP (discharge produced plasma) light source. Alternatively, and assuming a corresponding adaptation to

30 a numerical aperture in an intermediate focus, the light source 2 can also be a synchrotron radiation-based light source, for example a free electron laser (FEL).

In order to simplify the illustration of positional relationships, use is likewise made below of a Cartesian xyz-coordinate system. The x-direction extends perpendicular to the plane of the drawing in Figure 17 and into the latter. In Figure 17, the y-direction extends to the right. In Figure 17, the z-direction extends downward. The coordinate systems used following Figure 17 respectively have x-axes extending parallel to one another. To the extent that merely one component of the projection exposure apparatus 1 is depicted, the profile of a z-axis of these coordinate systems follows a respective main direction of illumination light 3 within the respectively considered figure.

10 Proceeding from the light source 2, initially a collector 44 and a field facet mirror FF serve to guide the illumination light 3 in the projection exposure apparatus according to Figure 17. An intermediate focus 45 of the illumination light 3 is arranged between the collector 44 and the field facet mirror FF. By way of example, a numerical aperture of the illumination light 3 in the region of the intermediate focus 45 is $NA = 0.2$. The field facet mirror FF is part of an illumination optical unit 6 of the projection exposure apparatus 1, which serves to illuminate an object field 4 arranged in an object plane 5.

The field facet mirror FF is arranged in a field plane of the illumination optical unit 6 conjugate to the object plane 5. A pupil facet mirror PF of the illumination optical unit 6 is arranged downstream of the field facet mirror FF. The pupil facet mirror PF is arranged in, or in the region of, a pupil plane 17 of the illumination optical unit 6. An illumination pupil of the illumination optical unit 6 lies in the pupil plane 17.

25 Arranged downstream of the pupil facet mirror PF in the beam path of the illumination light 3 are two mirrors 22, 23 for grazing incidence arranged in succession in the beam path, which are also denoted GI (grazing incidence) mirrors below.

An angle of incidence of the centroid beam of the illumination light overall beam 3_G on both GI mirrors 22, 23 is approximately 75° . A different angle of incidence in the region of between 60° and 85° is also possible.

The two GI mirrors 22, 23 are arranged in such a way that the deflection effects thereof on the illumination light 3 add up.

5 A beam path of a centroid ray of the illumination light 3 has a crossing point K in the illumination optical unit 6. At the crossing point K, the centroid ray of the illumination light 3 extending between the intermediate focus 45 and the field facet mirror FF crosses the centroid ray extending between the pupil facet mirror PF and the first GI mirror 22.

10 The field facet mirror FF is constructed from a plurality of field facets. Each one of these field facets is in turn constructed from at least one individual mirror. Details in this respect are described in e.g. US 2011/0001947 A1. Then, a field facet is formed in each case by a plurality or a group of such individual mirrors in the case of such an individual mirror construction. An x/y-aspect ratio of the field facets can be greater than the aspect ratio x_0/y_0 of the object field 4.

15 The facets of the field facet mirror FF can be embodied in a manner switchable between a plurality of tilt positions. This renders it possible to prescribe different illumination angle distributions in the object field 4, as is already known per se from the prior art of illumination optical units with a field facet mirror and a pupil facet mirror.

20 The pupil facet mirror PF in turn has a plurality of pupil facets. Each one of these pupil facets can in turn be constructed from a plurality of individual mirrors, as is likewise known per se from US 2011/0001947 A1. The facet design of the facet mirrors FF, PF is not depicted in any more detail in the drawing.

25 The facets of the pupil facet mirror PF can be configured in a switchable manner. Alternatively, it is possible to configure the facets of the pupil facet mirror PF in a non-switchable manner.

30 The pupil facet mirror PF and the two downstream GI mirrors 22, 23 form a transmission optical unit 46, which images the field facets of the field facet mirror FF superposed on one another in the object field 4 by way of illumination channels, which each have assigned to them a field facet and a pupil facet.

The two GI mirrors 22, 23 image the illumination pupil in the pupil plane 17 into an entry pupil plane 18, disposed downstream of the object field 4 in the beam path of the illumination light 3, of a projection optical unit 7 of the projection exposure apparatus 1. The projection optical unit 7 images the object field 4 into an image field 8 which is arranged in an image plane 9. The entry pupil of the projection optical unit 7 does not in reality lie in the same entry pupil plane for both sections xz, yz. In the yz-section, the entry pupil actually lies at the location of the pupil facet mirror PF, and so, in this section, there is coincidence of, firstly, the illumination pupil and, secondly, the entry pupil. In the xz-section, the entry pupil of the projection optical unit 7 lies significantly downstream of the object field 4 in the beam path.

10

Arranged in the object field 4 is a reflecting reticle 10, which carries a structure imageable by means of the projection optical unit 7.

15

The two GI mirrors 22, 23 produce an illumination angle bandwidth of an illumination light overall beam 3_G composed of the illumination channels in the object field 4, which bandwidth is smaller for a plane of incidence parallel to the object displacement direction or scanning direction y than for a plane of incidence perpendicular thereto.

20

A numerical aperture of the illumination light overall beam 3_G incident on the object field 8 is e.g. 0.0625 in the yz-plane of incidence. Accordingly, an angle of incidence of a central centroid beam of the illumination light overall beam 3_G on the reticle 10 is greater than 3.6° in the yz-plane of incidence and can for example lie in the range between 4° and 7° .

25

In the xz-plane perpendicular to the yz-plane of incidence, the numerical aperture of the illumination light overall beam 3_G is at least 10% greater than in the yz-plane of incidence and it is, for example, twice as large. The numerical aperture of the illumination light overall beam 3_G is e.g. 0.125 in the xz-plane.

30

Using the illumination optical unit 6, the object field 4 on the reticle 10 is illuminated in a defined manner in the object plane 5. The object field 4 has an arcuate or partial-circle-shaped form and is delimited by two mutually parallel circular arcs and two straight side edges, which extend in the y-direction with a length y_0 and have a distance x_0 from one another in the x-direction. The

aspect ratio x_0/y_0 is 13 to 1. In the case of an alternative and likewise possible object field 4, the edge shape thereof is rectangular.

5 The projection optical unit 7 has a total of six mirrors M1 to M6 arranged in succession in the beam path of the illumination or imaging light 3. The last mirror M6 defining an image-side numerical aperture of the projection optical unit 7 is the only one of these mirrors M1 to M6 which has a passage opening 47 for the illumination or imaging light 3.

10 All optical components of the illumination optical unit 6 on the one hand and of the projection optical unit 7 on the other hand have highly reflective coatings for the illumination or imaging light 3, which coatings can be constructed as multi-ply or many-ply layers.

15 A wafer 11, on which the structure of the reticle 10 arranged in the object field 4 is imaged, is arranged in the image field 8. Like the reticle 10, the wafer 11 is also carried by a holder 10a, 12.

Both the reticle holder 10a and the wafer holder 12 are displaceable in both the x-direction and the y-direction by way of corresponding displacement drives 10b, 12a. During the projection exposure, this displacement is brought about in a synchronized manner along the y-direction, which is also referred to as scanning direction. The scanning direction y lies on the reticle 10 in a
20 yz-plane of incidence of the illumination light 3. This yz-plane of incidence coincides with the plane of the drawing of Figure 17.

25 An installation space requirement of the wafer holder 12 and of further wafer-side components is depicted as a rectangular box at 48 in Figure 17. The installation space requirement 48 is rectangular with an extent in the x-direction, y-direction and z-direction that is dependent on the components to be housed therein. By way of example, proceeding from the centre of the image field 8 in the x-direction and in the y-direction, the installation space requirement 48 has an extent of 1 m. Proceeding from the image plane 9, the installation space requirement 48 also has an extent of e.g. 1 m in the z-direction. The illumination light 3 must be guided in the illumination optical
30 unit 6 and in the projection optical unit 7 in such a way that it is respectively guided past the installation space requirement 48.

The field facet mirror FF and/or the pupil facet mirror PF can be embodied as MEMS mirrors.

5 The projection optical unit 7 is embodied as an anamorphic projection lens and has a reducing imaging factor in the yz-plane, which is twice the reducing imaging factor in the xz-plane. By way of example, the reducing factor of the projection optical unit 7 in the yz-plane can be 8 and it can be 4 in the xz-plane. Such an anamorphic projection optical unit is known from e.g. WO 2012/034995 A2.

10 The two GI mirrors 22, 23 ensure an adaptation of the numerical apertures of the illumination light overall beam 3_G at the object field 4 in such a way that the numerical apertures of the illumination light overall beam 3_G fit to the object field-side numerical apertures which can be processed by the anamorphic projection optical unit 7.

15 The angle bandwidth of the illumination light overall beam 3_G constitutes a measure for the numerical aperture thereof. In the exemplary embodiment explained above, an x/y-aspect ratio of this angle bandwidth is 2:1 and this corresponds to the ratio of the numerical apertures explained above, i.e. the ratio of 0.125 to 0.0625.

20 A source angle of the projection exposure apparatus 1 is defined as an angle between a connecting line between the light source 2 and the intermediate focus 45 on the one hand and a normal to the xy-plane on the other hand. In the projection exposure apparatus 1, this source angle Q is approximately 28° .

25 A centroid ray of the illumination light overall beam 3_G is deflected by approximately 30° by the two GI mirrors 22, 23. Other centroid ray deflection angles in the range between 10° and 35° are also possible.

This deflection angle is divided approximately half and half between the two GI mirrors 22 and 23.

The crossing point K lies between an extent of the centroid ray between the facet mirrors FF and PF on the one hand and the image field 8 on the other hand in the beam path of the illumination optical unit 6 according to Figure 17.

- 5 A totality of the pupil facets on the pupil facet mirror PF has an edge contour 49, the extent of which corresponds to the extent of the illumination pupil. Parallel to the x-direction, i.e. perpendicular to the object displacement direction, this extent is greater than perpendicular thereto, i.e. in the yz-plane of incidence containing the scanning direction. In a local xy-coordinate system, the pupil facet mirror PF thus has a greater extent in the x-direction than in the y-direction. This is shown in an insert in Figure 17, in which an elliptic edge contour 49 of the pupil facet mirror PF is depicted. An x/y-aspect ratio of this edge contour 49 can be e.g. 4/3 and it is significantly smaller than the x/y-aspect ratio of the angle bandwidth at the object field, which was explained above. The aspect ratio x/y of the edge contour 49 is smaller than an aspect ratio $\sigma_{\max}/\sigma_{\min}$ between the dimensions σ_{\max} and σ_{\min} of the illumination pupil, which are assigned to these extents x and y perpendicular and parallel to the object displacement direction.
- 10
- 15

In an alternative design of the illumination optical unit 6, the pupil facet mirror PF is configured with an x/y-aspect ratio of the order of 1, for example is a round pupil facet mirror PF.

- 20 The x/y-aspect ratios of the edge contour 49 of the pupil facet mirror PF explained above render it possible to keep field facet switching angles or individual mirror switching angles of the field facet mirror FF for illuminating the pupil facet mirror PF small in the case of otherwise predetermined geometry of an illumination optical unit 6.

- 25 In a local xz-diagram, Figure 18 shows a number of sections through the reflection surface of the GI mirror 22, first in the beam path, of the embodiment according to Figure 17. A form of this xz-section line is dependent on the respective y-coordinate, along which the section is guided.

- 30 Figure 19 shows corresponding xz-section lines in the case of different y-coordinates through the reflection surface of the subsequent, second GI mirror 23 in the embodiment according to Figure 17.

The reflection surfaces of the two GI mirrors 22 and 23 according to Figures 17 to 19 can be described by means of a generalized conical section asphere equation. Here, the following applies:

$$5 \quad z(x,y) = f1(x,y) + f2(x,y) \tag{1}$$

z is the sag of the reflection surface in the z-direction of the local yz-coordinate system of the respective GI mirror 22, 23. The following applies to both terms f1 and f2:

$$f1 = \frac{(\text{rhox} * x^{**2} + \text{rhoy} * y^{**2})}{(1 + [1 - (1+kx) * (\text{rhox} * x)^{**2} - (1+ky) * (\text{rhoy} * y)^{**2}]^{**0.5})}$$

$$f2 = \begin{aligned} & c1*x + c2*y \\ & + c3*x^{**2} + c4*x*y + c5*y^{**2} \\ & + c6*x^{**3} + \dots + c9*y^{**3} \\ & + c10*x^{**4} + \dots + c12*x^{**2}*y^{**2} \dots + c14*y^{**4} \\ & + c15*x^{**5} + \dots + c20*y^{**5} \\ & + c21*x^{**6} + \dots + c24*x^{**3}*y^{**3} + \dots + c27*y^{**6} + \dots \end{aligned}$$

10 Here, f1 corresponds to a conical section and f2 is a polynomial expansion generalizing the latter.

Here, the variables *rhox* and *rhoy* are inverses of the vertex radii *vertex radius(x)* and *vertex radius(y)*, the variables *kx* and *ky* correspond to the conical constants *kappa(x)* and *kappa(y)*. For

15 reasons of symmetry, all odd polynomials in relation to *x* disappear.

The following two tables summarize the design parameters, which are to be used to describe the surface of the reflection surfaces of the two GI mirrors 22 and 23 in the generalized conical section asphere equation 1 above.

20

Table 1: Surface data for GI mirror 22

Asphere
 Surface: GI mirror 22
 Asphere type: KXY
 Constants:
 vertex radius(x) = -1161.133897

25

vertex radius(y) = 78026.475497

kappa(x) = 11.345415350

kappa(y) = 12492.823560000

Series expansion constants:

- 5 c1 = 0.00000000E+00
- c2 = 0.00000000E+00
- c3 = 5.54608544E-06
- c4 = 0.00000000E+00
- c5 = -7.87263073E-06
- 10 c6 = 0.00000000E+00
- c7 = -1.73373485E-08
- c8 = 0.00000000E+00
- c9 = -1.55353421E-08
- c10 = 2.08902055E-10
- 15 c11 = 0.00000000E+00
- c12 = -5.03741523E-
- c13 = 0.00000000E+00
- c14 = -2.16016795E-11
- c15 = 0.00000000E+00
- 20 c16 = 4.46517037E-13
- c17 = 0.00000000E+00
- c18 = 1.45192600E-12
- c19 = 0.00000000E+00
- c20 = -2.53950200E-13
- 25 c21 = 3.28893261E-14
- c22 = 0.00000000E+00
- c23 = -3.17999488E-15
- c24 = 0.00000000E+00
- c25 = 6.46841816E-15
- 30 c26 = 0.00000000E+00
- c27 = -8.60352971E-16
- c28 = 0.00000000E+00
- c29 = -2.17603010E-16
- c30 = 0.00000000E+00
- 35 c31 = 1.01297045E-16
- c32 = 0.00000000E+00
- c33 = -1.02694152E-17
- c34 = 0.00000000E+00
- c35 = 0.00000000E+00

40

Table 2: Surface data GI mirror 23

Asphere

Surface: GI mirror 23

Asphere type: KXY

45

Constants:

vertex radius(x) = -1118.269321

- 52 -

vertex radius(y) = -166716.903905

kappa(x) = -39.211036180

kappa(y) = 0.243886680E+06

Series expansion constants :

5 c1 = 0.00000000E+00
 c2 = 0.00000000E+00
 c3 = -7.94941515E-06
 c4 = 0.00000000E+00
 c5 = 8.64136545E-06
 10 c6 = 0.00000000E+00
 c7 = -1.96099022E-07
 c8 = 0.00000000E+00
 c9 = -2.83276609E-09
 c10 = -5.06097808E-10
 15 c11 = 0.00000000E+00
 c12 = 1.17710881E-10
 c13 = 0.00000000E+00
 c14 = 8.11300340E-11
 c15 = 0.00000000E+00
 20 c16 = 2.44564710E-12
 c17 = 0.00000000E+00
 c18 = -4.18622465E-13
 c19 = 0.00000000E+00
 c20 = 9.23896853E-13
 25 c21 = -6.94696602E-14
 c22 = 0.00000000E+00
 c23 = -7.11518761E-14
 c24 = 0.00000000E+00
 c25 = -5.76295970E-15
 30 c26 = 0.00000000E+00
 c27 = 6.09159387E-15
 c28 = 0.00000000E+00
 c29 = -3.19720083E-15
 c30 = 0.00000000E+00
 35 c31 = 3.74811351E-16
 c32 = 0.00000000E+00
 c33 = -5.13048163E-16
 c34 = 0.00000000E+00
 40 c35 = 0.00000000E+00

On the basis of Figures 20 to 23, further design options for illumination optical units with respectively two GI mirrors between the pupil facet mirror PF and the object field 4 are explained below, which options can be used instead of the illumination optical unit 6 according to Figure 17 in the projection exposure apparatus 1. Components corresponding to those which were already explained above with respect to Figures 1 to 19 and, in particular, with respect to Figures 17 to 19 have the same reference signs and are not once again discussed in detail.

Figure 20 shows a further embodiment of an illumination optical unit 50. The illumination optical unit 50 has a source angle Q of 90° . Thus, the illumination light 3 is guided horizontally to the intermediate focus 45 from the light source 2.

5

In the illumination optical unit 50, a folding geometry for the illumination light 3 by way of the two facet mirrors FF and PF is such that an extent of the centroid ray between the facet mirrors FF and PF lies between the crossing point K and the image field 8.

10 Figure 21 shows an embodiment of an illumination optical unit 51, in which there is no crossing of an extent of the centroid ray of the illumination light between the intermediate focus 45 and the object field 4. In the illumination optical unit 51, a source angle Q is approximately 59° . The extent of the centroid ray of the illumination light 3 between the pupil facet mirror PF and the first GI mirror 22 lies between the field facet mirror FF and the image field 8.

15

Figure 22 shows an embodiment of the illumination optical unit 52, in which the field facet mirror FF lies between an extent of the centroid ray of the illumination light 3 between the pupil facet mirror PF and the first GI mirror 22 on the one hand and the image field 8 on the other hand. In the illumination optical unit, a source angle Q is approximately 73° . In this case too,
20 there is no crossing of the illumination light centroid ray between the intermediate focus 45 and the object field 4.

Figure 23 shows an embodiment of an illumination optical unit 53, in which the deflection effect of the two GI mirrors 22, 23 on the illumination light does not add, as is the case in the illumination optical units described above, but rather subtracts. The two GI mirrors 22, 23 thus have an
25 opposite deflection effect on a centroid ray of the illumination light overall beam 3_G in the illumination optical unit 53. Otherwise, an extent of the illumination light 3 between the light source 2 and the first GI mirror 22 is comparable to the extent in the illumination optical unit 51 according to Figure 21. On account of the deflecting effect of the GI mirror 22 of the illumination optical unit 53, which is the inverse of the deflecting effect of the GI mirror 22 of the illumination
30 optical unit 51, there is a corresponding tilt of all optical components of the projection exposure apparatus 1 upstream of the GI mirror 22, leading to a source angle Q of approximately 5° .

The optical effect of the two GI mirrors 22, 23 can lead to a dependence of a field imaging scale on a pupil coordinate σ_x , σ_y assigned to the spatial coordinates x and y , respectively. An imaging scale β_y , i.e. an imaging scale in the yz -plane, can vary by several 10% about a mean scale value. The imaging scale β_x in the direction perpendicular thereto can also vary. This can be compensated by appropriately adapted x/y -aspect ratios of the field facets of the field facet mirror FF, respectively imaged by way of the pupil facets. To this end, it is advantageous if the field facets of the field facet mirror FF can be composed of freely selectable individual mirror groups, as, in principle, has already been described in e.g. US 2011/0318696 A1.

10

A reduced quality of imaging the pupil plane 17, i.e. the arrangement plane of the pupil facet mirror PF, onto the entry pupil plane 18 of the projection optical unit 7 can also require that the field facet mirror FF has field facets that are configured in a manner freely selectable from individual mirror groups. This avoids an unwanted overexposure of the entry pupil of the projection optical unit 7, for example by virtue of certain pupil facets being impinged with the illumination light 3 from field facets not illuminating the whole object field 4.

15

The above-described GI mirrors have a highly reflective coating for the illumination light or imaging light 3.

20

In order to produce a microstructured or nanostructured component, the projection exposure apparatus 1 is used as follows: First, the reflection mask 10 or the reticle and the substrate or the wafer 11 are provided. Subsequently, a structure on the reticle 10 is projected onto a light-sensitive layer of the wafer 11 with the aid of the projection exposure apparatus 1. Then, a microstructure or nanostructure on the wafer 11, and hence the microstructured component, is produced by developing the light-sensitive layer.

25

Patent Claims

1. Illumination optical unit (6; 50; 51; 52; 53) for EUV projection lithography for illuminating an object field (4) with illumination light (3), wherein an object (10) to be imaged is arrangeable in the object field (4), which object is displaceable in an object displacement direction (y) by means of an object holder (10a) during a projection exposure,
 - comprising a field facet mirror (FF) comprising a plurality of field facets, which are respectively constructed from at least one individual mirror,
 - comprising a pupil facet mirror (PF) comprising a plurality of pupil facets, which is part of a transmission optical unit (46), which images the field facets in a manner superposed on one another into the object field (4) by way of illumination channels, which each have assigned to them one of the field facets and one of the pupil facets,
 - wherein the transmission optical unit (46) has at least two mirrors (22, 23) for grazing incidence, which are arranged downstream of the pupil facet mirror (10) in the beam path of the illumination light (3) and
 - generate an illumination angle bandwidth of an illumination light overall beam (3_G), composed of the illumination channels, in the object field (4), which bandwidth is smaller for a plane of incidence (yz) of the illumination light (3) on the object field (4) parallel to the object displacement direction (y) than for a plane (xz) perpendicular thereto.
2. Illumination optical unit according to Claim 1, **characterized in that** the two mirrors for grazing incidence (22, 23) are arranged in such a way that the deflection effect thereof on the illumination light (3) adds up.
3. Illumination optical unit according to Claim 1 or 2, **characterized in that** a totality of the pupil facets on the pupil facet mirror (PF) has an edge contour (49), which has an aspect ratio (x/y) between

- an extent (x) of the edge contour (49) perpendicular to the object displacement direction (y) and
 - an extent (y) of the edge contour (49) parallel to the object displacement direction, which is less than an aspect ratio ($\sigma_{\max}/\sigma_{\min}$) between dimensions of an illumination pupil of the illumination optical unit (6; 50; 51; 52; 53), which are assigned to these extents of the edge contour (49) perpendicular (x) and parallel (y) to the object displacement direction.
- 5
4. Illumination optical unit according to one of Claims 1 to 3, **characterized in that** the field facets are constructed from a plurality of micro-mirrors.
- 10
5. Illumination optical unit according to one of Claims 1 to 4, **characterized in that** the field facets have an x/y-aspect ratio, which is greater than the x/y-aspect ratio of the object field (4).
- 15
6. Illumination optical unit according to one of Claims 1 to 5,
 - comprising an imaging optical subunit (16; 26; 33; 35; 37; 39; 41; 42; 43), which images an arrangement plane (17) lying upstream of the object field (4) in the beam path of the imaging light (3) into a pupil plane (18) of a projection optical unit (7) arrangeable downstream thereof,
 - wherein the imaging optical subunit (16; 26; 33; 35; 37; 39; 41; 42; 43) is configured in such a way that it only causes grazing deflection of the imaging light (3) in the beam path upstream of the object field (4) and it has a GI mirror (23) as last mirror in the beam path upstream of the object field (4).
- 20
- 25
7. Illumination system comprising an illumination optical unit (7; 26; 27; 28; 29) according to one of Claims 1 to 6 and comprising a projection optical unit (16) for imaging the object field (8) into an image field (17).
- 30

8. Illumination system according to Claim 7, characterized in that the projection optical unit (16) has an anamorphic embodiment.
9. Illumination system according to Claims 7 and 8, characterized by an EUV light source (2).
- 5
10. Projection exposure apparatus (1)
- comprising an illumination system according to one of Claims 7 to 9,
 - comprising an object holder (22) for holding the object (19), which object holder is connected to an object displacement drive (24) for displacing the object (19) in the object displacement direction (y),
 - 10 - comprising a wafer holder (23) for holding the wafer (21), which wafer holder is connected to a wafer displacement drive (25) for displacing the wafer (21) in a manner synchronized with the object displacement drive (24).
- 15
11. Method for producing a microstructured component, comprising the following method steps:
- providing a reticle (19),
 - providing a wafer (21) with a coating sensitive to the illumination light (3),
 - projecting at least a portion of the reticle (19) onto the wafer (21) with the aid of the projection exposure apparatus (1) according to Claim 10,
 - 20 - developing the light-sensitive layer on the wafer (21) exposed by the illumination light (3).
12. Component, produced according to a method according to Claim 11.

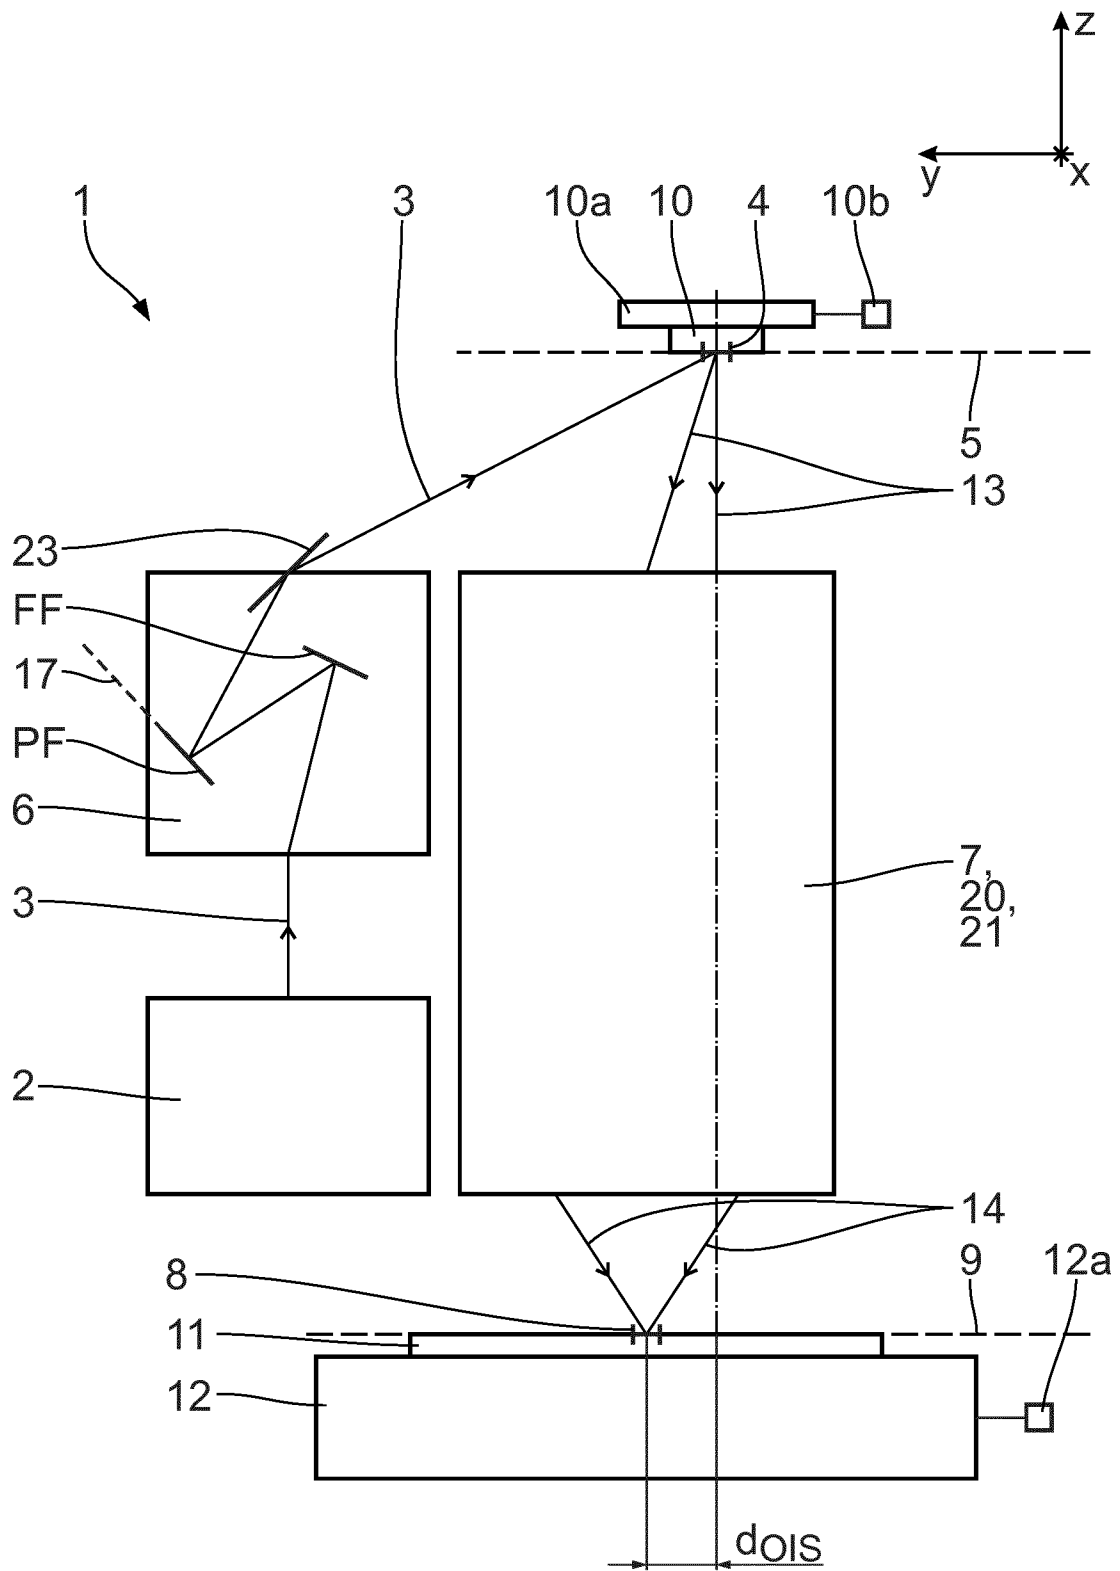


Fig. 1

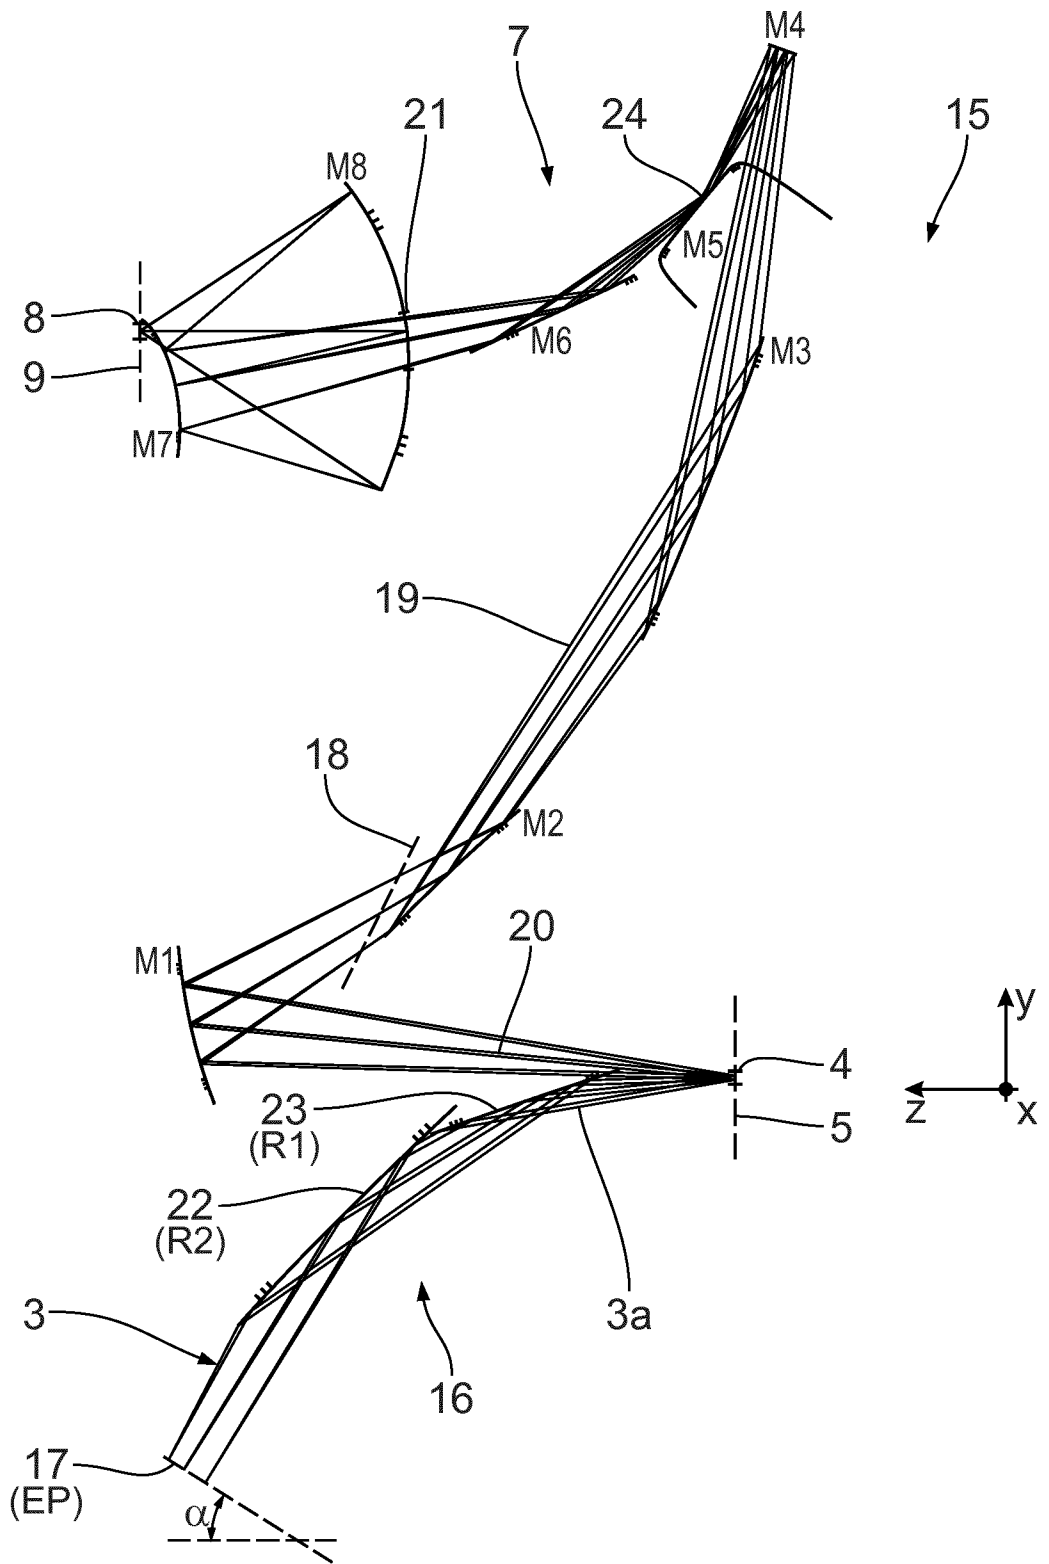


Fig. 2

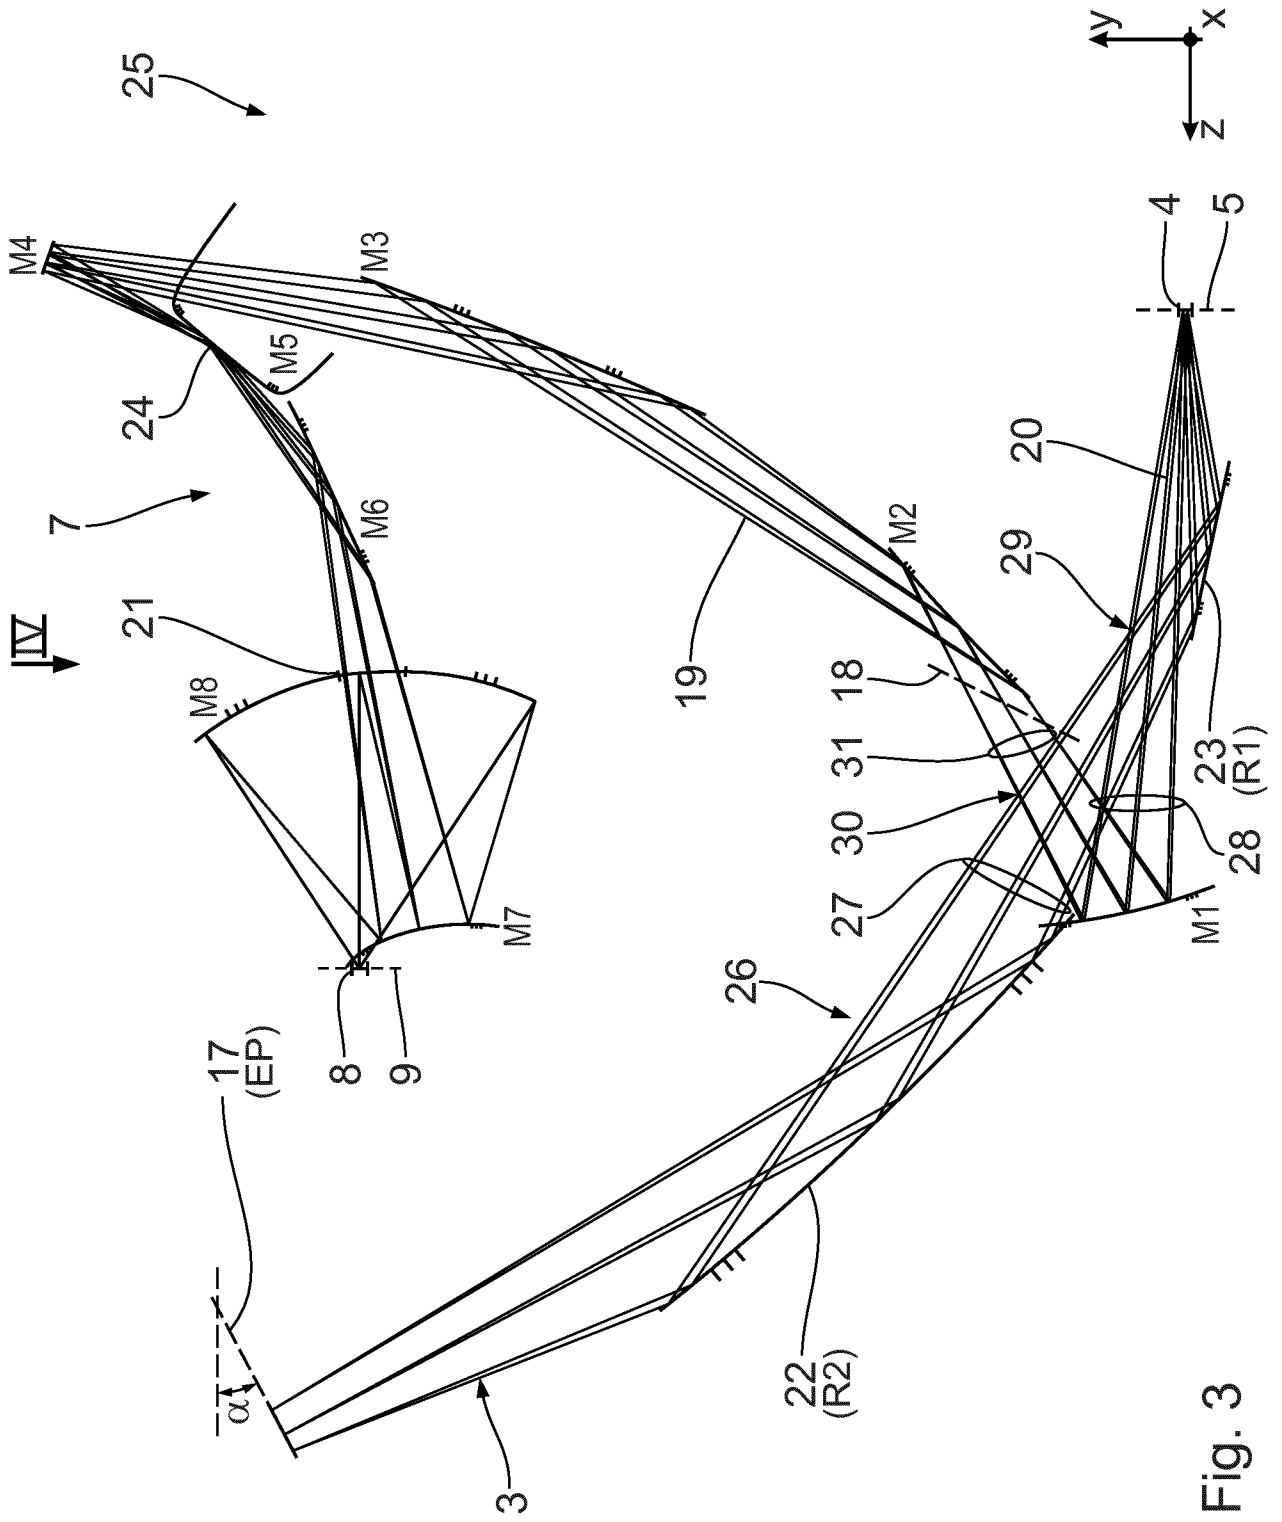


Fig. 3

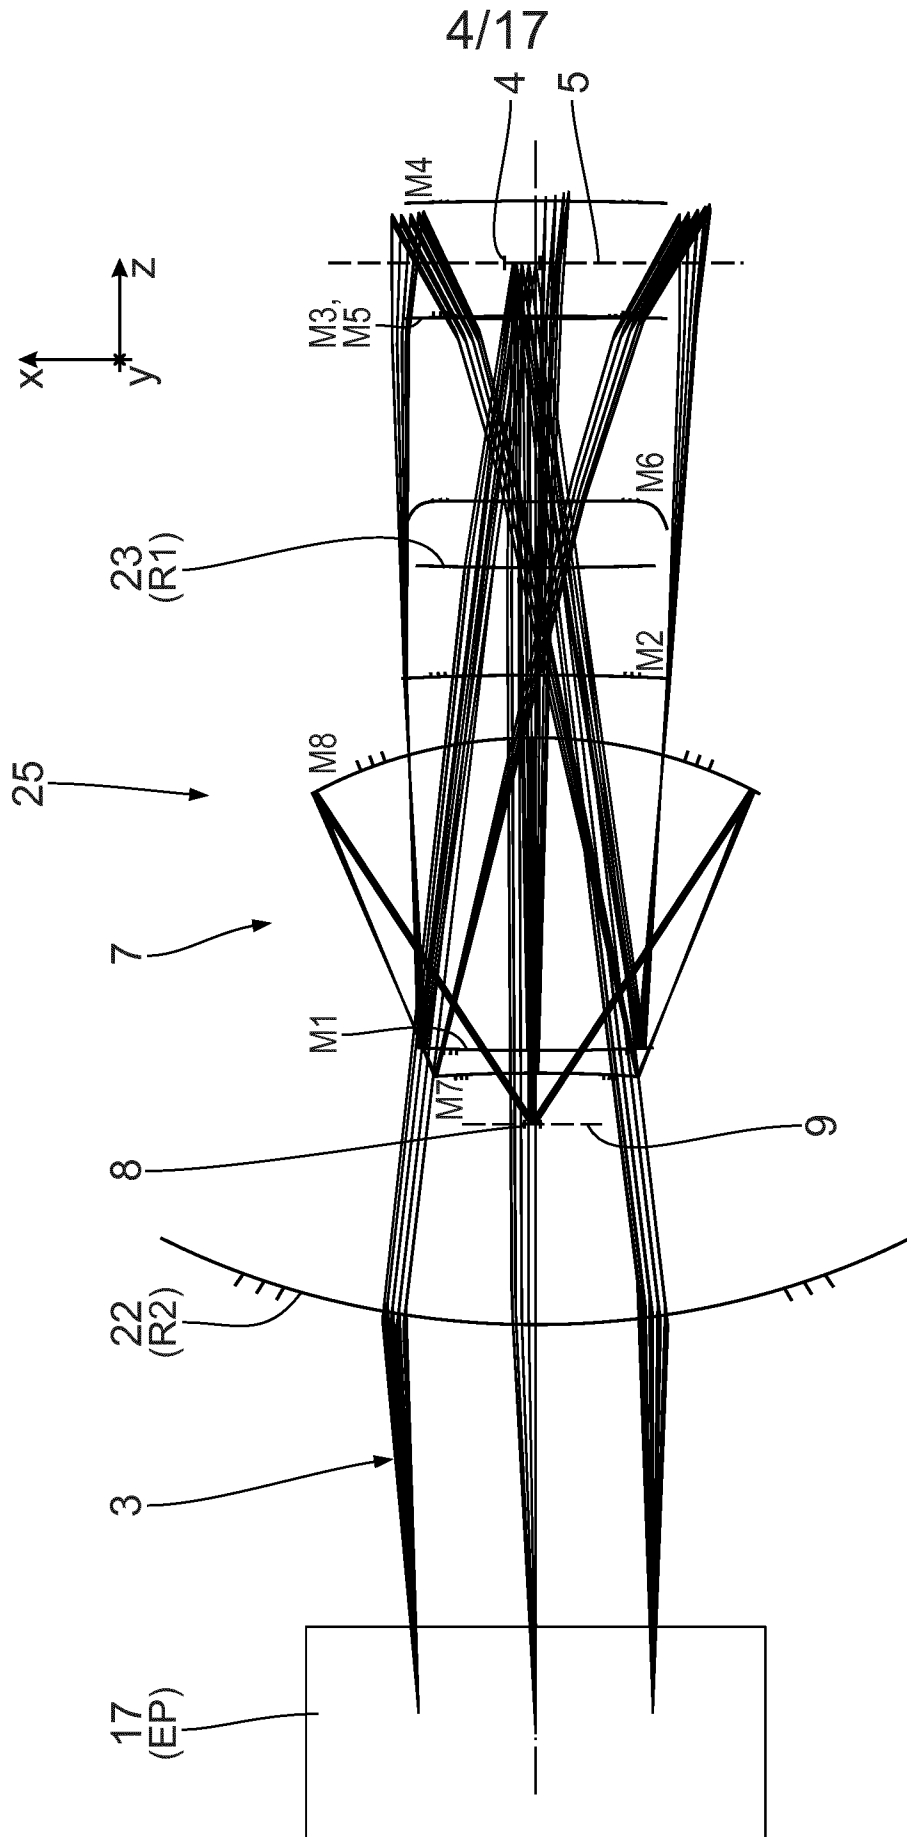


Fig. 4

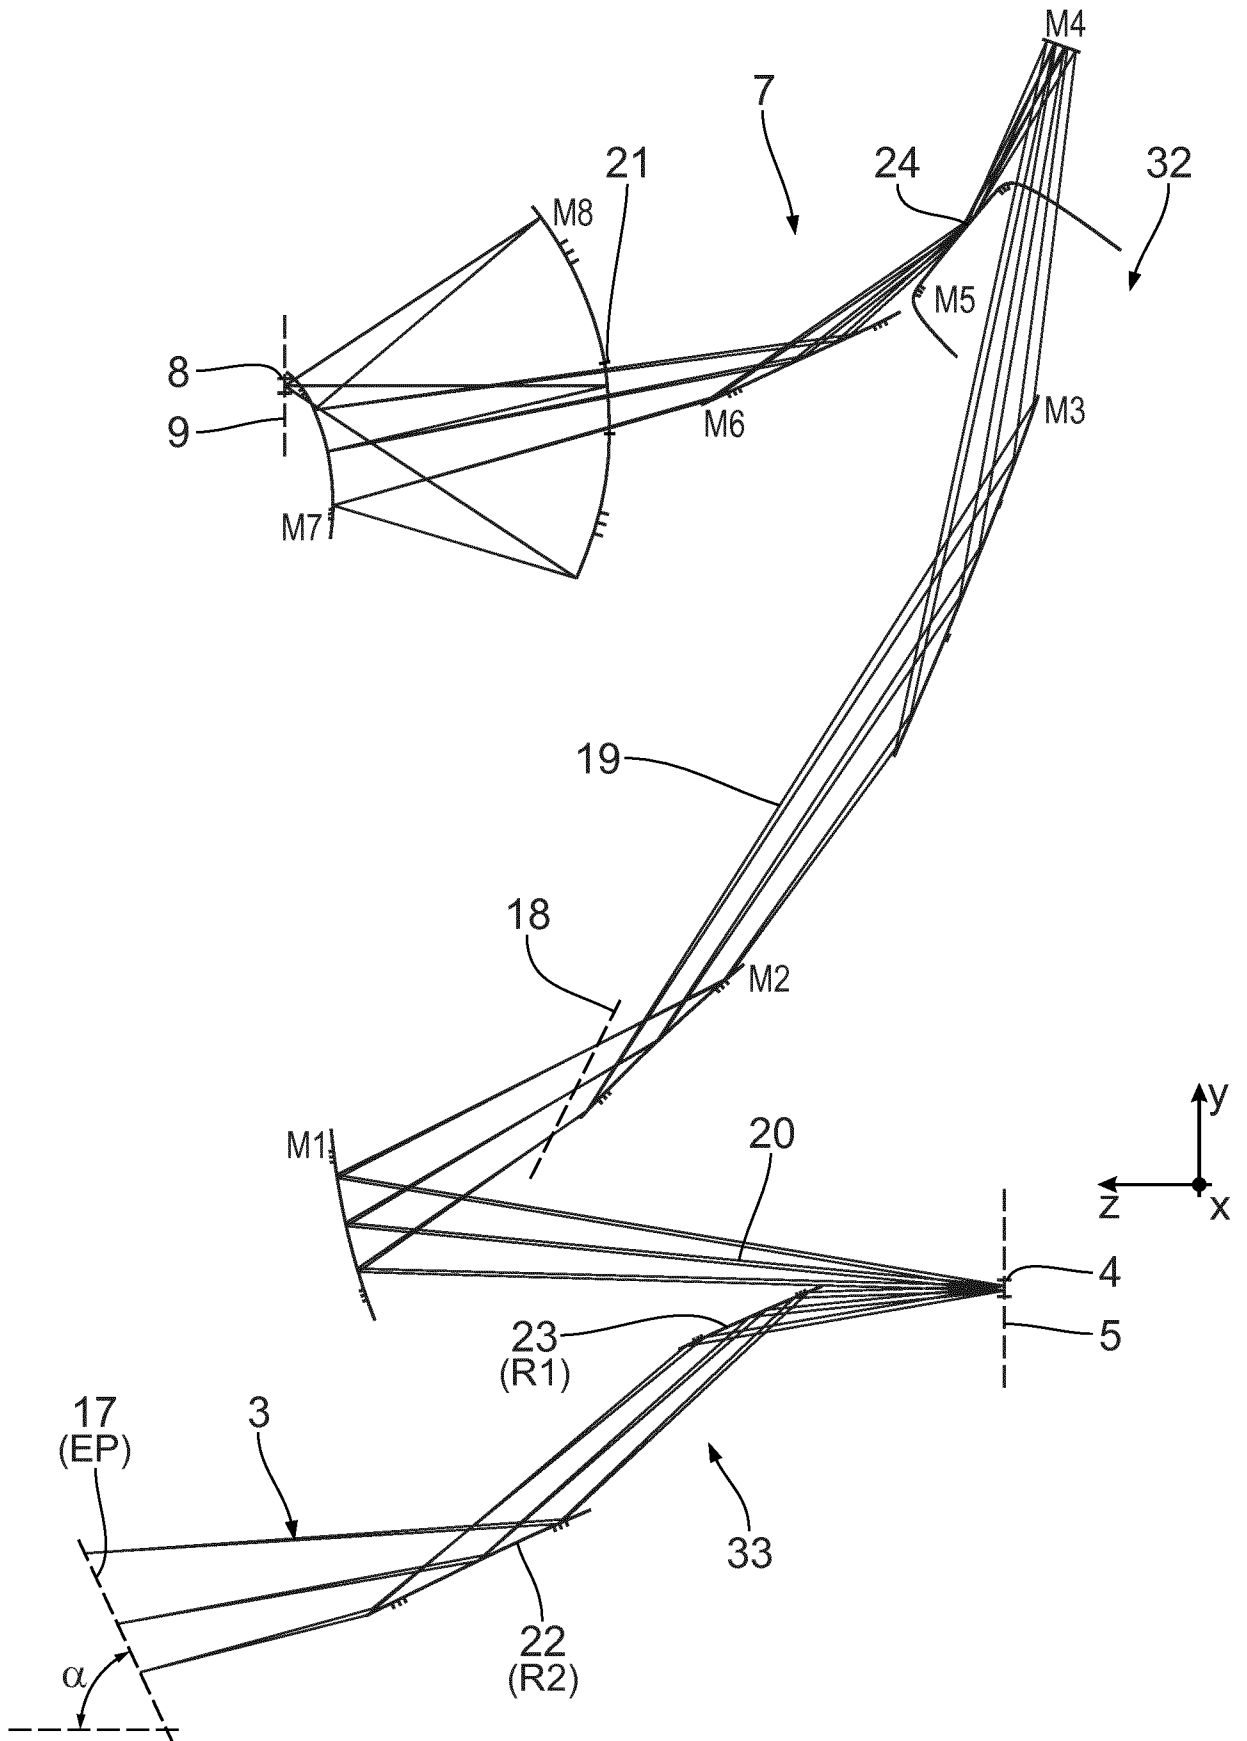


Fig. 5

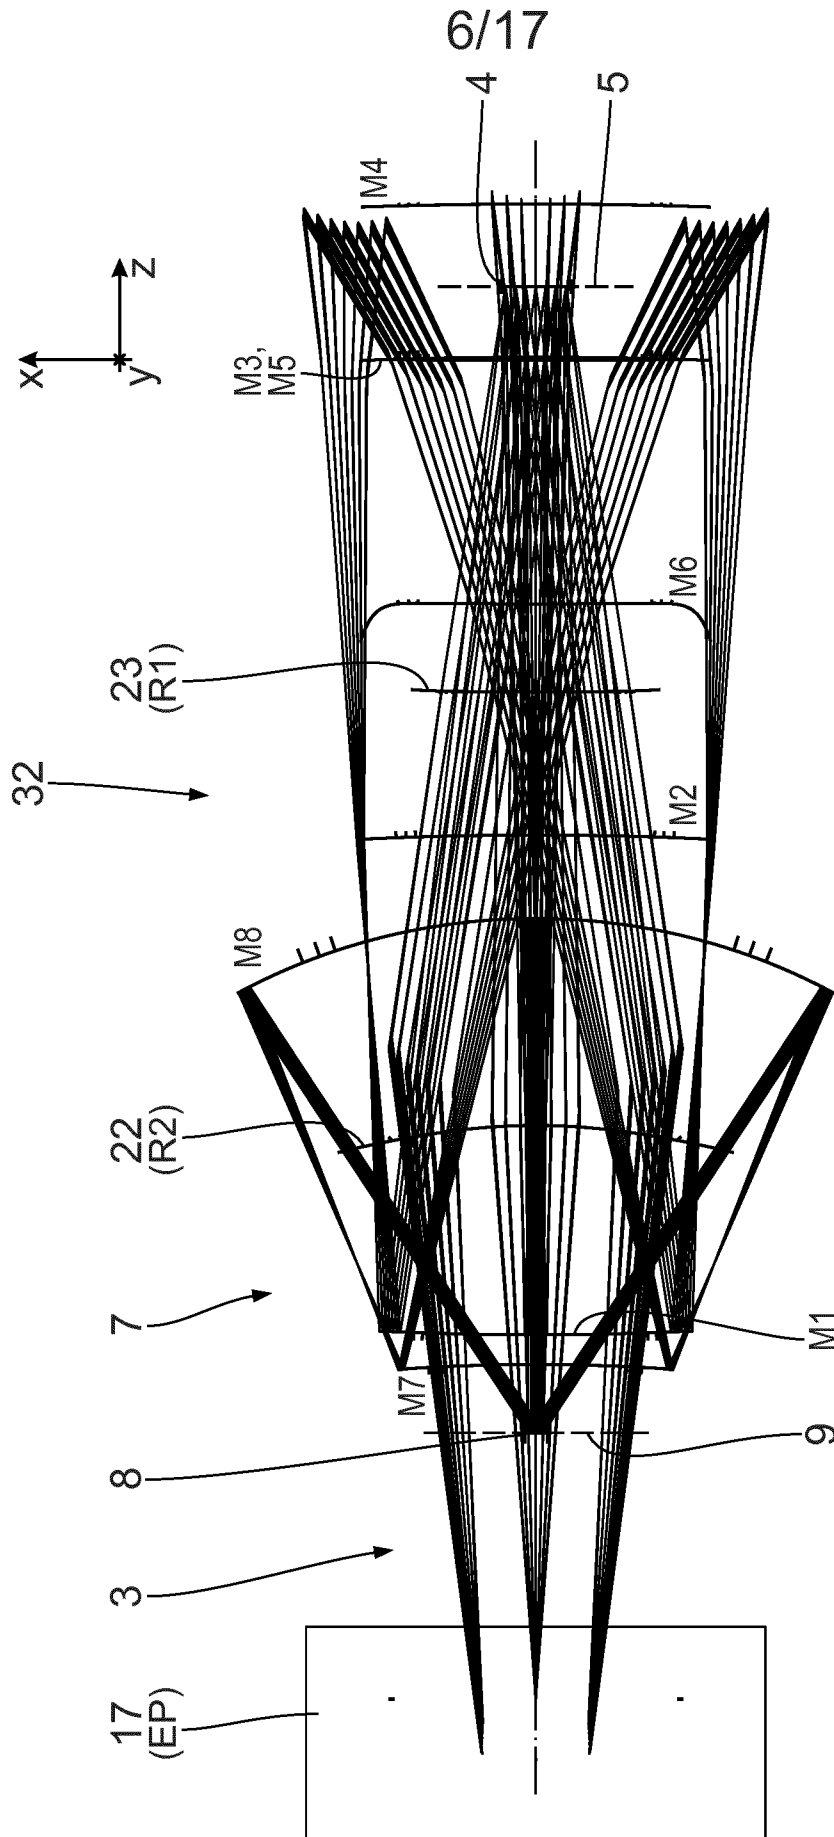


Fig. 6

7/17

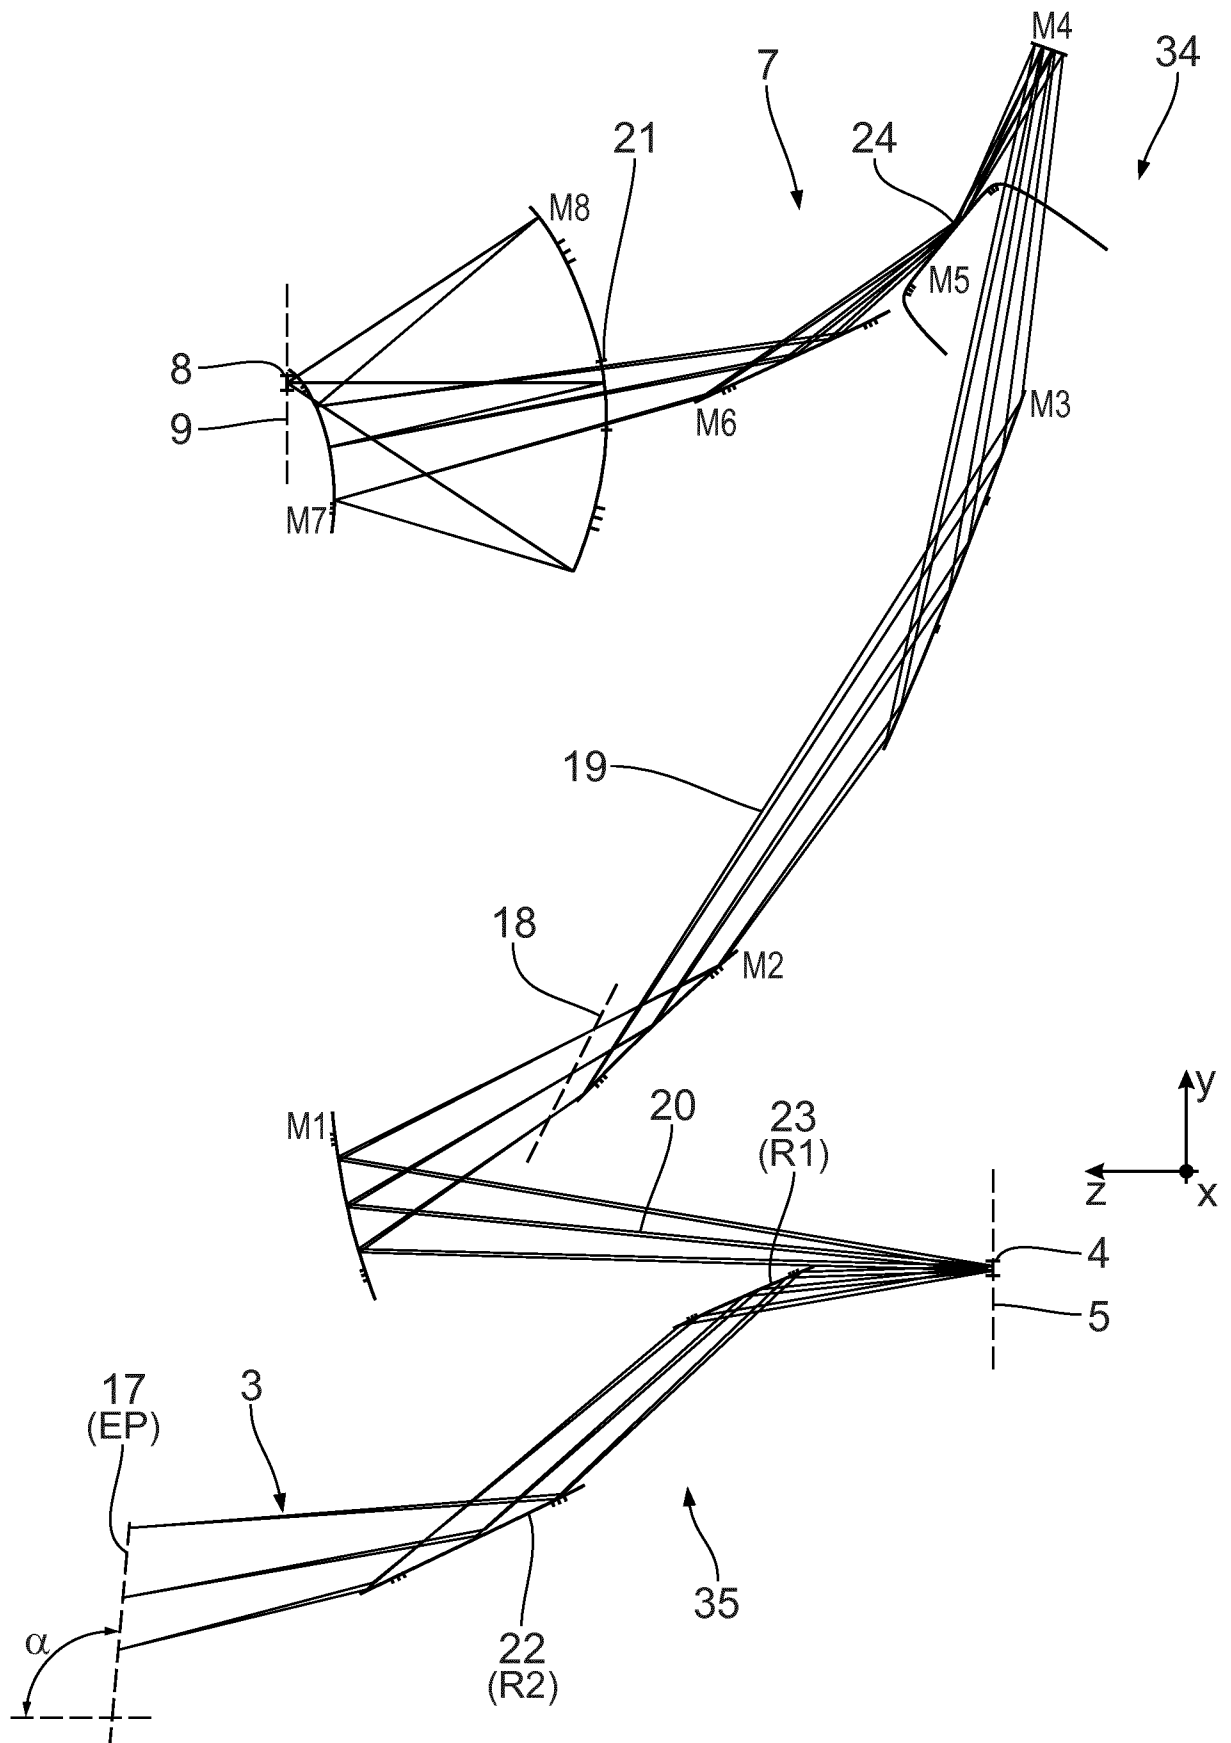


Fig. 7

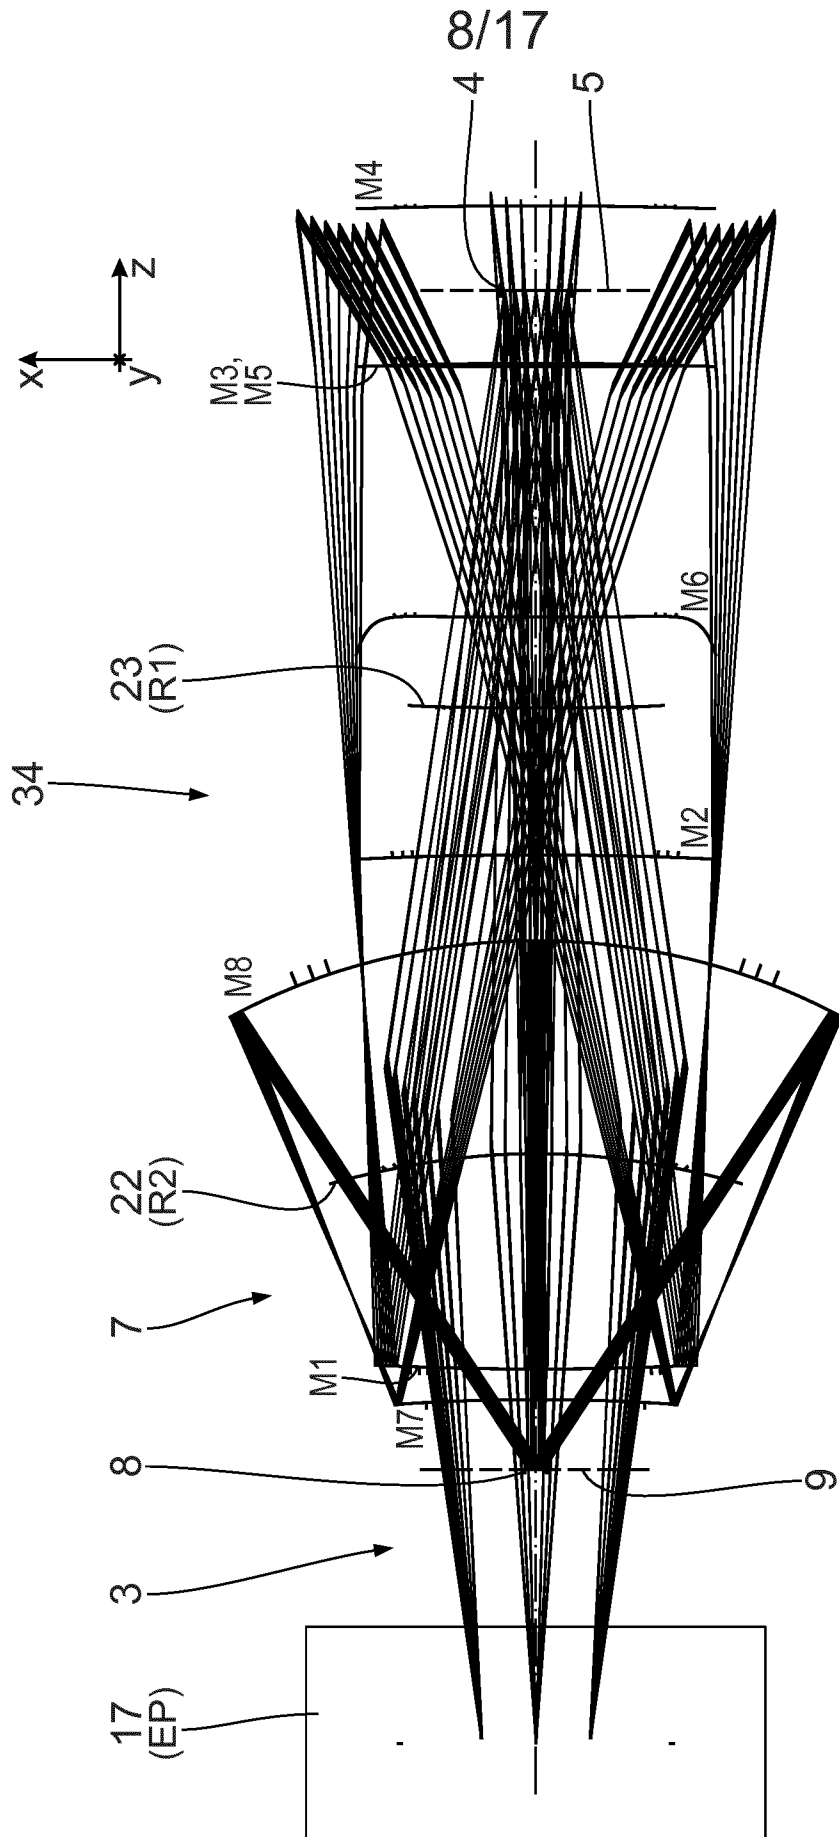


Fig. 8

9/17

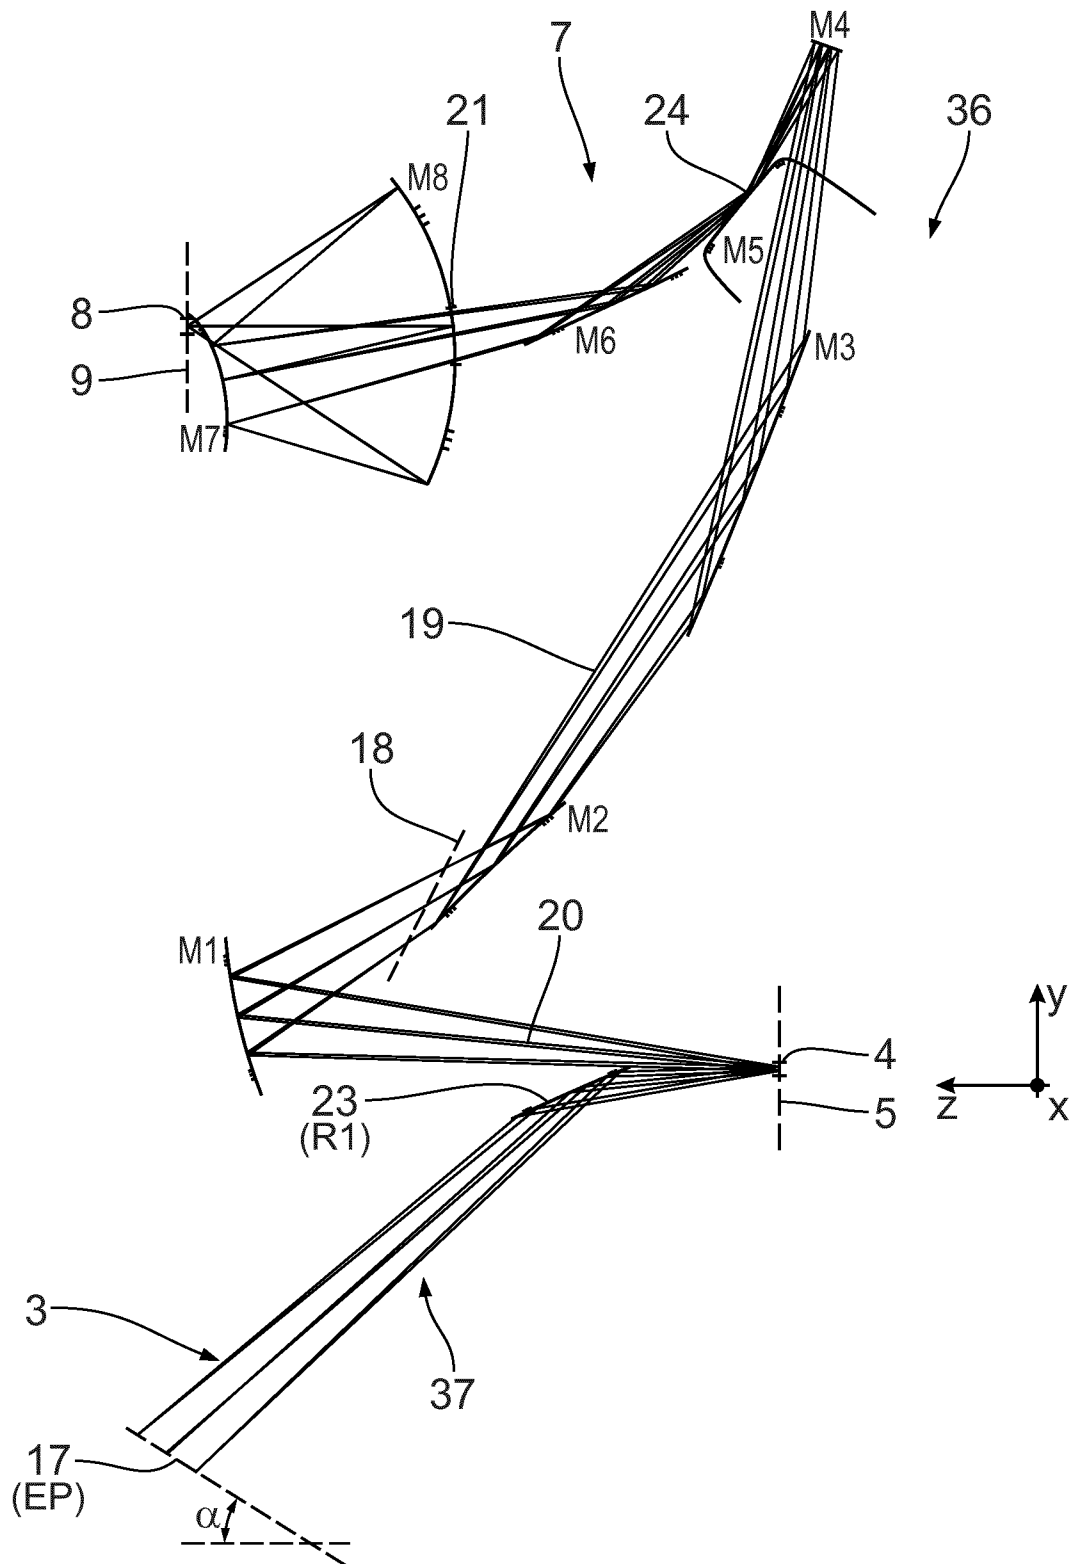


Fig. 9

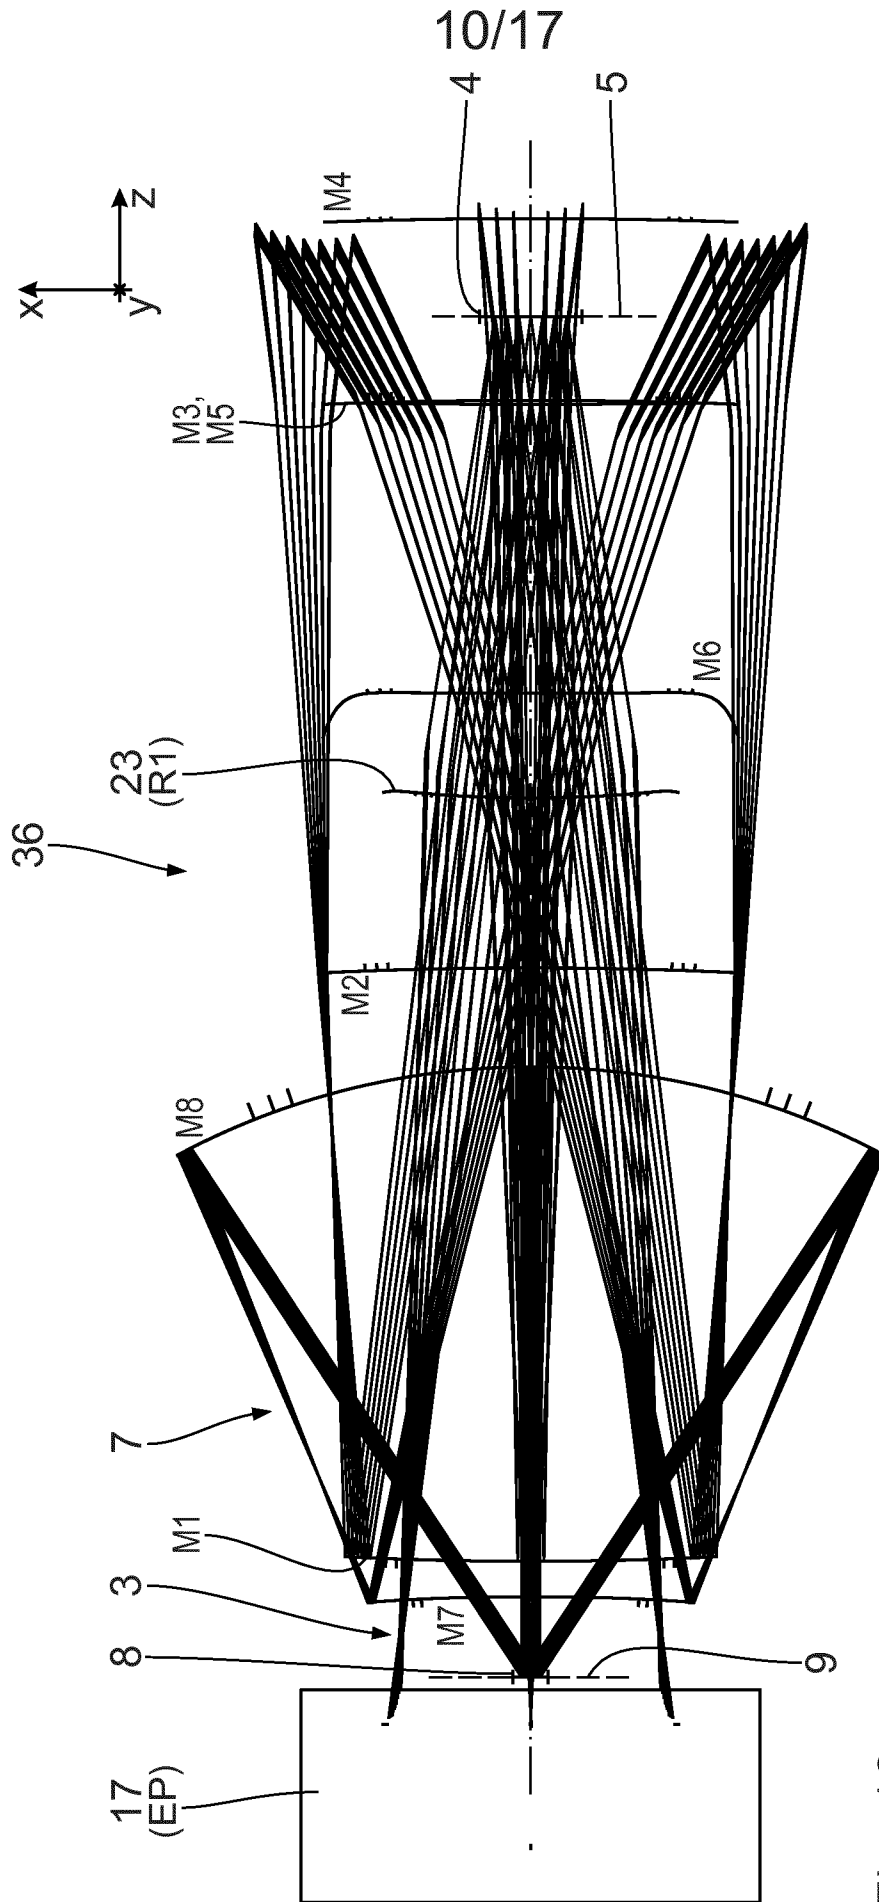


Fig. 10

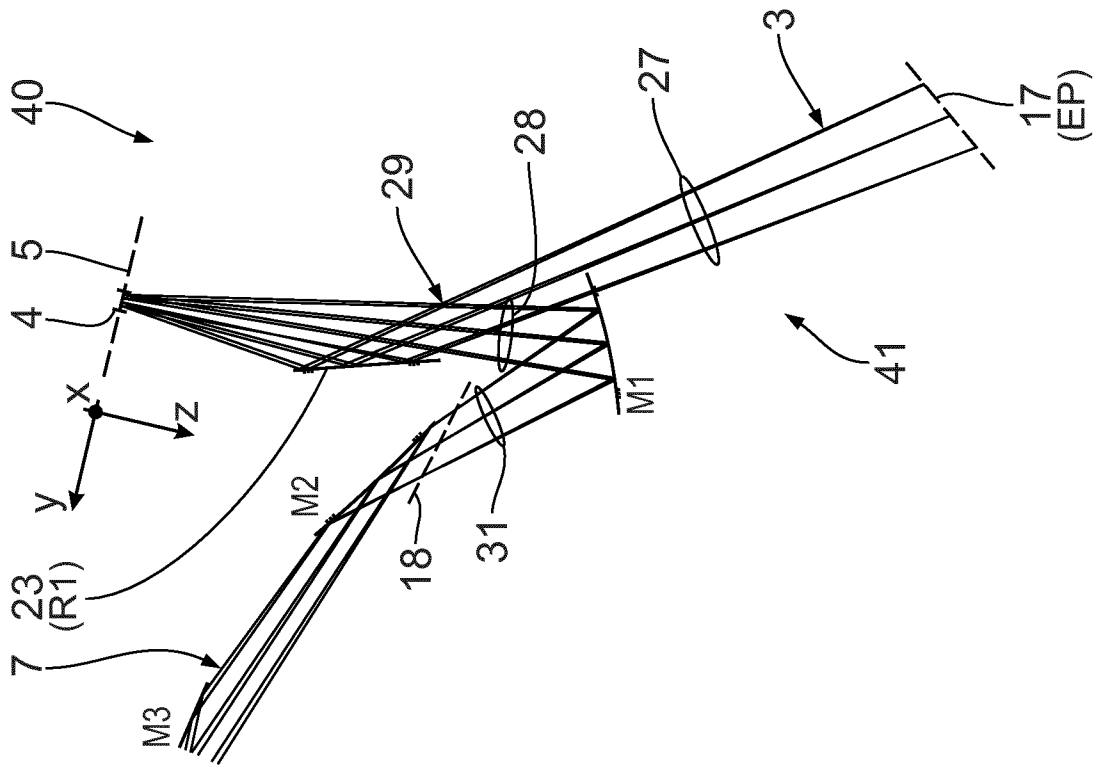


Fig. 11

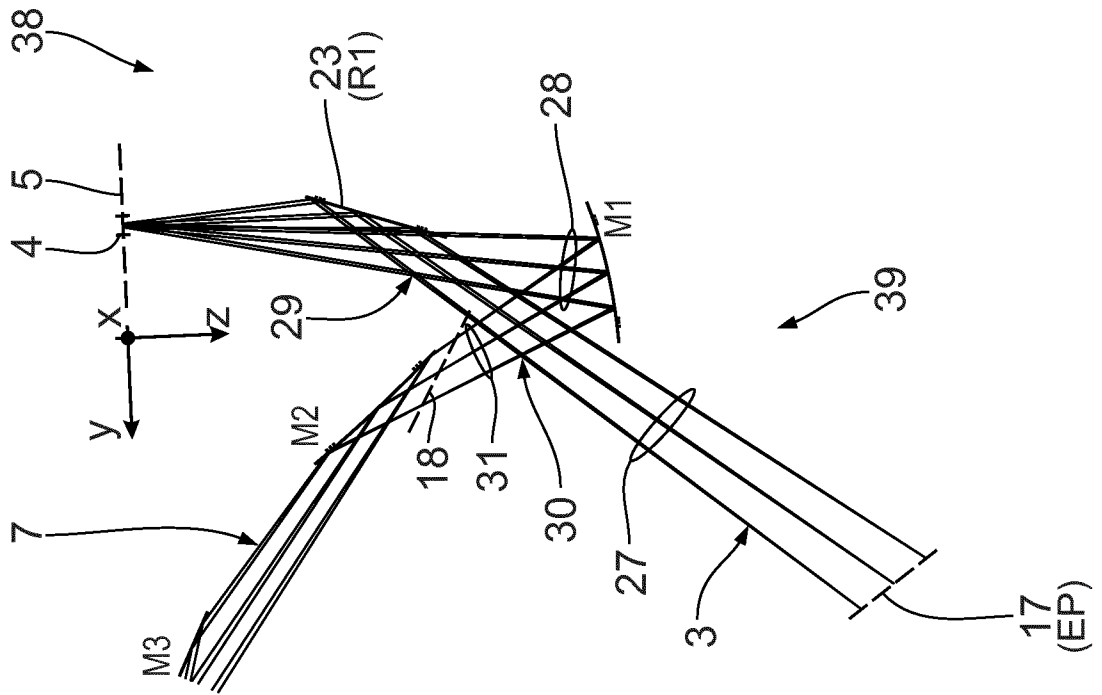


Fig. 12

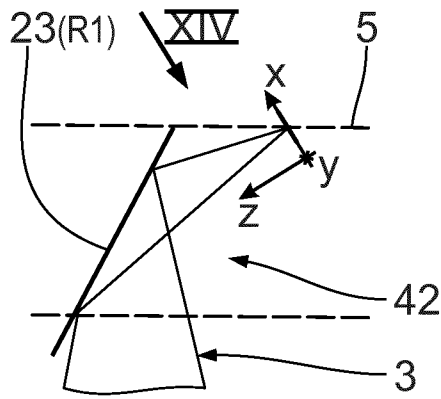


Fig. 13

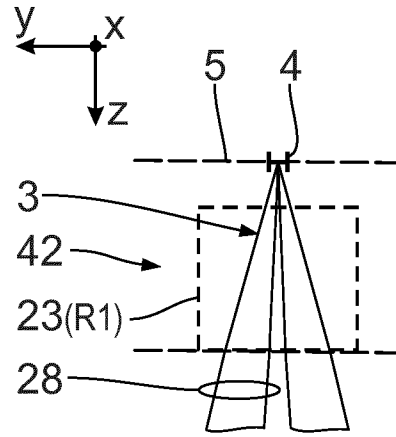


Fig. 14

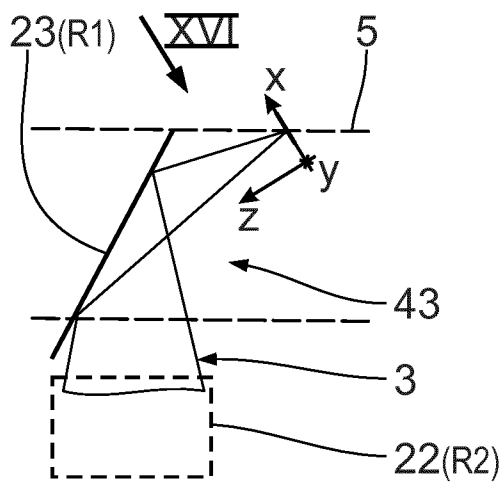


Fig. 15

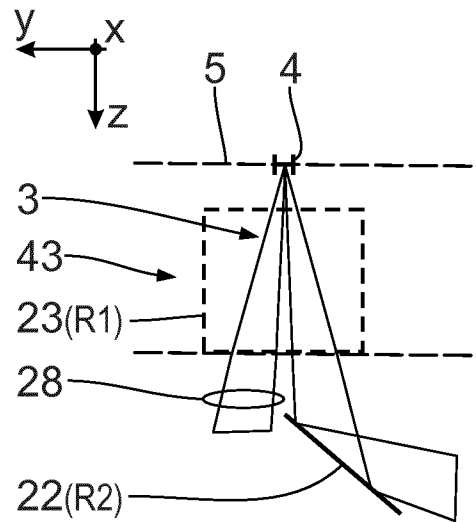


Fig. 16

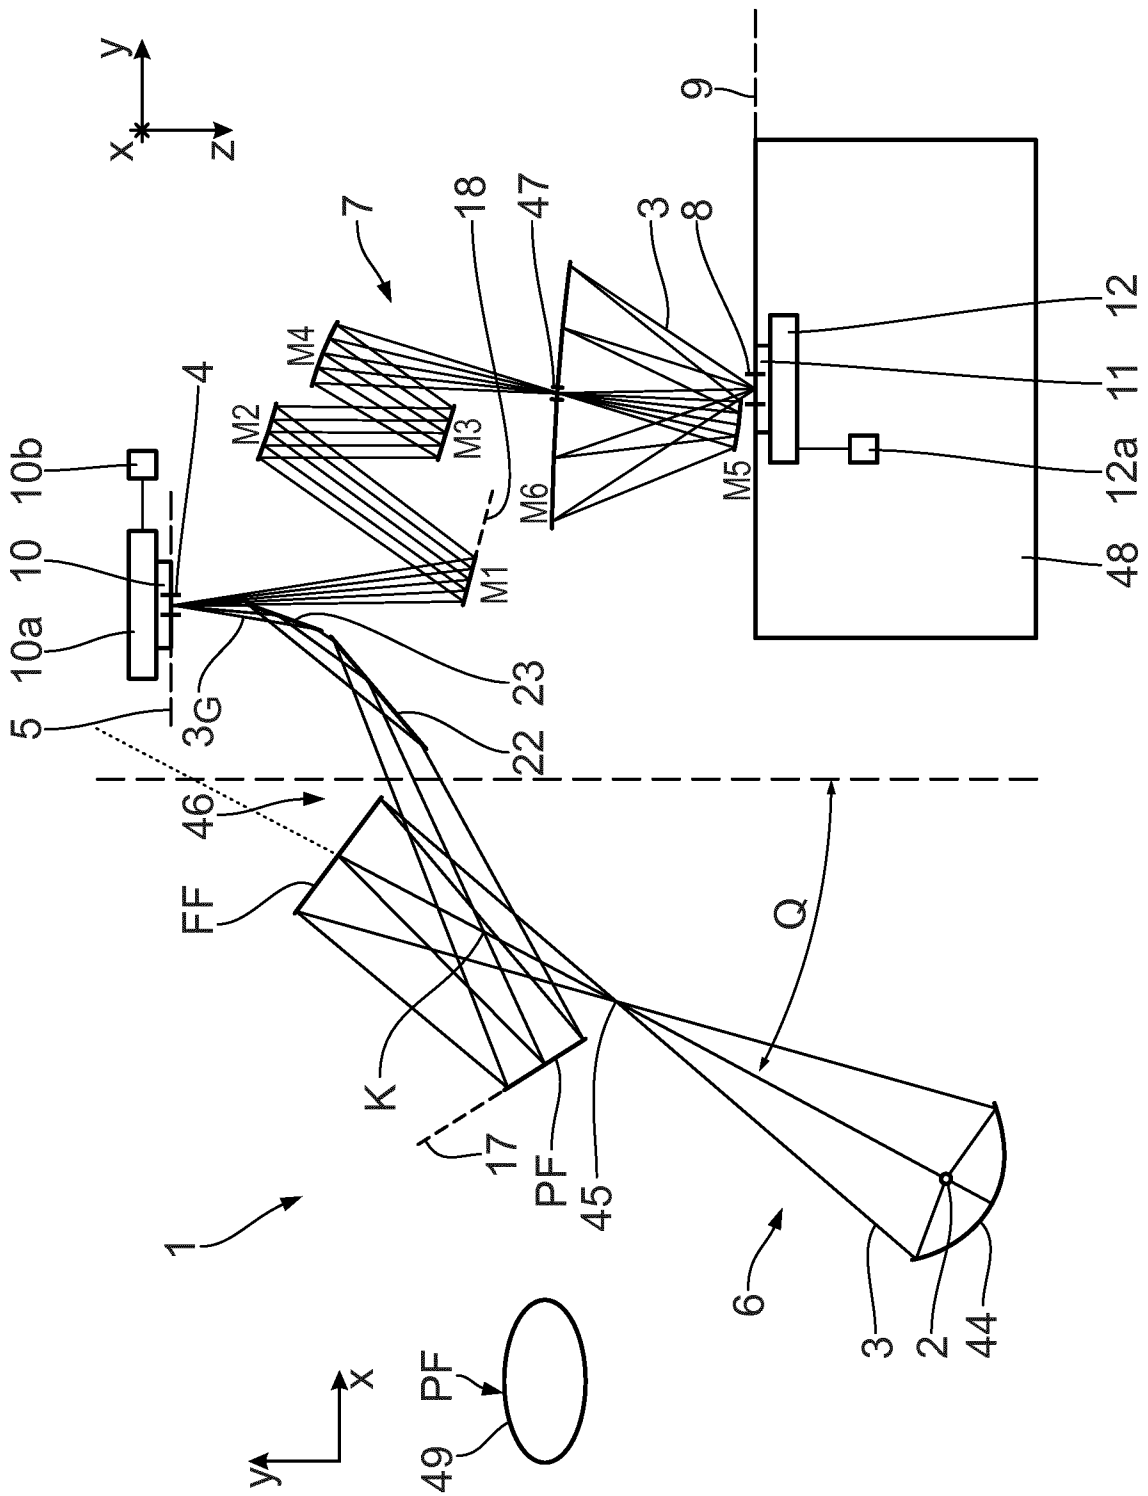


Fig. 17

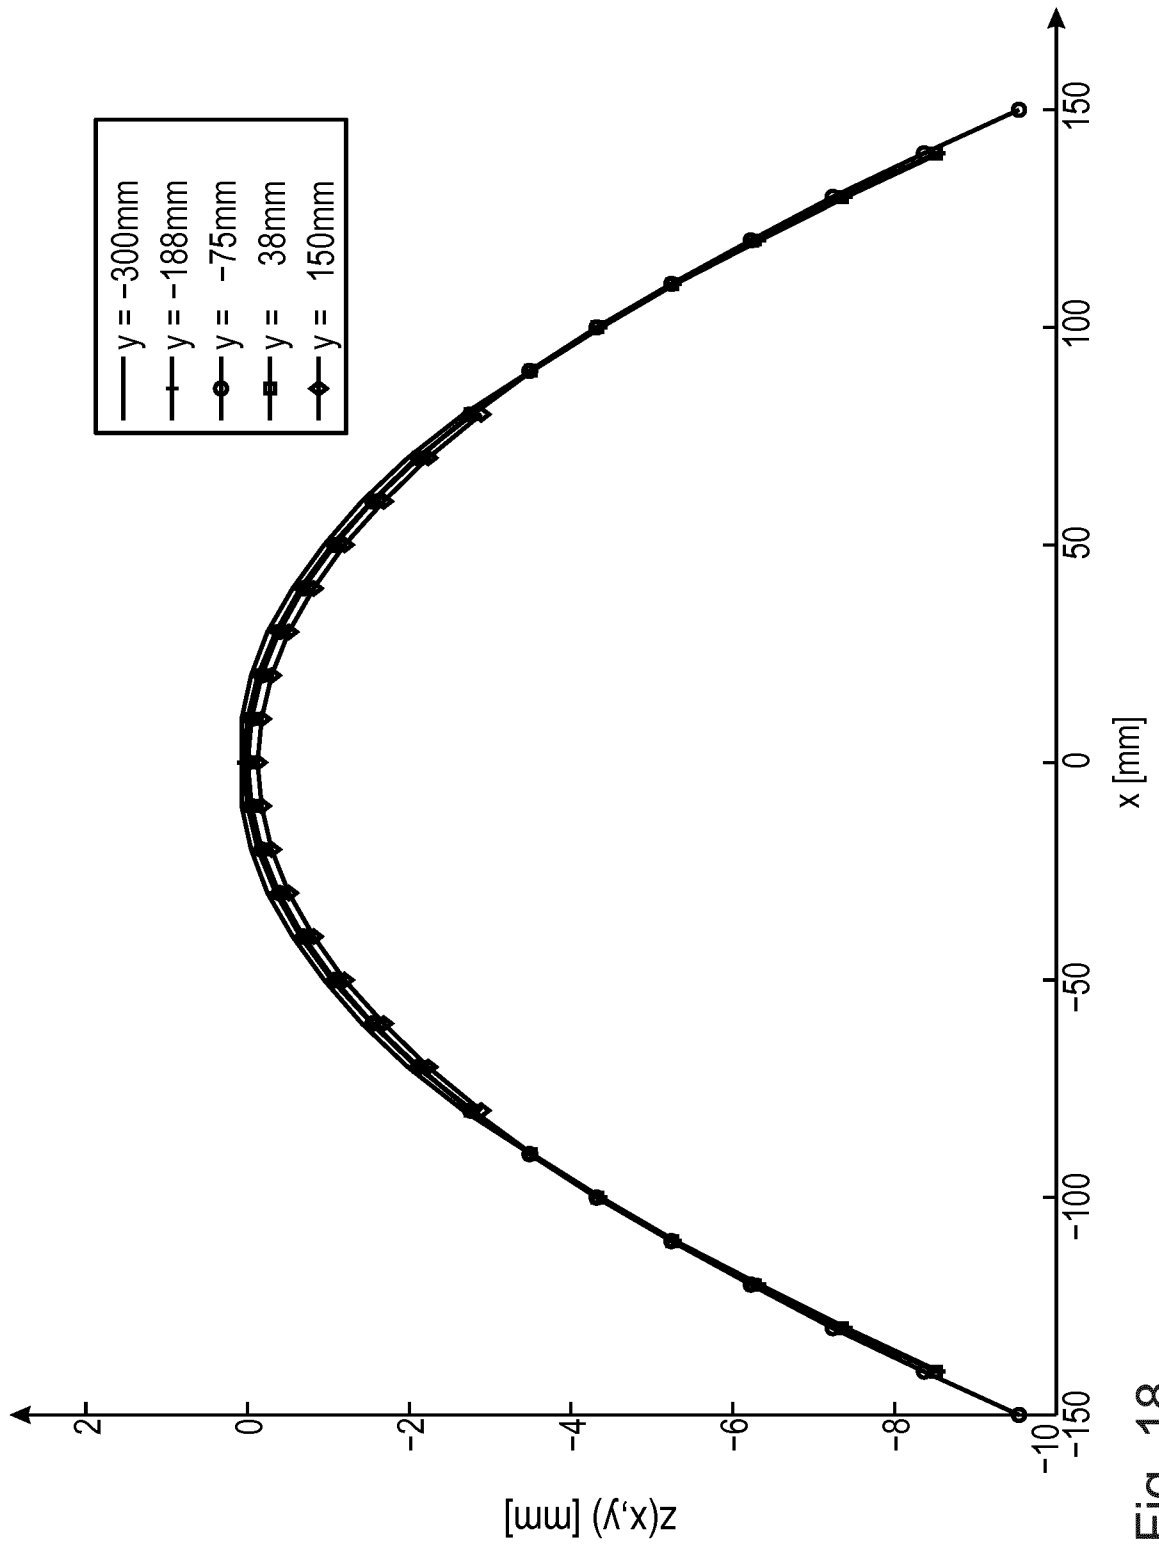


Fig. 18

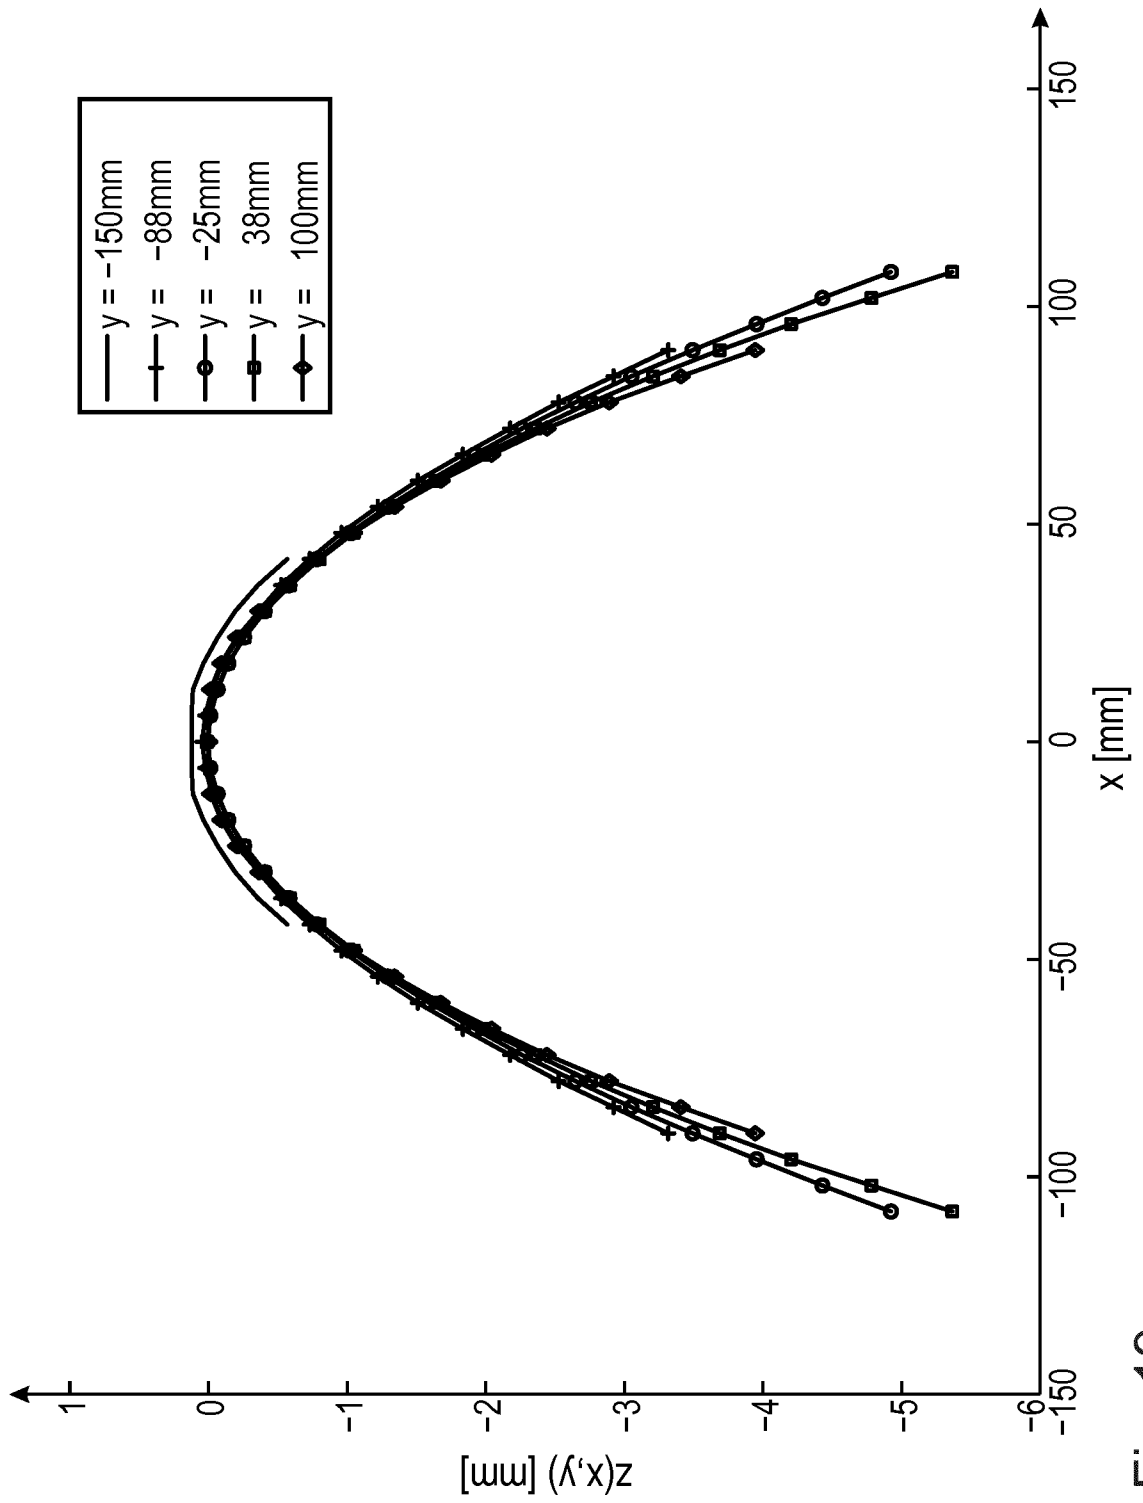


Fig. 19

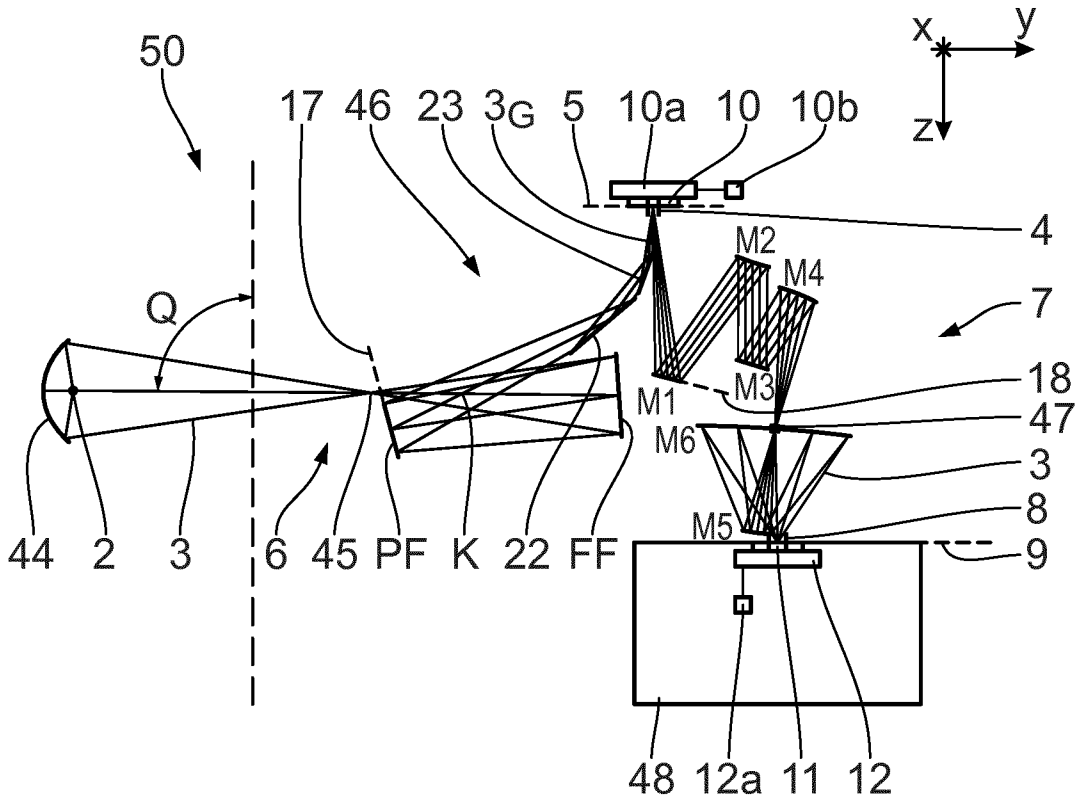


Fig. 20

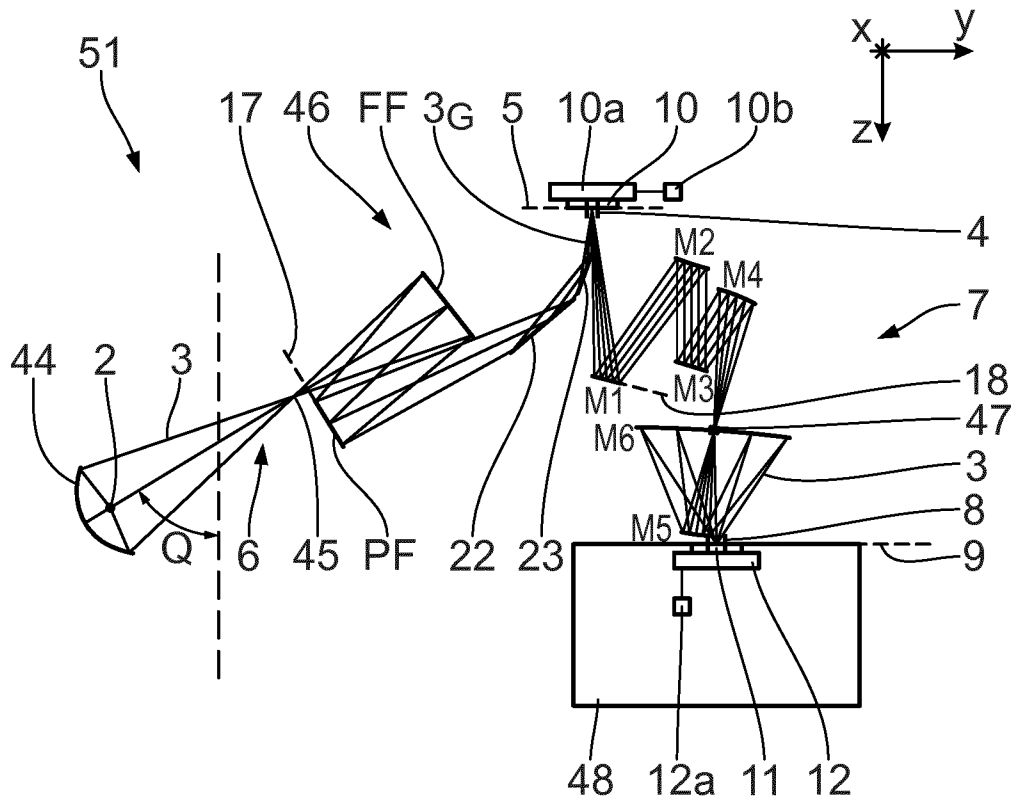


Fig. 21

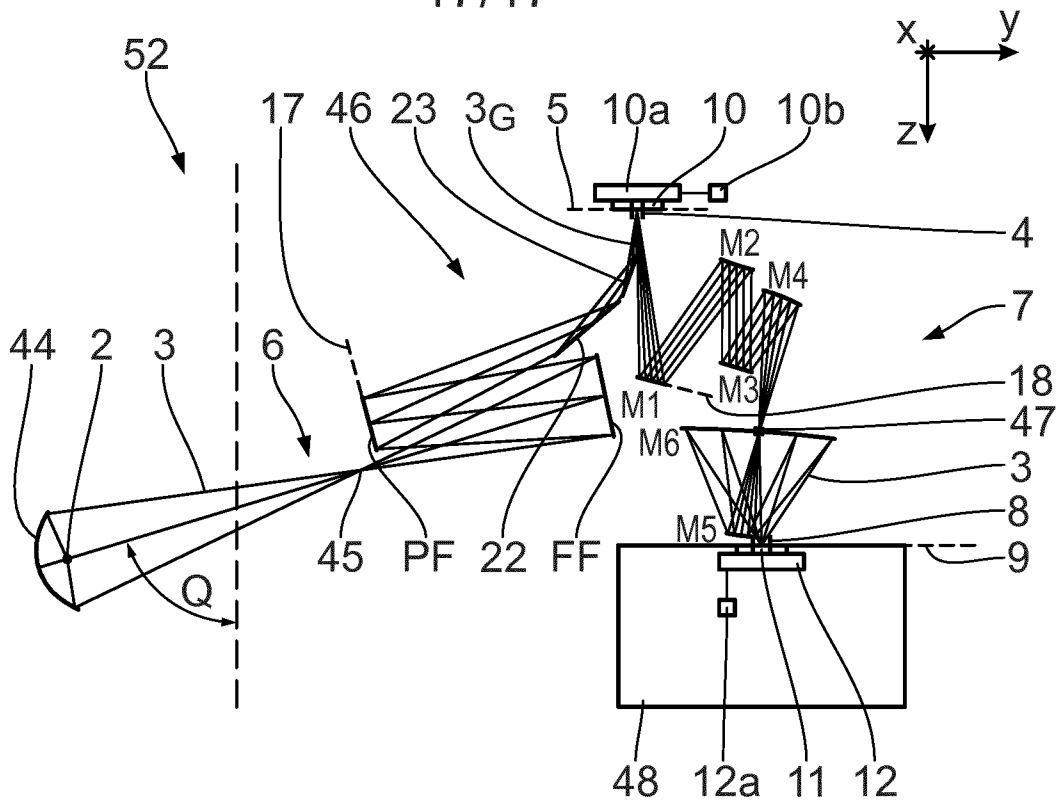


Fig. 22

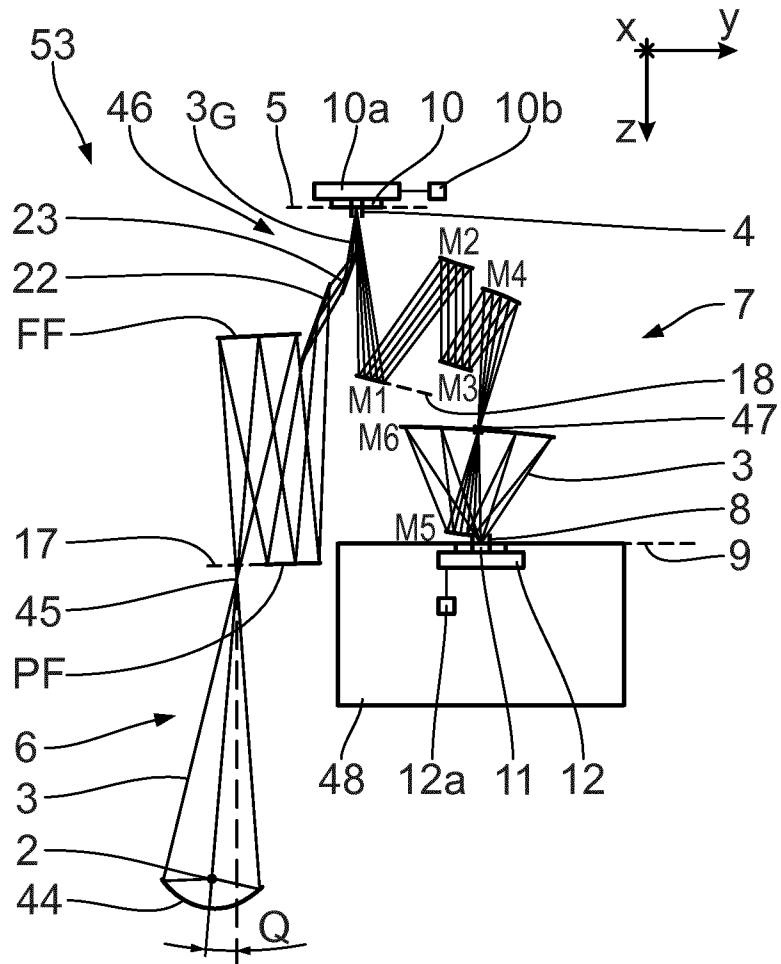


Fig. 23

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/072985

A. CLASSIFICATION OF SUBJECT MATTER
INV. G03F7/20
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
G03F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/002022 A1 (SCHULTZ JORG [DE]) 2 January 2003 (2003-01-02)	12
A	paragraphs [0151] - [0171]; figure 4d -----	1-11
X	DE 10 2009 045096 A1 (ZEISS CARL SMT AG [DE]) 7 October 2010 (2010-10-07)	12
A	cited in the application paragraph [0047]; figure 4 -----	1-11

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

20 January 2016

Date of mailing of the international search report

28/01/2016

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Eisner, Klaus

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2015/072985

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003002022	A1	02-01-2003	
		EP 1200878 A2	02-05-2002
		EP 1200879 A1	02-05-2002
		JP 2003506747 A	18-02-2003
		JP 2003506881 A	18-02-2003
		TW 472176 B	11-01-2002
		TW 490597 B	11-06-2002
		US 2003002022 A1	02-01-2003
		US 2003076607 A1	24-04-2003
		US 2005083503 A1	21-04-2005
		WO 0109681 A2	08-02-2001
		WO 0109684 A1	08-02-2001

DE 102009045096	A1	07-10-2010	NONE
