




(86) **Date de dépôt PCT/PCT Filing Date:** 2015/07/14
 (87) **Date publication PCT/PCT Publication Date:** 2016/04/07
 (45) **Date de délivrance/Issue Date:** 2019/06/25
 (85) **Entrée phase nationale/National Entry:** 2017/02/03
 (86) **N° demande PCT/PCT Application No.:** US 2015/040310
 (87) **N° publication PCT/PCT Publication No.:** 2016/053440
 (30) **Priorité/Priority:** 2014/09/29 (US14/499,719)

(51) **Cl.Int./Int.Cl. G01D 3/02** (2006.01),
G01D 3/024 (2006.01), **G01J 5/10** (2006.01)
 (72) **Inventeur/Inventor:**
 SCHNAARE, THEODORE HENRY, US
 (73) **Propriétaire/Owner:**
 ROSEMOUNT INC., US
 (74) **Agent:** RIDOUT & MAYBEE LLP

(54) **Titre : DISPOSITIF DE SURVEILLANCE DE PROCESSUS INDUSTRIEL SANS FIL**
 (54) **Title: WIRELESS INDUSTRIAL PROCESS MONITOR**

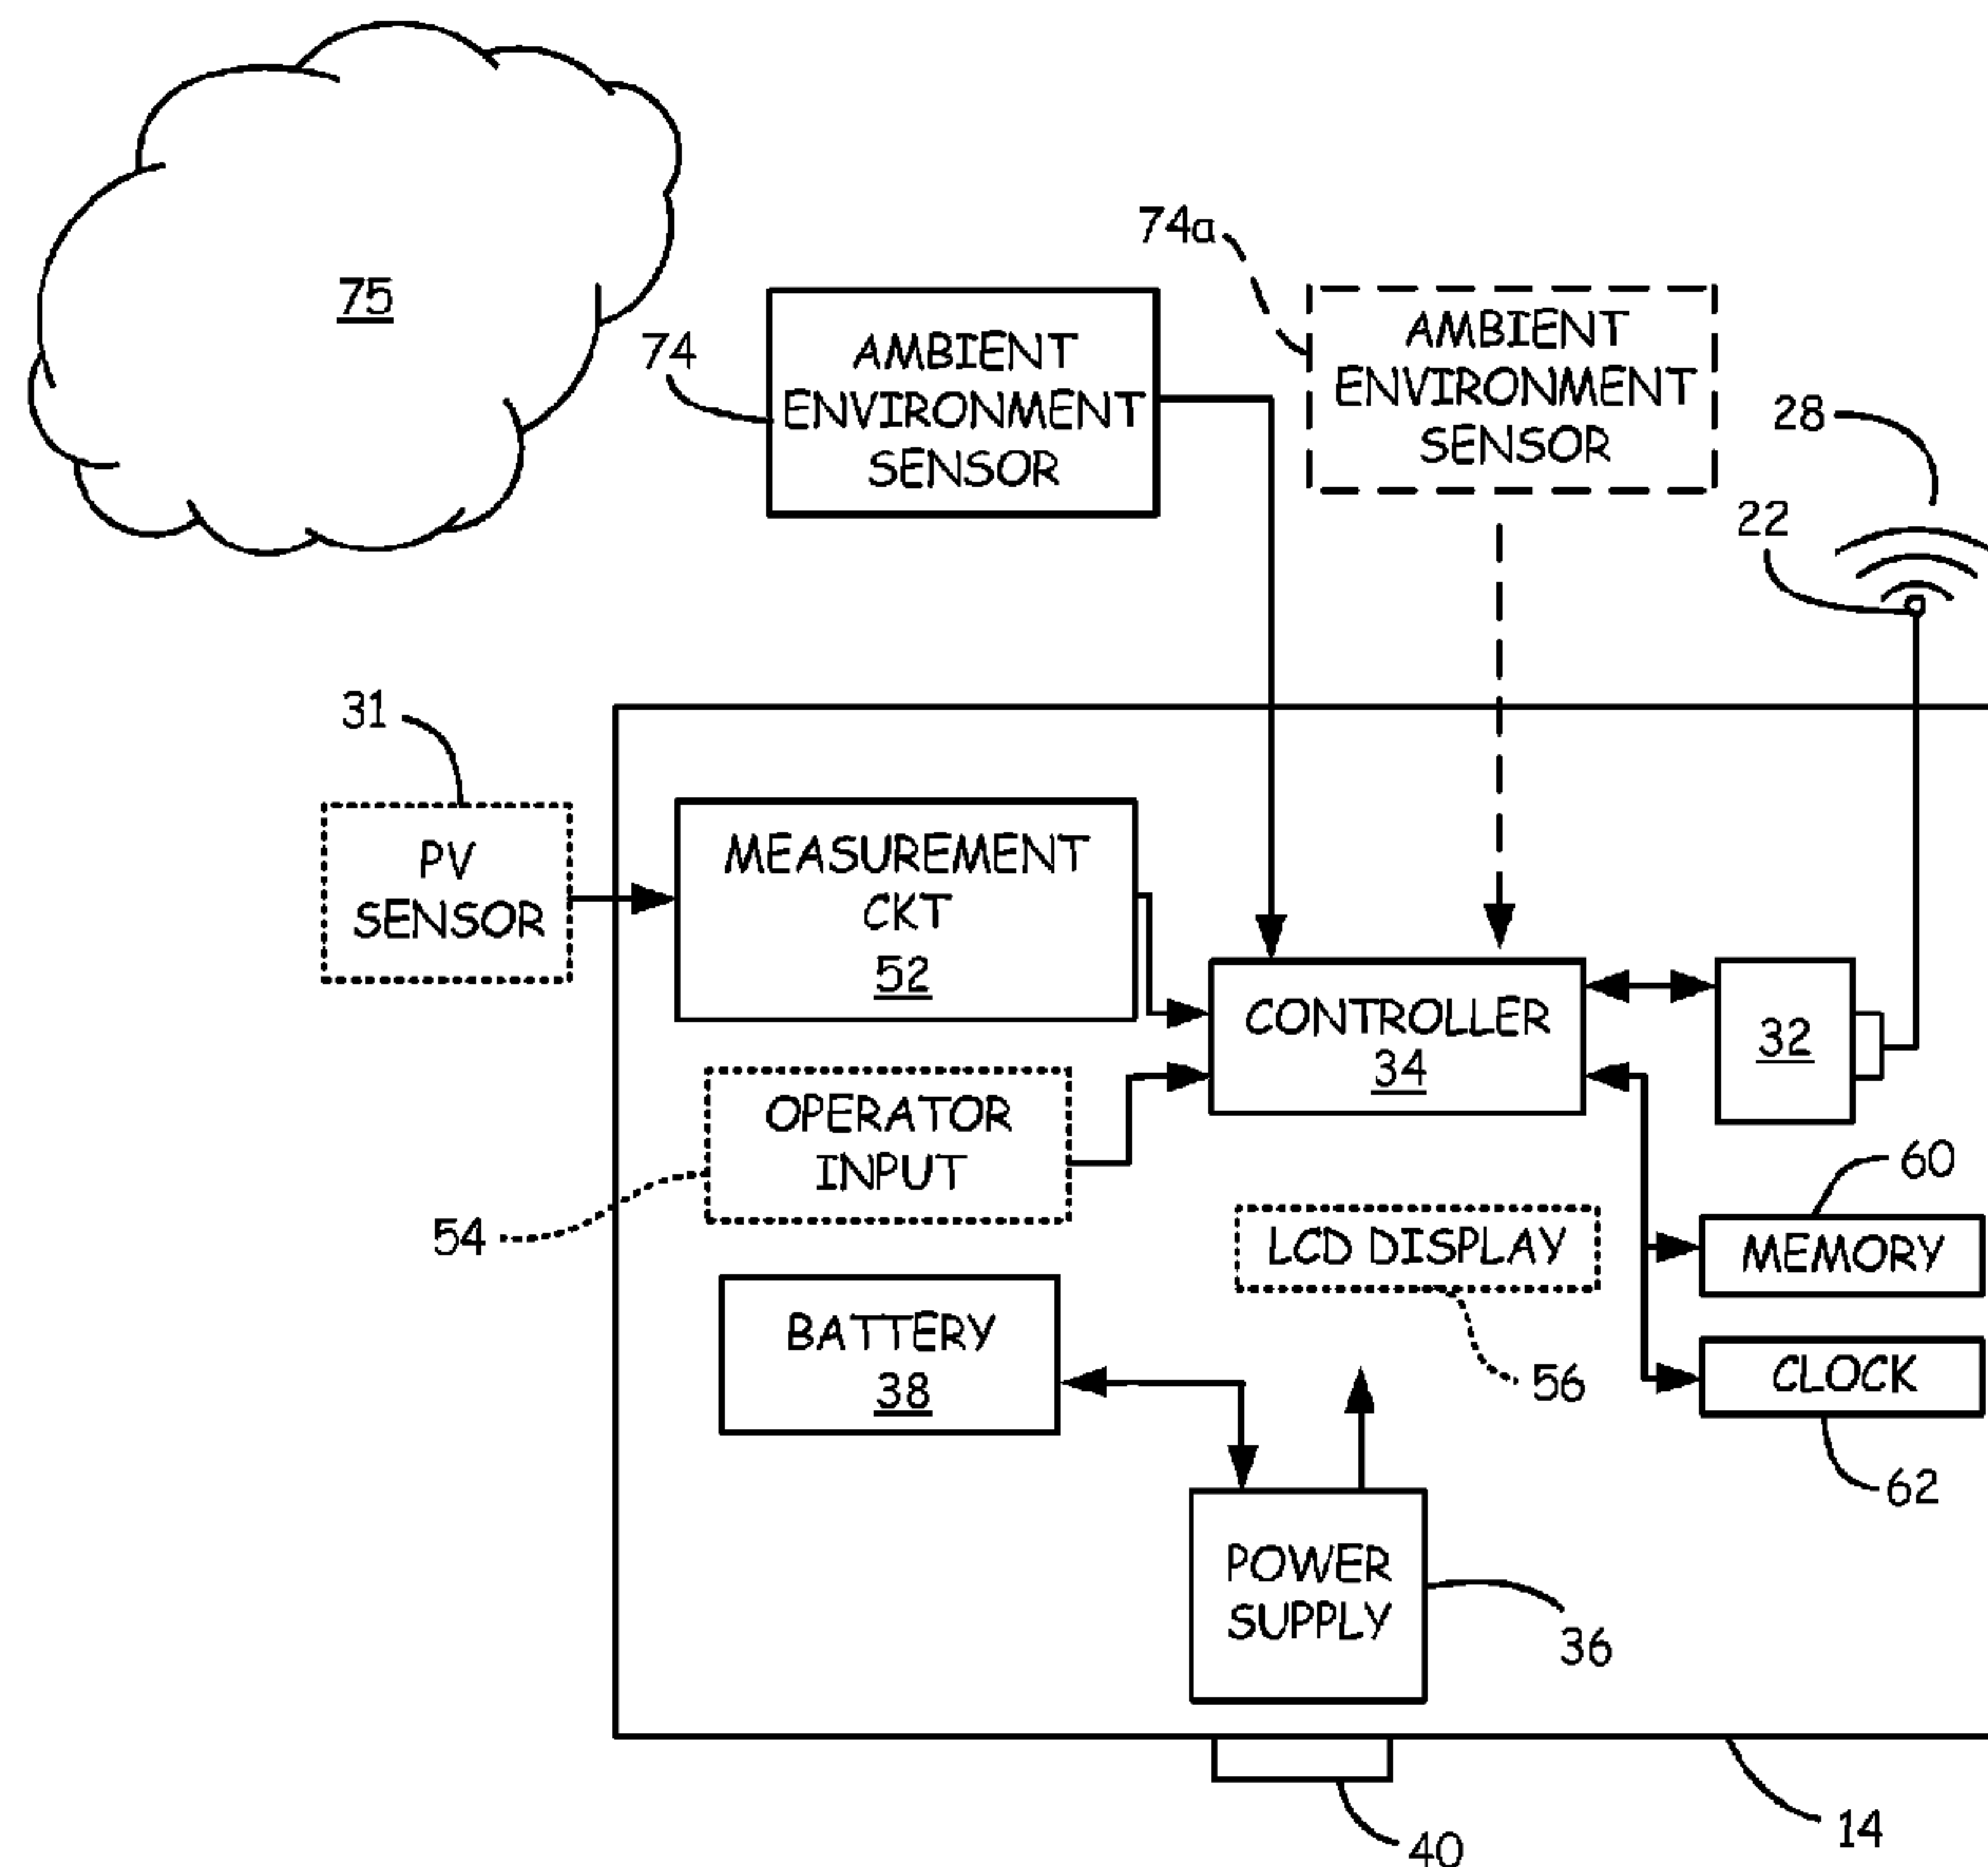

(57) **Abrégé/Abstract:**

An industrial process monitor (14) for monitoring an industrial process includes a controller (34) configured to control operation of the industrial process monitor. An ambient environment sensor (74) is configured to sense an ambient environment of the industrial process proximate the device (14) and responsively provide a sensor output signal. Output circuitry (32) is configured to provide an output based upon the sensor output signal. The controller (34) causes the ambient environment sensor to enter a high power mode upon detection of an anomaly and/or probable anomaly in the sensor output signal.


(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
7 April 2016 (07.04.2016)(10) International Publication Number
WO 2016/053440 A1

- (51) **International Patent Classification:**
G06F 1/32 (2006.01) *G08C 17/02* (2006.01)
- (21) **International Application Number:**
PCT/US2015/040310
- (22) **International Filing Date:**
14 July 2015 (14.07.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
14/499,719 29 September 2014 (29.09.2014) US
- (71) **Applicant:** ROSEMOUNT INC. [US/US]; 8200 Market Boulevard, Chanhassen, MN 55317 (US).
- (72) **Inventor:** SCHNAARE, Theodore, Henry; 235 Butternut Circle, Carver, MN 55315 (US).
- (74) **Agents:** CHAMPLIN, Judson K. et al.; Westman, Champlin & Koehler, P.A., 900 Second Avenue South, Suite 1400, Minneapolis, MN 55402-3319 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

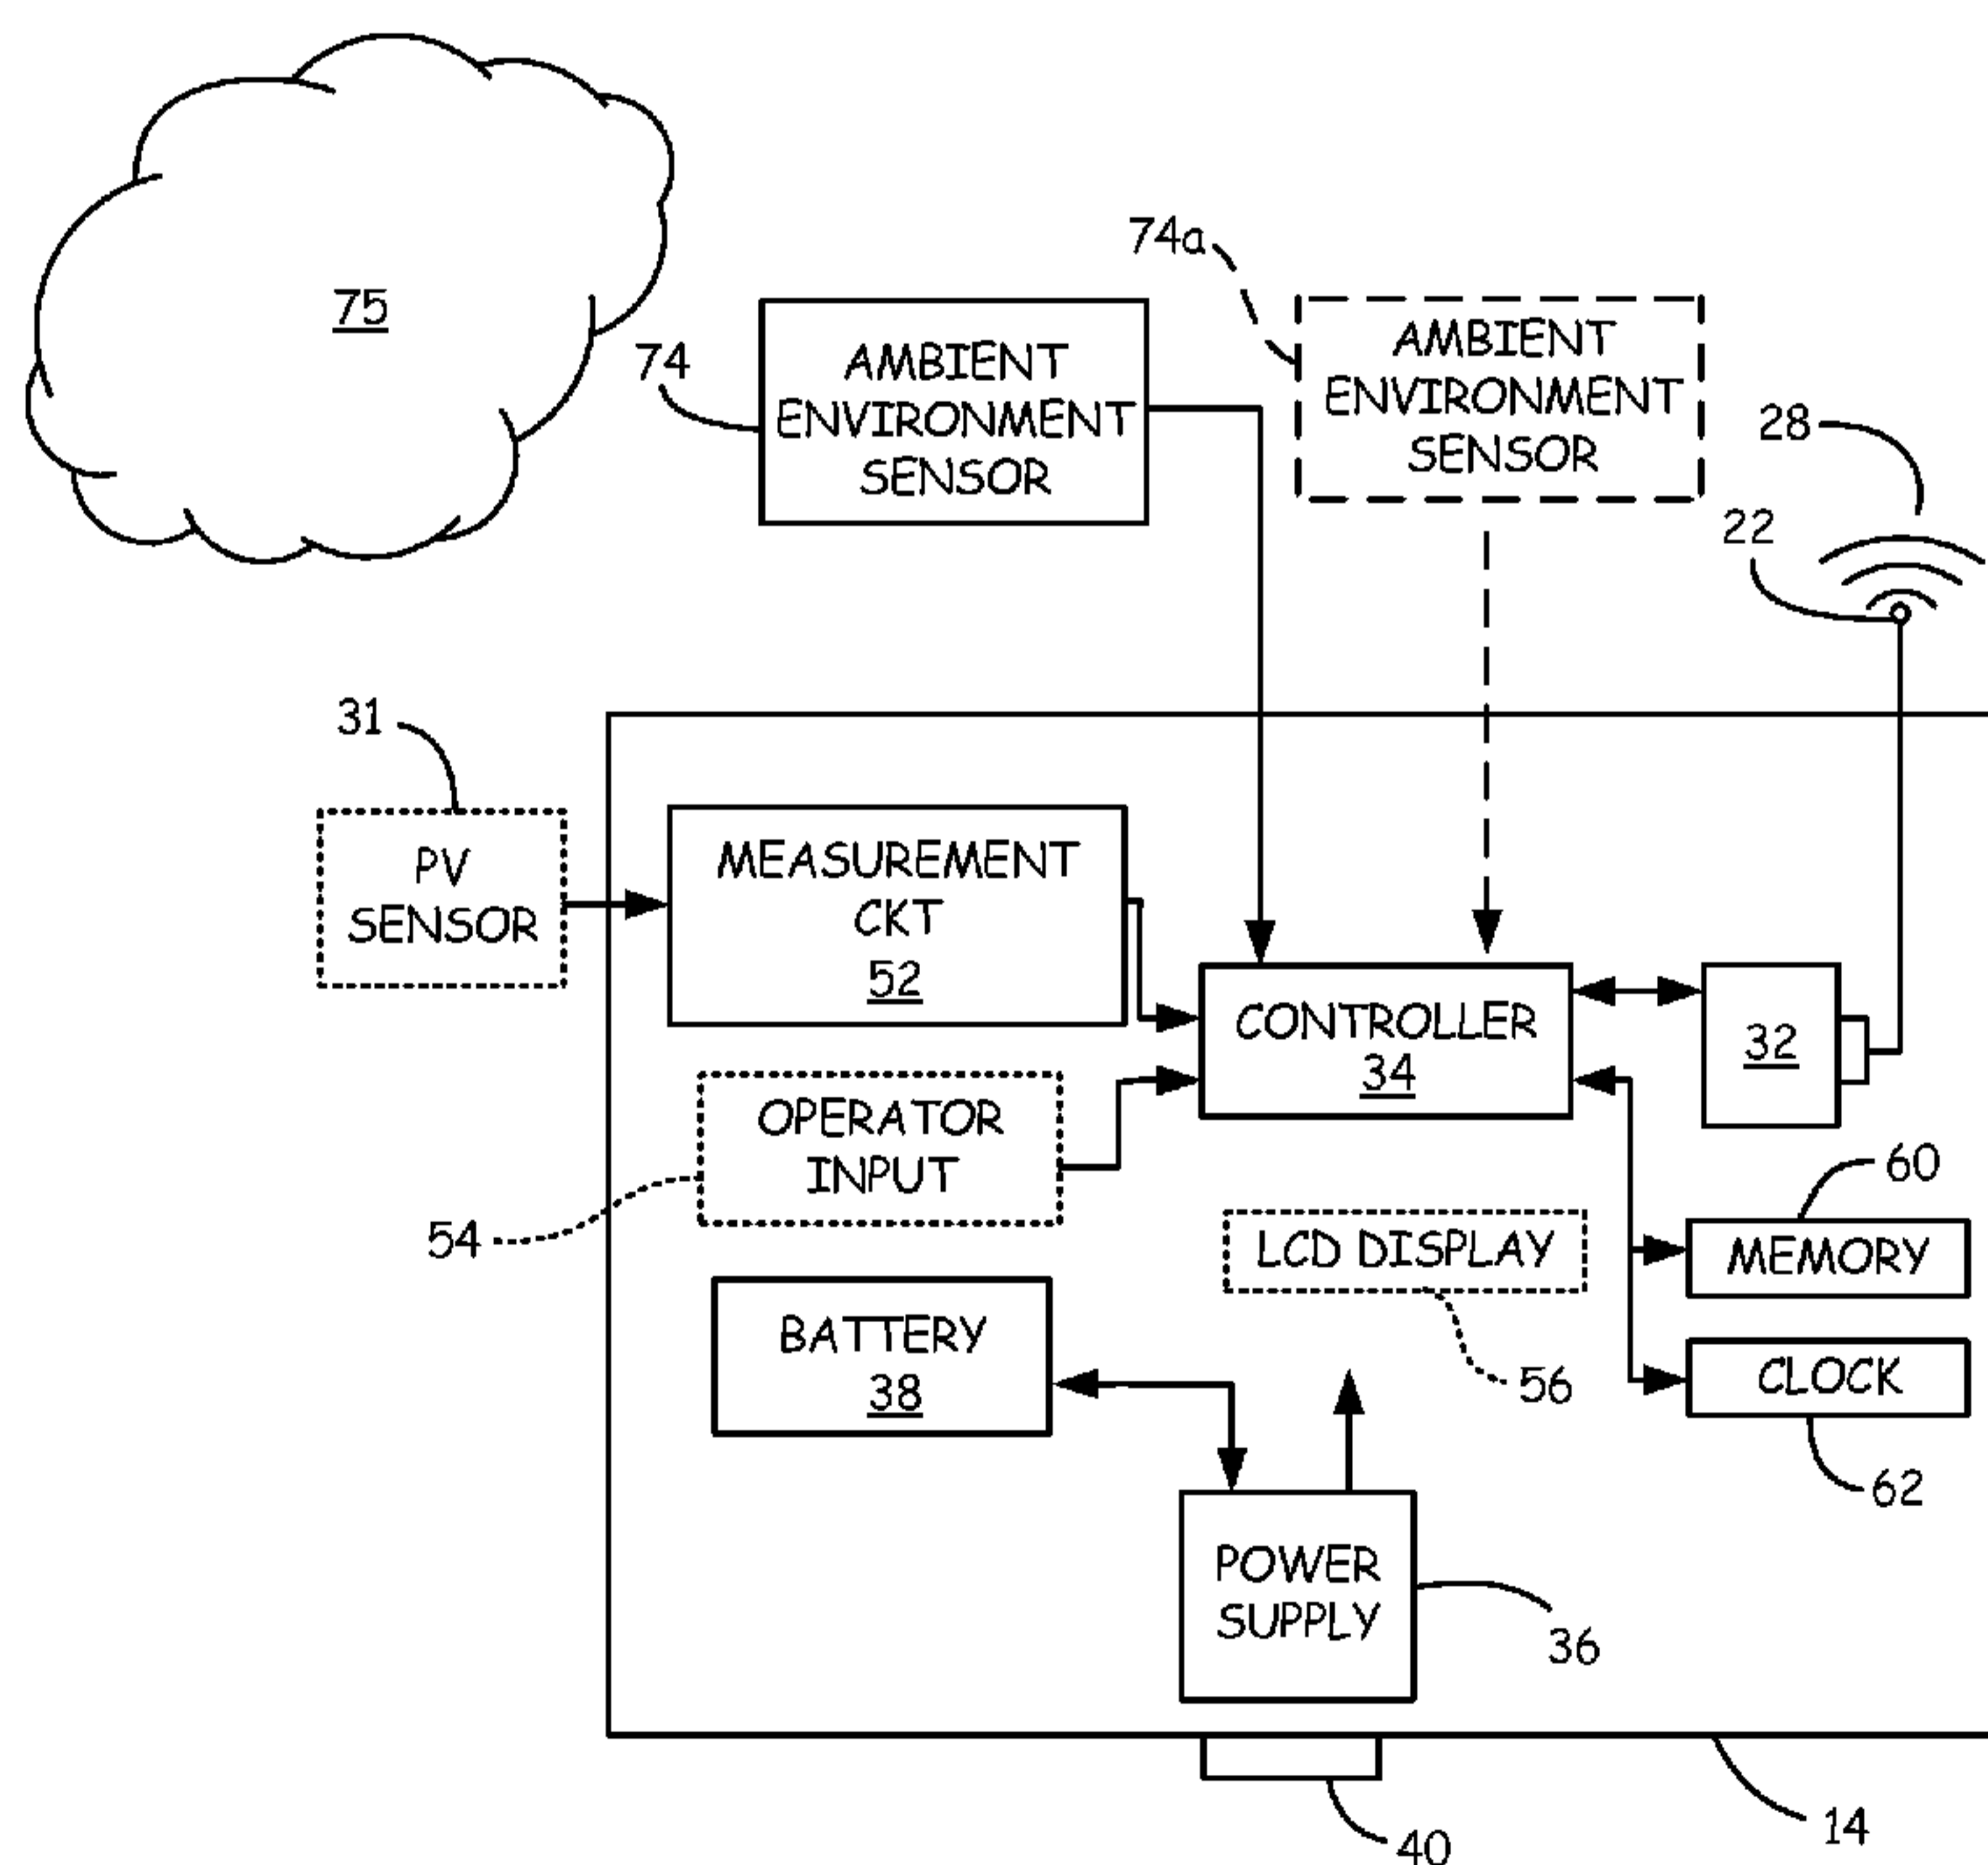(54) **Title:** WIRELESS INDUSTRIAL PROCESS MONITOR**FIG. 3**

(57) **Abstract:** An industrial process monitor (14) for monitoring an industrial process includes a controller (34) configured to control operation of the industrial process monitor. An ambient environment sensor (74) is configured to sense an ambient environment of the industrial process proximate the device (14) and responsively provide a sensor output signal. Output circuitry (32) is configured to provide an output based upon the sensor output signal. The controller (34) causes the ambient environment sensor to enter a high power mode upon detection of an anomaly and/or probable anomaly in the sensor output signal.

WIRELESS INDUSTRIAL PROCESS MONITOR

BACKGROUND

[0001] The present invention relates to industrial process control or monitoring systems. More specifically, the present invention relates to wireless process field devices used in such systems.

[0002] In industrial settings, systems are used to monitor and control inventories and operation of industrial and chemical processes, and the like. Typically, the system that performs these functions uses field devices distributed at key locations in the industrial process coupled to control circuitry in the control room by a process control loop. The term "field device" refers to any device that performs a function in a distributed control or process monitoring system, including all devices used in the measurement, control and monitoring of industrial processes.

[0003] Typically, each field device also includes communication circuitry that is used for communicating with a process controller, other field devices, or other circuitry, over the process control loop. In some installations, the process control loop is also used to deliver a regulated current and/or voltage to the field device for powering the field device. The process control loop also carries data, either in an analog or digital format.

[0004] In some installations, wireless technologies have begun to be used to communicate with field devices. Wireless operation simplifies field device wiring and setup. Wireless installations are currently used in which the field device includes an internal power source. However, because of power limitations, the functionality of such devices is typically limited.

[0005] Typically, field devices are used to sense or control process variables in an industrial process. However, in some installations, it may be desirable to monitor the local environment of the field device.

SUMMARY

[0006] An industrial process monitor for monitoring an industrial process includes a controller configured to control operation of the industrial process monitor. An ambient environment sensor is configured to sense an ambient environment of the industrial process proximate the device and responsively provide a sensor output signal. Output circuitry is configured to provide an output based upon the sensor output signal. The controller causes the

ambient environment sensor to enter a high power mode upon detection of an anomaly and/or probable anomaly in the sensor output signal.

[0007] This Summary and the Abstract are provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. The Summary and the Abstract are not intended to identify key features or essential features of the claimed subject matter, nor are they intended to be used as an aid in determining the scope of the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 is a simplified block diagram showing a process control or monitoring system for use with the present invention.

[0009] FIG. 2 is a block diagram showing components in a field device of one embodiment of the present invention.

[0010] FIG. 3 is a more detailed block diagram showing components of the field device of FIG. 2.

[0011] FIG. 4 shows a captured image of an industrial process during low power, low resolution "pilot mode" operation.

[0012] FIG. 5 is an image collected of the industrial process in a low power, low resolution pilot mode of operation showing an anomaly in the image.

[0013] FIG. 6 is an image captured of industrial process in a high power, high resolution mode of operation.

[0014] FIG. 7 is a graph showing the frequency domain of a captured acoustic signal during a low power, low spectral resolution pilot mode of operation.

[0015] FIG. 8 is a graph of the frequency domain of captured acoustic data during a high power, high spectral resolution mode of operation.

[0016] FIG. 9 is a graph of amplitude versus frequency illustrating a boundary fence.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[0017] Many high value monitoring applications which use monitoring techniques such as video, infrared, ultrasonic and audio require systems that can acquire information at high sampling rates and/or high resolutions. For example, a low resolution infrared monitoring system may be capable of monitoring an overall thermal profile. However, in order to specifically identify a location of a thermal anomaly high resolution is required. The capture and analysis of

high resolution infrared images is needed to fully characterize the anomaly and to distinguish it from background noise or from expected thermal changes in the environment. However, the acquisition and processing of such high resolution images requires significant power. This quickly depletes the batteries of a self-powered field device such as a wireless field device. A similar problem exists with other techniques for monitoring an ambient environment, for example, audio and ultrasonic monitoring. In order to correctly characterize an acoustic event, high sampling rates are needed in order to analyze the spectral content so that a signal profile can be compared to a known acoustic signature, for example one which occurs when a system leaks.

[0018] The present invention offers techniques for addressing the above problem. A system is provided for monitoring the ambient environment which utilizes both a low power mode that is capable of acquiring data at low resolutions and/or sampling rates, and a high power mode that is only activated when the low power (pilot) mode detects a signal of potential interest. The present invention provides a technique for monitoring the ambient environment of an industrial process and relates to monitoring systems implemented in locally or internally powered wireless field devices. A wireless industrial process monitor is implemented in a field device and is configured to monitor an ambient environment in the industrial process. The monitoring may be through any appropriate ambient environment sensor including video, infrared, acoustic, or other. Such a sensor requires a high sampling frequency and/or high resolution in order to characterize and locate events of interest in the local (ambient) environment and to distinguish sensed signals related to these events from background noise. However, as high resolution and/or high sampling frequencies require an increased amount of power, a configuration is used in which a low energy “pilot mode” is implemented for normal operation. In this “pilot mode”, a low resolution initial measurement is obtained. If an anomaly is detected based upon this low resolution initial measurement, a high resolution, high power mode may be entered by the system. In the high power mode, data is collected at a high data rate and/or resolution. Subsequently, the device may re-enter the “pilot mode” for continued low power operation.

[0019] FIG. 1 is a simplified diagram showing an example process control or monitoring system 10 which includes a control room 12 communicating with field devices 14 and 16 through a wireless gateway 13. Communication between gateway 13 and control room 12 may be over a wired or wireless communication link. Field device 14 is shown coupled to process piping 18 and field device 16 is shown coupled to storage tank 20. However, devices 14, 16 may

be located at any desired location. Devices 14 and 16 include antennas 22 and 24, respectively, for transmitting and/or receiving information from antenna 26 associated with wireless gateway 13. Devices 14 and 16 communicate using wireless radio frequency (RF) communication links 28, 29 and 30 with each other and with a remote location such as gateway 13. One example wireless communication protocol is the WirelessHART® protocol in accordance with IEC 62591. Field devices 14 and 16 include components to provide local (internal) power to the devices without requiring additional wires. For example, device 14 and 16 can include solar cells and/or batteries for local power.

[0020] As field device 14 and 16 operate using limited power, their processing abilities and the amount of data which they are capable of transmitting is limited. In one aspect, the present invention includes a wireless field device such as device 14 and 16, which includes the ability to monitor the ambient environment using an ambient environment sensor. Wireless field devices which are capable of operating at remote locations that do not require an external power source are available from, for example, Rosemount Inc. of Chanhassen, MN. Such devices are configured to measure process variables or obtain other process information and transmit information using wireless communication techniques such as the WirelessHART® protocol.

[0021] FIG. 2 is a simplified block diagram showing field device 14 shown in FIG. 1 in greater detail. According to this embodiment, field device 14 includes an optional transducer 31, wireless input/output (communication) circuitry 32, controller 34, power supply circuit 36, battery 38 and solar panel 40. The transducer 31 can be either a sensor used to sense a process variable or a control element, such as a valve, which is used to control a process variable. The wireless communication circuitry 32 couples to antenna 22 for communication with gateway 13 over its antenna 26. Optionally, device 14 communicates directly with control room 12. Power supply circuit 36 is used to provide power to circuitry within field device 14. The power supply circuitry 36 can operate using internal power received from solar cell 40 and/or power received from battery 38. The power supply circuitry 36 can be powered from any type of internal power source that does not require wiring to a remote power source. The power supply circuitry 36 can be self-contained within the field device 14 or, in some embodiments, be located externally to the field device and positioned proximate to the field device. For example, a solar powered unit can be used to power a transmitter or other field device over a two wire connection which is also used to carry information. In such a configuration, the power supply circuitry can also provide

wireless communication to a remote location. If sufficient power is received from solar cell 40, power supply circuitry 36 can also be used to charge the battery 38. An ambient environment sensor 74 is used to monitor the environment of device 14 as explained below in more detail.

[0022] FIG. 3 is a more detailed block diagram of process field device 14 according to an embodiment of the present invention and shows optional transducer 31 configured as a process variable sensor which can be used to measure a process variable such as pressure, temperature, etc. The process variable sensor 31 may be positioned within the housing of device 14 or external to the housing as illustrated in FIG. 3. Measurement circuitry 52 couples to process variable sensor 31 and is used to perform initial signal processing prior to providing a measurement signal to controller 34. An optional user input 54 is shown in FIG. 3. Similarly, an optional local output device such as LCD display 56 is shown.

[0023] Controller 34 is typically a microprocessor based controller and couples to a memory 60 and a clock 62. The clock 62 determines the operation speed of digital circuitry within field device 14 and memory 60 is used to store information. Memory 60 can comprise both permanent and volatile memory and can be used to store data used during processing, programming instructions, calibration information, or other information, data or instructions for use with process device 14. Memory 60 also stores information from sensor 74 as described herein.

[0024] FIG. 3 also illustrates ambient environment sensor 74 in accordance with one example embodiment. Ambient environment sensor 74 operates as discussed below in more detail and is configured to sense some aspect of an ambient environment 75 of the field device 14. For example, ambient environment sensor 74 may comprise an image capture device. In such a configuration, sensor 74 is configured to capture images from the ambient environment 75. Similarly, ambient environment sensor may comprise an acoustic or ultrasonic sensor configured to capture acoustic or ultrasonic signals from environment 75. In another example, sensor 74 is a thermal detector configured to capture a thermal image such as an infrared (IR) image. from environment 75. In one configuration, an optional high resolution sensor 74A is provided. In such a configuration, sensor 74A can be used to capture high resolution images or sample the environment at a higher data rate than sensor 74.

[0025] As discussed above, the device 14 operates in a “pilot mode” obtaining low resolution/data rate information from sensor 74 during normal operation. A wide area of

environment 75 can be monitored by sensor 74. For example, if sensor 74 is an infrared sensor, sensor 74 can comprise a low power infrared camera which is energized periodically to capture low resolution images such as that shown in FIG. 4. Controller 34 analyzes the low resolution images captured by sensor 74 to determine if there are thermal anomalies present that warrant capture of additional high resolution images and analysis. This determination can be through any appropriate technique, for example, a simple pixel comparison of the captured image to a reference image stored in the memory 60 of device 14. This reference image can be captured during commissioning of the device, or based upon an input received through circuitry 32 or local input 54. In another example, the reference image is transmitted to the device 14 using wireless communication or the like. The system may contain several reference images in memory 60 which all depict normal thermal profiles for the specific field of view of the sensor 74. If the acquired image is found to match one of the “normal” images, or found through some other low energy analysis technique to have no thermal anomalies present, the system may enter into a stand-by mode until the next scheduled low resolution image is captured. However, if the controller 34 determines that the low resolution capture contains a probable thermal anomaly such as illustrated in FIG. 5, the system may enter a high resolution mode. In one configuration, in the high resolution mode, the sensor 74 enters a high resolution capture mode. In another example embodiment, a second, high resolution sensor 74A is used to capture high resolution images. In this mode, field device 14 collects one or more high resolution images of the particular field of view of environment 75 such as illustrated in FIG. 6. These images can then be further analyzed in order to provide additional characterization of the anomaly including, for example, the location of the anomaly and temperature. Further, the high resolution image may be transmitted to a remote location such as control room 12 for further analysis and may be viewed by an operator.

[0026] A similar technique can be used for an acoustic monitoring system. For example, a low power pilot mode can be used to acquire acoustic data from the environment 75 at a low sample rate using sensor 74. The low sample rate data can be quickly analyzed in any appropriate way, including comparison of the low sample rate data to known normal acoustic profiles of the area stored in the memory 60 of device 14. FIG. 7 is a graph of such low sampling data. This low spectral resolution acoustic data shows an anomaly as illustrated in FIG. 7. When an anomaly is detected during the pilot mode, the controller 34 causes the system to enter a high

sampling rate mode to acquire a high band width acoustic profile of the environment such as illustrated in FIG. 8. This data may be acquired using the same sensor 74, or may be acquired using a different sensor 74A configured for high data rate acquisition. After the high data rate data is obtained, the profile can be characterized. For example, the profile can be scaled and compared to known acoustic events such as leaks, bearing wear, fires, etc.

[0027] FIG. 9 is a graph illustrating one technique for detecting an anomaly in an acoustic signal. FIG. 9 is a graph of amplitude versus frequency. Graph 80 illustrates a historical background or boundary “fence” of sensed acoustic signals. This fence is one example of a stored profile. This may be programmed through a learning technique, or by an operator setting particular frequencies and thresholds. FIG. 9 also illustrates a received acoustic signal 82 which violates the acoustic fence 80. This indicates that an anomaly has occurred in the received acoustic signal and can trigger a high resolution capture mode. Similar techniques can be used for RF or other sensing technologies.

[0028] In addition to obtaining high resolution data or data at a higher sample rate, the field device 14 can operate at a high clock speed, for example, by adjusting clock 62. This allows controller 34 to operate at a higher speed to analyze the collected data. In one aspect, the system is configured to transmit information, for example, wirelessly using communication link 28, which indicates that the power available from battery 38 is insufficient for continued operation. For example, although the system is capable of continued “pilot mode” operation, the stored energy may be insufficient for the device to enter a high power mode for any significant period of time. When in this condition, the system may automatically transition into an alternate operating mode. Instead of entering a high spectral resolution mode when triggered, the system will omit this step and simply alert the user via the wireless network that an uncharacterized anomaly has been detected.

[0029] An anomaly may be detected using an appropriate technique. As discussed above, the collected data can be compared to known normal profiles. Other techniques include comparison of the collected data to thresholds in the time or frequency domain, monitoring for rapid changes or spikes in the collected data, monitoring for sudden drop outs in the collected data. The analysis may be done in the time or frequency domain, or some combination thereof. As used herein, the term “ambient environment sensor” refers to a sensor which is configured to sense an aspect of the ambient environment of the device 14. These may be image sensors including

visible and infrared radiation, as well as acoustic sensors including both audible and ultrasonic acoustic sensors. In one configuration, the ambient environment sensor senses more than just a single data point, for example, such as a single data point provided by a temperature sensor. The particular sensor may be configured to operate in two modes of operation, a low power “pilot mode” for acquiring low resolution and/or low data rate information, as well as a high power mode for acquiring high resolution and/or high data rate information. In another configuration, a second ambient environment sensor is provided for high resolution/data rate data collection. In another example configuration, one or more devices 14 are provided for monitoring an environment in the “pilot mode.” Data collected during the “pilot mode” monitoring is transmitted to another location, for example, over communication link 28. This information may be received at a location which has a larger power source or is coupled to line power. The data can be used to trigger a high power mode in which high data rate/high resolution data collection from a sensor at the remote location. In another example configuration, the anomaly may be detected in one device 14, and a second device, such as device 16 shown in FIG. 1, used to collect the high data rate/high resolution information. Similarly, if the sensor 74 is directional, when entering a high data acquisition state, the sensor may be aimed or “zoomed” into the area in which the anomaly was detected. Similarly, the sensor 74 may be configured to scan an area either in the “pilot mode” as well as in the high data rate mode.

[0030] Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention. As used herein, the ambient environment sensors preferably are configured to provide an output having a profile. The profile may be a plurality of pixels such as those which are used to an image, a plurality of amplitude or magnitude values such as from the sampled output of an acoustic sensor, or can be spectral content such as from an acoustic or image sensor. In the high power mode, the clock 62 can operate at a higher frequency such that controller 34 operates a faster processing rate. As used herein, the term “anomaly” includes an actual anomaly, an impending anomaly as well as a probably anomaly. A probable anomaly includes an anomaly which is more likely than not to have occurred. However, the threshold for what constitutes “probable” can be selected as desired.

Claims

What is claimed is:

1. A wireless industrial process monitor for monitoring an industrial process, comprising:
a controller configured to control operation of the industrial process monitor;
an ambient environment sensor configured to sense an ambient environment of the industrial process proximate the process monitor and responsively provide a sensor output signal, wherein the ambient environment sensor is configured to operate in a low power mode and in a high power mode;
wireless output circuitry configured to provide an output based upon the sensor output signal;
wherein the controller is configured to detect an anomaly in the sensor output signal based upon at least one of a rapid change and a spike in the sensor output signal in at least one of a time domain or a frequency domain which is provided by the ambient environment sensor; and
wherein the controller causes the ambient environment sensor to enter a high power mode upon detection of an anomaly in the sensor output signal.
2. The wireless industrial process monitor of claim 1 including a clock and wherein the clock is configured to provide a higher clock rate than a clock rate during the low power mode, during the high power mode.
3. The wireless industrial process monitor of claim 1 including an internal power source configured to power the wireless industrial process monitor.
4. The wireless industrial process monitor of claim 1 wherein the ambient environment sensor comprises an image capture device configured to capture an image from the ambient environment.
5. The wireless industrial process monitor of claim 4 wherein the image capture device is configured to capture a thermal image.

6. The wireless industrial process monitor of claim 4 wherein the controller is configured to detect the anomaly based upon a comparison of pixels within a captured image.
7. The wireless industrial process monitor of claim 6 including a memory and wherein the comparison of pixels is based upon a reference image stored in the memory.
8. The wireless industrial process monitor of claim 7 wherein the memory is configured to store a plurality of reference images.
9. The wireless industrial process monitor of claim 1 wherein the controller is configured to detect an anomaly based upon a comparison of a portion of the sensor output signal to a threshold.
10. The wireless industrial process monitor of claim 1 wherein the controller is configured to detect an anomaly based upon a change in the sensor output signal.
11. The wireless industrial process monitor of claim 1 wherein the ambient environment sensor comprises a first ambient environment sensor configured to sense the ambient environment during the low power mode of operation and a second ambient environment sensor configured to sense the environment during the high power mode.
12. A wireless monitoring system including the wireless industrial process monitor of claim 1 and a remote device having a second ambient environment sensor.
13. The wireless industrial process monitor of claim 1 wherein the ambient environment sensor comprises an acoustic sensor.
14. The wireless industrial process monitor of claim 13 wherein the acoustic sensor comprises an ultrasonic sensor.

15. The wireless industrial process monitor of claim 1 wherein the ambient environment sensor enters a high resolution mode when in the high power mode.

16. The wireless industrial process monitor of claim 1 wherein the ambient environment sensor is directional and is configured to be aimed at the anomaly in the high power mode.

17. The wireless industrial process monitor of claim 1 wherein the ambient environment sensor comprises an image sensor and wherein a sensed image is enlarged in the high power mode.

18. The wireless industrial process monitor of claim 1 wherein the ambient environment sensor is configured to operate at a high data rate in the high power mode.

19. A method in a wireless field device in an industrial process control system for monitoring an industrial process, comprising:

sensing an ambient environment of the industrial process using an ambient environment sensor operating in a low power mode, to provide a sensor output signal;
providing, by wireless output circuitry, an output to a controller based upon the sensor output signal;
comparing the sensor output signal from the ambient environment sensor;
detecting, by the controller, an anomaly in the sensor output signal based upon at least one of a rapid change and spike in the sensor output signal in at least one of a time domain or a frequency domain which is provided by the ambient environment sensor; and
entering a high power mode in response to detection of the anomaly.

20. The method of claim 19 wherein the comparing is to a stored profile.

21. The method of claim 19 wherein the ambient environment sensor comprises an image sensor.

22. The method of claim 19 wherein the ambient environment sensor comprises an acoustic sensor.

23. The method of claim 19 including outputting an alert if there is insufficient power available to enter the high power mode.

24. The method of claim 19 wherein the ambient environment sensor is configured to operate at a high data rate and /or high resolution in the high power mode.

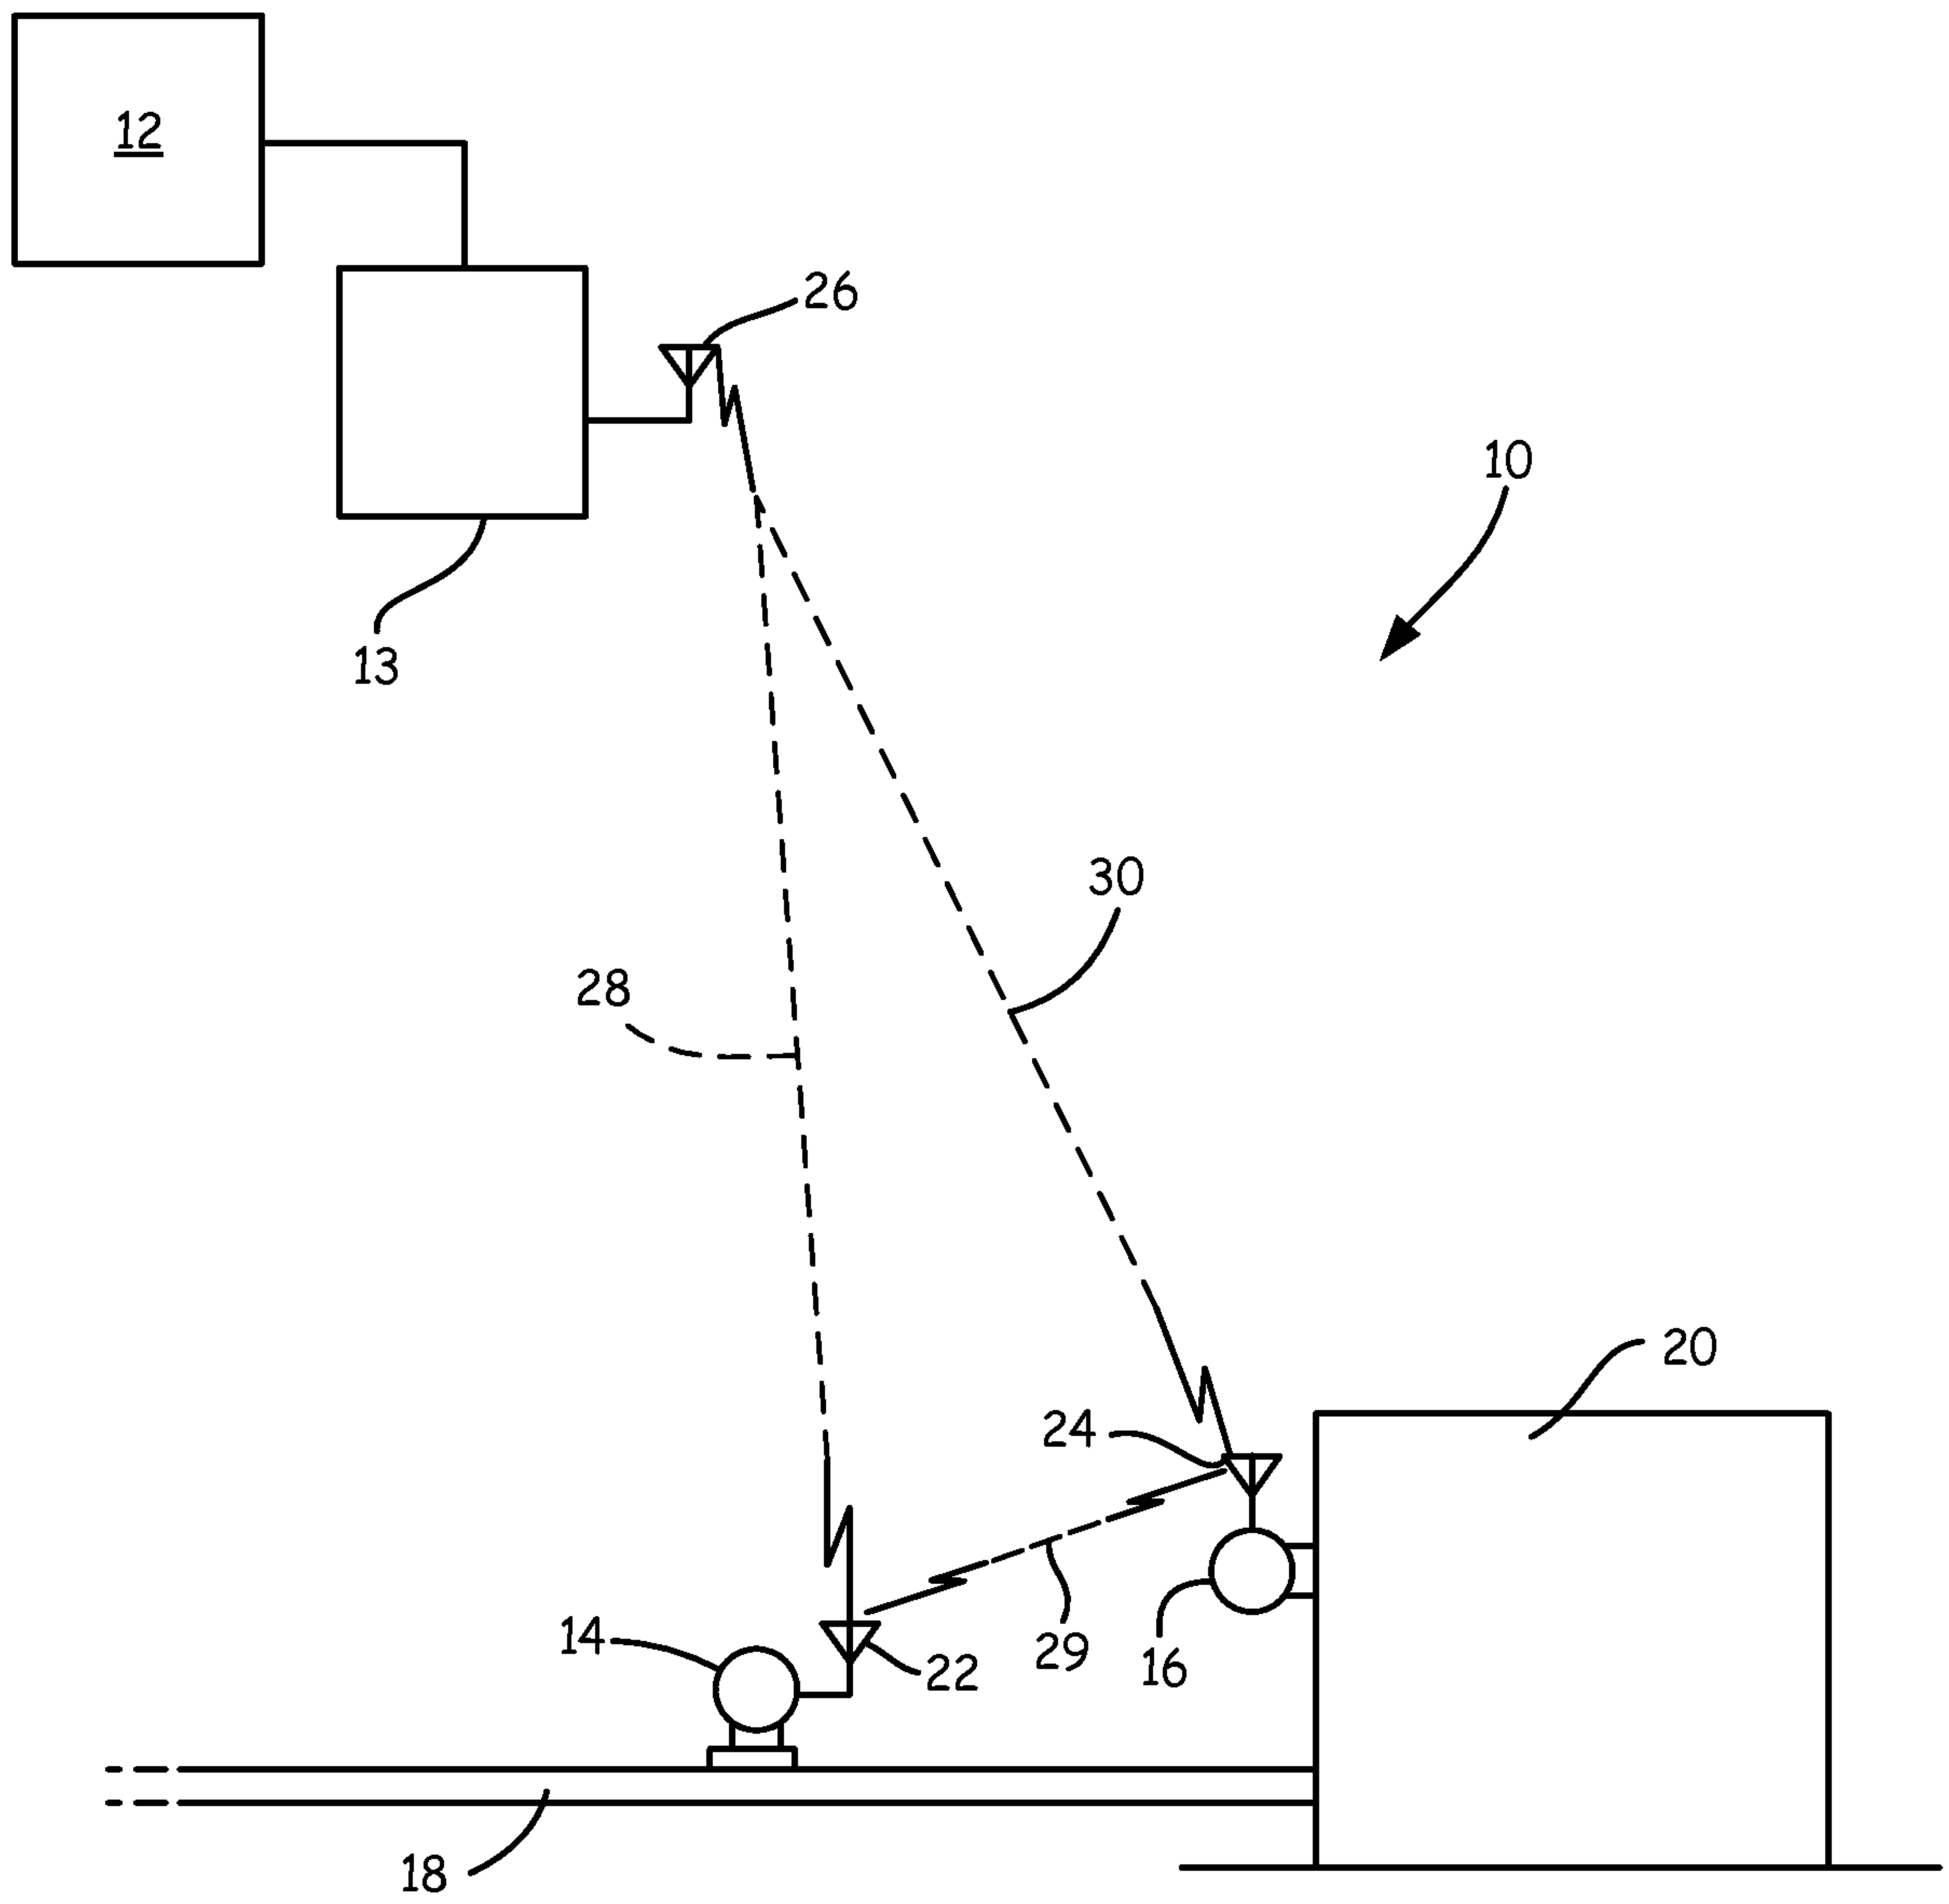


FIG. 1

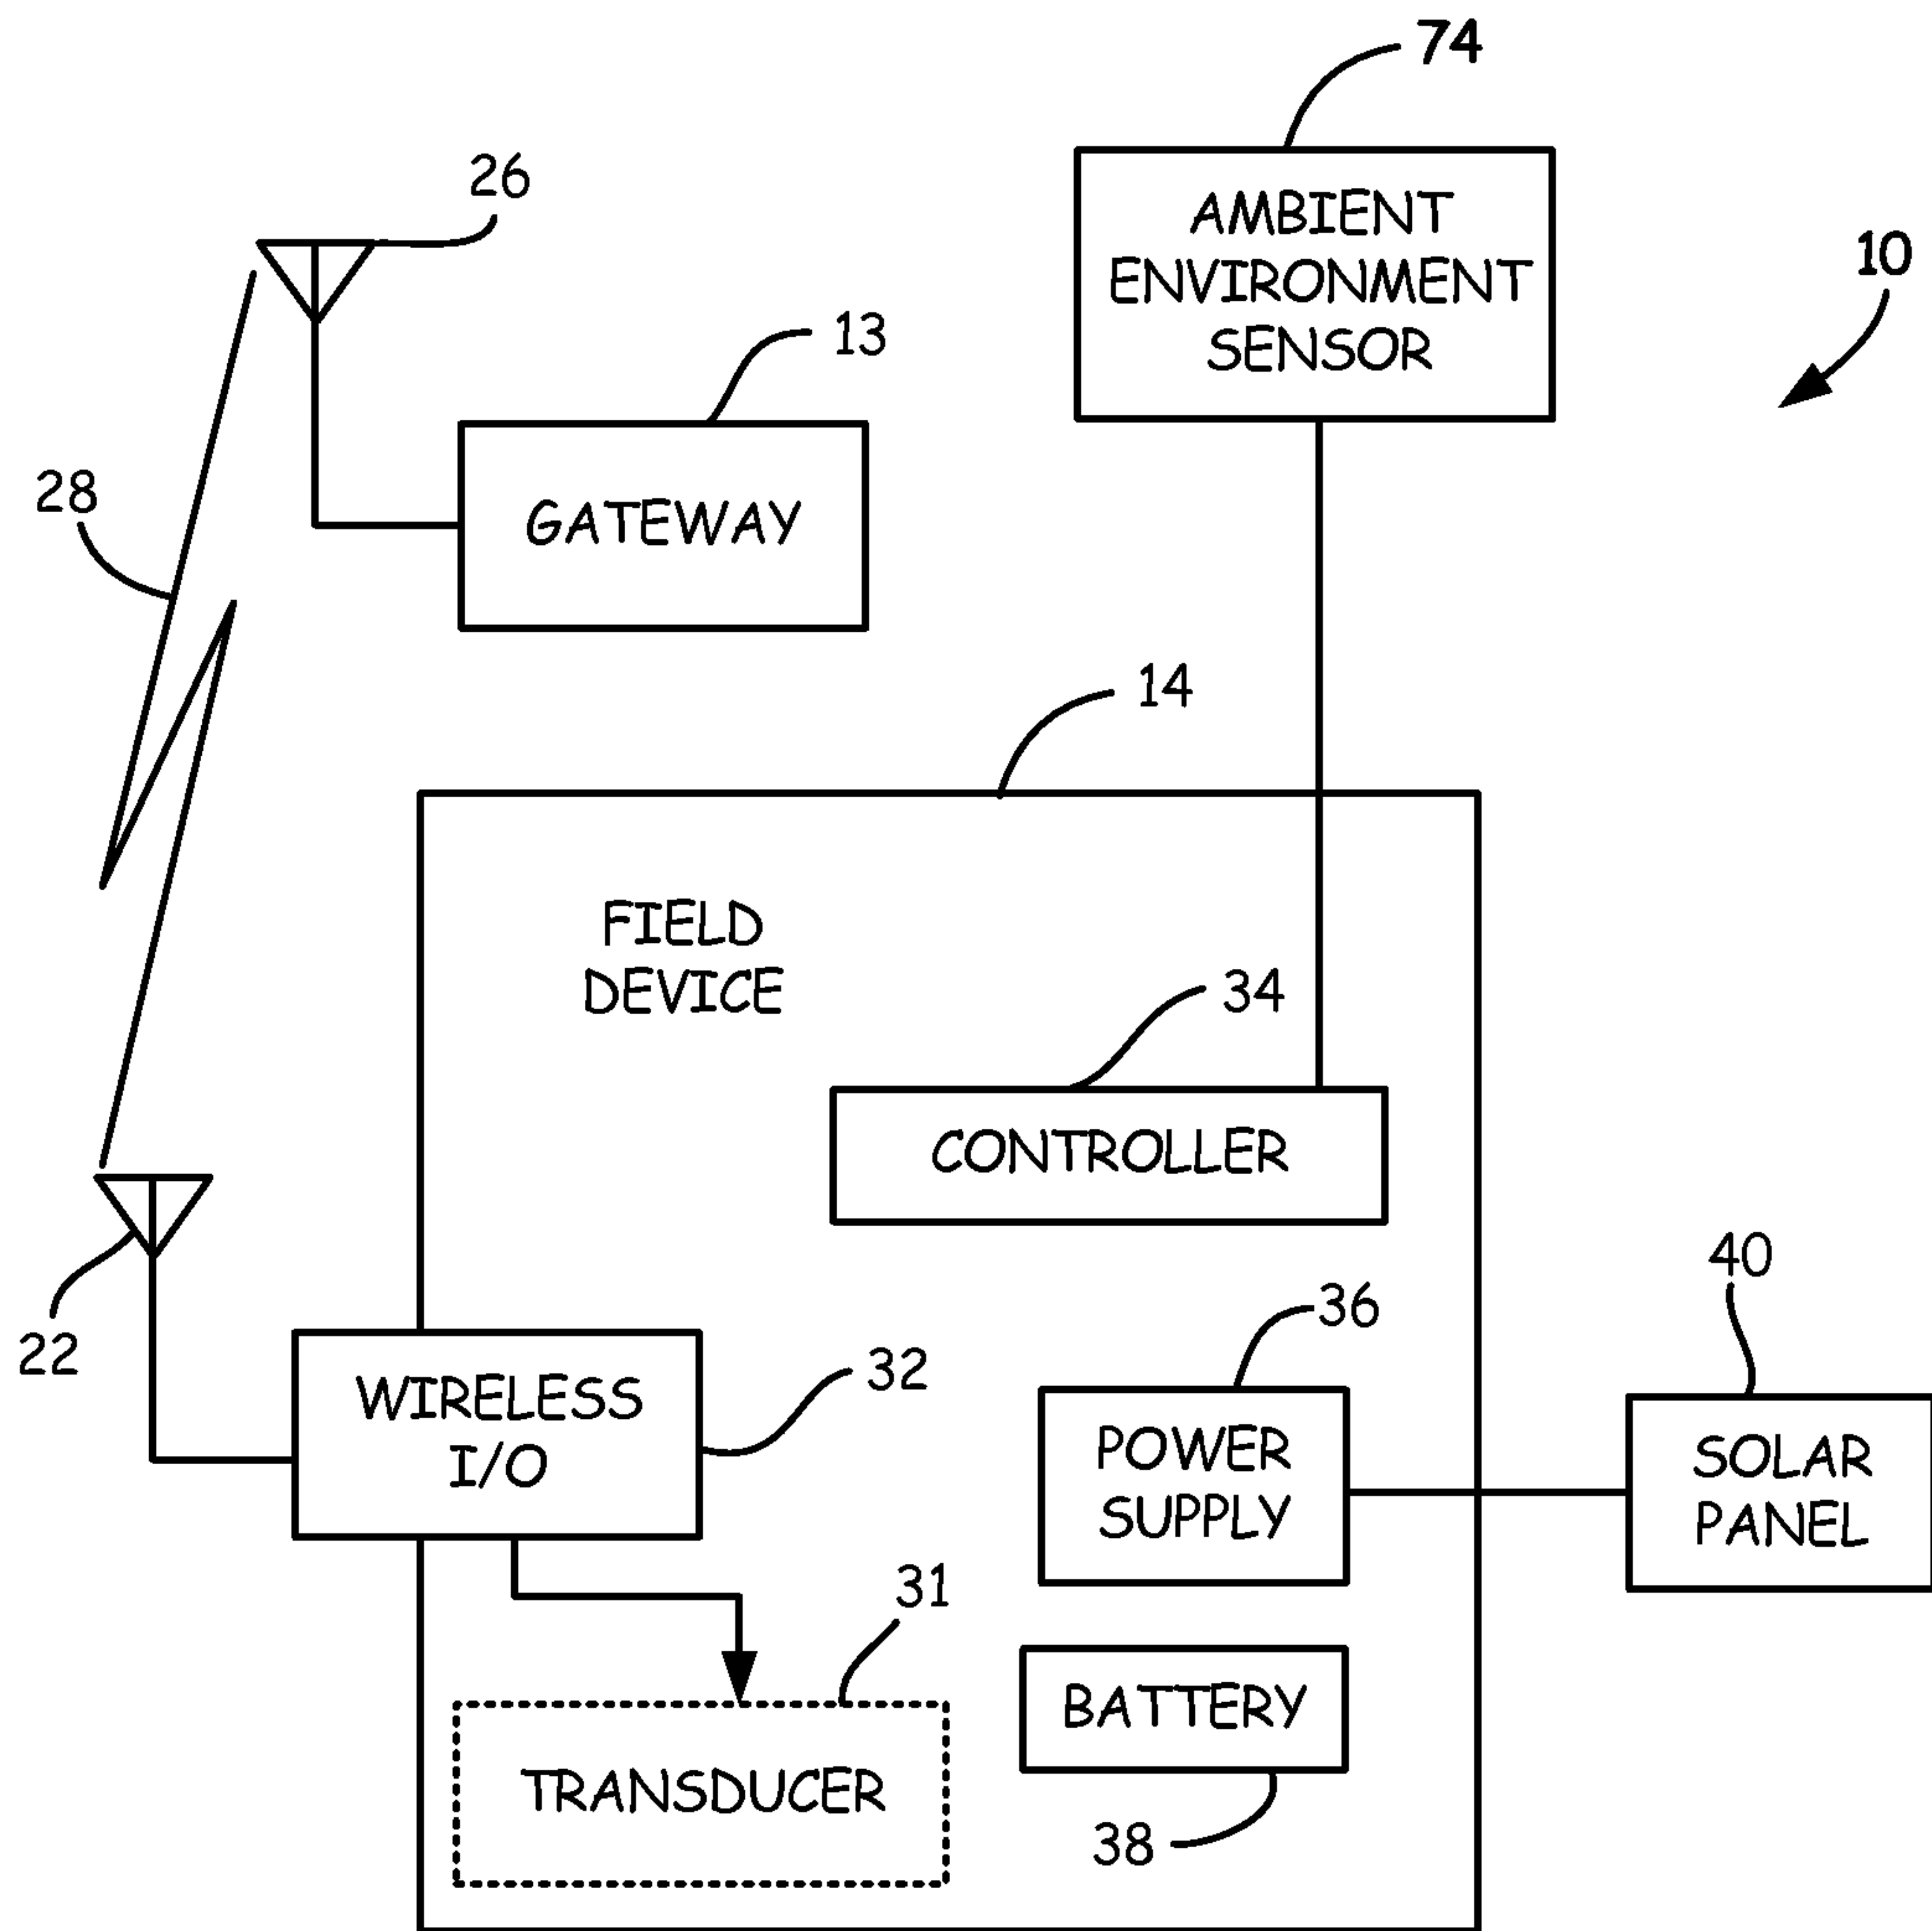


FIG. 2

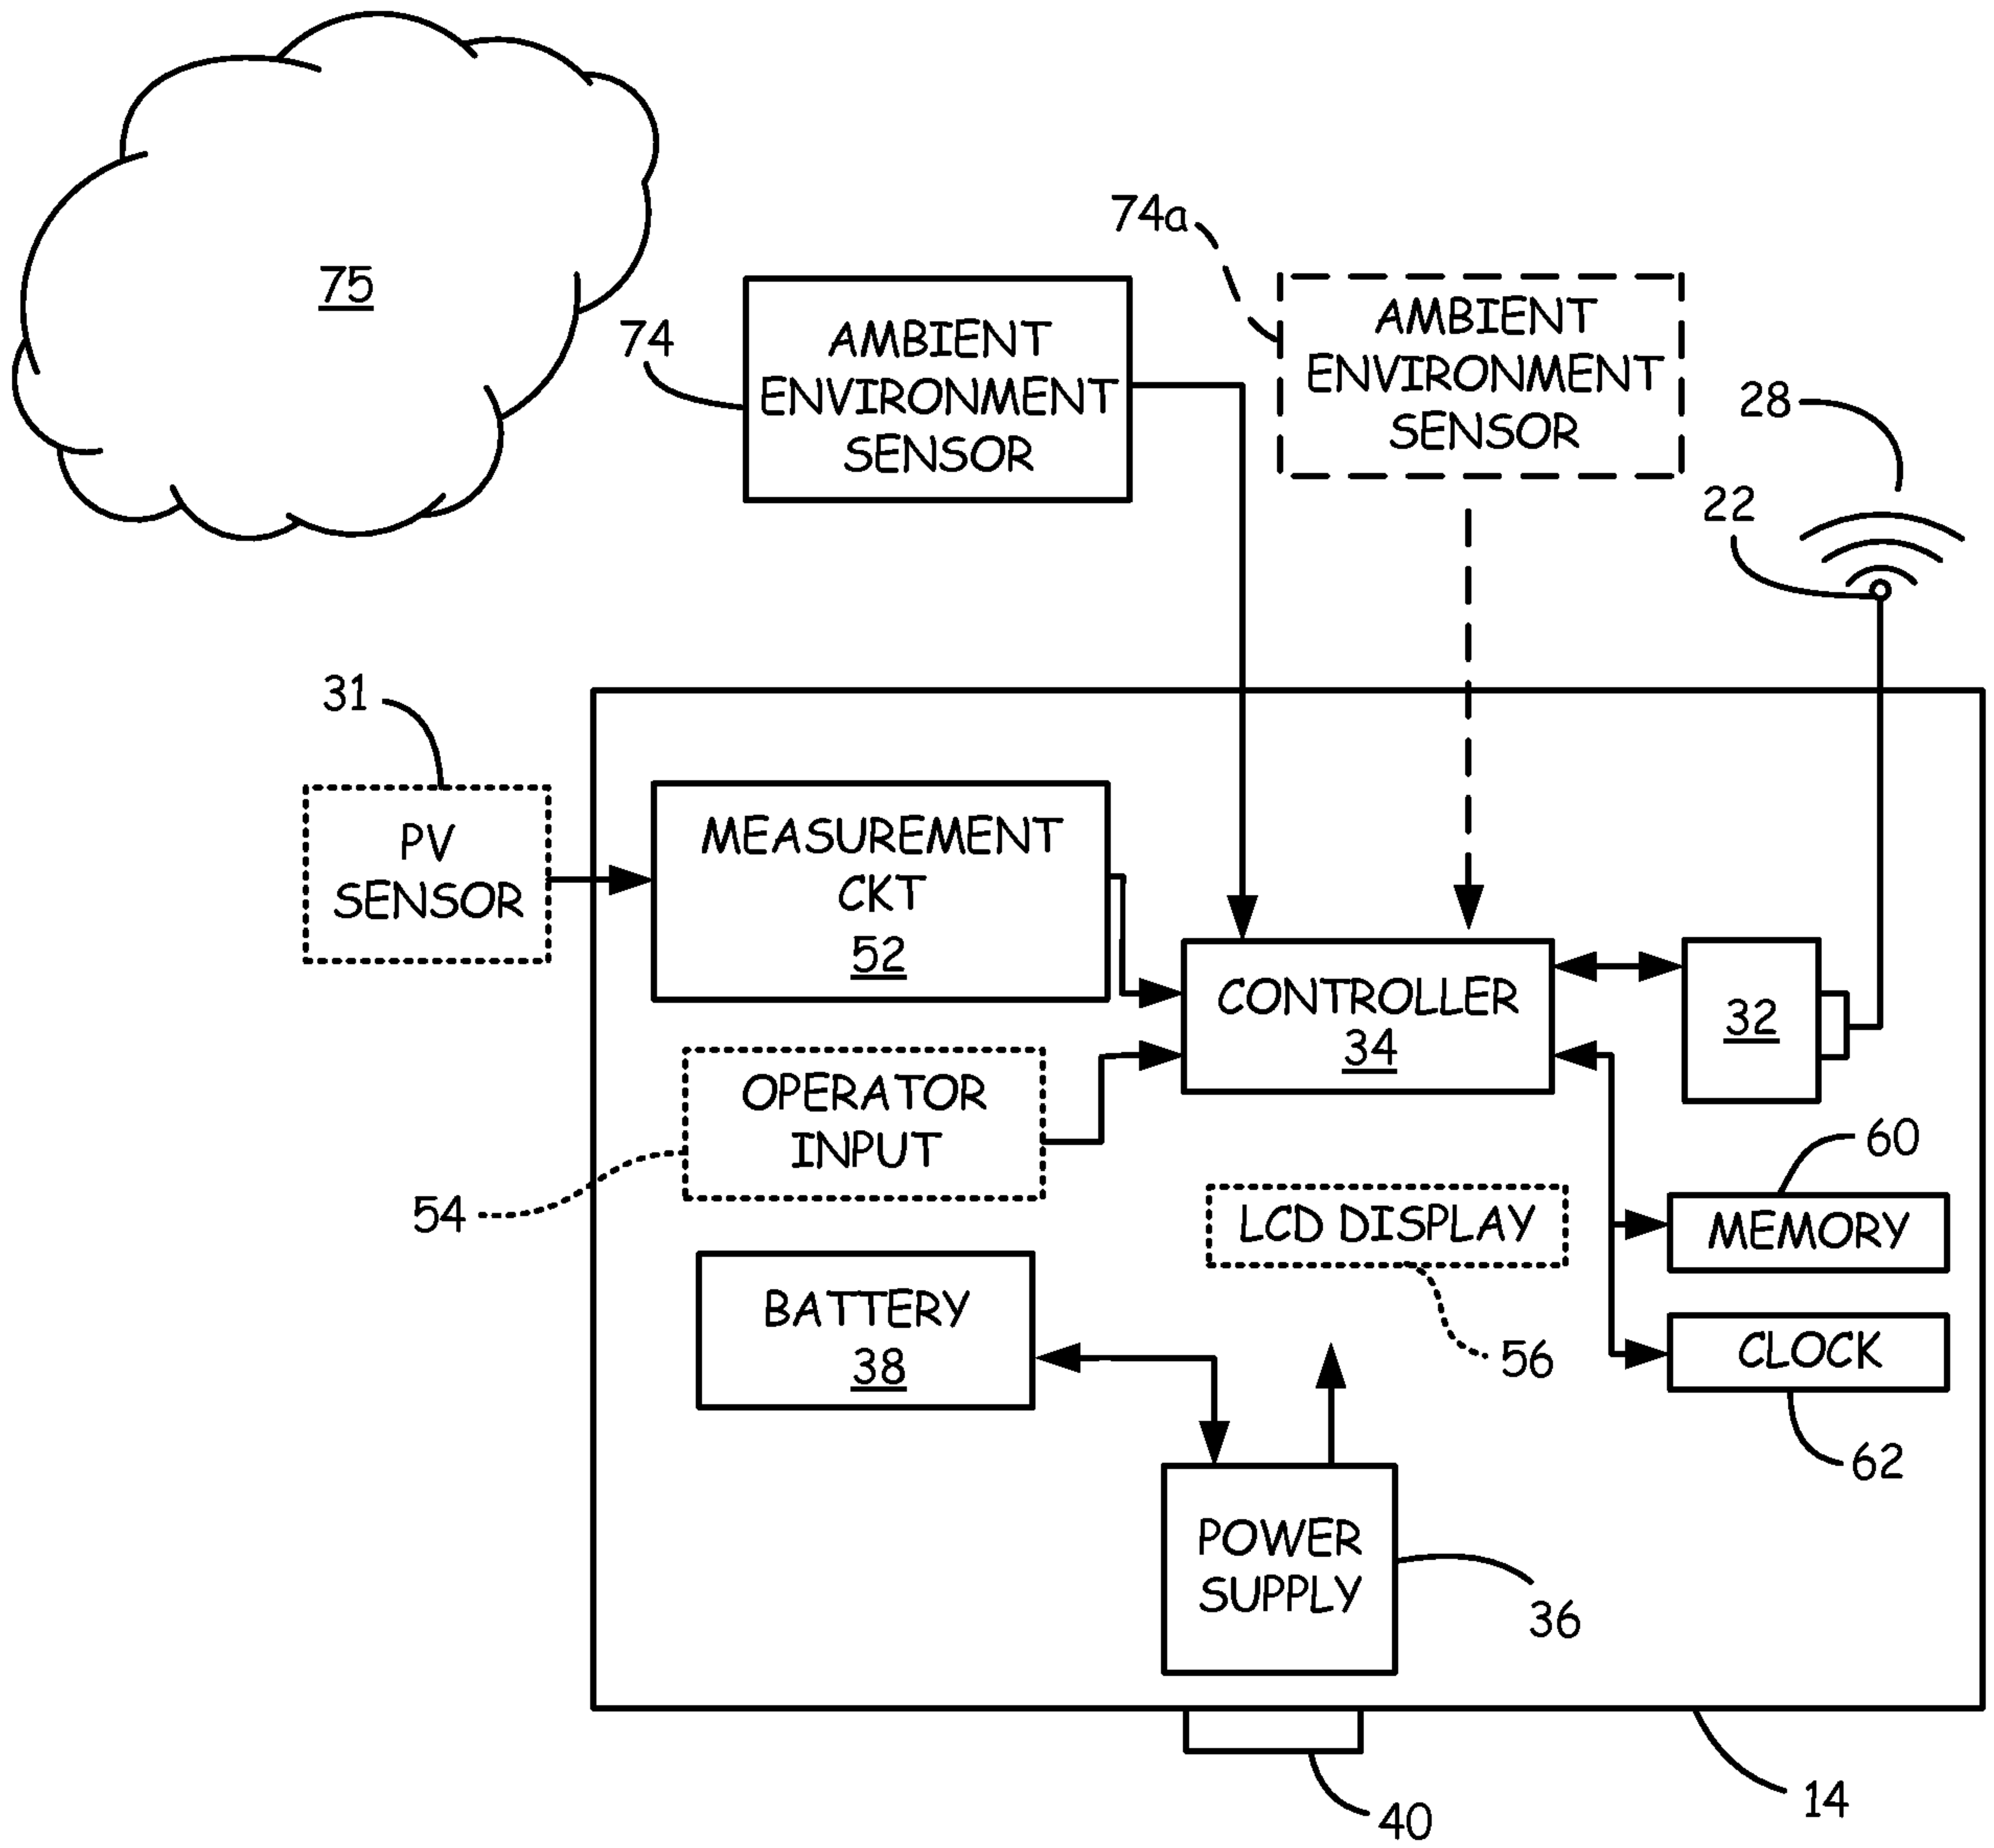


FIG. 3

4/6

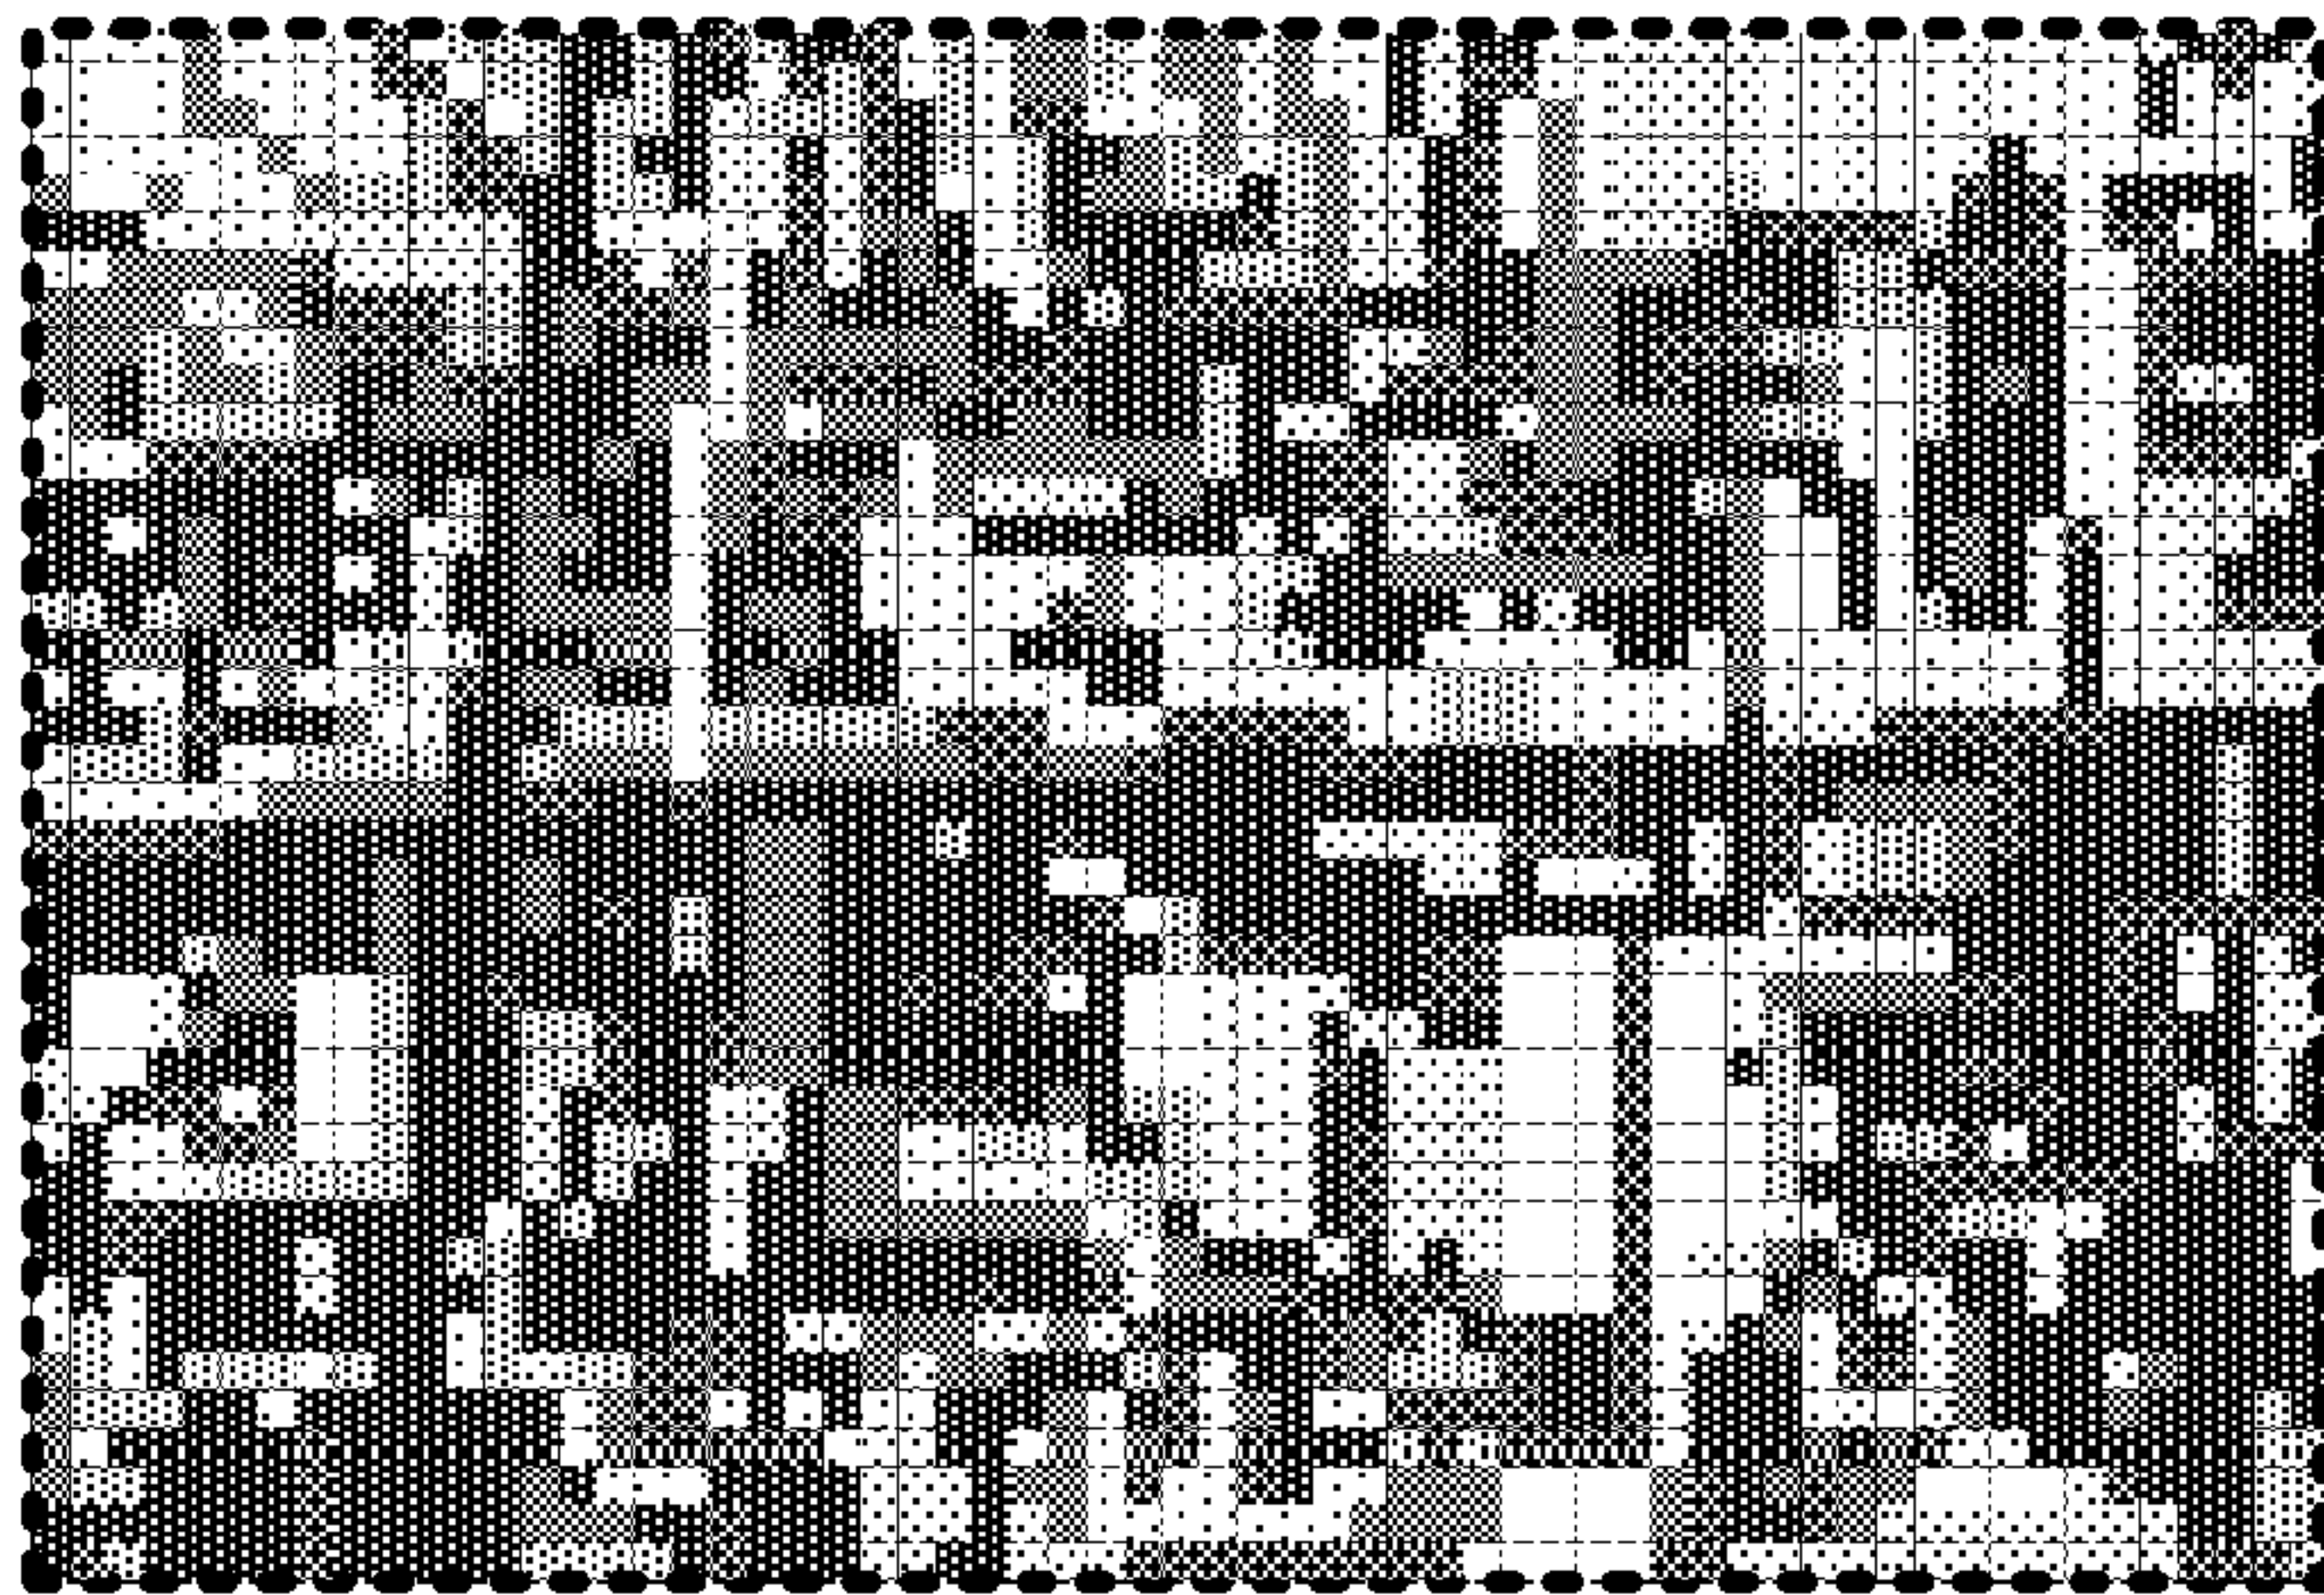


FIG. 4

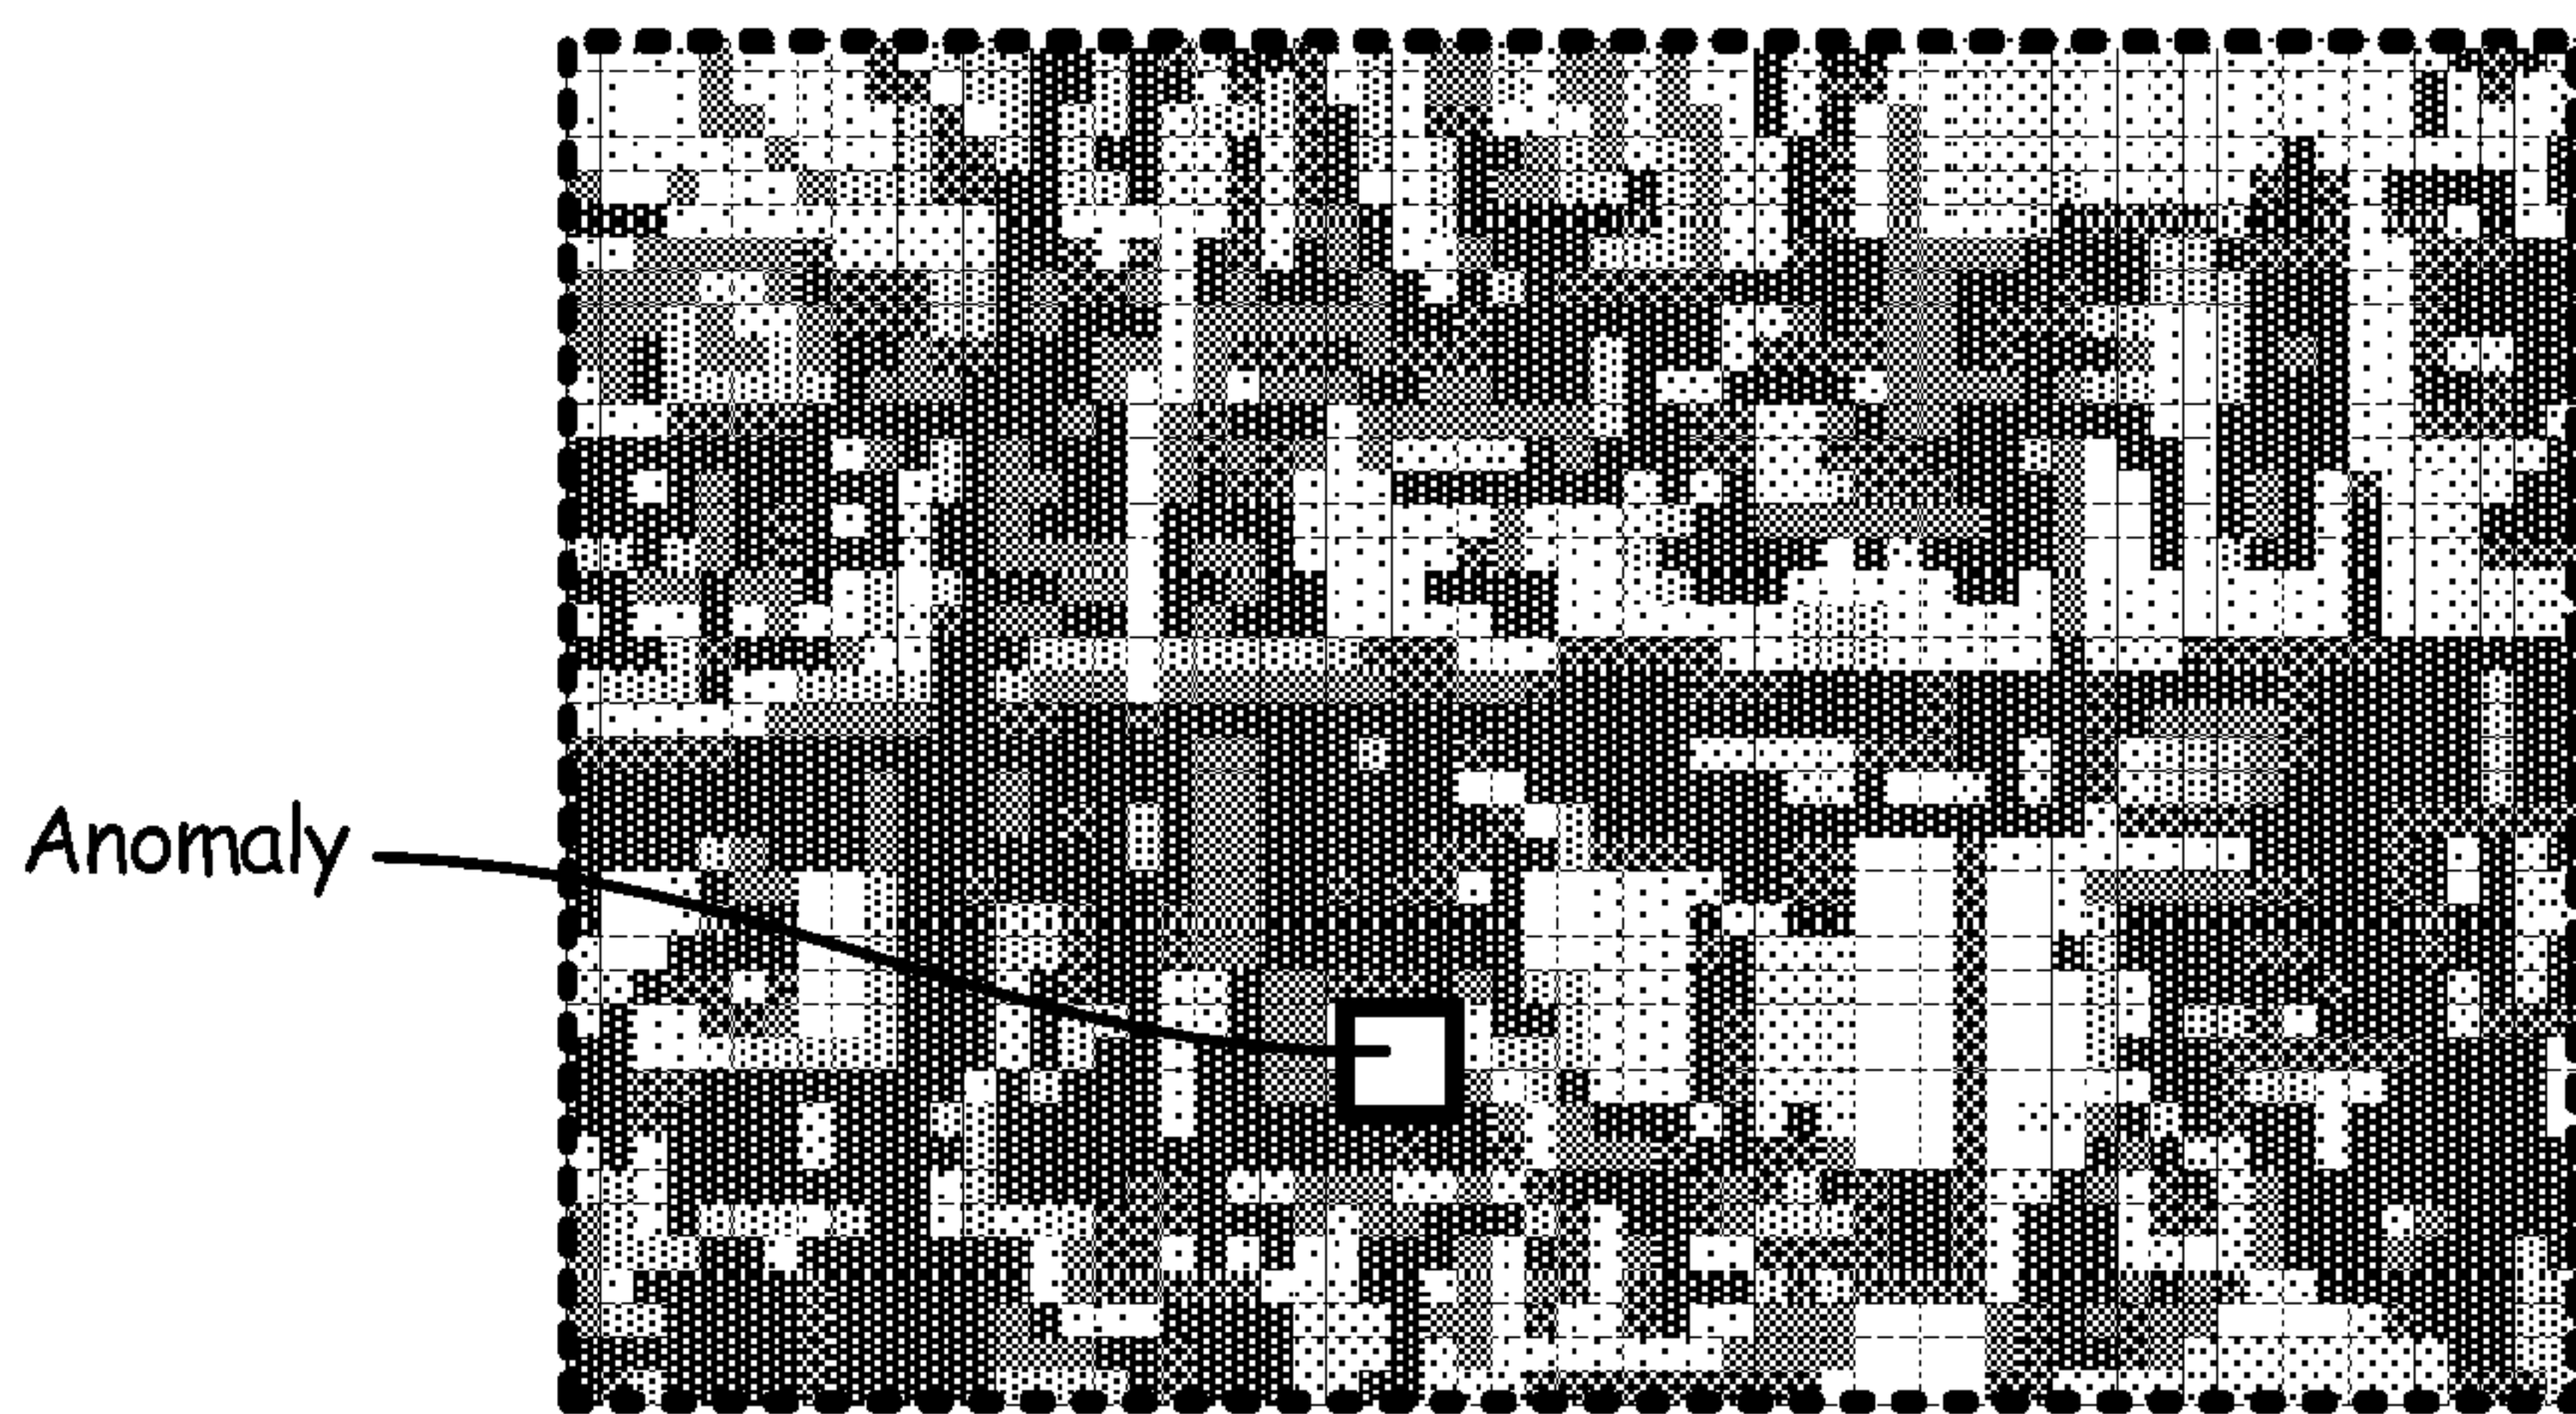


FIG. 5

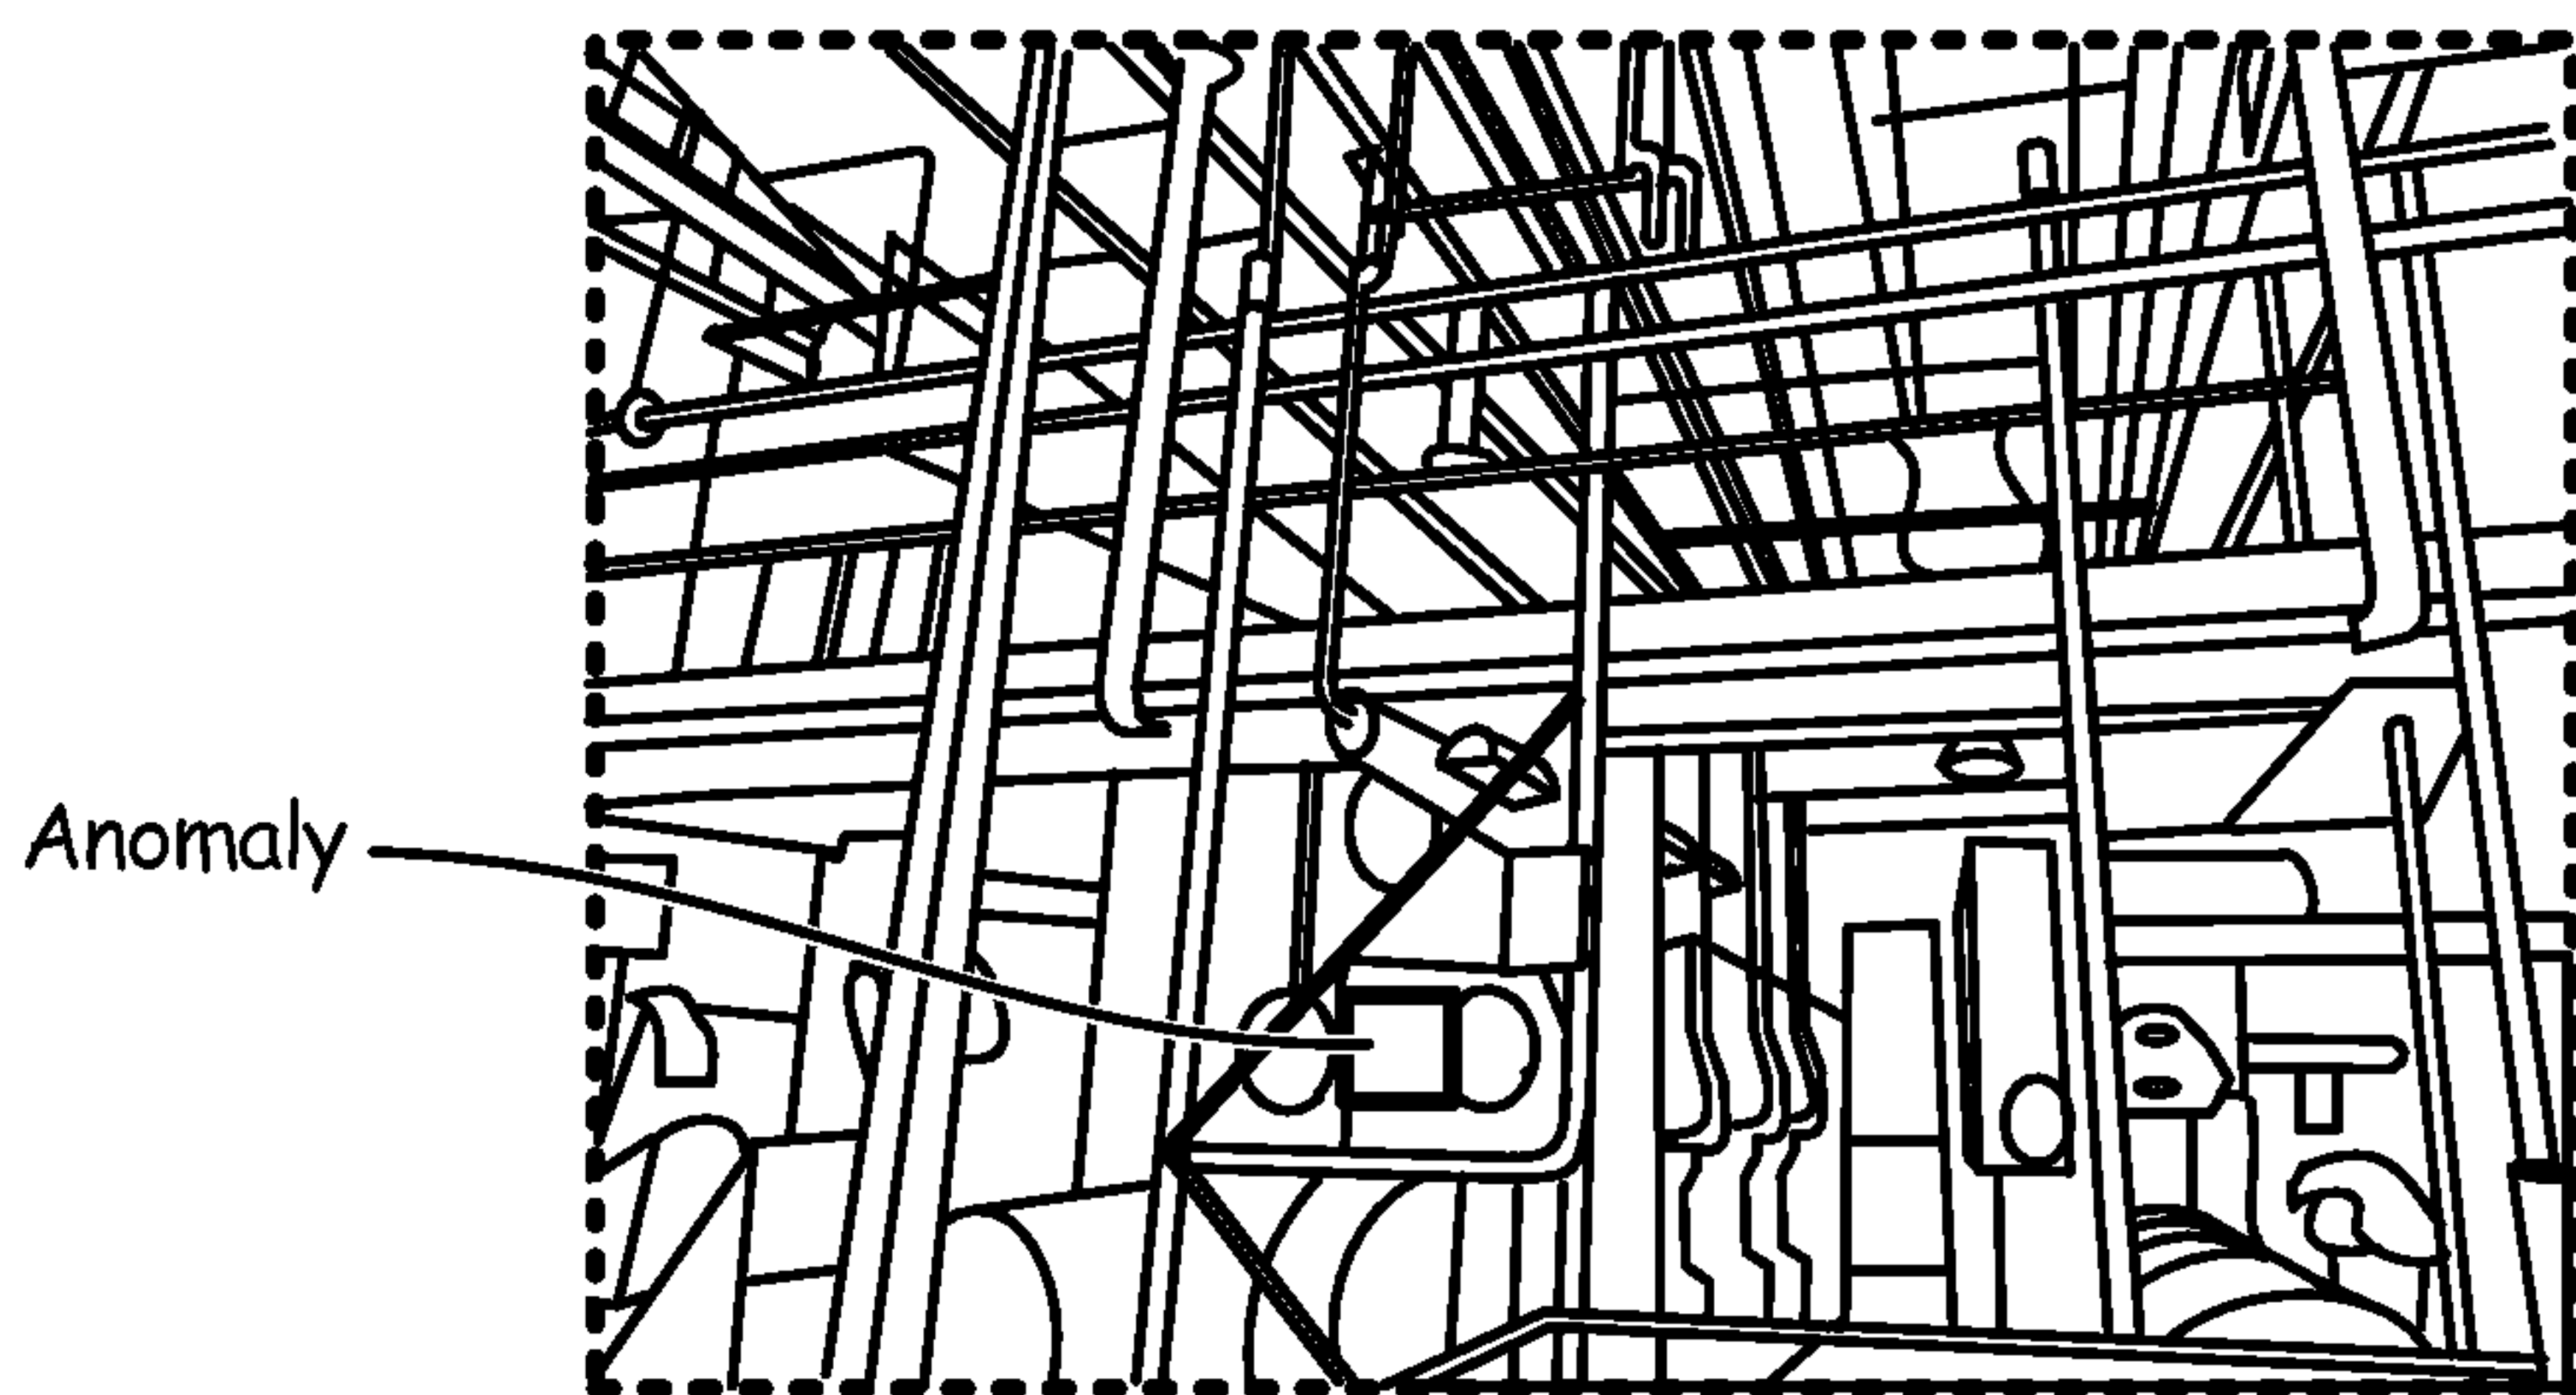


FIG. 6

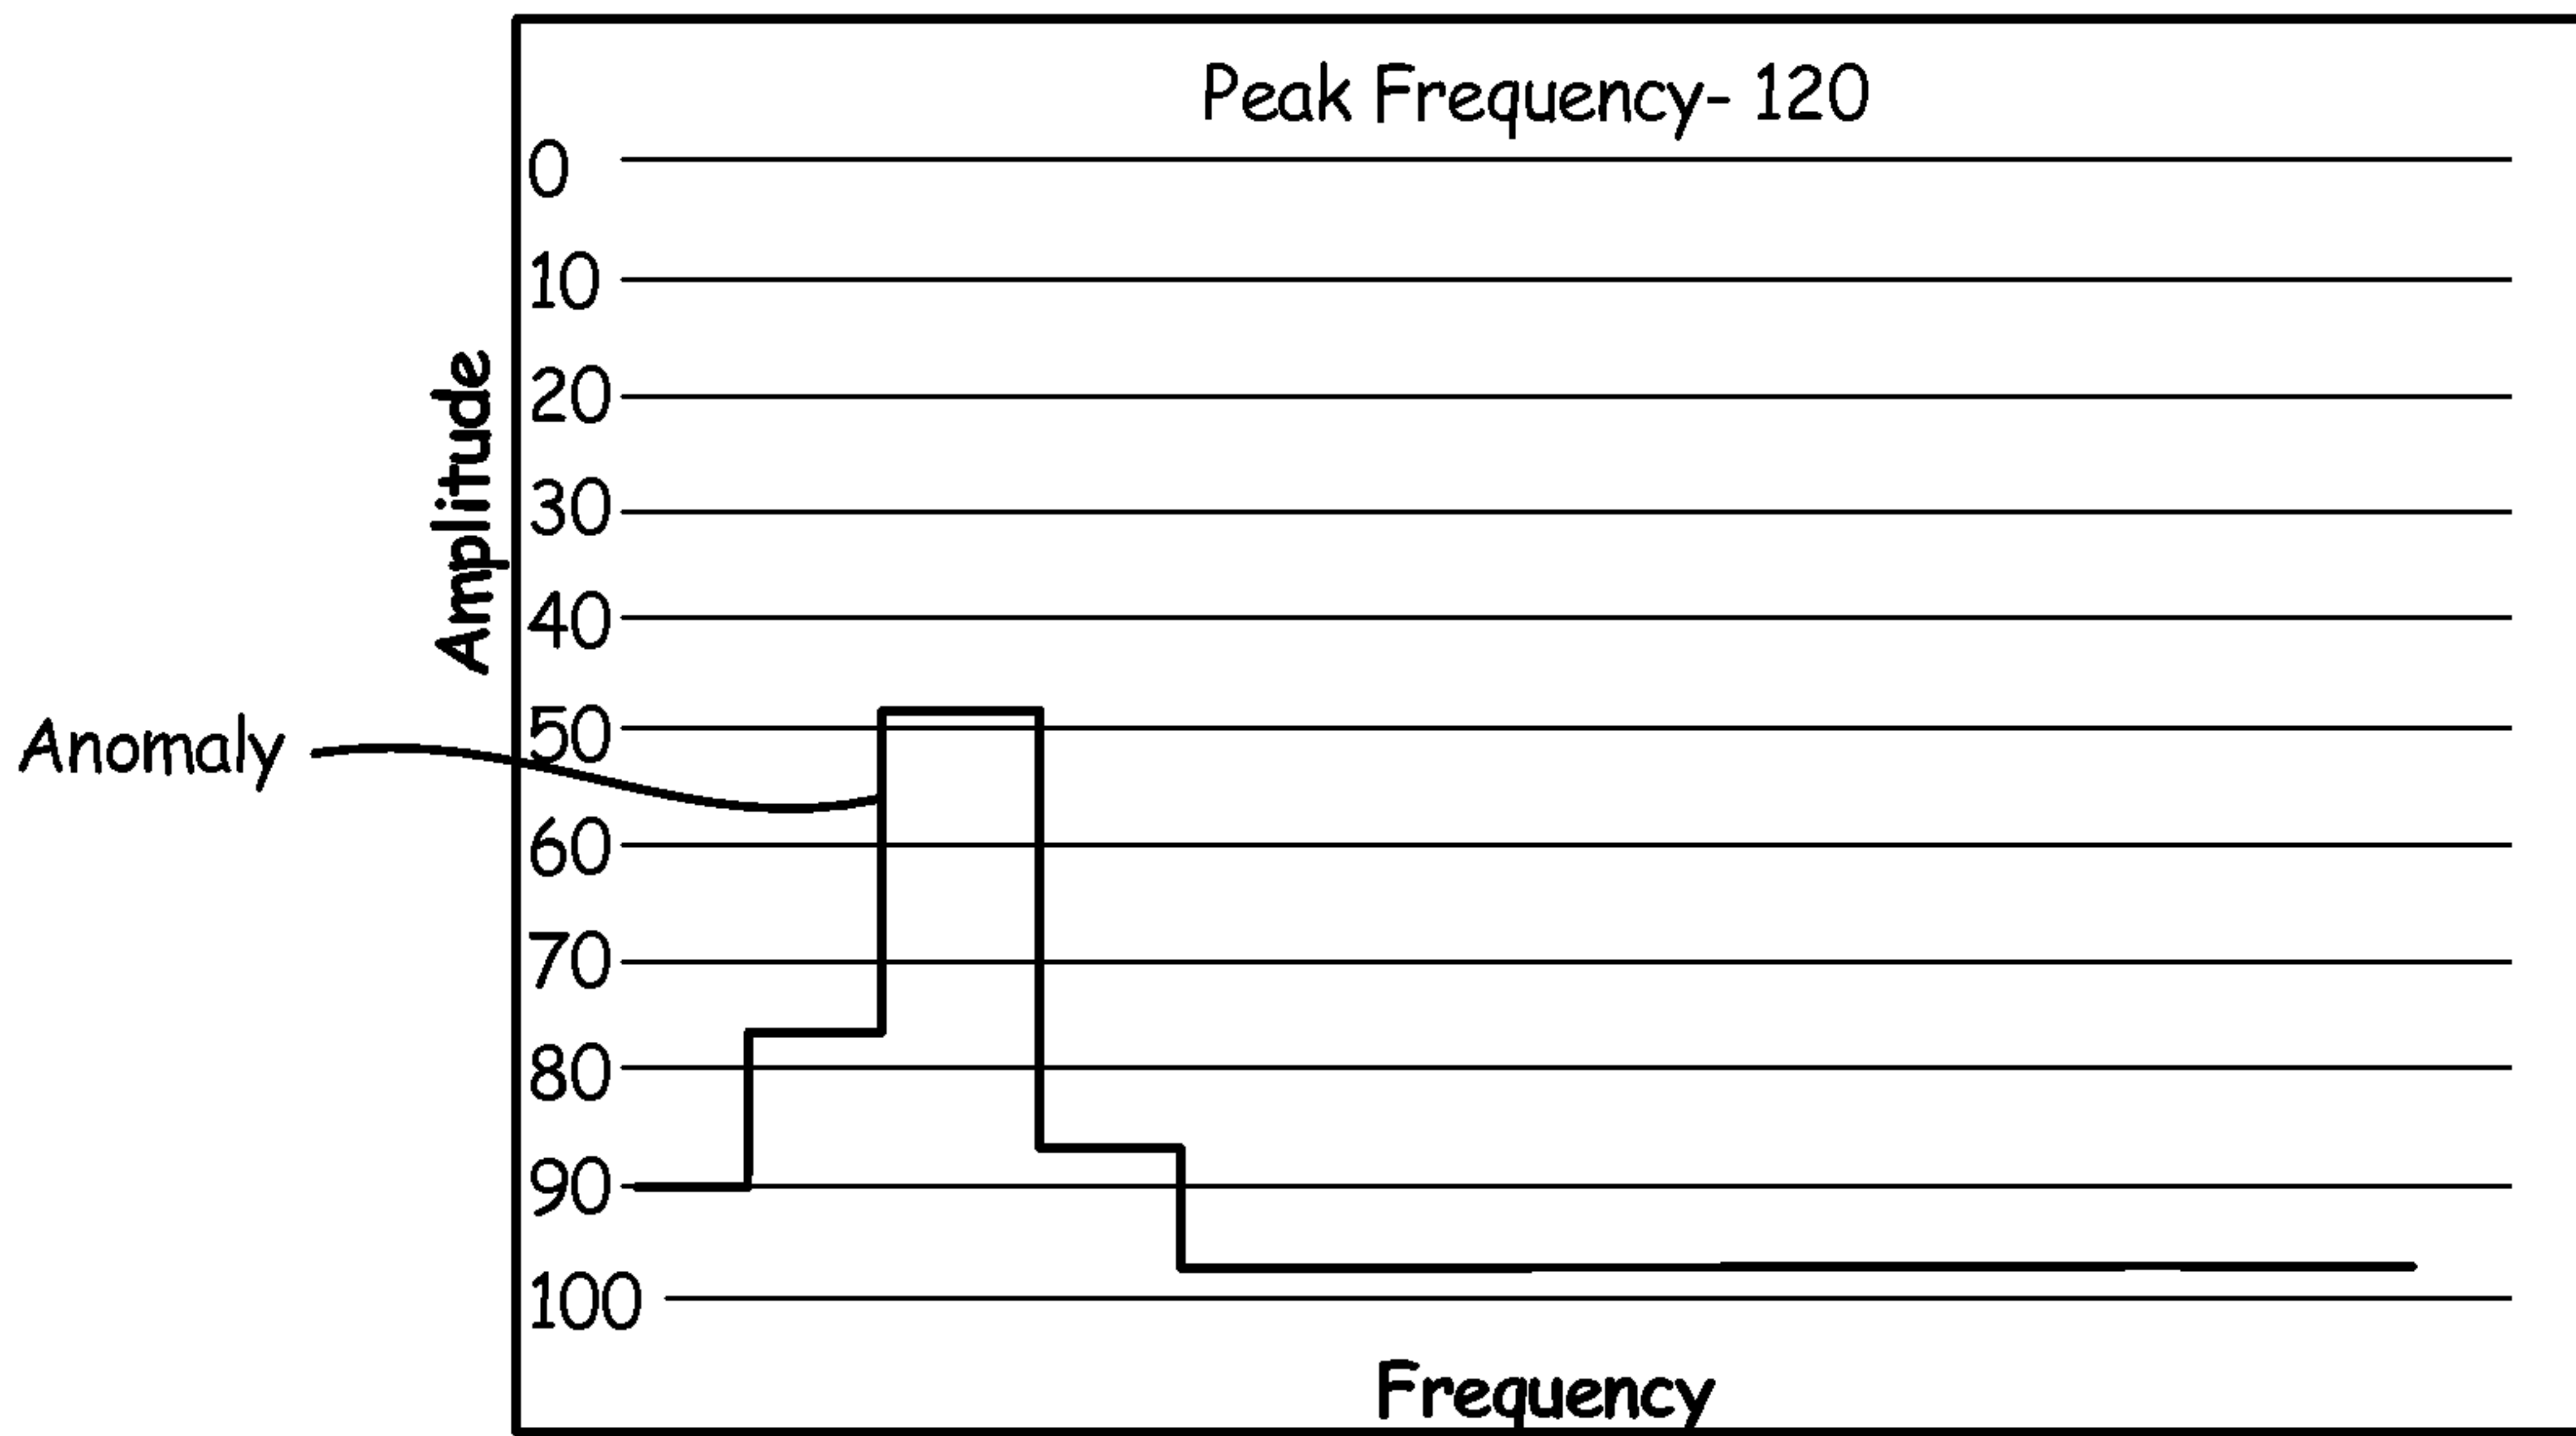


FIG. 7

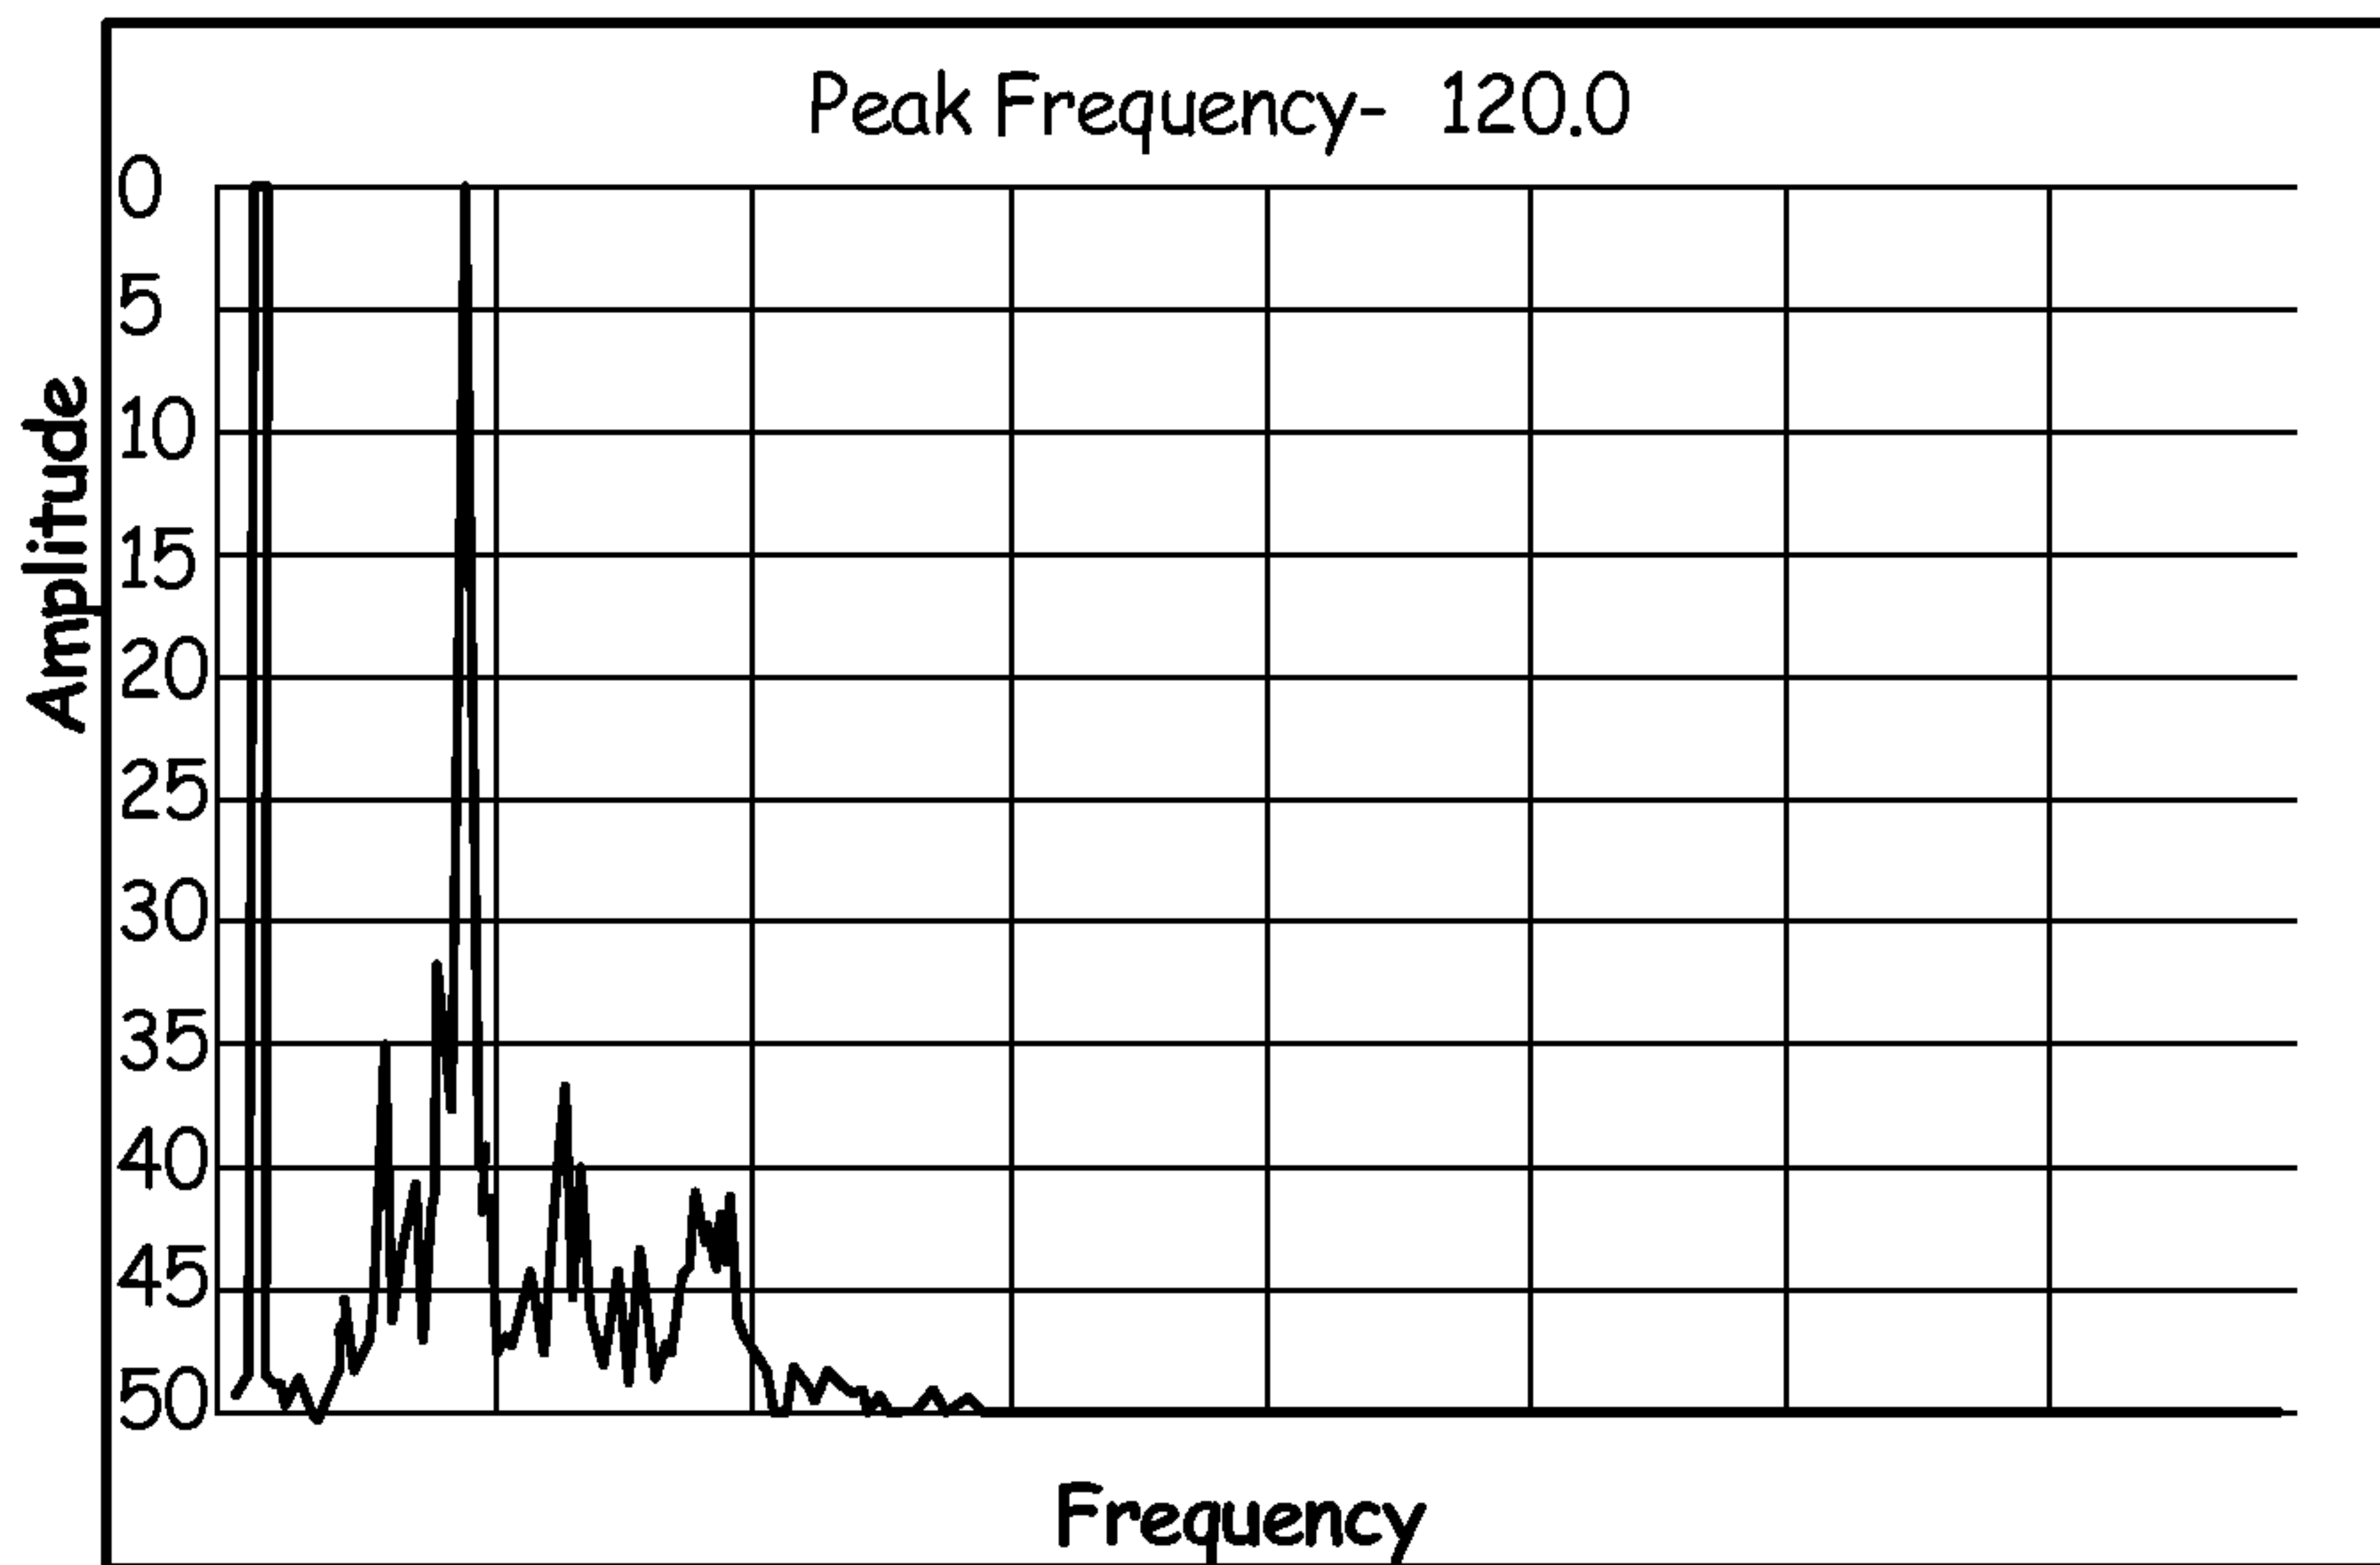


FIG. 8

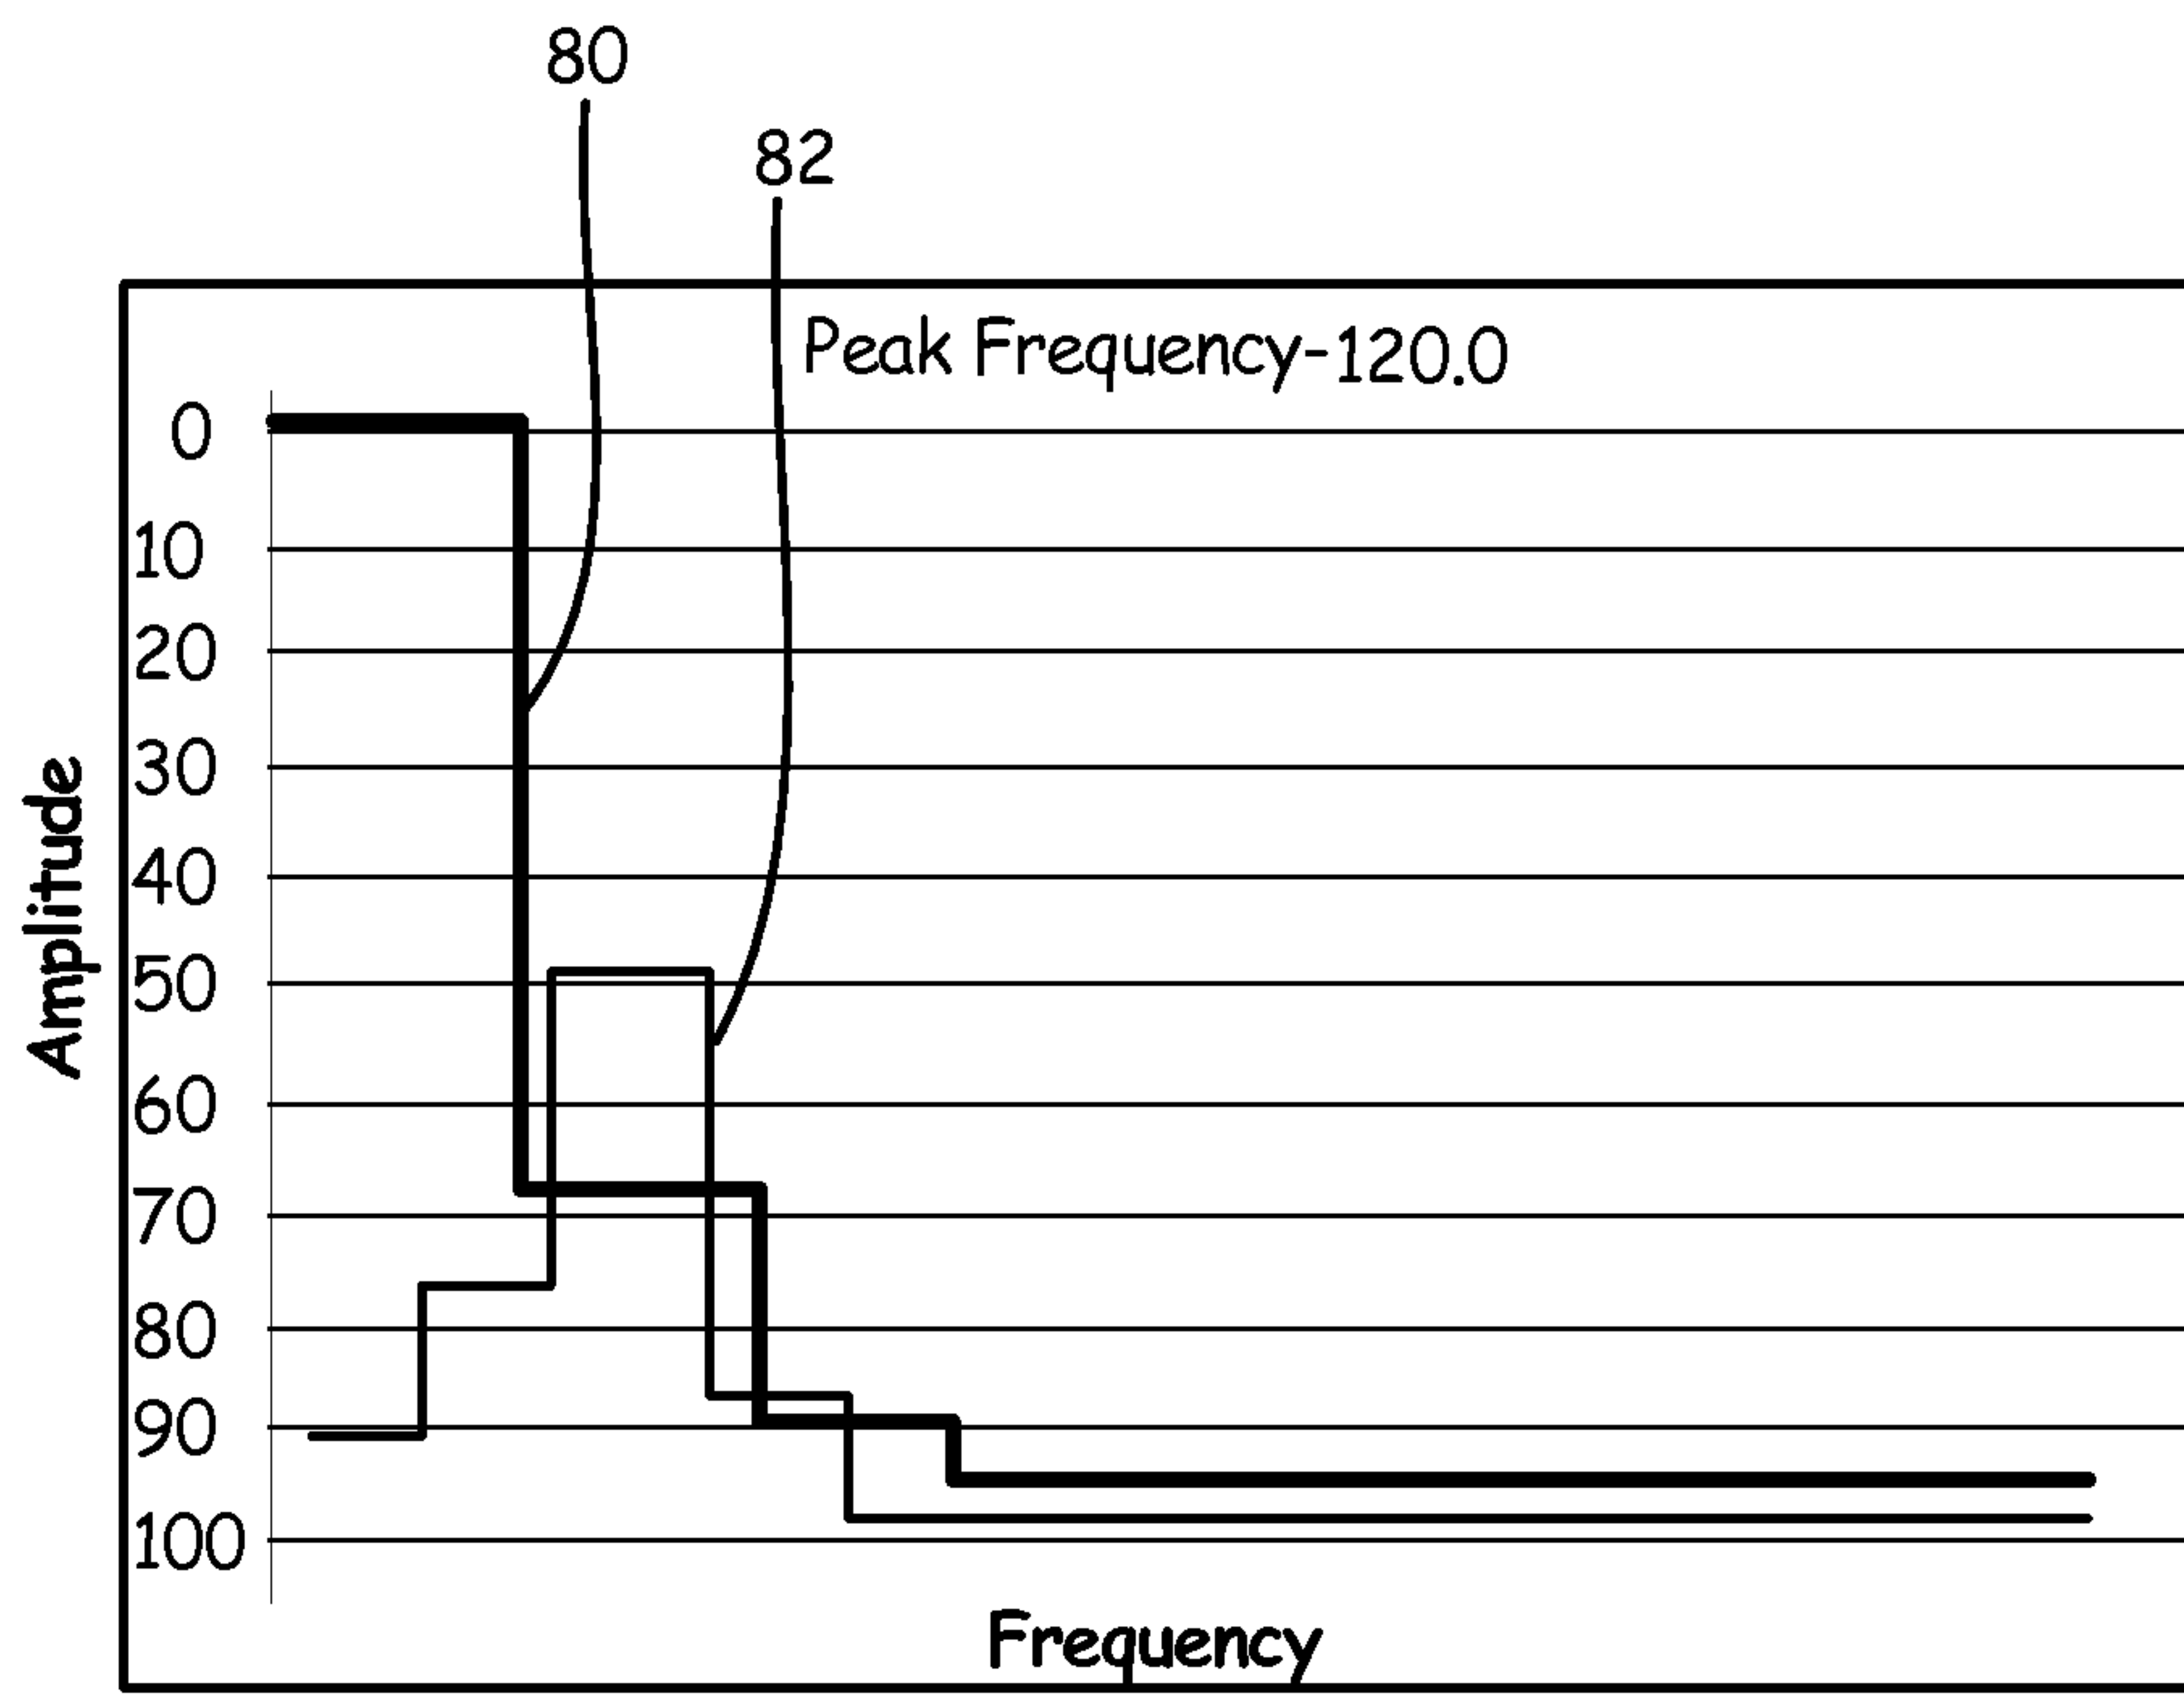


FIG. 9

