



US 20040225266A1

(19) **United States**

(12) **Patent Application Publication**
Tapadiya

(10) **Pub. No.: US 2004/0225266 A1**

(43) **Pub. Date: Nov. 11, 2004**

(54) **SUCTION HOSE FOR WOUND ASPIRATION**

Publication Classification

(76) **Inventor: Dilip Tapadiya, Newport Beach, CA (US)**

(51) **Int. Cl.⁷ A61M 1/00**

(52) **U.S. Cl. 604/317**

Correspondence Address:
KNOBBE MARTENS OLSON & BEAR LLP
2040 MAIN STREET
FOURTEENTH FLOOR
IRVINE, CA 92614 (US)

(57) **ABSTRACT**


(21) **Appl. No.: 10/776,085**

A wound irrigation kit includes a basin for collecting irrigation fluid that is configured to closely fit the specific body part that is to be irrigated. The kit optionally includes a grommet that can be readily incorporated into the basin to allow for active draining of the basin during the irrigation procedure. The kit also optionally includes a flexible irrigation shield that can be attached to an existing irrigation device and that can be readily modified to vary its length.

(22) **Filed: Feb. 11, 2004**

Related U.S. Application Data

(60) **Provisional application No. 60/446,649, filed on Feb. 11, 2003. Provisional application No. 60/498,926, filed on Aug. 29, 2003.**

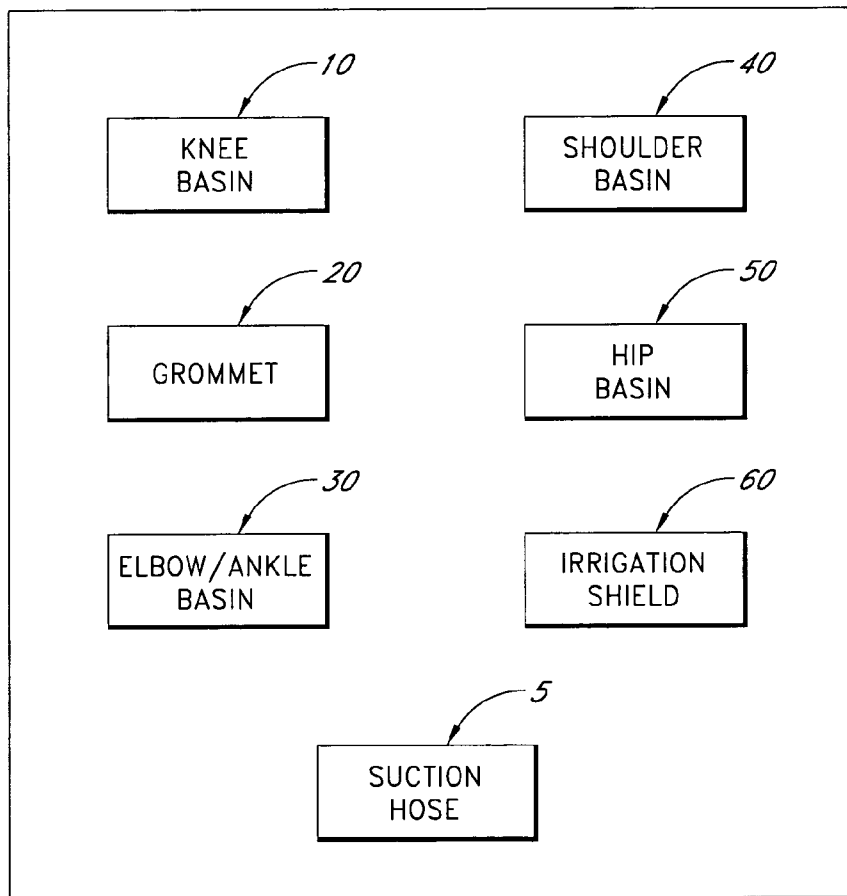

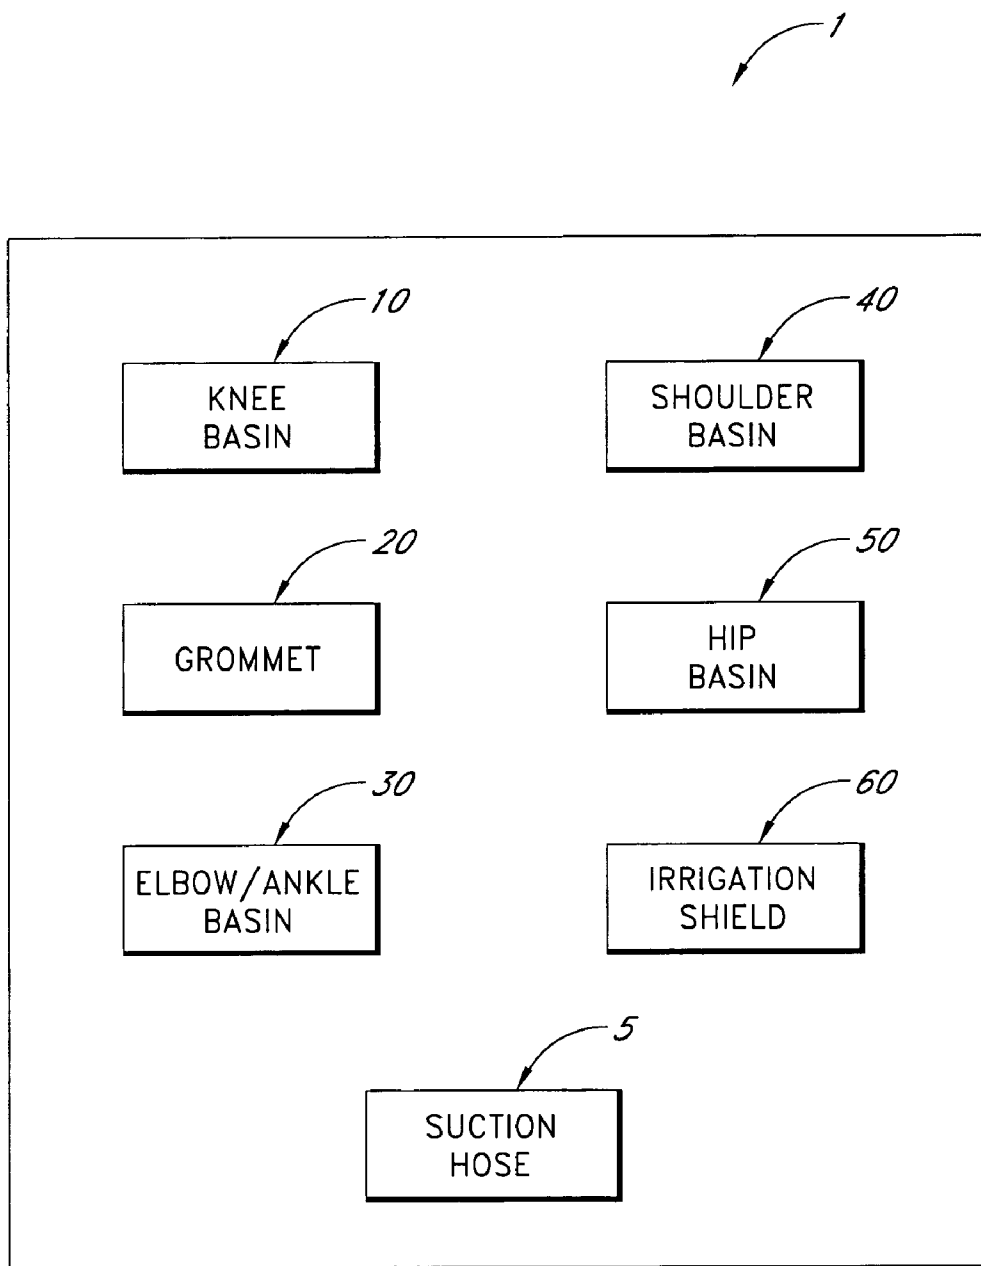


FIG. 1

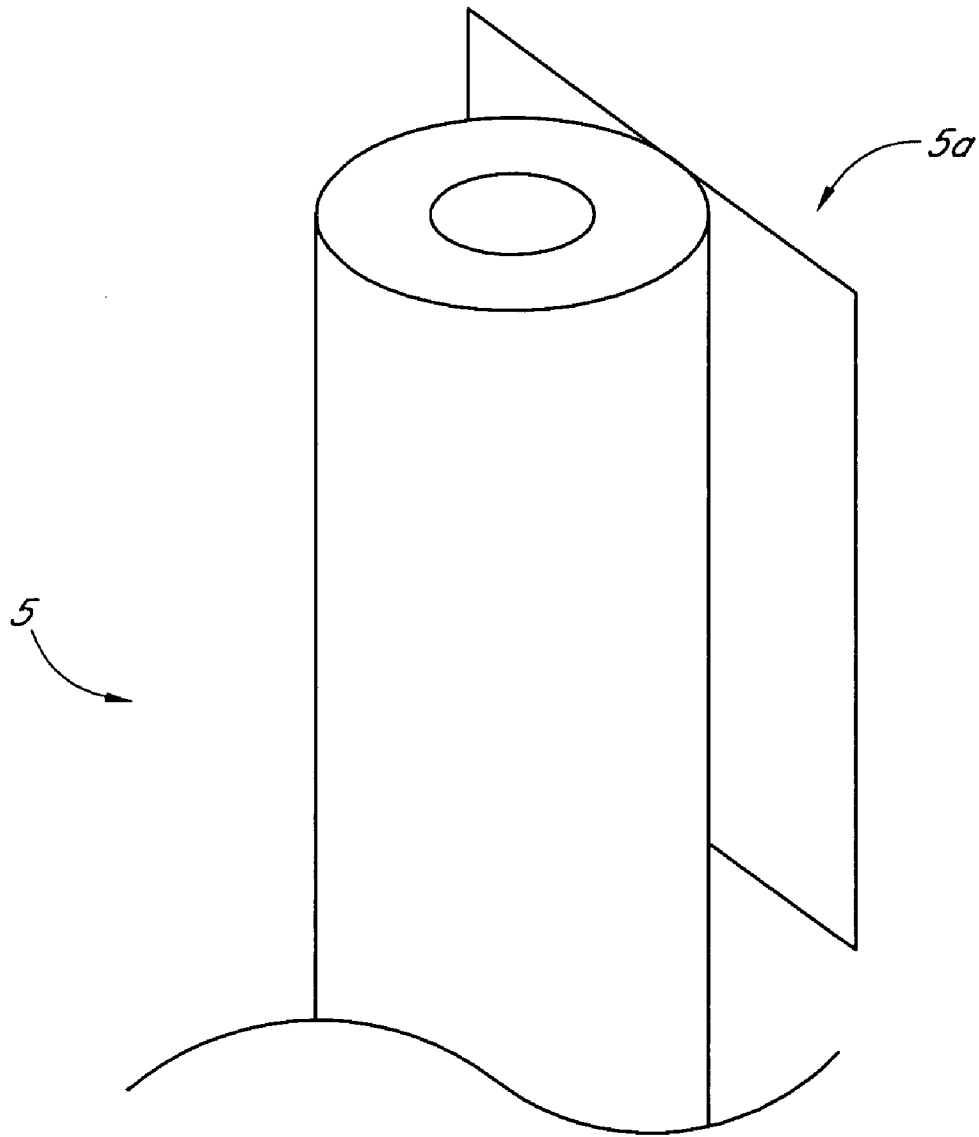


FIG. 1A

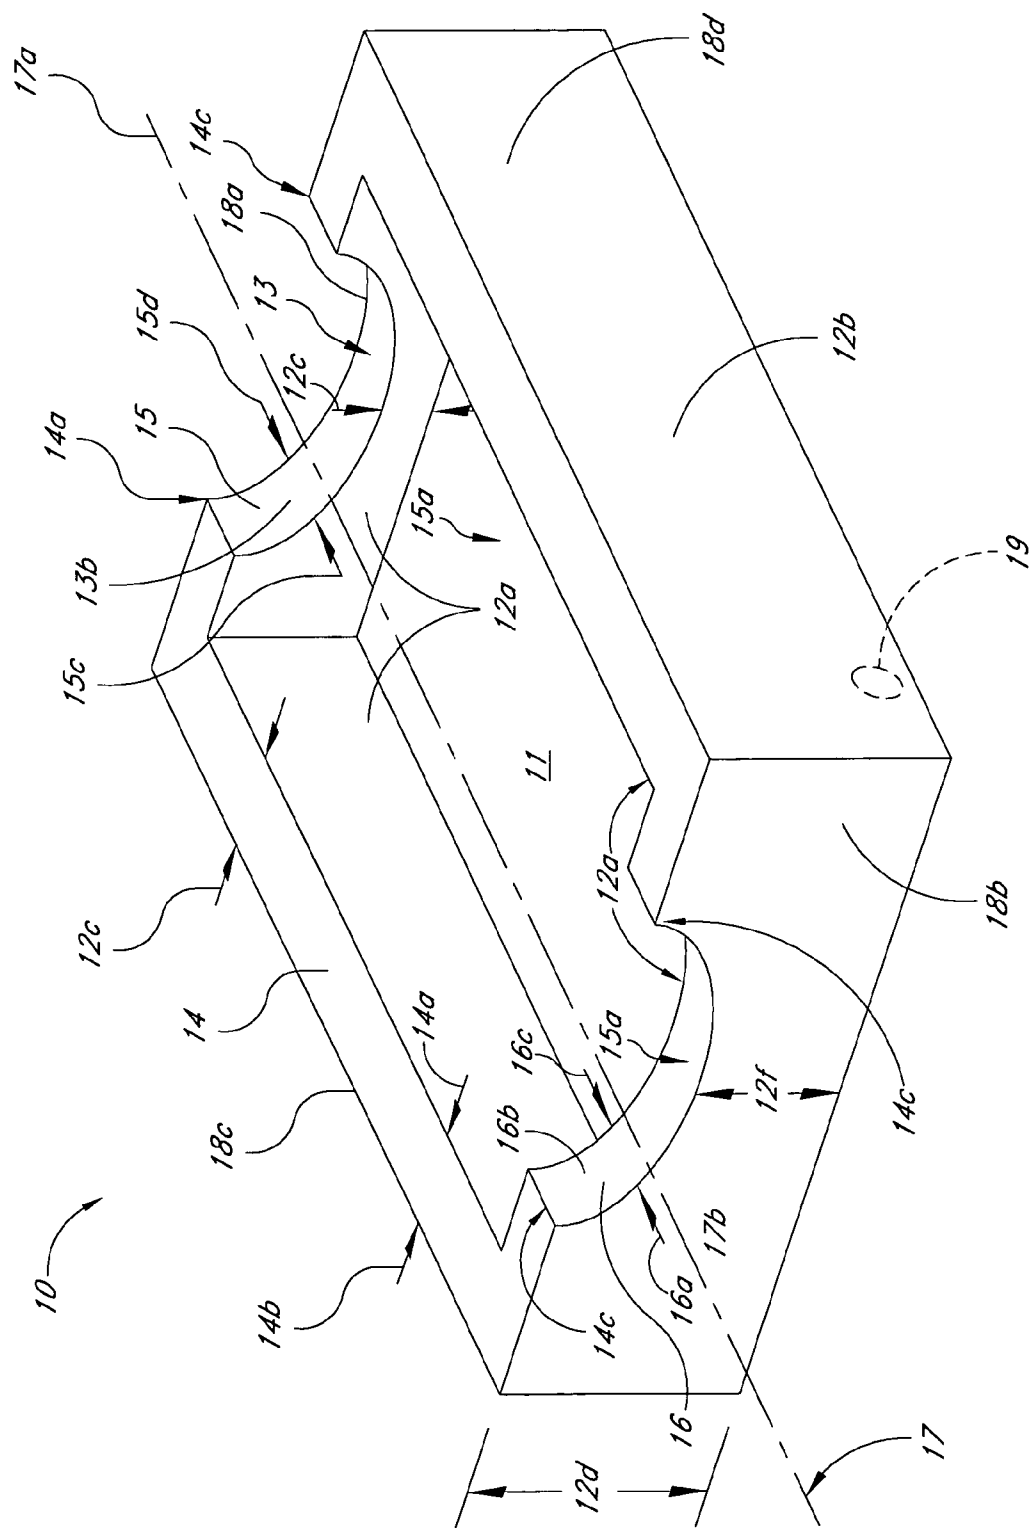


FIG. 2

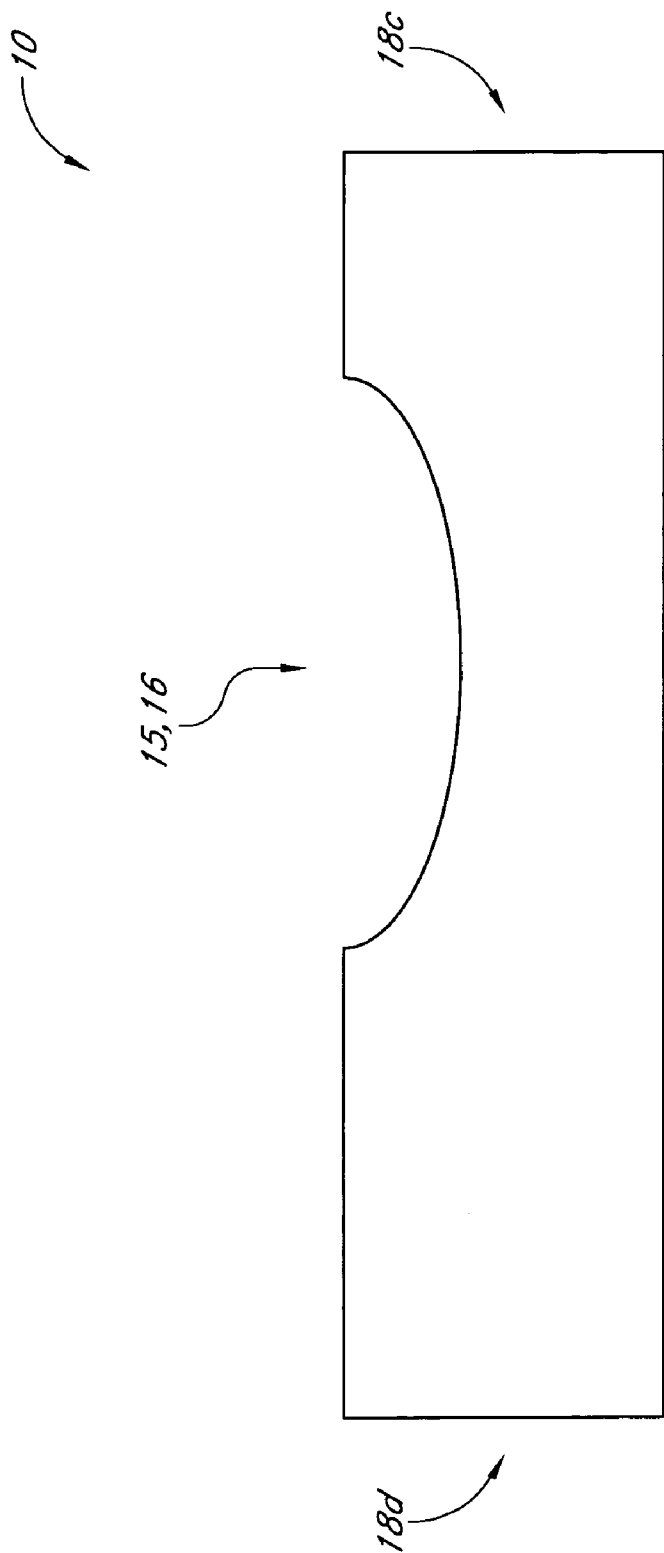


FIG. 2A

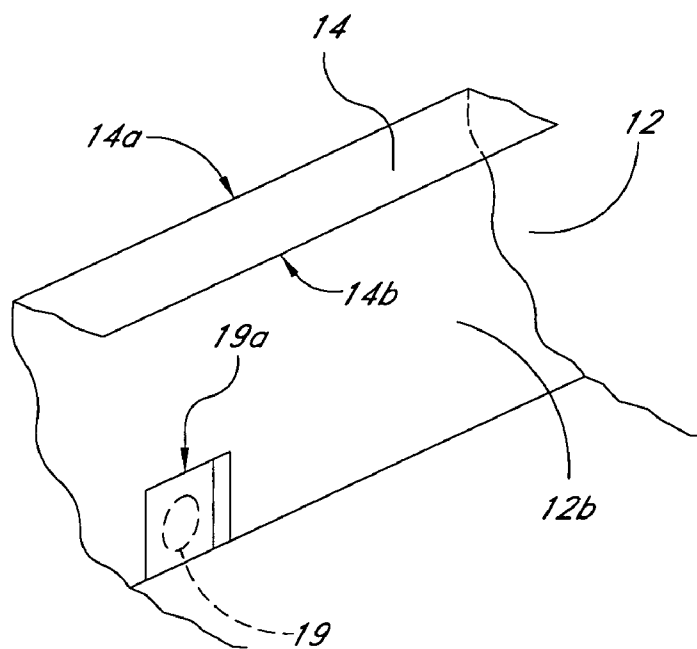


FIG. 2B

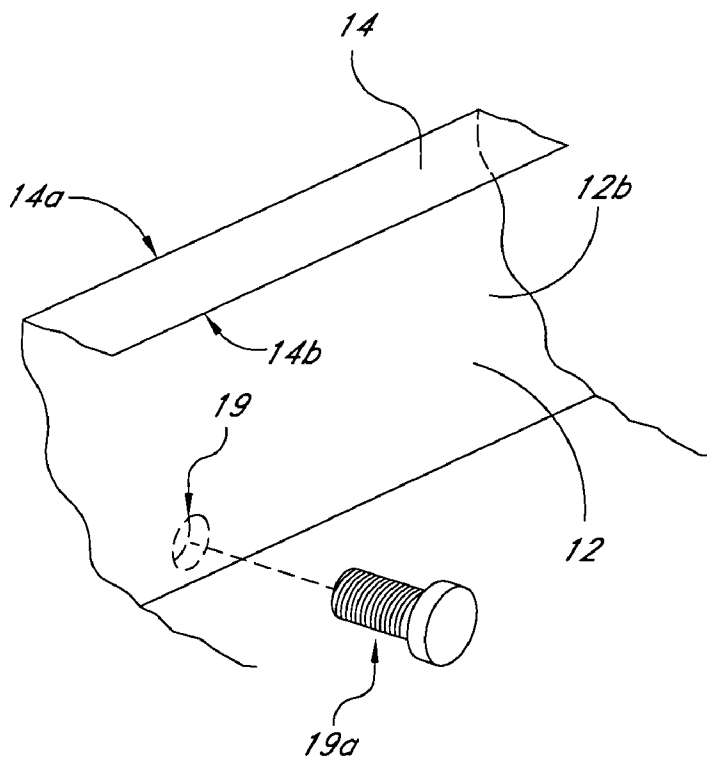


FIG. 2C

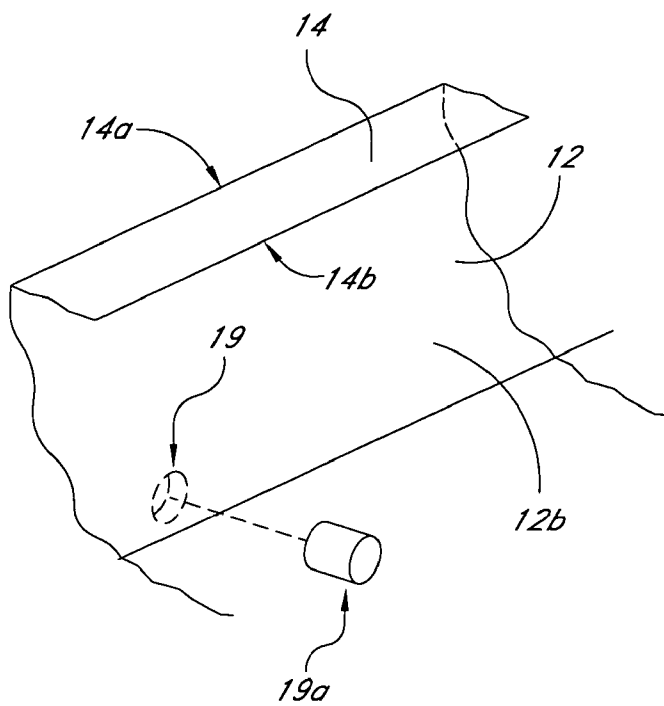


FIG. 2D

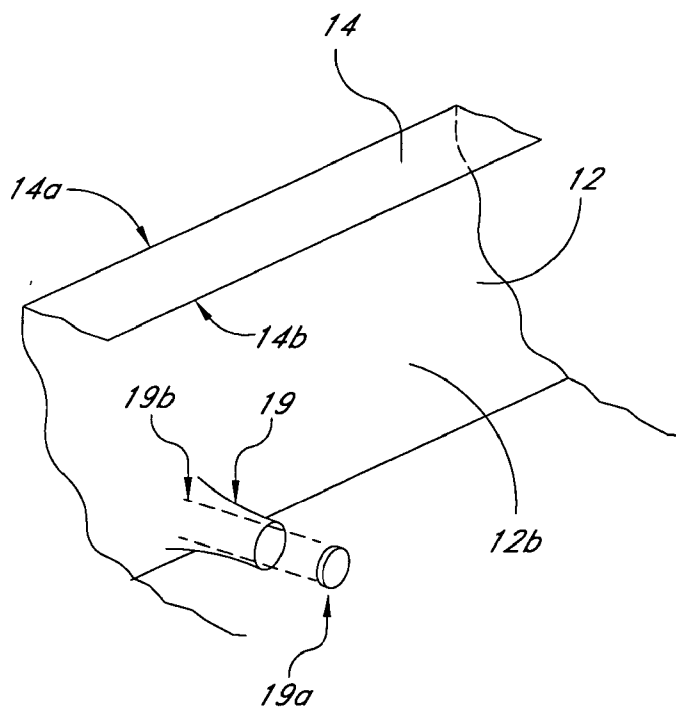


FIG. 2E

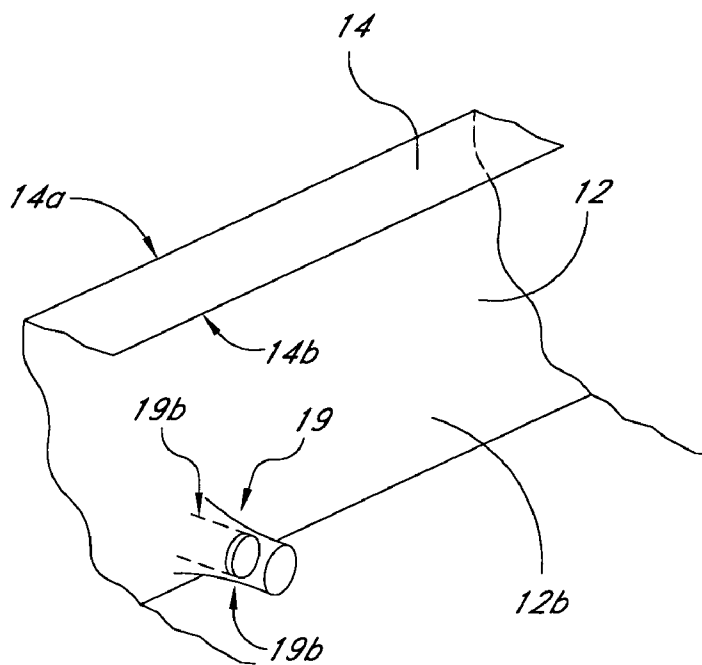


FIG. 2F

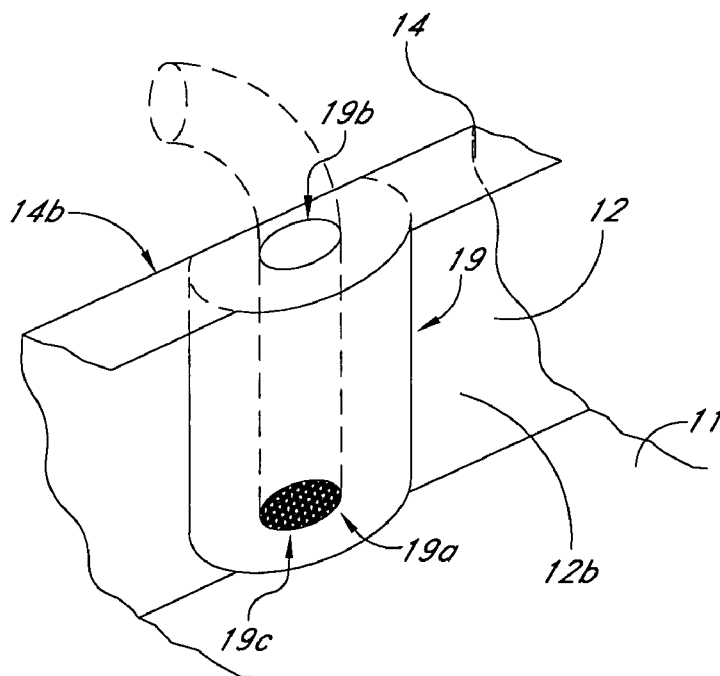


FIG. 2G

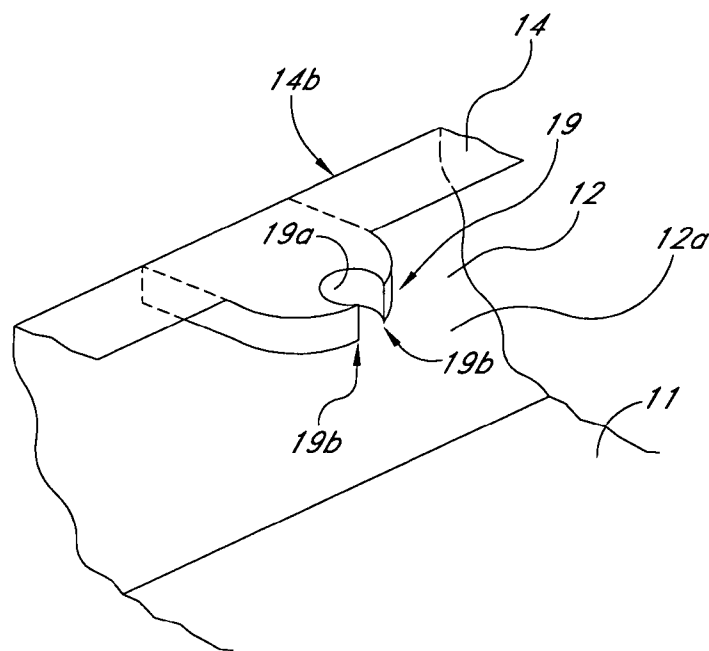


FIG. 2H

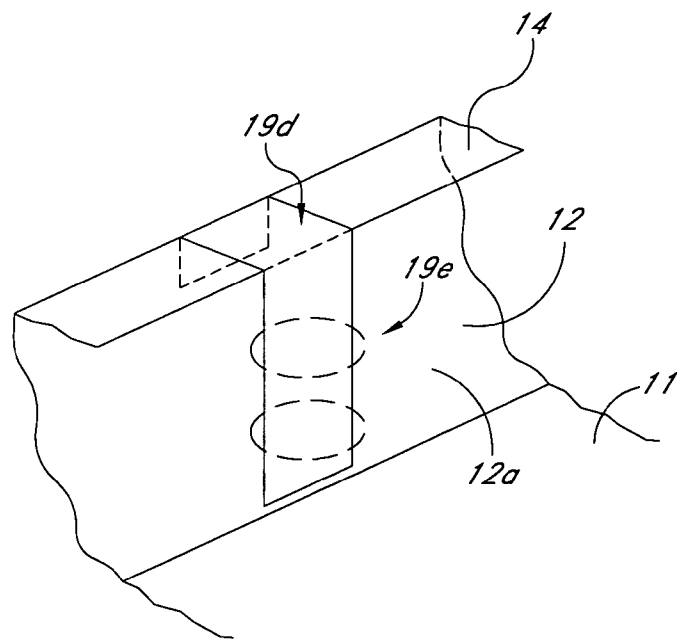


FIG. 2I

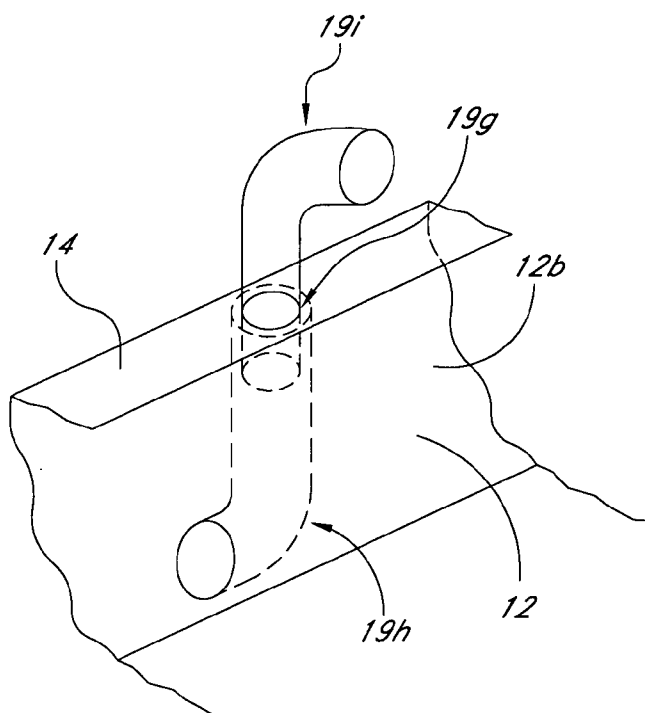


FIG. 2J

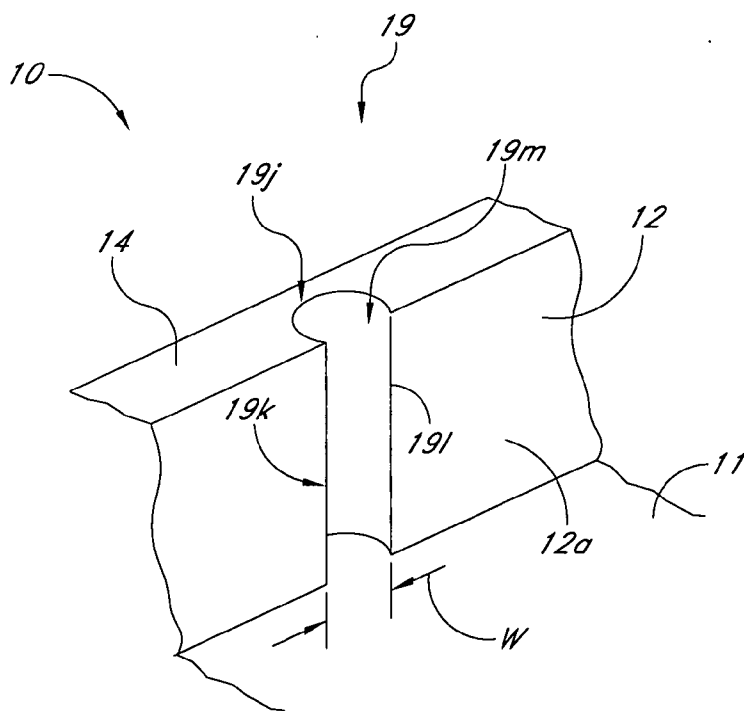


FIG. 2K

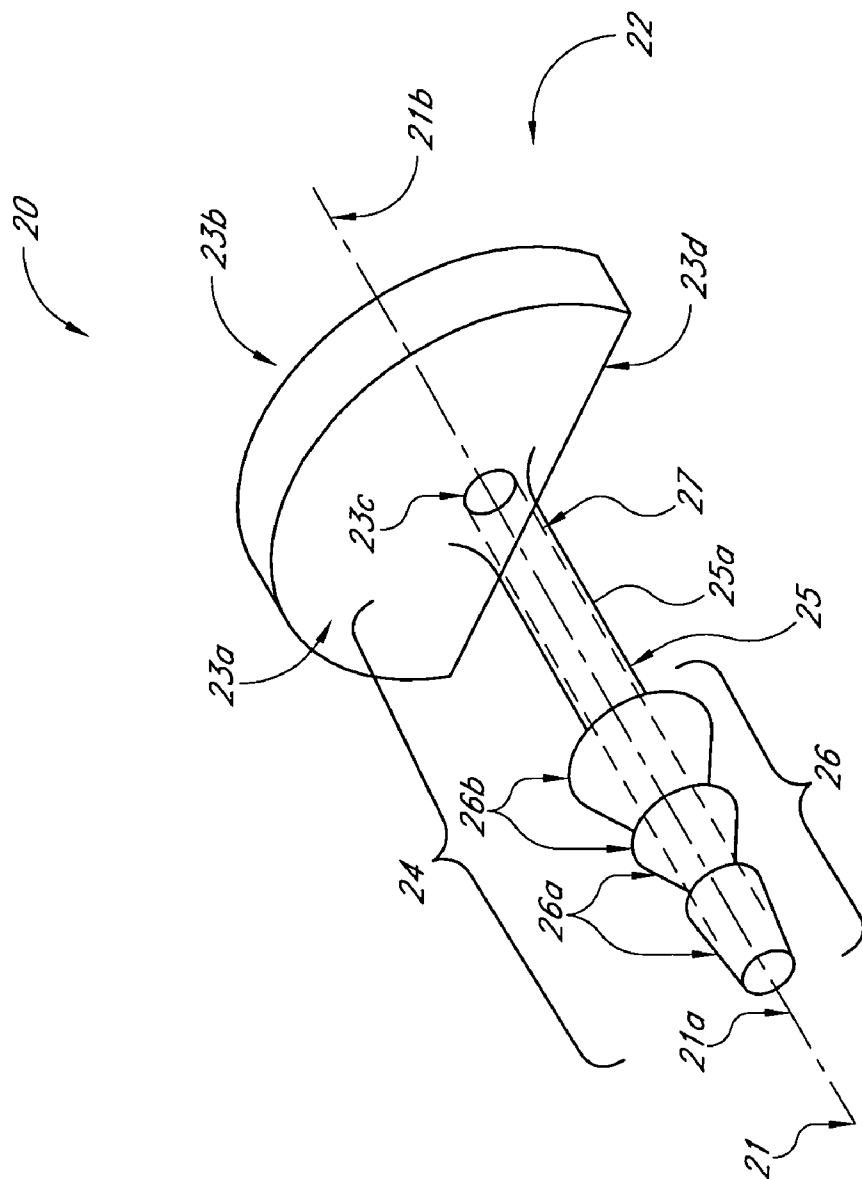


FIG. 3

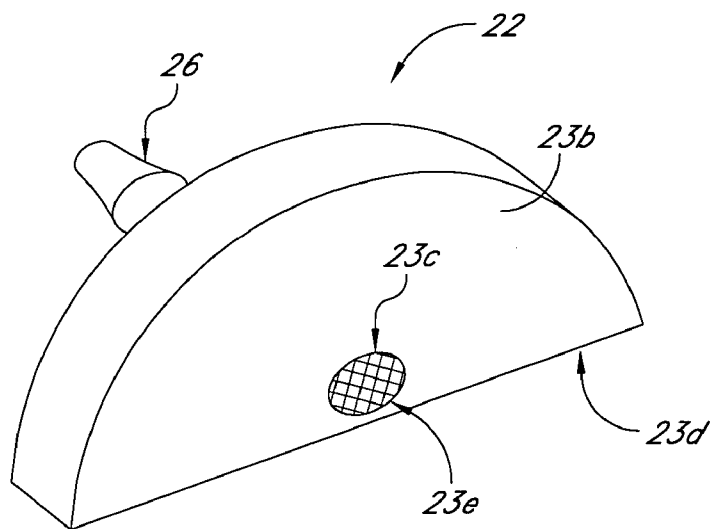


FIG. 3A

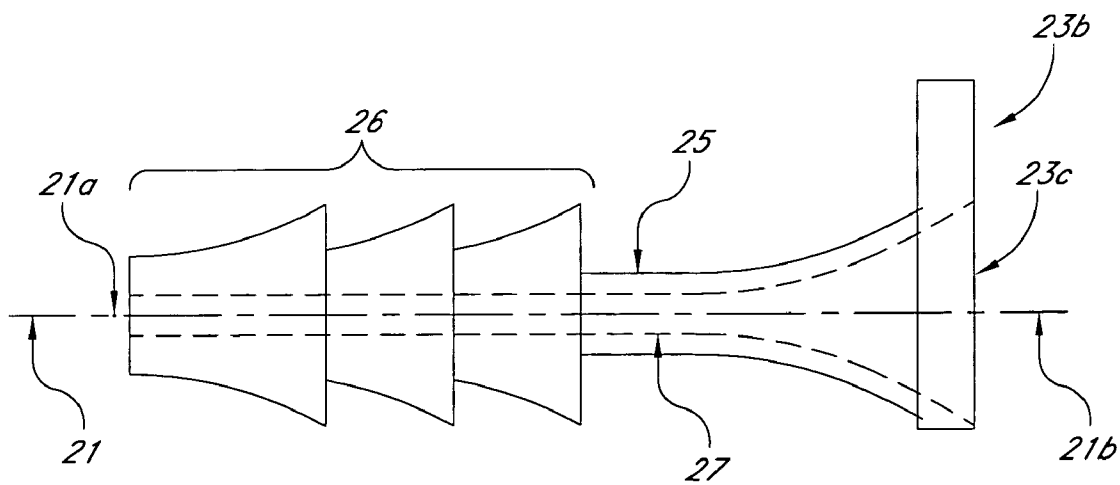


FIG. 3B

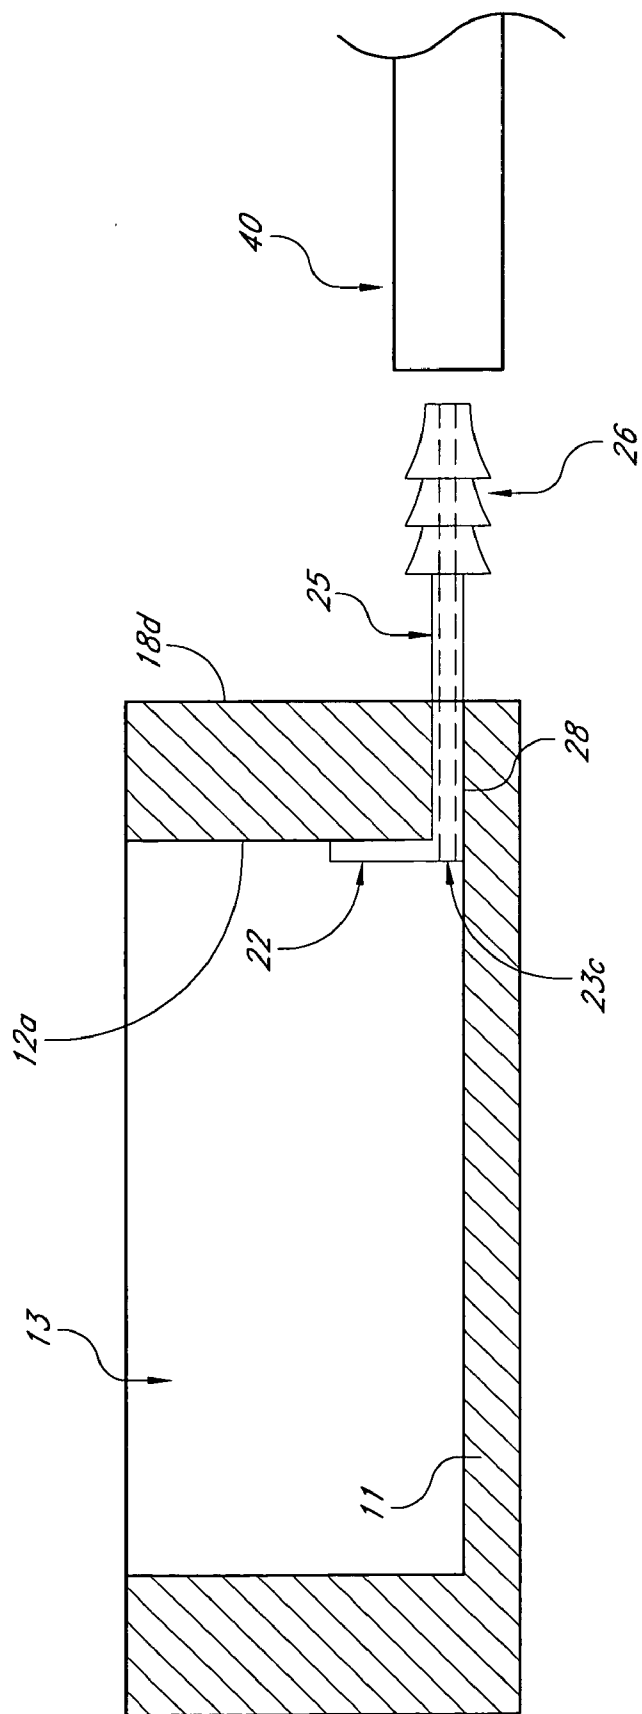


FIG. 4

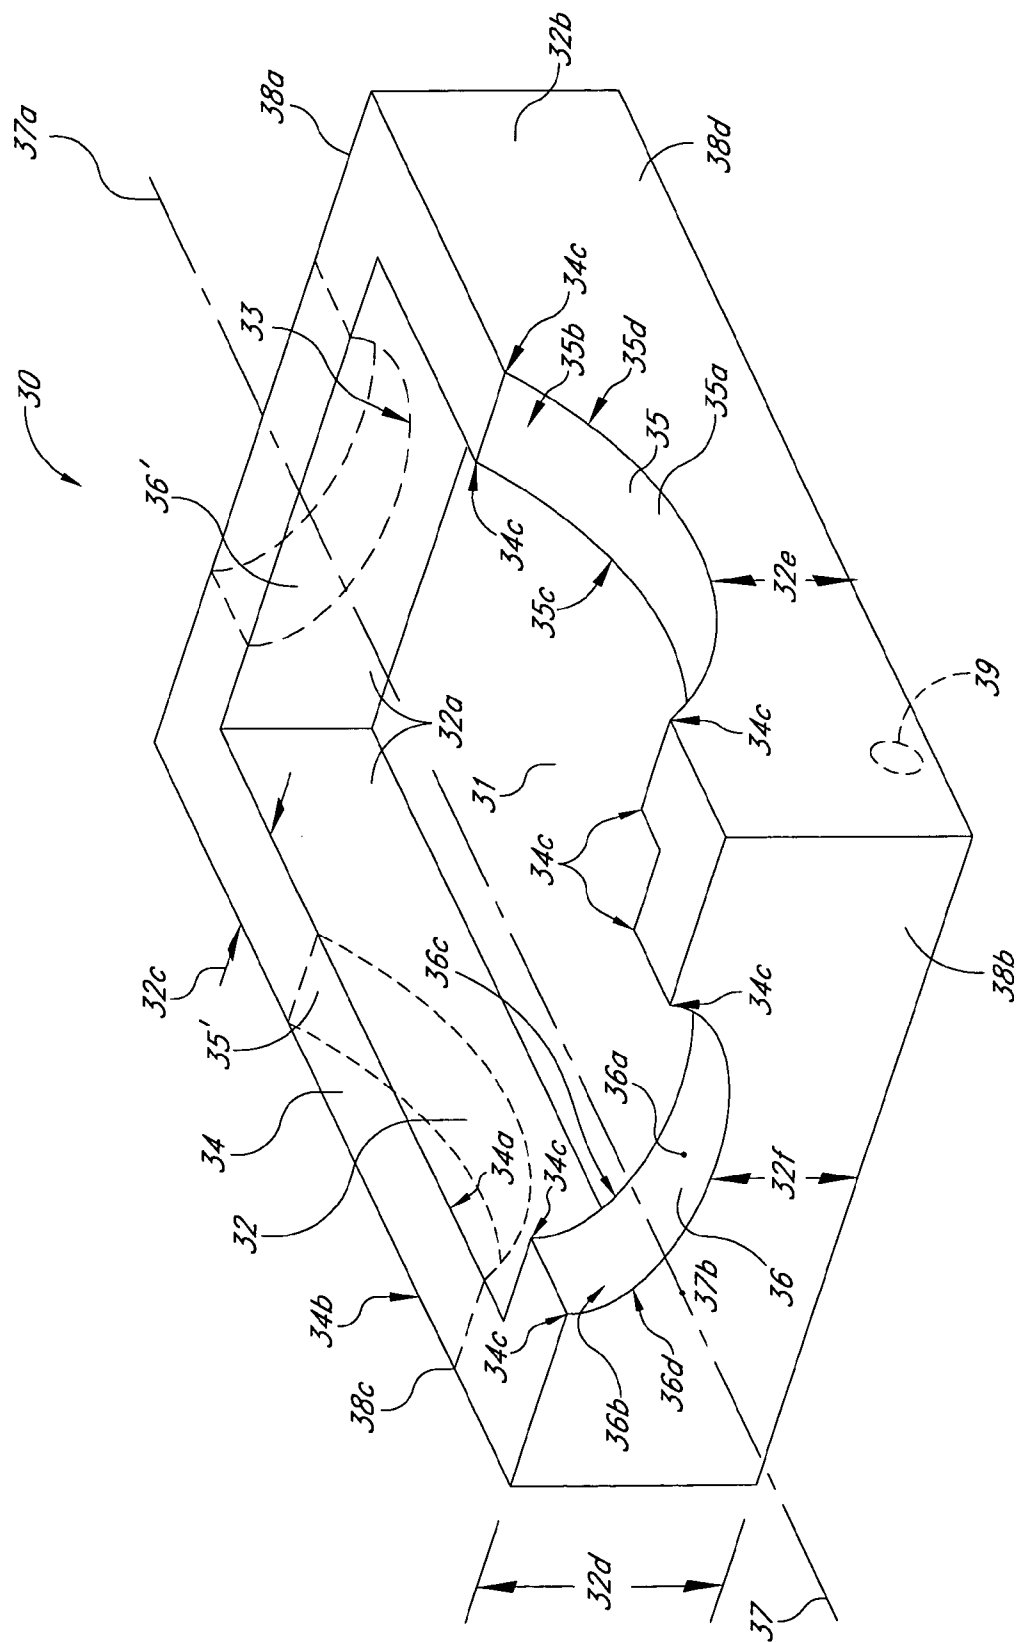


FIG. 5

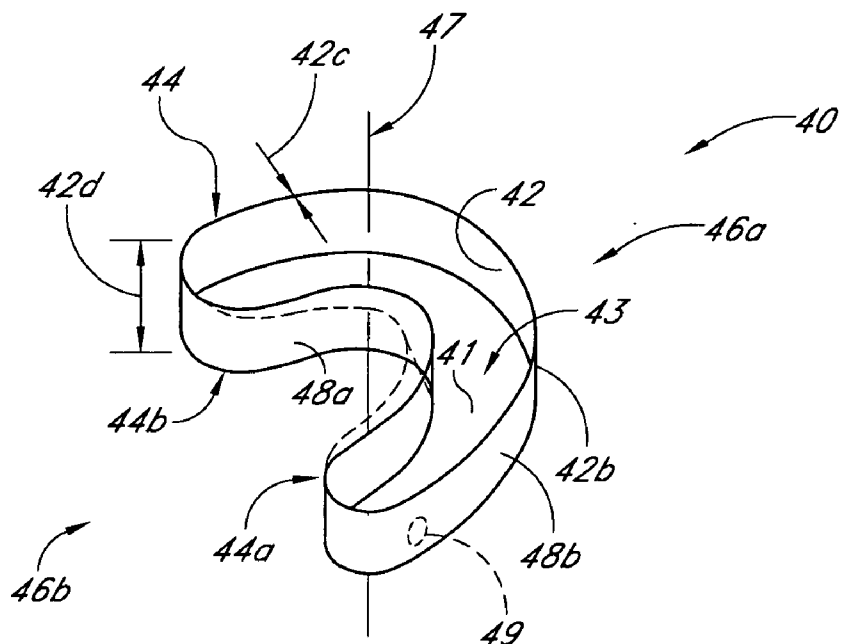


FIG. 6

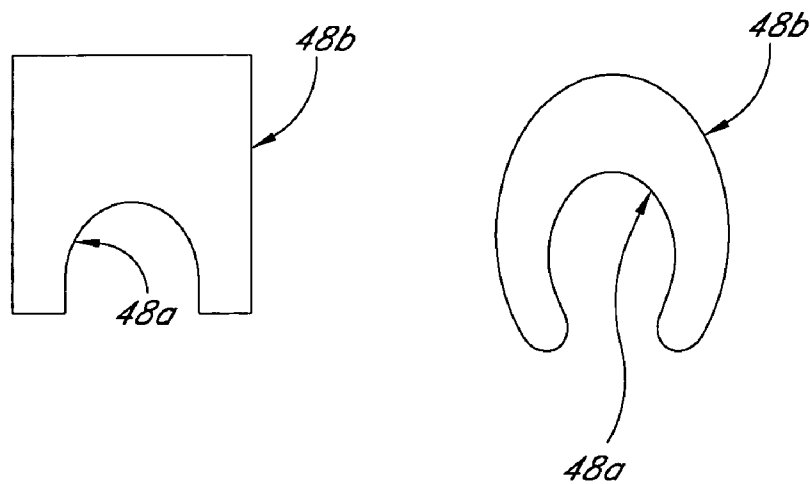


FIG. 6A

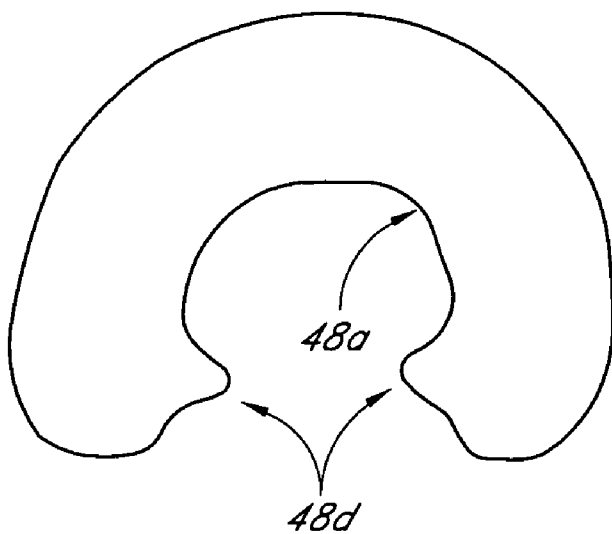


FIG. 6B

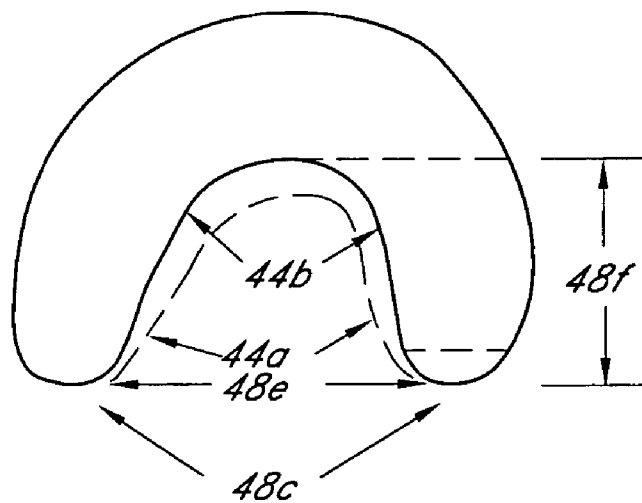


FIG. 7

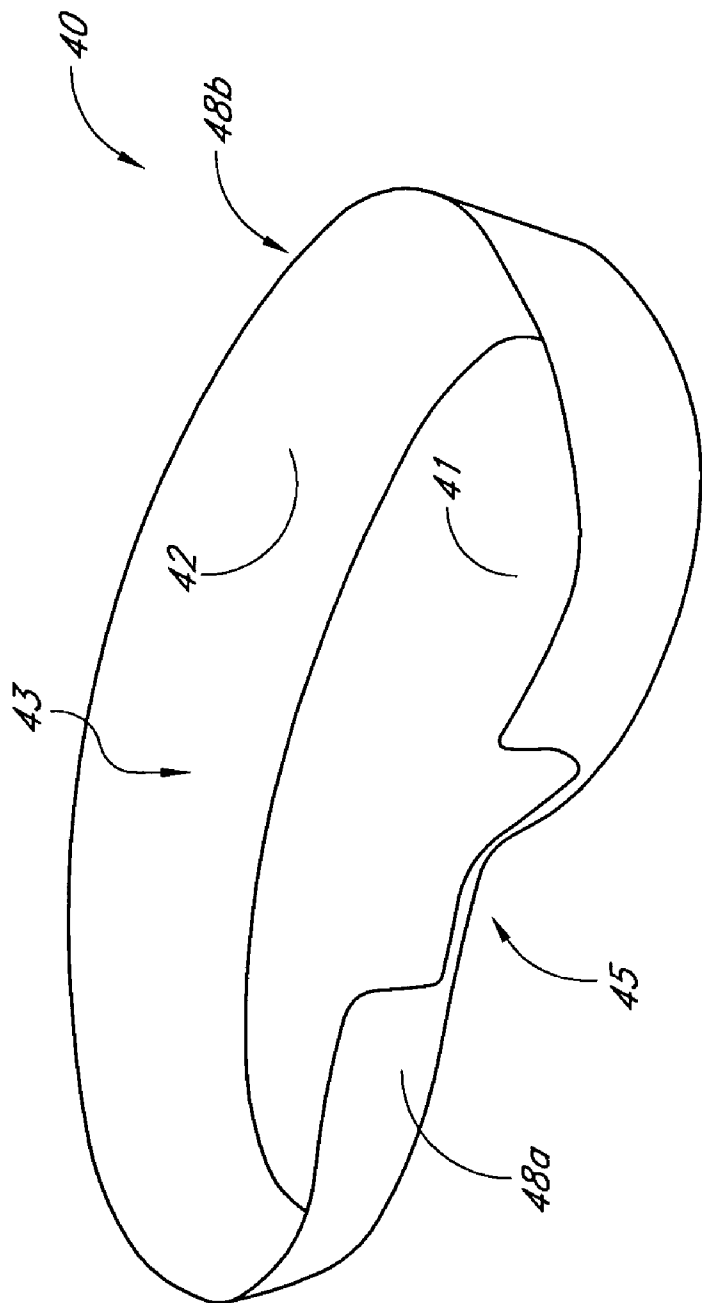


FIG. 7A

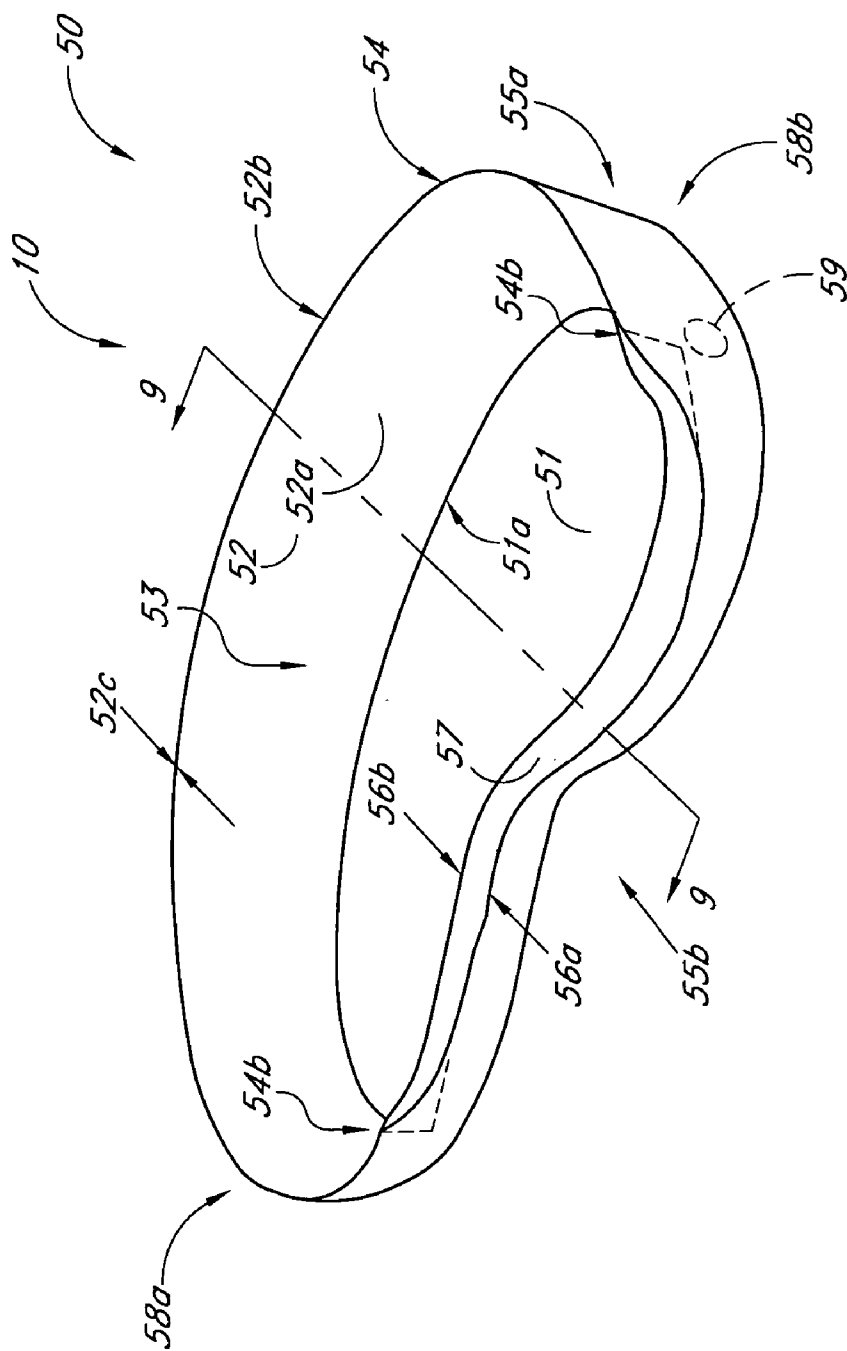


FIG. 8

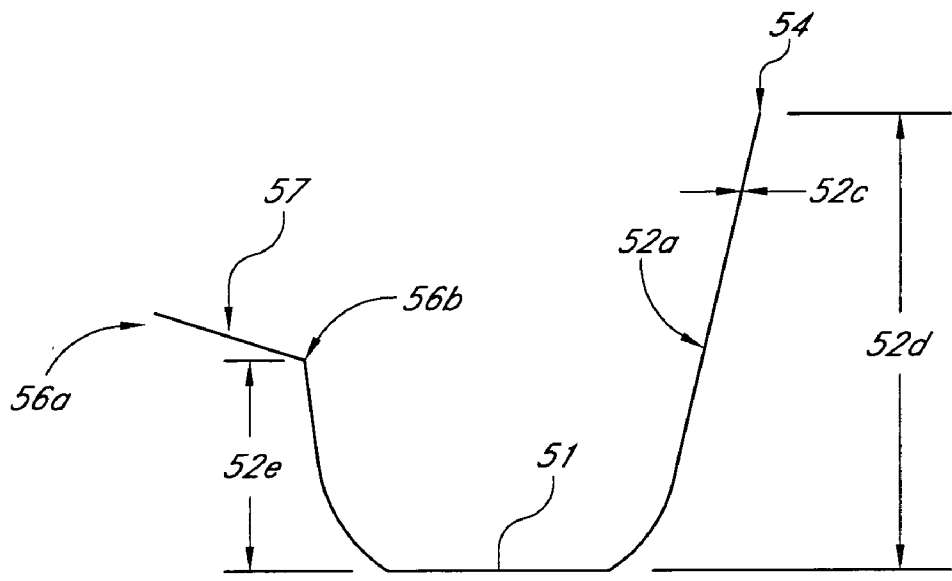


FIG. 9

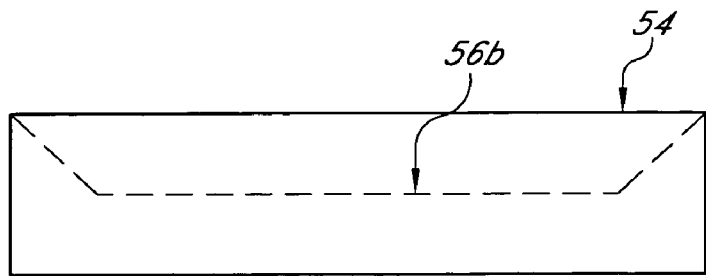


FIG. 10

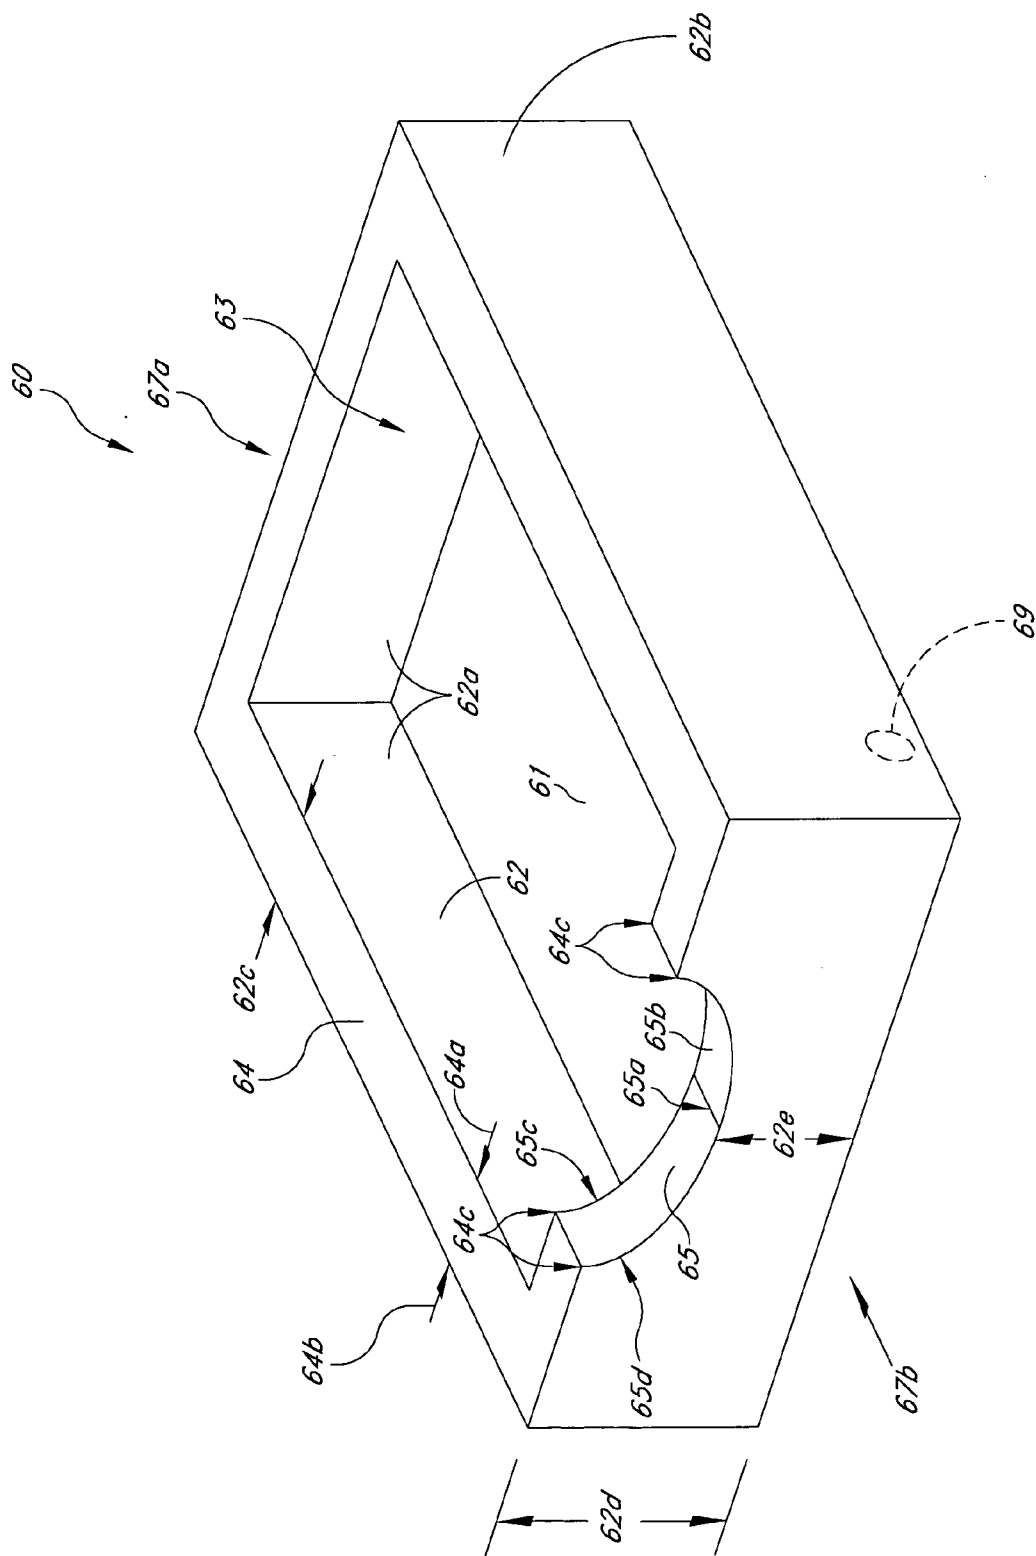


FIG. 11

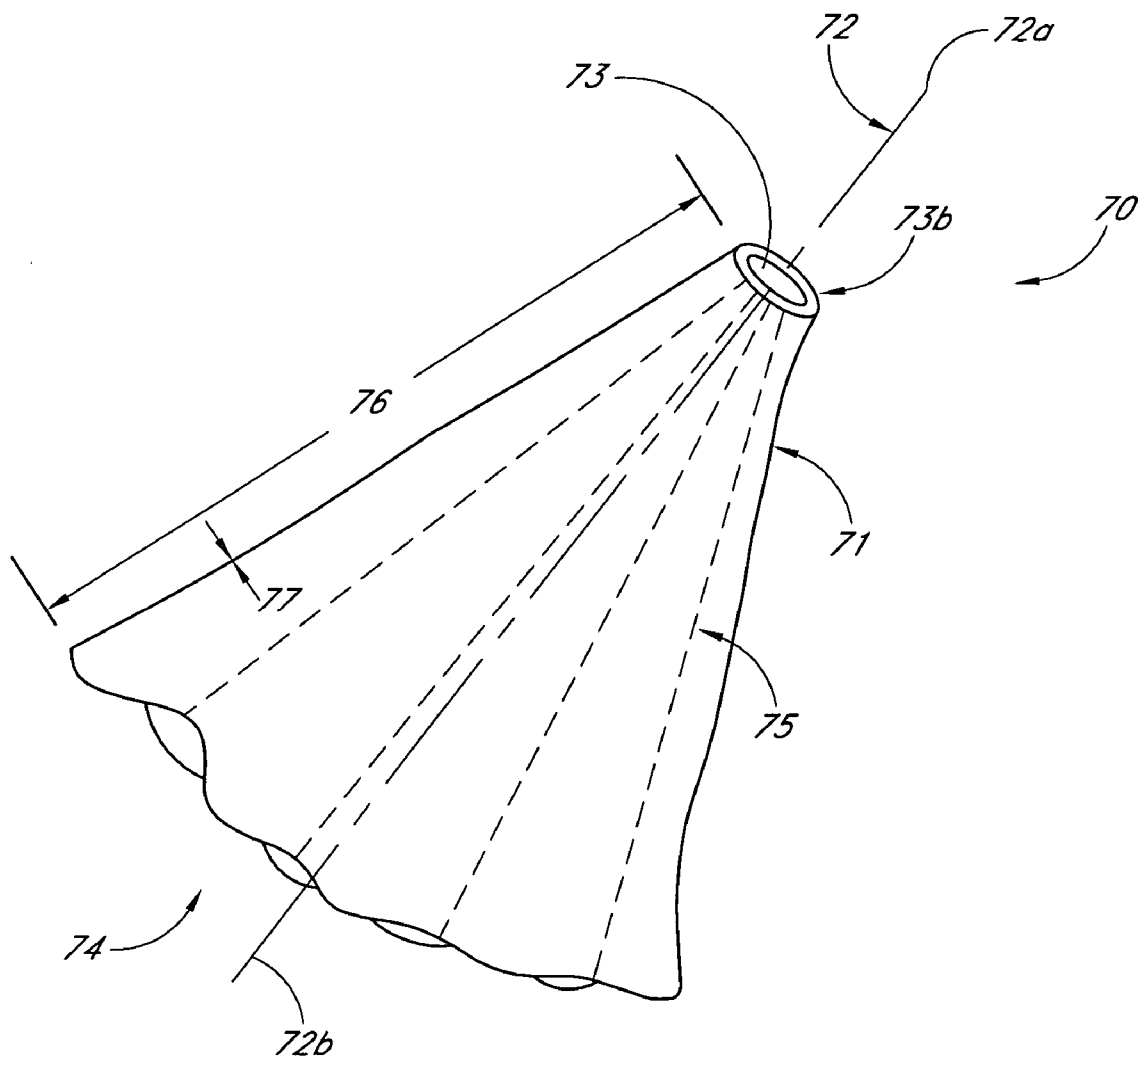


FIG. 12

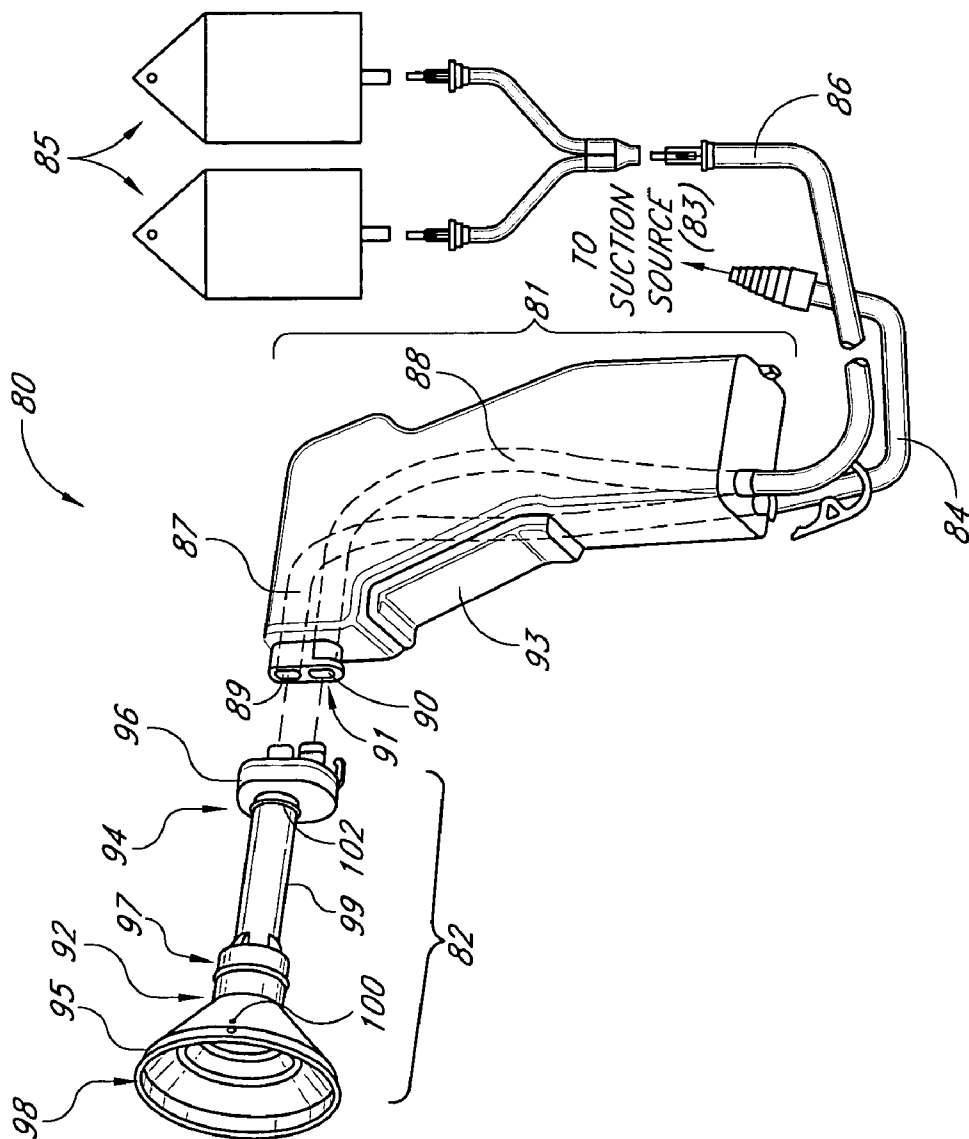


FIG. 13
(PRIOR ART)

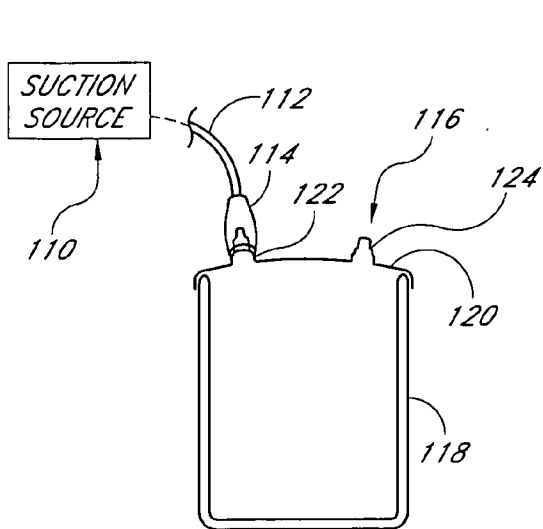


FIG. 14
(PRIOR ART)

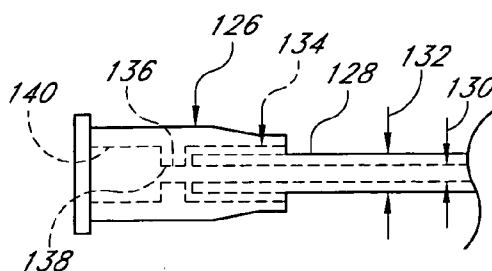


FIG. 15
(PRIOR ART)

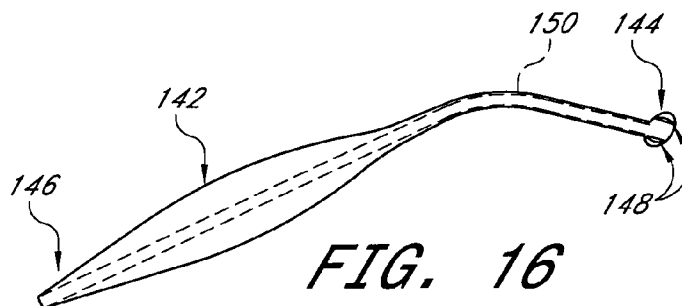


FIG. 16
(PRIOR ART)

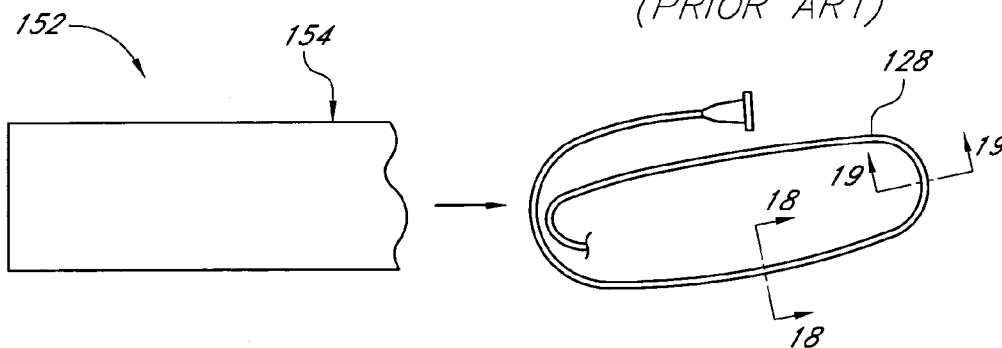


FIG. 17
(PRIOR ART)




FIG. 18
(PRIOR ART)




FIG. 19
(PRIOR ART)




FIG. 20

SUCTION HOSE FOR WOUND ASPIRATION

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present inventions are directed to surgical equipment, and in particular, equipment used for irrigating wounds on the human body.

[0003] 2. Description of the Related Art

[0004] Basins are widely used in the medical field to collect irrigation fluid during an irrigation procedure of a wound on a patient. The wound may consist of a laceration or a cut that breaks a skin surface. Fractures may also require irrigation procedures. Medical personnel irrigate such wounds to flush out any contaminants from the wound prior and/or subsequent to conducting a medical procedure on the wound area.

[0005] Irrigation procedures are common in the medical field, particularly in the field of orthopedic surgery, due to the fact that wounds are fairly common injuries, many of them requiring treatment at a medical facility, particularly deep cuts. Therefore, medical facilities tend to maintain a significant number irrigation kits ready for use during surgical procedures. This is also true for emergency room facilities, where patients with wounds requiring immediate treatment generally arrive, and where the number of patients that will arrive throughout a day is impossible to predict. However, the use of irrigation kits is not limited to emergency room procedures and includes other medical procedures as well.

[0006] Existing irrigation kits typically include at least one basin to collect the irrigation fluid wrapped in plastic or other material preventing dirt or other contamination from coming in contact with the basin. Wrapping the kit in plastic also allows the kits to be kept separate from each other, even if the kits are stacked one on top of another. Moreover, each kit generally includes various components necessary for an irrigation procedure so that medical personnel usually need not open more than one irrigation kit to perform an irrigation procedure. The components, such as the basins, are usually sterilized.

[0007] When a wound requires irrigation, medical personnel open an irrigation kit to take the basin out of the kit, and place the basin in an area below the region of the patient's body where the wound is located. Then, with an irrigation device, the medical personnel directs an irrigation fluid, such as, but without limitation, water, saline, or a solution including antibacterials and/or antibiotics at the wound area to remove contaminants, tissue and/or bone fragments from the wound.

[0008] The irrigation device preferably delivers irrigation fluid at a pressure and flow rate sufficient to effectively clean the wound area. The irrigation device may have a shield connected to the device to reduce the amount of irrigation fluid that splashes off the wound field and/or in the direction of the treating medical personnel or on the floor. The shield can further be used to focus the direction of the irrigation fluid on the wound when the device is placed close to the wound area.

[0009] Throughout the irrigation procedure, medical personnel adjust the location of the basin to collect the irrigation

fluid after it strikes the wound area. For example, one may place the basin just below the body part where the wound is located. Alternatively, one may place the basin in a location to which the irrigation fluid flows after striking the wound area.

SUMMARY OF THE INVENTION

[0010] One aspect of at least one invention disclosed herein includes the realization that a significant amount of labor is unnecessarily wasted during medical irrigation procedures. For example, in a typical irrigation procedure, an open wound or fracture is irrigated with an irrigation device that discharges a stream of irrigation fluid. Typically, a doctor or surgeon manually aims the stream of irrigation fluid into the wound in order to dislodge and flush out contaminants, tissue and/or bone fragments. Occasionally, irrigation fluid will splash out of the wound when the stream of irrigation fluid strikes tissue or bone.

[0011] The amount of irrigation fluid used for such procedures varies. For example, more irrigation fluid is used for irrigating larger wounds than that used for irrigating smaller wounds. However, the amount of irrigation fluid used may also vary depending on the depth of the wound, e.g., more irrigation fluid being used for deeper wounds. Additionally, the amount of irrigation fluid used may also vary depending on the type and risk of potential contamination. For example, where a wound was partially created during an accident such as impalement, more irrigation fluid may be used compared to that used to irrigate a wound created by a surgeon during a planned procedure or other surgical procedures. Finally, a surgeon may decide to irrigate one wound more than another for various other reasons, such as, but without limitation, the amount of time the wound was open. Thus, it can be difficult to predict the amount of irrigation fluid that will be used to irrigate a wound.

[0012] During irrigation procedures performed for orthopedic surgery or other major medical procedures, a large amount of irrigation fluid is often used, e.g. one to ten liters. Thus, the basin used for collecting the irrigation fluid must be emptied repeatedly, requiring the irrigation procedure to stop, unless additional personnel and/or basins are used. As a full basin is removed, and an empty basin is re-positioned, some irrigation fluid inevitably is spilled on the floor, thus requiring additional towels and cleaning equipment to be used to keep the floor clean. If the towels or equipment is to be re-used, they must be sterilized.

[0013] An additional consideration with conventional basins is the potential for contamination of medical personnel with the bodily fluids of the patient that are collected in the basin during an irrigation procedure. If the irrigation fluid in the basin is spilled, the irrigation fluid, soft tissue, bone, and other debris contained therein may come in contact with medical personnel, exposing the personnel to contaminated and potentially infectious matter. Such an exposure can result in the transmission of diseases.

[0014] Thus, one aspect of at least one of the inventions disclosed herein includes the realization that a basin that can be used alone or quickly modified to be actively drained can decrease the risk of transmission of disease and save a significant amount of labor normally associated with surgical irrigation procedures. Such a basin can reduce the

number of medical personnel needed for an irrigation procedure and the total man-hours required for the procedure.

[0015] Thus, in accordance with one embodiment of at least one invention disclosed herein, a basin comprises a sidewall portion and a bottom portion, at least one of the sidewall and bottom portions including at least one convertible portion configured to provide a substantially leak-proof barrier in a first state and to form a drain in a second state through which the basin can be drained, such as, for example, but without limitation, a suction hose commonly used in operating rooms.

[0016] By including at least one convertible portion in the basin, the basin achieves the dual goals of providing a conventional multi-purpose basin, and providing a basin that can be modified for use during a large volume irrigation procedure. For example, the basin can have any conventional shape, including for example, but without limitation, round, square, rectangular, oval, C-shaped, L-shaped, and kidney. Thus, the basin can be used for irrigation procedures just as any conventional basin is used, as well as non-irrigation related uses such as the temporary placement of instruments or devices. Additionally, the convertible portion can be modified to drain the basin. As such, the basin provides a more convenient device for collecting and discarding irrigation fluid used during an irrigation procedure.

[0017] For example, in one embodiment the convertible portion includes a frangible portion, which can be broken to form an aperture. A suction hose commonly used in an operating room can be connected to the aperture formed by the broken frangible portion. Thus, personnel handling the basin will not have to stop the irrigation procedure to empty the basin, and are less likely to spill any irrigation fluid, either on the floor or on themselves, during the procedure.

[0018] In accordance with another embodiment of at least one of the inventions disclosed herein, a wound irrigation kit comprises a grommet that can be readily fitted onto a basin in the kit to allow for draining of the basin during the irrigation procedure. Accordingly, the kit is advantageously versatile, allowing the basin to be used without the grommet for a shortened irrigation procedure, as well as allowing the basin to be readily modified to incorporate the draining attachment for a prolonged irrigation procedure. The grommet is defined by an axis and comprises a fitting part, a sealing part and a channel disposed in the center of the fitting and the sealing part along the axis. The fitting part is configured to be inserted through the convertible portion of the basin so that the sealing part of the grommet forms a substantially watertight seal with the wall of the basin facing the cavity of the basin. The fitting part protrudes out of the body of the basin in a direction away from the basin body. The fitting part also comprises an outer surface configured to securely receive a draining hose for active draining of the basin.

[0019] In accordance with another embodiment of at least one of the inventions disclosed herein, a wound irrigation kit comprises a cannula optionally having an adhesive surface. The cannula can optionally be made of flexible rubber. In another option, the cannula can be made of a hard plastic. Additionally, the cannula can optionally be configured to have a specific shape, such as, but without limitation, a C-shape, a Z-shape and an L-shape. The adhesive surface can optionally comprise flange integrally formed with the

cannula. In another option, the adhesive surface can comprise the outer surface of the cannula itself

[0020] In another embodiment of at least one of the inventions disclosed herein, a basin is configured for irrigation of a wound generally located on a knee area of a human leg. For example, the wound may be located on the leg over a kneecap. Additionally, the wound may be located on an upper shin or a lower quadriceps region of the leg, proximally located to the knee area. Use of the basin is not limited to wounds located on a front side of the leg, where the front side is defined as the side on which the knee-cap is located. The basin can also be used in irrigation procedures on a side of the knee or a region behind the knee. Additionally, the basin can be used in irrigation procedures on a wound on an upper calf or a lower hamstring region of the leg, proximally located to the knee area of the leg. Further, the basin can also be used for irrigation procedures on open fractures of other lower extremities.

[0021] The basin advantageously includes two recesses located on opposite sides of the basin along an upper periphery of the basin. The recesses are configured to receive the leg at two regions proximal to the location of the wound or fracture, so that the wound or fracture is located over the cavity of the basin. Specifically, the recesses are sized so that one is broader than the other, the broader recess configured to comfortably accommodate a larger region of the leg and the other recess configured to comfortably accommodate a smaller region of the leg.

[0022] For example, the recesses are configured to receive a shin and a thigh portion of the leg. If the wound is located on the kneecap, the recesses disposed on the upper periphery of the basin are capable of receiving the lower quadriceps region and the upper calf region of the leg. Moreover, one of the recesses is sized broader than the other recess, wherein the broader recess is sized to receive the thigh portion and the other recess is sized to receive the shin portion of the leg. Further, the recesses are preferably contoured in shape to comfortably receive the shin and thigh portions. The recesses advantageously allow the basin to more effectively collect the irrigation fluid used to irrigate a wound on the knee region during an irrigation procedure.

[0023] In still another embodiment of at least one of the inventions disclosed herein, a basin is configured for irrigation of a wound generally located on a human elbow region. For example, the wound may be located on either side of the elbow. Additionally, the wound may be located on a biceps region, a triceps region or a forearm region proximal to the elbow.

[0024] The basin for use in irrigation of a wound on the elbow region also has two recesses on the upper periphery for receiving two regions of the arm. The recesses are further configured to more effectively collect the irrigation fluid used to irrigate a wound on the elbow region during an irrigation procedure.

[0025] In another embodiment of at least one of the inventions disclosed herein, a basin is configured for irrigation of a wound generally located on a human ankle region. For example, the wound may be located on either side of the ankle. Additionally, the wound may be located on a lower shin or a lower calf region of the leg proximal to the ankle.

[0026] The basin for use in irrigation of a wound on the ankle region (i.e., ankle-basin) is configured similarly to the

basin used to irrigate a wound on the elbow region (i.e., elbow-basin). The ankle-basin preferably has a taller sidewall and differently sized recesses than the elbow-basin. Specifically, the ankle-basin has two recesses on the upper periphery for receiving two regions of the leg proximal to the ankle. The recesses are configured to more effectively collect the irrigation fluid used to irrigate a wound on the ankle region.

[0027] In another embodiment of at least one of the inventions disclosed herein, a basin comprises three recesses on the upper periphery. The first and third recesses are optionally sized to receive a human leg, while the second recess is sized to receive a human upper arm. Therefore, according to this embodiment, the basin can be used to irrigate wounds on the knee and elbow regions. Similarly, the second recess can optionally be sized to receive a human foot. Therefore, according to this embodiment, the basin can be used to irrigate wounds on the knee and ankle regions.

[0028] In still another embodiment of at least one of the inventions disclosed herein, a basin can have four recesses. The recesses can optionally have the same dimensions. In another option, only three of the four recesses can have the same dimensions. In still another option, only two of the recesses can have the same dimensions. In yet another option, the recesses can each have different dimensions. Accordingly, the basin can be configured to receive various parts of human extremities.

[0029] In another embodiment of at least one of the inventions disclosed herein, a basin comprises one recess on the upper periphery of the basin. The recess is preferably configured to receive a human extremity. For example, the recess can be configured to receive a human forearm to irrigate wounds located below the elbow. In another example, the recess can be configured to receive a human thigh region to irrigate wounds located below the knee. The height of the basin sidewalls is greater if the basin is used to irrigate leg wounds than if it is used to irrigate arm wounds.

[0030] In another embodiment of at least one of the inventions disclosed herein, a basin is configured for irrigation of a wound on a human shoulder. The wound can be located on an upper arm region near the juncture of the arm with the shoulder. The wound can also be located on a shoulder blade region or a pectoral region near the juncture with the arm.

[0031] The basin is preferably generally C-shaped, which advantageously allows the basin to be fitted around the upper arm region proximal to the wound. However, the basin can optionally have other shapes, such as, but without limitation, oval, round, square, kidney and horseshoe. The basin is further configured to have a contact region on an outer surface of the basin, wherein the contact region is advantageously configured to fit against a portion of a circumference of the upper arm. Accordingly, the basin is configured to more effectively collect the irrigation fluid used to irrigate a wound on the shoulder region during an irrigation procedure.

[0032] In yet another embodiment of at least one of the inventions disclosed herein, a basin is configured for irrigation of a wound on a human hip. The wound may be located on a buttock region or a lower hip region near the juncture with the buttock.

[0033] The basin advantageously has a contact region formed on the upper periphery of the basin. Moreover, the contact region advantageously makes substantial contact with the human anatomy from just above a hip to just below a buttock. Further, the contact region is advantageously recessed downward relative to the upper periphery of the basin, allowing the upper periphery to operate as a splash shield during the irrigation procedure.

[0034] Another embodiment of at least one of the inventions disclosed herein includes providing a flexible irrigation shield that can be attached to an irrigation device, such as the irrigation device shown in U.S. Pat. No. 6,156,004. The shield can also be readily modified to vary its length. Such a shield advantageously allows medical personnel to vary the splash-prevention area as needed for a specific irrigation procedure. The irrigation shield can have a variety of shapes. For example, the shield can be in the shape of a circle or a square. The shield can also be made of a variety of materials. For example, the shield can be made of a clear plastic.

[0035] Still another embodiment of at least one invention disclosed herein is directed to an irrigation kit that provides a plurality of the components useful for an irrigation procedure. The kit includes a plurality of basins, each basin configured to receive a body part that is to be irrigated to more effectively collect an irrigation fluid in the basin. Each basin comprises a body with a base and at least one wall defining a cavity configured to collect irrigation fluid. Additionally, each basin is advantageously configured to be readily modified for active draining of the basin. Each basin optionally has at least one convertible portion on the body, which may optionally be a frangible portion in the form of a circle. The convertible portion is preferably located near the bottom of the basin wall, wherein the convertible portion may be modified to form a drain. Further, the base of each basin is preferably slanted at an angle toward an end of the basin proximal to the convertible portion so that irrigation fluid collected in the basin advantageously rolls toward the drain formed on the basin body when the convertible portion is modified.

[0036] Another aspect of at least one of the inventions disclosed herein includes the realization that during certain types of surgery, such as for example, but without limitation, orthopedic surgery, the standard suction tubing commonly used suffers from a clogging problem that can be caused by constrictions that form in the tubing during packaging and storage. For example, typical operating rooms and other medical facilities use suction tubing having an inner diameter (I.D.) of about 5-6 mm in a relaxed state. Additionally, all of the components which are configured to be connectable with the 5-6 mm I.D. tubing, are sized and shaped so that they will only allow debris to pass into the suction tubing that is smaller than 5-6 mm.

[0037] During certain medical procedures, only liquids such as bodily fluids, humors, or irrigation fluid, is removed with a suction device. The typical 5-6 mm tubing does not suffer from a clogging problem when only liquids are being suctioned. However, during certain types of surgery, such as orthopedic surgery, for example, a significant amount of bodily tissues can be drawn into a suction device. It has been found that the conventional 5-6 mm I.D. tubing commonly used in operating rooms suffers from a bottle-necking problem, due in part to the packaging technique used in market-

ing the tubing. More specifically, the conventional 5-6 mm tubing commonly stocked for operating room use is folded into a sterilized package. The tubing is soft and flexible. Typically, the tubing is between 5 and 20 feet long. Thus, when the tubing is folded, the tubing collapses in the area of each fold. After the tubing has been stored for a significant amount of time, the collapsed portions of the tubing, usually in the area of the folds, remain in a partially collapsed state.

[0038] During an orthopedic operation, such as a joint replacement, many bone chips and clumps of tissue must be removed from the wound prior to closing. Thus, an orthopedic surgeon typically uses a small suction device having a suction tip with restricted openings, to suck out irrigation fluid, clumps of tissue, and bone chips. The restricted openings are sized so as to prevent large clumps of tissue and bone fragments from entering the suction hose. However, despite the size of the restricted opening, tissue clumps and bone fragments pass through the restricted opening which are large enough to form clogs at bottlenecks in the suction circuit. When a clog forms in the suction tubing, it is often difficult to dislodge the debris causing the clog. Thus, it is often necessary to stop the procedure, shut off the vacuum device, replace the tubing, then continue the procedure. This interruption can increase the labor hours required for certain procedures, and thus represents additional costs suffered by the medical facility in performing the medical procedure.

[0039] It has been found that the partially collapsed portions of conventional suction tubing contributes significantly to the clogging problem. Another aspect of at least one of the inventions disclosed herein includes the realization that where a larger diameter suction tubing is partially collapsed, the resulting cross sectional size of the collapsed portion can be large enough to reduce the likelihood of clogs from forming at the partially collapsed portion.

[0040] Thus, in accordance with yet another aspect of at least one of the inventions disclosed herein, a suction hose kit comprises a sterilized package enclosing tubing having an inner diameter of at least about 8 mm. As such, the tubing can be made from the typically-used soft plastic material and folded into a compact shape, without causing constrictions that cause the clogging problem associated with the conventional smaller diameter suction tubing. Other objects, advantages, and features of the present invention will become readily apparent to those skilled in this art from the ensuing detailed description of preferred embodiments thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

[0041] FIG. 1 is a block diagram of an irrigation kit.

[0042] FIG. 1a is a perspective view of a cannula having an adhesive surface.

[0043] FIG. 2 is a perspective view of an irrigation basin for irrigating a wound on a human extremity having a frangible portion.

[0044] FIG. 2a is an end view of the irrigation basin in FIG. 2 having recesses proximally disposed to the sidewalls.

[0045] FIG. 2b is an enlarged perspective view of an irrigation basin with a hole and a peel-off seal.

[0046] FIG. 2c is an enlarged perspective view of an irrigation basin with a threaded hole and a threaded plug.

[0047] FIG. 2d is an enlarged perspective view of an irrigation basin with a hole and a removable cork.

[0048] FIG. 2e is an enlarged perspective view of an irrigation basin with a nipple and a removable cap.

[0049] FIG. 2f is an enlarged perspective view of an irrigation basin with a nipple and a peel-off seal.

[0050] FIG. 2g is an enlarged perspective view of an irrigation basin with a cannula.

[0051] FIG. 2h is an enlarged perspective view of an irrigation basin with a clamp.

[0052] FIG. 2i is an enlarged perspective view of an irrigation basin with a removable clip holder.

[0053] FIG. 2j is an enlarged perspective view of an irrigation basin having an aperture along the upper periphery and two cannulas.

[0054] FIG. 2k is an enlarged perspective view of an irrigation basin with a recess configured to engage a suction hose.

[0055] FIG. 3 is a front, top, and left side perspective view of a draining attachment for use with an irrigation basin.

[0056] FIG. 3a is a rear, top, and left side perspective view of a draining attachment having an aperture with a strainer.

[0057] FIG. 3b is a cross-sectional view of a draining attachment having a flared channel.

[0058] FIG. 4 is a cross-sectional view of the irrigation basin in FIG. 2 incorporating the draining attachment of FIG. 3 to form a drain.

[0059] FIG. 5 is a perspective view of another irrigation basin for irrigating a wound on a human extremity.

[0060] FIG. 6 is a perspective view of another irrigation basin for irrigating a wound on a human extremity.

[0061] FIG. 6a is a top plan view of an irrigation basin for irrigating a wound on a human extremity having different shapes.

[0062] FIG. 6b is a top plan view of an irrigation basin for irrigating a wound on a human extremity having protrusions along the contact region.

[0063] FIG. 7 is a top plan view of the irrigation basin in FIG. 6.

[0064] FIG. 7a is a perspective view of another irrigation basin for irrigating a wound on a human extremity.

[0065] FIG. 8 is a perspective view of another irrigation basin for irrigating a wound on a human extremity.

[0066] FIG. 9 is a cross-sectional view of the irrigation basin taken along line 9-9 of FIG. 8.

[0067] FIG. 10 is a side elevational view of the irrigation basin as viewed along arrow 10 of FIG. 8.

[0068] FIG. 11 is a perspective view of another irrigation basin for irrigating a wound on a human extremity.

[0069] FIG. 12 is a perspective view of an irrigation shield.

[0070] FIG. 13 is a perspective view of a conventional irrigation device.

[0071] FIG. 14 is a schematic elevational and sectional view of a suction jar commonly used for collecting fluids suctioned from a wound of a patient during an operation.

[0072] FIG. 15 is an enlarged side elevational view of a female adapter mounted to a suction hose commonly used in operating rooms.

[0073] FIG. 16 is a suction device commonly used in operating rooms and configured to engage with the female adapter illustrated in FIG. 15.

[0074] FIG. 17 is an exploded view of a sterilized package and a suction hose commonly used in operating rooms.

[0075] FIG. 18 is a sectional view of the suction hose illustrated in FIG. 17, taken along line 18-18.

[0076] FIG. 19 is a sectional view of the suction hose illustrated in FIG. 17, taken along line 19-19.

[0077] FIG. 20 is a sectional view of an improved suction hose constructed in accordance with an aspect of at least one of the inventions disclosed herein.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0078] With reference to FIG. 1, a block diagram of an irrigation kit 1 according to an embodiment of at least one of the inventions disclosed herein is illustrated therein. The irrigation kit 1 comprises a basin 10 for irrigation of a wound on a human knee, a grommet 20, a basin 30 for irrigation of a wound on a human elbow or ankle, a basin 40 for irrigation of a wound on a human shoulder, a basin 50 for irrigation of a wound on a human hip and an irrigation shield 60, each of which are described in greater detail below.

[0079] The kit 1 preferably also comprises a cover 2 that envelops the basins 10, 20, 30, 40, 50, the grommet 20 and the shield 60 together. The cover 2 is configured to form a seal over the kit 1 to maintain the contents of the kit 1 in a sterilized state. Additionally, the cover 2 is configured to be readily removed by a user for easy access to the contents of the kit 1.

[0080] The cover 2 is preferably made of a material that can maintain the contents of the kit 1 in a sterilized state. For example, the cover 2 may be made of plastic. Alternatively, the cover 2 may be made of reinforced paper or a cloth.

[0081] As discussed above, the kit 1 preferably comprises a plurality of basins, preferably one each of the basins 10, 30, 40, 50. However, the kit 1 can optionally include any number of each basin type. Additionally, the kit 1 preferably comprises an irrigation shield 60 and/or optionally, a grommet 20.

[0082] The kit 1 optionally comprises a cannula 5 configured to operate as a suction hose. The cannula 5 is preferably made of a flexible plastic. The cannula 5 can optionally be made of a hard plastic, such as, but not limited to, polyurethane or polypropylene. The cannula 5 can also comprise a variety of shapes, such as, but without limitation, a C-shape, a Z-shape, and an L-shape. At least one end of the cannula 5 is configured to engage a suction device.

[0083] The cannula 5 preferably comprises a cylindrical outer surface. However, the outer surface of the cannula 5 can comprise other shapes, such as, but without limitation, square and hexagonal.

[0084] With reference to FIG. 1a, the cannula 5 also preferably comprises an adhesive surface 5a. For example, the adhesive surface 5a can comprise the outer surface of the cannula 5. In another example, the adhesive surface 5a can comprise a flange 5a integrally formed on an outer surface of the cannula 5. In another example, the flange 5a can be attached to the outer surface of the cannula 5 with, for example, but without limitation, an adhesive. The cannula 5 preferably comprises a peel-off cover over the adhesive surface 5a. The cannula 5 advantageously provides a simple attachment for use with any of the basins described above to actively drain said basin.

[0085] During use, the user takes a kit 1 from a storage location when needed for use in an irrigation procedure. The user removes the cover 2 of the kit 1 and removes its contents. The cover 2 may be removed by opening the seal of the cover 2. Alternatively, the cover 2 may be removed by cutting the material of the cover 2 with a sharp instrument, such as a knife, scalpel, or scissors.

[0086] With reference to FIG. 2, an irrigation basin 10 for irrigating a wound on a human extremity is illustrated therein. For example, the basin 10 can be used for irrigating a wound on a human knee. The basin 10 comprises a base 11 having a generally rectangular shape and a peripheral wall 12. The basin 10 can have other shapes, such as, but without limitation, round, oval, kidney, and square. The wall 12 is substantially at ninety degrees relative to a resting surface upon which the basin 10 rests. However, the wall 12 can be inclined at any desired angle, inwardly or outwardly.

[0087] The base 11 and the wall 12 define a cavity 13 in the center of the basin 10. The peripheral wall 12 also defines an inner surface 12a facing toward the cavity 13 of the basin 10 and an outer surface 12b facing away from the cavity 13 of the basin 10. The basin 10 also comprises an upper periphery 14 having an inner edge 14a and an outer edge 14b. The outer edge 14b preferably joins the upper periphery 14 to the outer surface 12b. In the illustrated embodiment, the periphery 14 defines an inwardly extending flange having a width 12c, supported only by the connection between the outer edge 14b to the wall 12. Optionally, the flange can extend outwardly from the wall 12. Alternatively, the thickness of the wall 12 can be sufficient to form the periphery 14. In another option, the inner edge 14a joins the upper periphery 14 to the outer surface 12b and the periphery 14 is supported only by the connection between the inner edge 14a to the wall 12.

[0088] The basin 10 is preferably made of a hard plastic material. For example, but without limitation, the basin 10 can be made of polyurethane or polypropylene, among other materials. The material is preferably biocompatible and hypo-allergenic. The basin 10 can also be made of metal, such as, but without limitation, stainless steel. Additionally, the basin 10 is preferably sterilized for use in medical procedures. The basin 10 can optionally be re-useable.

[0089] The outer surface 12b comprises two end surfaces 18a, 18b arranged at longitudinal ends 17a, 17b of a major axis 17, respectively, and disposed generally perpendicular to the major axis 17. The outer surface 12b also comprises two side surfaces 18c, 18d extending between the longitudinal ends 17a, 17b and generally parallel to the major axis 17. As used herein, the term "major axis" generally refers to an axis that passes through the basin 10 along the longitu-

dinal direction of the basin 10, i.e., along the greatest dimension or "length" of the basin 10.

[0090] The basin 10 further comprises a first recess 15 configured to receive, for example, a human thigh and a second recess 16 configured to receive, for example, a human shin. The first recess 15 is preferably broader than the second recess 16. The first recess 15 is disposed along the upper periphery 14 at the longitudinal end 17a of the basin 10. The recess 15 bisects the end surface 18a and the inner surface 12a at the longitudinal end 17a.

[0091] The second recess 16 is disposed along the upper periphery 14 at the longitudinal end 17b of the basin 10. The recess 16 bisects the end surface 18b and the inner surface 12a at the longitudinal end 17b. The recesses 15, 16 are preferably aligned along the axis 17.

[0092] FIG. 2 illustrates the recesses 15, 16 as centrally disposed along the upper periphery 14 at the longitudinal ends 17a, 17b of the basin 10. However, as illustrated in FIG. 2a, the recesses 15, 16 can optionally be disposed along the periphery 14 proximally to one of the side surfaces 18c, 18d. The recesses 15, 16 preferably join to the upper periphery 14 at edges 14c.

[0093] The basin 10 also optionally includes at least one convertible portion 19 communicating with an area near the bottom edge of the basin 10, where the bottom edge is the edge that contacts the resting surface. One convertible portion 19 is shown in the illustrated embodiment. The convertible portion 19 can optionally be disposed on the base 11. In one example, the convertible portion 19 can be centrally disposed on the bottom of the base 11. In the illustrated embodiment, the convertible portion 19 is disposed on the side surface 18d.

[0094] As shown in FIG. 2, the base 11 of the basin 10 is generally horizontal relative to the resting surface and rectangular in shape. Moreover, the base 11 is substantially at zero degrees relative to the resting surface. However, the base 11 of the basin 10 is not limited to the rectangular shape or to being parallel to the resting surface. For example, the base 11 may be inclined at an angle greater than zero degrees and configured to direct irrigation fluid on the base 11 in the direction of the convertible portion 19. For example, the wall 12 can include downwardly protruding portions (not shown) which raise the end 17a relative to the end 17b. Alternatively, the base 11 can be mounted to the wall 12 such that the end of the base 11 adjacent end 17a is higher than the end of the base 11 adjacent the end 17b. In another example, the base 11 can be configured to be adjustably inclined to a plurality of angles such that the end of the base 11 adjacent end 17a is higher than the end of the base 11 adjacent the end 17b. For example, but without limitation, the outer surface of the base 11 can be configured to releasably engage at least one shim (not shown) to selectively change the inclination of the base 11 relative to the resting surface. Thus, the kit 1 can include a basin 10 and at least one shim to selectively vary the inclination of the base 11.

[0095] The peripheral wall 12 defines a thickness, which preferably is uniform along the periphery of the wall 12. The thickness is configured to provide the wall 12 with adequate structural rigidity to prevent excessive flexing of the wall 12. Accordingly, the thickness can optionally have various sizes,

each of which is capable of providing the wall 12 with adequate structural rigidity. For example, the thickness can be between 1 mm and 5 cm.

[0096] The wall 12 defines a maximum height 12d along the periphery of the wall 12. The maximum height 12d is defined as the distance from the resting surface to the upper periphery 14 of the wall 12. The wall 12 also defines a minimum height 12e at the longitudinal end 17a of the basin. The minimum height 12e is defined as the distance from the resting surface to a minimum point 15a of the first recess 15. Further, the wall defines a minimum height 12f at the longitudinal end 17b of the basin 10. The minimum height 12f is defined as the distance from the resting surface to a minimum point 16a of the second recess 16. The heights 12d, 12e, 12f are configured to be sufficiently large to allow the cavity 13 defined by the wall 12 and the base 11 to hold a substantial volume of fluid.

[0097] The upper periphery 14 in the illustrated embodiment is generally parallel to the axis 17. However, the upper periphery 14 can optionally be inclined inwardly so as to drain liquid falling on the periphery 14 back into the cavity 13. Additionally, the periphery 14 can have a curved surface so that the periphery 14 does not have the edges 14a, 14b and to provide a seamless junction between the upper periphery 14 and the outer surface 12b.

[0098] The first recess 15, as illustrated in FIG. 2, extends from the edges 14c of the upper periphery 14 to the minimum point 15a. Moreover, the recess 15 has a curved shape. However, the first recess 15 can optionally have any contoured shape configured to receive, for example, a human thigh. Accordingly, the recess 15 is not limited to the arcuate shape illustrated in FIG. 2. The recess 15 further comprises a recess surface 15b and edges 15c, 15d. The recess 15 preferably joins to the wall 12 at the edge 15d. Optionally, the recess 15 can join to the wall 12 at the edge 15c. The recess surface 15b extends horizontally from the edge 15c to the edge 15d adjacent the end surface 18a. The recess surface 15b can optionally be curved between the inner surface 12a and the end surface 18a to provide a seamless junction between the surface 15b and the surfaces 12a, 18a without the edges 15c, 15d. The recess surface 15b can also optionally be inclined inwardly so as to drain liquid falling on the surface 15b back into the cavity 13. The first recess 15 may also have a contoured juncture with the upper periphery 14 to provide a seamless junction between the recess surface 15b and the upper periphery 14, without the edges 14c.

[0099] Similarly, the second recess 16 has a generally curved shape, as illustrated in FIG. 2, and extends from the edges 14c of the upper periphery 14 to the minimum point 16a. Moreover, the second recess 16 has a curved shape, which can be different than the curved shape of the first recess 15. Accordingly, the first recess 15 and the second recess 16 can optionally be asymmetric. Additionally, the second recess 16 can optionally have any contoured shape configured to receive, for example, a human shin. Therefore, the recess 16 is not limited to the arcuate shape illustrated in FIG. 2. The recess 16 further comprises a recess surface 16b and edges 16c, 16d. The recess 16 preferably joins to the wall 12 at the edge 16d. Optionally, the recess 16 can join to the wall 12 at the edge 16c. The recess surface 16b extends horizontally from the edge 16c to the edge 16d

adjacent the end surface **18b**. The recess surface **16b** can optionally be curved between the inner surface **12a** and the end surface **18b** to provide a seamless junction between the surface **16b** and the surfaces **12a**, **18b** without the edges **16c**, **16d**. The recess surface **16b** can also optionally be inclined inwardly so as to drain liquid falling on the surface **16b** back into the cavity **13**. The second recess **16** may also have a contoured juncture with the upper periphery **14** to provide a seamless junction between the recess surface **16b** and the upper periphery **14**, without the edges **14c**.

[0100] The convertible portion **19** can comprise a variety of structures and combination of structures. Moreover, as noted above, one or a plurality of convertible portions **19** can be disposed along the periphery of the basin **10** or on the base **11**.

[0101] For example, but without limitation, the convertible portion **19** can comprise a hole **19** formed on the base **11** or the wall **12** covered with a peel-off seal **19a**, as illustrated in **FIG. 2b**. The peel-off seal **19a** can be disposed on the inner surface **12a** or the outer surface **12b** of the basin **10**, or on the bottom of the base **11**. Preferably, the seal **19a** is constructed of an adhesive applied to a thin light-weight plastic, such as, for example, but without limitation, a thermo-plastic. The adhesive is configured to allow the thin plastic portion to be peeled-off of the basin **10** by hand.

[0102] The basin **10** can optionally comprise a strainer portion (not shown) over the hole **19**, where the strainer is configured to capture bone chips, soft tissue, and other debris. The peel-off seal **19a** advantageously provides a simple way of creating a drain on the basin **10** or any container used for collecting contaminated and potentially infectious fluids, such as, but without limitation, bed pans.

[0103] A kit **1** including the basin **10** can also comprise additional peel-off seals **19a** configured to cover the hole **19**. The additional peel-off seals **19a** can be used to cover the hole **19** if a drain is no longer desired.

[0104] In another example, the convertible portion **19** can comprise a threaded hole **19** formed on the wall **12** and a threaded plug **19a** to plug the hole **19**, as illustrated in **FIG. 2c**. The plug **19a** and threaded hole **19** advantageously allow medical personnel to readily modify the convertible portion **19** to create a drain in the basin **10** by removing the plug **19a** from the hole **19**. Similarly, personnel can insert the plug **19a** into the hole **19** if a drain is no longer desired. The threaded hole **19** and threaded plug **19a** advantageously provide a simple way of creating a drain on the basin **10** or any container used for collecting contaminated and potentially infectious fluids, such as, but without limitation, bed pans.

[0105] In still another example, the convertible portion **19** can comprise a hole **19** formed on the wall **12** and a removable cork **19a** to cover the hole **19**, as illustrated in **FIG. 2d**. The cork **19a** advantageously allows medical personnel to readily modify the convertible portion **19** to create a drain in the basin **10** by removing the cork **19a** from the hole **19**. Similarly, personnel can insert the cork **19a** into the hole **19** if a drain is no longer desired. The hole **19** and removable cork **19a** advantageously provide a simple way of creating a drain on the basin **10** or any container used for collecting contaminated and potentially infectious fluids, such as, but without limitation, bed pans.

[0106] In yet another example, the convertible portion **19** can comprise a nipple **19** extending outward from the side surface **18d** having a removable cap **19a**, as illustrated in **FIG. 2e**. The nipple **19** can be molded onto the side surface **18d**. Optionally, the nipple **19** can be removably screwed onto a threaded hole on the side surface **18d**. The nipple **19** defines a channel **19b** extending therethrough to the inner surface **12a** of the basin **10**. The nipple **19** and cap **19a** advantageously provides a way to create a drain in the basin **10** by removing the cap **19a** from the nipple **19**, which allows fluid in the basin **10** to flow through the channel **19b** of the nipple **19**. Similarly, medical personnel can place the cap **19a** over the nipple **19** if a drain is no longer desired. The nipple **19** and removable cap **19a** advantageously provide a simple way of creating a drain on the basin **10** or any container used for collecting contaminated and potentially infectious fluids, such as, but without limitation, bed pans.

[0107] In another example, the convertible portion **19** can comprise a nipple **19** having a strainer (not shown) and a removable cover **19a**, such as, but not limited to, a peel-off seal **19a**, as illustrated in **FIG. 2f**. As discussed above, the nipple **19** defines a channel **19b** extending therethrough to the inner surface **12a**. The peel-off seal **19a** is preferably disposed over the protruding nipple **19**. Alternatively, the peel-off seal **19a** can be disposed on the inner surface **12a** over the strainer. This configuration advantageously provides a convertible portion **19** that is readily modifiable to create a drain in the basin **10** by peeling off the peel-off seal **19a**, and that captures soft tissue, bone chips, and other debris during the draining of the basin **10**. The basin **10** can also comprise additional peel-off seals **19a** configured to cover the nipple **19**. The nipple **19** and peel-off seal **19a** advantageously provide a simple way of creating a drain on the basin **10** or any container used for collecting contaminated and potentially infectious fluids, such as, but without limitation, bed pans.

[0108] In still another example, the convertible portion **19** can comprise a cannula **19** extending generally vertical to the resting surface from an aperture **19a** proximal to the base **11** to an aperture **19b** proximal to and disposed on a plane generally parallel to the periphery **14**, as illustrated in **FIG. 2g**. However, the cannula **19** can optionally extend above the periphery **14**, as shown in phantom in **FIG. 2g**.

[0109] The cannula **19** can optionally be integrally molded to the inner surface **12a** of the basin **10**. In another option, the cannula **19** can optionally be integrally molded to the outer surface **12b** of the basin **10** and extend through the wall **12** such that the aperture **19a** is disposed generally along the base **11**. In still another option, the aperture **19b** of the cannula **19** can face away from the basin **10**. In yet another option, the cannula **19** can be removably attached to the inner surface **12a** of the basin **10**.

[0110] The aperture **19a** proximal to the base **11** optionally comprises a perforated screen **19c** to prevent bone chips, soft tissue, and other debris from entering the cannula. A peel-off seal (not shown) can optionally be disposed over the perforated screen **19c**. The aperture **19b** proximal to the periphery **14** is configured to receive a fitting to actively drain the basin **10**. Optionally, the aperture **19b** proximal to the periphery can receive and hold a flexible tube to actively drain the basin **10**. As another option, the portion of the

cannula **19** proximal to the periphery **14** includes a nipple (not shown) sized to fit within a suction hose commonly used in operating rooms.

[0111] In yet another example, the convertible portion **19** can comprise a clamp **19**, as illustrated in **FIG. 2h**. The clamp **19** can optionally be integrally molded to the inner surface **12a** of the basin **10**. In another option, the clamp **19** can be removably attached to the inner surface **12a** of the basin **10**. The clamp **19** comprises a contact surface **19a** defined by two arms **19b** about an axis. The contact surface **19a** is configured to receive a tube, but allow said tube to be adjusted along said axis in response to a force. The arms **19b** are configured to hold the tube against the contact surface **19a**. The clamp **19** advantageously provides a simple structure on the basin **10** that can be used in conjunction with a tube or a fitting to actively drain the basin **10**. Moreover, the tube can advantageously be adjusted while the arms **19b** of the clamp **19** hold it. Medical personnel can thus adjust the tube to a position that provides the best active draining of the basin **10**.

[0112] In another example, the convertible portion **19** can comprise a removable holder **19d** having at least one clip **19e**, as shown in **FIG. 2i**. Two clips **19e** are shown in the illustrated embodiment. The clips **19e** are configured to engage and hold a conventional suction hose against the holder **19d** and proximal to the base **11** of the basin **10** for active draining of the basin. **10**. The clips **19e** are optionally manually actuated to engage the suction hose. Similarly, the clips **19e** are optionally manually actuated to release the hose when active draining is no longer desired. The holder **19d** is configured to fit over the periphery **14** of the basin **10** such that it hangs generally vertical to the resting surface. Thus, a kit **1** including an irrigation basin **10** can include a removable holder **19d** having at least one clip **19e** to allow the basin **10** to be readily converted for draining.

[0113] In still another example, the convertible portion **19** can comprise an aperture **19g** formed on the upper periphery **14** of the basin **10**, as illustrated in **FIG. 2j**. The aperture **19g** is configured to align with a first cannula **19h** disposed under the periphery **14** such that an upper end of the first cannula **19h** abuts against an underside of the periphery **14** about the aperture **19g**. The first cannula **19h** preferably has an outer diameter that is greater than the diameter of the aperture **19g**. The upper end of the first cannula **19h** is configured to receive a lower end of a second cannula **19i** that is inserted through the aperture **19g** and through the upper end of the first cannula **19h**. The second cannula **19i** preferably has an outer diameter that is smaller than an inner diameter of the first cannula **19h**. The cannulas **19h**, **19i** are preferably made of a hard plastic. Optionally, the cannulas **19h**, **19i** can be made of a flexible rubber.

[0114] With reference to **2k** in yet another modification, the convertible portion **19** can comprise a recess **19j** defined on the inner surface **12a** of the wall **12**. The recess **19j** preferably is configured to releasably engage a suction hose that is commonly used in an operating room or medical facility. For example, the Sherwood Medical Company of St. Louis, Mo. manufactures suction hose under the trade name "argyle® non-conductive connecting tube with shore group female molded connectors". The argyle® suction hose has an inner diameter of about 6 millimeters and an outer diameter of about 9 millimeters. Thus, the recess **19j** pref-

erably is configured to releasably engage a hose having an outer diameter of about 9 millimeters with an interference fit.

[0115] For example, the recess **19j** can include lateral edges **19k**, **19l**. A rear wall **19m** can connect the lateral edges **19k**, **19l**. Preferably, the spacing **W** between the lateral edges **19k**, **19l** is less than about 9 millimeters. Optionally, the lateral edges **19k**, **19l** can include tabs (not shown) extending from the lateral edges **19k**, **19l**, thereby further reducing the minimum clearance between the lateral edges **19k**, **19l**. Thus, the standard argyle® suction hose can be snapped into the recess **19j**. Further, the lateral edges **19k**, **19l** and rear wall **19m** are sized so as to provide an interference fit with the outer surface of suction hose, such as the argyle® 6 millimeter suction hose, or any other suction hose. Thus, once the suction hose is snapped into the recess **19j**, the hose is held in place through an interference fit therewith. As such, the basin **10** illustrated in **FIG. 2k** can be quickly and conveniently modified by attaching a commonly used suction hose to the convertible portion **19**.

[0116] Optionally, a strainer (not shown) can be attached to the lower end of the suction hose to be connected to the convertible portion **19**. Thus, the strainer can prevent large clumps of tissue and bone fragments from entering the suction hose, so as to reduce the likelihood of clogging.

[0117] According to the illustrated embodiment of the basin **10**, the at least one convertible portion **19** is in the form of an annularly extending score **19** defining a frangible portion disposed on the side surface **18d**. However, the score **19** can be disposed on any portion of the wall **12** or the base **11**. Additionally, a plurality of scores **19** can optionally be disposed on the basin **10**. The score **19** is configured to form an aperture through the wall **12** or base **11** to drain the cavity **13** following the removal of the material bounded by the score **19** from the wall **12**. The score **19** is preferably disposed near the bottom of the surface **18d**, close to the resting surface. However, the score **19** can be disposed in any location capable of providing an effective drain for the cavity **13** upon the removal of the material bounded by the score **19** from the wall **12**. Additionally, though the score **19** preferably comprises a circular shape, as shown in the illustrated embodiment, the score **19** can comprise any shape that provides an effective drain for the cavity **13**. For example, the score **19** can comprise a slit.

[0118] In preparation for the irrigation of a knee wound, medical personnel remove the cover **2** from the kit **1** and remove the basin **10** from the kit. If the wound is in the knee area along the front part of the leg, personnel have the patient sit on an examination table with their leg extended. The patient can optionally lie on his or her back if the wound is on the back of the knee. Medical personnel then place the basin **10** under the extended leg of the patient so that the patient's thigh rests on the first recess **15** and the patient's shin rests on the second recess **16**. Accordingly, the patient's wound is disposed over the cavity **13** of the basin **10**. If the wound is in the knee area along the back part of the leg, personnel have the patient lay on their stomach with their injured leg extended. The personnel then place the basin **10** under the patient's leg as described above. If the personnel wish to actively drain the basin **10** during the irrigation procedure, the personnel modify the convertible portion **19**. As noted above, the basin **10** can comprise a plurality of

convertible portions 19 disposed along the periphery of the basin 10, allowing personnel to choose the convertible portion 19 that best accommodates the draining of the basin 10 or create additional drains. The draining device and active draining process are further described below.

[0119] If the convertible portion 19 comprises a hole 19 formed on the wall 12 covered with a removable cover, such as a peel-off seal, a threaded plug, and a cork, one can modify the convertible portion 19 by removing the cover from the hole 19. This allows irrigation fluid in the cavity 13 of the basin 10 to flow out of the basin through the hole 19.

[0120] In another example, if the convertible portion 19 comprises a nipple 19 having a removable cap 19a, personnel can modify the convertible portion 19 by removing the cap 19a from the nipple 19. In still another example, if the convertible portion 19 comprises a nipple 19 having a strainer and a peel-off seal 19a, personnel can modify the convertible portion 19 by peeling off the seal 19a. Personnel can then connect a suction hose to the nipple and connect the suction hose to a suction device to actively drain the basin 10.

[0121] In yet another example, if the convertible portion 19 comprises a cannula 19, personnel can insert a conventional tube into the cannula 19. Personnel can then connect an end of the suction tube to a suction device to actively drain the basin 10.

[0122] In another example, if the convertible portion 19 comprises a clamp 19, medical personnel can attach a conventional suction hose to the clamp 19 so that an end of the suction hose is proximal to the base 11. Personnel can then connect a second end of the hose to a suction device to actively drain the basin 10.

[0123] In still another example, if the convertible portion 19 comprises a removable holder 19d with at least one clip 19e, medical personnel can attach the at least one clip 19e to a conventional suction hose so that an end of the suction hose is proximal to the base 11. Personnel can then connect a second end of the hose to a suction device to actively drain the basin 10.

[0124] In another example, if the convertible portion 19 comprises an aperture 19g formed on the upper periphery 14, personnel can place a first cannula 19h under the upper periphery 14 so that it aligns with the aperture 19g. Personnel can then insert a second cannula 19i through the aperture 19g and the first cannula 19h. Personnel can then connect a second end of the second cannula 19i to a suction hose or a suction device to actively drain the basin 10.

[0125] In yet another example, personnel can attach the adhesive surface 5a of the cannula 5 to the inner surface 12a of the basin 10 so that one end of the cannula 5 is proximal to the base 11 and the other end of the cannula 5 engages a suction device. In another option, the cannula 5 is configured to self-support against the inner surface 12a of the basin 10 without the adhesive surface 5a. The suction device can then be operated to actively drain the basin 10.

[0126] In the illustrated embodiment, where the convertible portion 19 comprises a frangible portion 19, personnel can break the frangible portion 19 to create a drain for the basin 10. Personnel can optionally insert a draining device into the drain and attach a suction hose to an end of the

draining device. Personnel can then attach a second end of the suction hose to a suction device to actively drain the basin 10.

[0127] Irrigation fluid is then directed to the wound region to remove any contaminants from the wound region. The irrigation fluid directed to the wound region subsequently collects in the cavity 13 of the basin 10. The recesses 15, 16 that receive the thigh and shin of the patient, respectively, further improve the fluid-collection ability of the cavity 13 by reducing escape of irrigation fluid through the juncture of the thigh and shin with the recesses 15, 16, respectively.

[0128] With reference to FIG. 3, the draining device is illustrated therein. In the illustrated embodiment, the draining device is a grommet 20. The grommet 20 can optionally comprise a peel-off seal (not shown). The grommet 20 can also optionally comprise a strainer (not shown). In the illustrated embodiment, the grommet 20 defines an axis 21 along the longitude of the grommet 20, the axis 21 having two longitudinal ends 21a, 21b. The grommet 20 comprises a sealing part 22 and a fitting part 24. The grommet 20 is preferably made of a rigid material. For example, the grommet 20 can be made of a hard plastic. Optionally, the sealing part 22 and the fitting part 24 can be made of different materials. For example, the sealing part 22 can be made of a flexible rubber and the fitting part 24 can be made of a hard plastic.

[0129] The sealing part 22 is disposed at the longitudinal end 21b and comprises a sealing surface 23a facing in the direction of the longitudinal end 21a. The sealing surface 23a is configured to provide a substantially watertight seal with a mating surface (not shown) in contact with the sealing surface 23a. The sealing part 22 also comprises a drain surface 23b facing in the direction away from the longitudinal end 21a. The drain surface 23b defines a drain aperture 23c preferably disposed in a substantially central position on the drain surface 23b. Both surfaces 23a, 23b extend about the axis 21. The sealing part also comprises a bottom surface 23d proximal to the drain aperture 23c. The bottom surface 23d is preferably a flat surface.

[0130] As illustrated in FIG. 3a, the grommet 20 optionally comprises a strainer 23e disposed on the drain surface 23b over the drain aperture 23c. The strainer 23e is configured to advantageously capture any bone debris, soft tissue, and other debris.

[0131] The fitting part 24 comprises a stem 25 having an outer surface 25a extending circumferentially about the axis 21. The fitting part 24 further comprises a plurality of steps 26 along the outer surface 25a of the stem 25, proximal to the longitudinal end 21a. In the illustrated embodiment, the fitting part 24 of the grommet 20 has three steps 26.

[0132] The plurality of steps 26 is configured to engage a tube disposed over the stem 25 at the longitudinal end 21a. For example, the steps 26 can be sized to elastically deform and thereby engage and seal against the inner surface of a suction hose commonly used in an operating room. The steps 26 comprise a running surface 26a and a stepping surface 26b, where both surfaces 26a, 26b extend circumferentially about the axis 21. The running surface 26a is preferably angled downward, relative to the axis 21, in the direction of the longitudinal end 21a. The running surface 26a of the plurality of steps 26 preferably has the same angle

relative to the axis 21 for each of the steps 26. Optionally, the running surface 26a has a different angle relative to the axis 21 for each of the steps 26, the angle increasing with each of the steps 26 in a direction away from the longitudinal end 21a. The stepping surface 26b is preferably at substantially a ninety degree angle relative to the axis 21 and comprises a same height for each of the plurality of steps 26. As used here, the height is the vertical distance between the stepping surfaces 26b of two adjacent steps 26. Optionally, the stepping surface 26b has a different height for each of the steps 26, the height increasing with each of the steps 26 in a direction away from the longitudinal end 21a.

[0133] A channel 27, illustrated by the short dashed lines in FIG. 3, is defined inside the grommet 20 about the axis 21 and extends from an endpoint of the stem at the longitudinal end 21a through the sealing part 22, to the drain aperture 23c at the longitudinal end 21b. As illustrated in FIG. 3b, the channel 27 is optionally flared in the direction of the longitudinal end 21b such that the diameter of the channel 27 at the longitudinal end 21b and the diameter of the drain aperture 23c is greater than the diameter of the channel 27 at the longitudinal end 21a. This feature advantageously provides a larger drain area.

[0134] With reference to FIG. 4, use of the grommet 20 to provide a basin of the kit 1 with a drain for use in an active draining process is illustrated therein. In the illustrated embodiment, the grommet 20 is used to provide the basin 10 with a drain.

[0135] To form the drain on the basin 10, medical personnel first modify the convertible portion 19 to form a drain. In the illustrated embodiment, the convertible portion 19 is a frangible portion 19 in the form of an annularly extending score 19. However, as discussed above, the convertible portion 19 can comprise a variety of different structures and combination of structures. In the illustrated embodiment, personnel preferably remove the material by punching the material through the wall 12, creating an aperture 28 through the wall 12, extending from the side surface 18d to the inner surface 12a. Medical personnel can use any number of instruments to remove this material. For example, personnel can use their finger, or another instrument with an end surface corresponding to the surface of the material bound by the score 19.

[0136] Upon modification of the convertible portion 19, personnel insert the fitting part 24 of the grommet 20 through the aperture 28 at the inner surface 12a so that the sealing surface 23a contacts the inner surface 12a to form a substantially watertight seal. The bottom surface 23d optionally contacts the base 11. Personnel subsequently direct a tube 40 connected to a suction device (not shown) over the longitudinal end 21a of the stem 25, so that the plurality of steps 26 substantially grip the tube 40. Medical personnel can then operate the suction device during the irrigation procedure to draw irrigation fluid from the cavity 13 of the basin 10, through the channel 27 and into the tube 40.

[0137] With reference to FIG. 5, the irrigation basin 30 for irrigating a wound on a human extremity is illustrated therein. For example, the basin 30 can be used for irrigating a wound on a human elbow. The basin 30 comprises a base 31 having a generally rectangular shape and a peripheral wall 32. The basin 30 can have other shapes, such as, but without limitation, round, oval, kidney, and square. The wall

32 is substantially at ninety degrees relative to the resting surface. The base 31 and the wall 32 define a cavity 33 in the center of the basin 30. The peripheral wall 32 also defines an inner surface 32a facing toward the cavity 33 of the basin 30 and an outer surface 32b facing away from the cavity 33 of the basin 30. The basin 30 also comprises an upper periphery 34 having an inner edge 34a and an outer edge 34b. The outer edge 34b preferably joins the upper periphery 34 to the outer surface 32b. In the illustrated embodiment, the periphery 34 defines an inwardly extending flange having a width 32c, supported only by the connection between the outer edge 34b to the wall 32. Alternatively, the thickness of the wall 32 can be sufficient to form the periphery 34. In another option, the inner edge 34a joins the upper periphery 34 to the outer surface 32b and the periphery 34 is supported only by the connection between the inner edge 34a to the wall 32.

[0138] The basin 30 is preferably made of a hard plastic material. For example, but without limitation, the basin 30 can be made of polyurethane or polypropylene, among other materials. The material is preferably biocompatible and hypo-allergenic. The basin 30 can also be made of metal, such as, but without limitation, stainless steel. Additionally, the basin 30 is preferably sterilized for use in medical procedures. The basin 30 can optionally be re-useable.

[0139] The outer surface 32b comprises two end surfaces 38a, 38b arranged at longitudinal ends 37a, 37b of a major axis 37, respectively, and generally perpendicular to the major axis 37. The outer surface 32b also comprises two side surfaces 38c, 38d extending between the longitudinal ends 37a, 37b and generally parallel to the major axis 37. As used herein, the term "major axis" generally refers to an axis that passes through the basin 30 along the longitudinal direction of the basin 30, i.e., along the greatest dimension or "length" of the basin 30.

[0140] The basin 30 further comprises a first recess 35 configured to receive, for example, a human upper arm and a second recess 36 configured to receive, for example, a human forearm. The first recess 35 is disposed along the upper periphery 34 at a side of the basin 30 parallel to the axis 37. The recess 35 bisects the side surface 38d and the inner surface 32a at the side parallel to the axis 37.

[0141] The second recess 36 is disposed along the upper periphery 34 at the longitudinal end 37b of the basin 30. The recess 36 bisects the end surface 38b and the inner surface 32a at the longitudinal end 37b. Further, the recesses 35, 36 join to the upper periphery 34 at a plurality of edges 34c.

[0142] The basin 30 also optionally includes at least one convertible portion 39 disposed on the outer surface 32b of the wall 32 near the bottom edge of the basin 30, where the bottom edge is the edge that contacts the resting surface. One convertible portion 39 is shown in the illustrated embodiment. The convertible portion 39 can optionally be disposed on the base 31. In one example, the convertible portion 39 can be centrally disposed on the bottom of the base 31. In the illustrated embodiment, the convertible portion 39 is disposed on the side surface 38d.

[0143] In the illustrated embodiment, the base 31 of the basin 30 is generally horizontal relative to the resting surface and rectangular in shape. Moreover, the base 31 is substantially at zero degrees relative to the resting surface. However, the base 31 of the basin 30 is not limited to the

rectangular shape or to being parallel to the resting surface. For example, the base 31 may be inclined at an angle greater than zero degrees and configured to direct irrigation fluid on the base 31 in the direction of the end surface 38b nearest to the convertible portion 39. For example, the wall 32 can include downwardly protruding portions (not shown) which raise the end 37a relative to the end 37b. Alternatively, the base 31 can be mounted to the wall 32 such that the end of the base 31 adjacent end 37a is higher than the end of the base 31 adjacent the end 37b. In another example, the base 31 can be configured to be adjustably inclined to a plurality of angles such that the end of the base 31 adjacent end 37a is higher than the end of the base 11 adjacent end 37b.

[0144] The peripheral wall 32 defines a thickness, which preferably is uniform along the periphery of the wall 32. The thickness is configured to provide the wall 32 with adequate structural rigidity to prevent excessive flexing of the wall 32. Accordingly, the thickness can optionally have various sizes, each of which is capable of providing the wall 32 with adequate structural rigidity. For example, the thickness can be between 1 mm and 5 cm.

[0145] The wall 32 also defines a maximum height 32d along the periphery of the wall 32. The maximum height 32d is defined as the distance from the resting surface to the upper periphery 34 of the wall 32. The wall 32 also defines a minimum height 32e at the side of the basin 30 parallel to the axis 37. The minimum height 32e is defined as the distance from the resting surface to a minimum point 35a of the first recess 35. Further, the wall defines a minimum height 32f at the longitudinal end 37b of the basin 30. The minimum height 32f is defined as the distance from the resting surface to a minimum point 36a of the second recess 36. The heights 32d, 32e, 32f are configured to be sufficiently large to allow the cavity 33 defined by the wall 32 and the base 31 to hold a substantial volume of fluid.

[0146] The upper periphery 34 in the illustrated embodiment is generally parallel to the axis 37. However, the upper periphery 34 can optionally be inclined inwardly so as to drain liquid falling on the periphery 34 back into the cavity 33. Additionally, the periphery 34 can have a curved surface so that the periphery 34 does not have the edges 34a, 34b and to provide a seamless junction between the upper periphery 34 and the outer surface 32b.

[0147] The first recess 35, as illustrated in FIG. 5, extends from the edges 34c of the upper periphery 34 to the minimum point 35a. Moreover, the recess 35 has a curved shape. However, the first recess 35 may optionally have any contoured shape configured to receive, for example, a human upper arm. Accordingly, the recess 15 is not limited to the arcuate shape illustrated in FIG. 5. The recess 35 further comprises a recess surface 35b and edges 35c, 35d. The recess 35 preferably joins to the wall 32 at the edge 35d. Optionally, the recess 35 can join to the wall 32 at the edge 35c. In the illustrated embodiment, the recess surface 35b extends horizontally from the edge 35c to the edge 35d adjacent the side surface 38d. The recess surface 35b can optionally be curved between the inner surface 32a and the side surface 38d to provide a seamless junction between the surface 35b and the surfaces 32a, 38d without the edges 35c, 35d. The recess surface 35b can also optionally be inclined inwardly so as to drain liquid falling on the surface 35b back into the cavity 33. The first recess 35 can also have a

contoured juncture with the upper periphery 34 to provide a seamless junction between the recess surface 35b and the upper periphery 34, without the edges 34c.

[0148] Similarly, the second recess 36 has a generally curved shape, as illustrated in FIG. 5, and extends from the edges 34c of the upper periphery 34 to the minimum point 36a. However, the second recess 36 may optionally have any contoured shape configured to receive, for example, a human forearm. Accordingly, the recess 36 is not limited to the arcuate shape illustrated in FIG. 5. The recess 36 further comprises a recess surface 36b and edges 36c, 36d. The recess 36 preferably joins to the wall 32 at the edge 36d. Optionally, the recess 36 can join to the wall 32 at the edge 36c. The recess surface 36b extends horizontally from the edge 36c to the edge 36d adjacent the end surface 38b. The recess surface 36b can optionally be curved between the inner surface 32a and the end surface 38b to provide a seamless junction between the surface 36b and the surfaces 32a, 38b without the edges 36c, 36d. The recess surface 36b can also optionally be inclined inwardly so as to drain liquid falling on the surface 36b back into the cavity 33. The second recess 26 can also have a contoured juncture with the upper periphery 34 to provide a seamless junction between the recess surface 36b and the upper periphery 34, without the edges 34c.

[0149] As described above with respect to the basin 10, the convertible portion 39 can similarly comprise a variety of structures and combination of structures. Moreover, a plurality of convertible portions 39 can optionally be disposed along the periphery of the wall 32 and the base 31. For example, but without limitation, the convertible portion 39 can comprise a hole 39 formed on the wall 32 covered with a removable cover, such as, but not limited to, a peel-off seal. The cover can be attached to the side wall 38d, for example, with an adhesive.

[0150] In another example, the convertible portion 39 can comprise a threaded hole 39 formed on the wall 32 with a threaded plug that covers the hole 39. In still another example, a removable cork can be used to cover the hole 39.

[0151] In yet another example, the convertible portion 39 can comprise a nipple 39 having a removable cap, the nipple 39 extending outward from the side wall 38d. The nipple 39 can be molded onto the side wall 38d. Optionally, the nipple 39 can be removably screwed onto the side wall 38d. In another example, the convertible portion 39 can comprise a nipple 39 having a strainer and a removable cover, such as, but not limited to a peel-off seal.

[0152] In still another example, the convertible portion 39 can comprise a clamp 39 configured to receive a suction hose, such as a conventional suction hose found in a medical facility, where the clamp 39 is integrally molded or removably attached to the inner surface 32a of the basin 30. In another example, the convertible portion 39 can comprise a removable holder comprising at least one clip disposed over the wall 32 of the basin 30. In still another example, the convertible portion 39 can comprise an aperture on the upper periphery 34 configured to receive a cannula.

[0153] According to the illustrated embodiment of the basin 30, the convertible portion 39 is in the form of an annularly extending score 39 defining a frangible portion disposed on the side surface 38d. However, the score 39 can

be disposed on any portion of the wall **32** or the base **31**. Additionally, a plurality of scores **39** can optionally be disposed on the basin **30**. The score **39** is configured to form an aperture through the wall **32** or base **11** to drain the cavity **33** following the removal of the material bounded by the score **39** from the wall **32**. The score **39** is preferably disposed near the bottom of the surface **38d**, close to the resting surface. However, the score **39** can be disposed in any location capable of providing an effective drain for the cavity **33** upon the removal of the material bounded by the score **39** from the wall **32**. Additionally, though the score **39** preferably comprises a circular shape, as shown in the illustrated embodiment, the score **39** can comprise any shape that provides an effective drain for the cavity **33**. For example, the score **39** can comprise a slit.

[0154] In preparation for the irrigation of an elbow wound, medical personnel remove the cover **2** from the kit **1** and remove the basin **30** from the kit. If the wound is in the elbow area, medical personnel have the patient place the patient's upper arm on the first recess **35** and the patient's forearm on the second recess **36** so that the wound is disposed over the cavity **33** of the basin and faces away from the base **31** of the basin **30**.

[0155] If medical personnel wish to actively drain the basin **30** during the irrigation procedure, as described above with respect to the basin **10**, the personnel modify the convertible portion **39** to create a drain in the basin **30**. The basin **30** is then ready to be actively drained. In the illustrated embodiment, where the convertible portion **39** comprises a frangible portion **39**, medical personnel can break the frangible portion **39** to create a drain for the basin **30**. Personnel can optionally insert a draining device, such as the grommet **20**, into the drain and attach a suction hose to the draining device. Personnel can then attach a second end of the suction hose (not shown) to a suction device (not shown) to actively drain the basin **30**. As noted above, the basin **30** can comprise a plurality of convertible portions **39** disposed along the periphery of the basin **30**, allowing personnel to choose the convertible portion **39** that best accommodates the draining of the basin **30** or create additional drains. The grommet **20** and active draining process are described above.

[0156] Medical personnel can also actively drain the basin **30** by attaching the adhesive surface **5a** of the cannula **5** to the inner surface **32a** of the basin **30** such that an end of the cannula **5** is proximal to the base **31**. In another option, the cannula **5** is configured to self-support against the inner surface **32a** of the basin **30** without an adhesive surface. Personnel can then attach a second end of the cannula **5** to a suction device, as described above.

[0157] Irrigation fluid is then directed to the wound region to remove any contaminants from the wound region. The irrigation fluid directed to the wound region subsequently collects in the cavity **33** of the basin **30**. The recesses **35**, **36** further improve the fluid-collection ability of the cavity **33** by reducing escape of irrigation fluid through the juncture of the patient's arm with the recesses **35**, **36**.

[0158] The basin **30**, as described above, can optionally be configured for irrigating wounds on a human ankle. The first recess **35** can be configured to receive, for example, a human shin, and the second recess **36** can be configured to receive, for example, a human foot. Additionally, the maximum

height **32d** is greater for the basin **30** configured for irrigation of an ankle wound than for irrigation of an elbow wound.

[0159] To irrigate an ankle wound along the outer side of the leg, medical personnel first have the patient sit on the examination table with his or her leg extended. Medical personnel then place the basin **30** under the extended leg of the patient so that the inner side of the patient's leg along the shin region rests on the first recess **35** of the basin **30** and the inner side of the patient's foot rests on the second recess **36** of the basin **30**. As used here, the outer side means the side facing away from the patient's body and the inner side means the side facing toward the patient's other leg when the patient stands-up straight. Accordingly, the patient's wound is disposed over the cavity **33** of the basin **30**. Likewise, if the wound is in the ankle area along the inner side of the leg, personnel have the patient sit on the examination table with their leg extended. Personnel then place the basin **30** under the extended leg of the patient so that the outer side of the patient's leg along the shin region rests on the first recess **35** of the basin **30** and the outer side of the patient's foot rests on the second recess **36** of the basin **30**.

[0160] In another embodiment, the basin **30**, as described above, can optionally comprise a third recess **36'** disposed along the upper periphery **34** opposite the second recess **36**, as illustrated by the dashed lines in FIG. 5. The third recess **36'** has the same general structure as the second recess **36** and would be identified with similar reference numerals (not shown).

[0161] The second and third recess **36,36'** can optionally be configured to receive an upper leg portion of a human anatomy, such as a thigh, and a lower leg portion, such as a calf, respectively. The first recess **35** can be configured to receive, for example, an upper arm portion. Accordingly, the basin **30** can be used for irrigating wounds on the knee area and the elbow area of the human anatomy. Optionally, the first recess **35** can be configured to receive a human foot, so that the basin **30** can be used for irrigating wounds on the knee area and the ankle area of the human anatomy.

[0162] In another embodiment, the basin **30** can optionally comprise a fourth recess **35'**, disposed along the periphery **34** opposite the first recess **35**. The fourth recess **35'** has the same general structure as the first recess **35** and would be identified with similar reference numerals (not shown). The recesses **35**, **36,35'**, **36'** can optionally be sized to have the same dimensions. The recesses **35**, **36**, **35'**, **36'** can also optionally be sized such that only two of the recesses **35**, **36**, **35'**, **36'** share the same dimensions. In another example, the recesses **35**, **36**, **35'**, **36'** can be sized such that only three of the four recesses **35**, **36**, **35'**, **36'** share the same dimensions. In still another example, the recesses **35**, **36**, **35'**, **36'** can each have different dimensions. As used herein, the dimension of a recess includes the breadth and depth of the recess. For example, the depth of the first recess is the difference between the maximum height **32d** and the minimum height **32e** of the first recess **35**.

[0163] With reference to FIGS. 6 and 7, an irrigation basin **40** for irrigating a wound on a human extremity is illustrated therein. For example, the basin **40** can be used for irrigating a wound on a human shoulder. The basin **40** preferably comprises a base **41** having a generally C-shape and a peripheral wall **42**. However, the base **41** can have a

variety of other shapes, as illustrated in FIG. 6a. The wall 42 is substantially at ninety degrees relative to the resting surface. The basin 40 preferably also comprises a C-shape. However, the basin 40 can optionally comprise other shapes, such as round, oval, kidney, square and horseshoe. The base 41 and the wall 42 define a cavity 43 in the basin 40. The peripheral wall 42 also defines an inner surface 42a facing toward the cavity 43 of the basin 40 and an outer surface 42b facing away from the cavity 43 of the basin 40. The basin 40 also comprises an upper edge 44. The basin 40 further comprises longitudinal ends 46a, 46b.

[0164] The basin 40 is preferably made of a hard plastic material. For example, but without limitation, the basin 40 can be made of polyurethane or polypropylene, among other materials. The material is preferably biocompatible and hypo-allergenic. The basin 40 can also be made of metal, such as, but without limitation, stainless steel. Additionally, the basin 40 is preferably sterilized for use in medical procedures. The basin 40 can optionally be re-useable.

[0165] The outer surface 42b comprises a contact region 48a and a surrounding region 48b, wherein both regions 48a, 48b extend around an axis 47. The outer surface 42b further comprises two end regions 48c, each of the end regions disposed on either side of the axis 47. In the illustrated embodiment, the end regions 48c extend on either side of the axis 47 so that the basin 40 has a C-shape. However, the end regions 48c can optionally extend further on either side of the axis 47 so that the basin 40 has a horseshoe shape, as illustrated in FIG. 6a.

[0166] The contact region 48a is preferably contoured to receive, for example, a human upper arm region near the shoulder. The contact region 48a optionally comprises a plurality of protrusions 48d extending outwardly from the contact region 48a toward the axis 47, as illustrated in FIG. 6b. As illustrated in FIGS. 6 and 7, the contact region 48a preferably has an arcuate shape defining a breadth 48e and a depth 48f. The breadth 48e is preferably six inches, and more preferably eight inches. The depth 48f is preferably eight inches.

[0167] The contact region 48a is not limited to the arcuate shape, but can have any shape capable of receiving, for example, the upper arm. Additionally, an upper edge 44a of the contact region 48a can optionally be inclined toward the axis 47 such that the upper edge 44a of the contact region 48a is closer to the axis 47 than a lower edge 44b of the contact region 48a, as illustrated by the dashed lines in FIGS. 6 and 7. The illustrated embodiment further shows the end regions 48c as having a curved shape. However, the end regions 48c can have any number of shapes, such as, but without limitation, a generally flat shape, as illustrated by the dashed line in FIG. 7.

[0168] The basin 40 also optionally includes at least one convertible portion 49 disposed on the outer surface 42b of the wall 42 near the bottom edge of the basin 40, where the bottom edge is the edge that contacts the resting surface. One convertible portion 49 is shown in the illustrated embodiment. The convertible portion 49 can optionally be disposed on the base 41. In one example, the convertible portion 49 can be centrally disposed on the bottom of the base 41. In the illustrated embodiment, the convertible portion 49 is disposed on the surrounding region 48b.

[0169] In the illustrated embodiment, the base 41 of the basin 40 is generally horizontal relative to the resting surface

and extends around the axis 47. Moreover, the base 41 is substantially at zero degrees relative to the resting surface. However, the base 41 is not limited to being parallel to the resting surface. For example, the base 41 may be inclined at an angle greater than zero degrees and configured to direct irrigation fluid on the base 41 in the direction of the surrounding region 48b nearest to the convertible portion 49. Alternatively, the base 41 can be mounted to the wall 42 such that the end of the base 41 adjacent longitudinal end 46a is higher than the end of the base 41 adjacent the end 46b. In another example, the base 41 can be configured to be adjustably inclined to a plurality of angles such that the end of the base 41 adjacent longitudinal end 46a is higher than the end of the base 41 adjacent the end 46b.

[0170] The peripheral wall 42 defines a thickness 42c, which preferably is uniform along the periphery of the wall 42. The thickness 42c is configured to provide the wall 42 with adequate structural rigidity to prevent excessive flexing of the wall 42. Accordingly, the thickness 42c can optionally have various sizes, each of which is capable of providing the wall 42 with adequate structural rigidity. For example, the thickness 42c can be between 1 mm and 5 cm.

[0171] The wall 42 also defines a maximum height 42d along the periphery of the wall 42. The maximum height 42d is defined as the distance from the resting surface to the upper edge 44 of the wall 42. The height 42d is configured to be sufficiently large to allow the cavity 43 to hold a substantial volume of fluid.

[0172] As described above with respect to the basin 10, the convertible portion 49 can similarly comprise a variety of structures and combination of structures. Moreover, a plurality of convertible portions 49 can optionally be disposed along the periphery of the wall 42 and the base 41. For example, but without limitation, the convertible portion 49 can comprise a hole 49 formed on the wall 42 covered with a removable cover, such as, but not limited to, a peel-off seal. The cover can be attached to the outer surface 42b, for example, with an adhesive.

[0173] In another example, the convertible portion 49 can comprise a threaded hole 49 formed on the wall 42 with a threaded plug that covers the hole 49. In still another example, a removable cork can be used to cover the hole 49.

[0174] In yet another example, the convertible portion 49 can comprise a nipple 49 having a removable cap, the nipple 49 extending outward from the outer surface 42b. The nipple 49 can be molded onto the outer surface 42b. Optionally, the nipple 49 can be removably screwed onto the outer surface 42b. In another example, the convertible portion 49 can comprise a nipple 49 having a strainer and a removable cover, such as, but not limited to a peel-off seal.

[0175] In still another example, the convertible portion 49 can comprise a clamp 49 configured to receive a suction hose, such as a conventional suction hose found in a medical facility, where the clamp 49 is integrally molded or removably attached to the inner surface 42a of the basin 40. In another example, the convertible portion 49 can comprise a removable holder having at least one clip disposed over the wall 42 of the basin 40.

[0176] According to the illustrated embodiment of the basin 40, the convertible portion 49 is preferably in the form of an annularly extending score 49 defining a frangible

portion disposed on the surrounding region **48b**. However, the score **49** can be disposed on any portion of the wall **42** or the base **41**. Additionally, a plurality of scores **49** can optionally be disposed on the basin **40**. The score **49** is configured to form an aperture through the wall **42** or base **41** to drain the cavity **43** following the removal of the material bounded by the score **49** from the wall **42**. The score **49** is preferably disposed near the bottom of the surrounding region **48b**, close to the resting surface. However, the score **49** can be disposed in any location capable of providing an effective drain for the cavity **43** upon the removal of the material bounded by the score **49** from the wall **42**. Additionally, though the score **49** preferably comprises a circular shape, as shown in the illustrated embodiment, the score **49** can comprise any shape that provides an effective drain for the cavity **43**. For example, the score **49** can comprise a slit.

[0177] In preparation for the irrigation of a shoulder wound, medical personnel place the basin **40** around the patient's upper arm region so that the contact region **48a** comes in contact with the patient's upper arm and so the cavity **43** faces toward the location of the wound on the patient's shoulder region. Personnel preferably place the basin **40** on the patient's upper arm so that the contact region **48a** is in contact with the upper arm surface nearest to the wound and the end regions **48c** face in a direction away from the wound.

[0178] If medical personnel wish to actively drain the basin **40** during the irrigation procedure, the personnel modify the convertible portion **49**, as described above with respect to the basin **10**, to create a drain in the basin **40**. The basin **40** is then ready to be actively drained. In the illustrated embodiment, where the convertible portion **49** comprises a frangible portion **49**, personnel can break the frangible portion **49** to create a drain for the basin **40**. Personnel can optionally insert a draining device, such as the grommet **20**, into the drain and attach a suction hose (not shown) to the draining device. Personnel can then attach a second end of the suction hose to a suction device (not shown) to actively drain the basin **40**. As noted above, the basin **40** can comprise a plurality of convertible portions **49** disposed along the periphery of the basin **40**, allowing personnel to choose the convertible portion **49** that best accommodates the draining of the basin **40** or create additional drains.

[0179] Medical personnel can also actively drain the basin **40** by attaching the adhesive surface **5a** of the cannula **5** to the inner surface **42a** of the basin **40** such that an end of the cannula **5** is proximal to the base **41**. Optionally, the cannula **5** is configured to self-support against the inner surface **42a** of the basin **40** without an adhesive surface. Personnel can then attach a second end of the cannula **5** to a suction device, as described above.

[0180] Irrigation fluid is then directed to the wound region to remove any contaminants from the wound region. The irrigation fluid directed to the wound region subsequently collects in the cavity **43** of the basin **40**.

[0181] The basin **40**, as described above, can optionally be configured for the irrigation of wounds on a variety of human extremities. For example, the contact region **48a** can be configured to receive a lower leg region. In another example, the contact region **48a** can be configured to receive

an upper leg human region. The maximum height **42d** of the wall **42** is preferably taller if the basin is configured for irrigation of leg wounds than arm wounds.

[0182] In addition, the basin **40** can optionally be configured for the irrigation of wounds on a human knee while the knee is in a flexed position. For example the basin **40** can comprise an upper periphery (not shown) having an inner edge and an outer edge, where the outer edge joins the upper periphery to the wall **42**. The periphery can be an inwardly extending flange having a width and supported only by the connection between the outer edge to the wall **42**. In another option, the periphery can be supported only by the connection between the inner edge to the wall **42**.

[0183] The basin **40** can further comprise a recess (not shown) similar to the first recess **15** described above with respect to the basin **10**. The recess is preferably disposed along the upper periphery and is configured to receive, for example, a human thigh. The recess bisects the wall **42** preferably at a location opposite the contact region **48a**, which is preferably U-shaped and configured to receive a lower leg region, so that the recess and contact region **48a** are aligned. The recess also preferably has a generally arcuate shape. However, the recess can have any contoured shape configured to receive a thigh. The lower edge **44b** of the contact region **48a** can optionally be inclined toward the axis **47** such that the lower edge **44b** is closer to the axis **47** than the upper edge **44a** of the contact region. The basin **40** can thus be advantageously configured for use in irrigation of a wound on a flexed knee, resulting in a thorough cleaning of a knee wound.

[0184] To irrigate a wound on a flexed knee, the user places the basin **40** under the patient's leg, such that the patient's upper leg region, such as a thigh, rests on the recess. The user also has the patient flex the injured knee such that the patient's lower leg region, such as the calf, comes in contact with the contact region **48a**. Accordingly, the wound is disposed over the basin **40**. Irrigation fluid is then directed to the wound region as previously described.

[0185] In another embodiment, the basin **40** can comprise the general shape of a kidney basin, as illustrated in FIG. 7a. The basin **40** has a contact region **48a** and a surrounding region **48b**. The basin **40** preferably defines an aperture **45** along the contact region for receiving a human extremity to irrigate a wound on the extremity.

[0186] To irrigate a wound on a human extremity with the basin **40** illustrated in FIG. 7a, medical personnel place the basin **40** under the patient's extremity so that a region of the extremity rests in the aperture **45** and the wound or fracture is disposed over the cavity **43** of the basin **40**. Personnel then direct irrigation fluid to the wound as previously described.

[0187] With reference to FIG. 8, a basin **50** for irrigating a wound on a human extremity is illustrated therein. For example, the basin **50** can be used for irrigating a wound on a human hip. The basin **50** comprises a base **51**, preferably having a generally kidney shape, and a peripheral wall **52**. The wall **52** is preferably substantially at ninety degrees relative to the resting surface. The base **51** and the wall **52** define a cavity **53** in the basin **50**. The peripheral wall **52** also defines an inner surface **52a** facing toward the cavity **53** and an outer surface **52b** facing away from the cavity **53** of the basin **50**. The basin **50** also comprises an upper edge **54**

and longitudinal ends **58a**, **58b**. The basin **50** further comprises a curved region **55a** and an arched region **55b** disposed opposite the curved region **55a**.

[0188] The basin **50** is preferably made of a hard plastic material. For example, but without limitation, the basin **50** can be made of polyurethane or polypropylene, among other materials. The material is preferably biocompatible and hypo-allergenic. The basin **50** can also be made of metal, such as, but without limitation, stainless steel. Additionally, the basin **50** is preferably sterilized for use in medical procedures. The basin **50** can optionally be re-useable.

[0189] The basin **50** also optionally includes at least one convertible portion **59** disposed on the outer surface **52b** of the wall **52** near the bottom edge of the basin **50**, where the bottom edge is the edge that contacts the resting surface. One convertible portion **59** is shown in the illustrated embodiment. The convertible portion **59** can optionally be disposed on the base **51**. In one example, the convertible portion **59** can be centrally disposed on the bottom of the base **51**. In the illustrated embodiment, the convertible portion **59** is disposed on the curved region **55a**.

[0190] In the illustrated embodiment, the base **51** of the basin **50** is generally horizontal relative to the resting surface and defines an edge **51a** at the juncture with the inner surface **52a**. Moreover, the base **51** is substantially at zero degrees relative to the resting surface. However, the base **51** is not limited to being parallel to the resting surface. For example, the base **51** may be inclined at an angle greater than zero degrees and configured to direct irrigation fluid on the base **51** in the direction of the curved region **55a** nearest to the convertible portion **59**. For example, the wall **52** can include downwardly protruding portions (not shown) which raise the end **58a** relative to the end **58b**. Alternatively, the base **51** can be mounted to the wall **52** such that the end of the base **51** adjacent end **58a** is higher than the end of the base **51** adjacent the end **58b**. Additionally, the base **51** may join to the inner surface **52a** through a contoured juncture so that the base **51** does not define the edge **51a**, as illustrated in **FIG. 9**. In another example, the base **51** can be configured to be adjustably inclined to a plurality of angles such that the end of the base **51** adjacent end **58a** is higher than the end of the base **51** adjacent the end **58b**.

[0191] The peripheral wall **52** defines a thickness **52c**, which preferably is uniform along the periphery of the wall **52**. The thickness **52c** is configured to provide the wall **52** with adequate structural rigidity to prevent excessive flexing of the wall **52**. Accordingly, the thickness **52c** may optionally have various sizes, each of which is capable of providing the wall **52** with adequate structural rigidity. For example, the thickness can be between 1 mm and 5 cm.

[0192] The upper edge **54** of the wall **52** comprises a recessed edge **56a** that preferably extends along the arched region **55b** of the basin **50** between junctures **54b**. The recessed edge **56a** is recessed downward relative to the upper edge **54**. In the illustrated embodiment, the junctures **54b** that connect the upper edge **54** to the recessed edge **56a** have a contoured shape. For example, the junctures **54b** are curved to provide a continuous transition between the recessed edge **56a** and the upper edge **54**. However, the junctures can have any number of shapes, such as, but without limitation, a step shape as illustrated by the dashed line in **FIG. 8**.

[0193] The basin **50** further comprises an inner edge **56b** formed on the inner surface **52a** and disposed between the junctures **54b**. The inner edge **56b** is recessed downward relative to the upper edge **54** as illustrated in **FIGS. 9 and 10**. The inner edge **56b** may optionally also be recessed downward relative to the recessed edge **56a** as illustrated in **FIG. 9**. In the illustrated embodiment, the junctures **54b** that connect the upper edge **54** to the inner edge **56b** have a contoured shape to provide a continuous transition between the inner edge **56b** and the upper edge **54**. However, the junctures **54b** can have any number of shapes as discussed above.

[0194] The recessed edge **56a** and the inner edge **56b** define a contact region **57** that extends between the edges **56a**, **56b**. In the illustrated embodiment, the contact region **57** is an outwardly extending flange having a width **57a**, supported only by the connection between the recessed edge **56a** to the wall **52**. In another option, the inner edge **56b** joins the contact region **57** to the outer surface **52b** and the contact region **57** is supported only by the connection between the inner edge **56b** to the wall **52**. The contact region **57** is recessed downward relative to the upper edge **54**, as shown in **FIG. 9**, and is configured to receive, for example, a human hip. Moreover, the contact region **57** is preferably configured to receive the human anatomy from a point above the hip to a point below the buttock. The contact region **57** is also preferably horizontal. As used here, horizontal means substantially at zero degrees relative to the resting surface. However, the contact region **57** can optionally be inclined inwardly so as to drain liquid falling on the contact region **57** back into the cavity **53**, as shown in **FIG. 9**.

[0195] The wall **52** defines a maximum height **52d** along the periphery of the wall **52**. The maximum height **52d** is defined as the distance from the resting surface to the upper edge **54** of the wall **52**. The wall **52** also defines a minimum height **52e** defined as the distance from the resting surface to the inner edge **56b**. The heights **52d**, **52e** are configured to be sufficiently large to allow the cavity **53** defined by the wall **52** and the base **51** to hold a substantial volume of fluid.

[0196] As described above with respect to the basin **10**, the convertible portion **59** can similarly comprise a variety of structures and combination of structures. Moreover, a plurality of convertible portions **59** can optionally be disposed along the periphery of the wall **52** and the base **51**. For example, but without limitation, the convertible portion **59** can comprise a hole **59** formed on the wall **52** covered with a removable cover, such as, but not limited to, a peel-off seal. The cover can be attached to the outer surface **52b**, for example, with an adhesive.

[0197] In another example, the convertible portion **59** can comprise a threaded hole **59** formed on the wall **52** with a threaded plug that covers the hole **59**. In still another example, a removable cork can be used to cover the hole **59**.

[0198] In yet another example, the convertible portion **59** can comprise a nipple **59** having a removable cap, the nipple **59** extending outward from the outer surface **52b**. The nipple **59** can be molded onto the outer surface **52b**. Optionally, the nipple **59** can be removably screwed onto the outer surface **52b**. In another example, the convertible portion **59** can comprise a nipple **59** having a strainer and a removable cover, such as, but not limited to a peel-off seal.

[0199] In still another example, the convertible portion 59 can comprise a clamp 59 configured to receive a suction hose, such as a conventional suction hose found in a medical facility, where the clamp 59 is integrally molded or removably attached to the inner surface 52a of the basin 50. In another example, the convertible portion 59 can comprise a removable holder having at least one clip disposed over the wall 52 of the basin 50.

[0200] According to the illustrated embodiment of the basin 50, the convertible portion 59 is preferably in the form of an annularly extending score 59 defining a frangible portion disposed on the curved region 55a. However, the score 59 can be disposed on any portion of the wall 52 or the base 51. Additionally, a plurality of scores 59 can optionally be disposed on the basin 50. The score 59 is configured to form an aperture through the wall 52 or base 51 to drain the cavity 53 following the removal of the material bounded by the score 59 from the wall 52. The score 59 is preferably disposed near the bottom of the curved region 55a, close to the resting surface. However, the score 59 may be disposed in any location capable of providing an effective drain for the cavity 53 upon the removal of the material bounded by the score 59 from the wall 52. Additionally, though the score 59 preferably comprises a circular shape, as shown in the illustrated embodiment, the score 59 can comprise any shape that provides an effective drain for the cavity 53. For example, the score 59 can comprise a slit.

[0201] In preparation for the irrigation of a hip wound, medical personnel have the patient lay on their side on the examination table so that the wound on the hip faces away from the table. Personnel then place the basin 50 adjacent the patient's hip so that the hip rests on the contact region 57 from a point above the hip to a point below the buttock. Accordingly, the contact region 57 receives the injured hip and the wound faces toward the cavity 53. Personnel then direct irrigation fluid with an irrigation device to the wound region to remove any contaminants from the wound region. Because the contact region 57 is recessed relative to the upper edge 54, the upper edge 54 advantageously acts as a shield during the irrigation procedure, effectively directing irrigation fluid toward the cavity 53. The irrigation fluid directed to the wound region subsequently collects in the cavity 53 of the basin 50.

[0202] If medical personnel wish to actively drain the basin 50 during the irrigation procedure, personnel modify the convertible portion 59, as described above with respect to the basin 10, to create a drain in the basin 50. The basin 50 is then ready to be actively drained. In the illustrated embodiment, where the convertible portion 59 comprises a frangible portion 59, personnel can break the frangible portion 59 to create a drain for the basin 50. Personnel can optionally insert a draining device, such as the grommet 20, into the drain and attach a suction hose to the draining device. Personnel can then attach a second end of the suction hose to a suction device to actively drain the basin 50. As noted above, the basin 50 can comprise a plurality of convertible portions 59 disposed along the periphery of the basin 50, allowing personnel to choose the convertible portion 59 that best accommodates the draining of the basin 50 or create additional drains.

[0203] Medical personnel can also actively drain the basin 50 by attaching the adhesive surface 5a of the cannula 5 to

the inner surface 52a of the basin 50 such that an end of the cannula 5 is proximal to the base 51. Optionally, the cannula 5 is configured to self-support against the inner surface 52a of the basin 50 without an adhesive surface. Personnel can then attach a second end of the cannula 5 to a suction device, as described above.

[0204] With reference to FIG. 11, an irrigation basin 60 for irrigating a wound on a human anatomy is illustrated therein. For example, the basin 60 can be used for irrigating a wound on a lower arm region or a lower leg region of the human anatomy. The basin 60 comprises a base 61 having a generally rectangular shape and a peripheral wall 62. The basin 60 can have other shapes, such as, but without limitation, round, oval, kidney, and square. The wall 62 is preferably substantially at ninety degrees relative to a resting surface upon which the basin 60 rests. The base 61 and the wall 62 define a cavity 63 in the center of the basin 60. The peripheral wall 62 also defines an inner surface 62a facing toward the cavity 63 of the basin 60 and an outer surface 62b facing away from the cavity 63 of the basin 60. The basin 60 also comprises an upper periphery 64 having an inner edge 64a and an outer edge 64b. The outer edge 64b joins the upper periphery 64 to the outer surface 62b. In the illustrated embodiment, the periphery 64 defines an inwardly extending flange having a width 62c, supported only by the connection between the outer edge 64b to the wall 62. Alternatively, the thickness of the wall 62 can be sufficient to form the periphery 64. In another option, the inner edge 64a joins the upper periphery 64 to the outer surface 62b and the periphery 64 is supported only by the connection between the inner edge 64a to the wall 62.

[0205] The basin 60 is preferably made of a hard plastic material. For example, but without limitation, the basin 60 can be made of polyurethane or polypropylene, among other materials. The material is preferably biocompatible and hypo-allergenic. The basin 60 can also be made of metal, such as, but without limitation, stainless steel. Additionally, the basin 60 is preferably sterilized for use in medical procedures. The basin 60 can optionally be re-useable.

[0206] The basin 60 comprises a recess 65 configured to receive a human extremity. For example, the recess 65 can be configured to receive a human forearm to irrigate a wound located below a human elbow. In another example, the recess 65 can be configured to receive a human calf to irrigate a wound located below a human knee. The recess 65 is disposed along the upper periphery 64 at one end of the basin 60 and bisects the outer surface 62b and the inner surface 62a. The recess 15 joins to the upper periphery 14 at edges 14c.

[0207] The basin 60 also optionally includes at least one convertible portion 69 disposed on the outer surface 62b of the wall 62 near the bottom edge of the basin 60, where the bottom edge is the edge that contacts the resting surface. One convertible portion 69 is shown in the illustrated embodiment. The convertible portion 69 can optionally be disposed on the base 61. In one example, the convertible portion 69 can be centrally disposed on the bottom of the base 61.

[0208] As shown in FIG. 11, the base 61 of the basin 60 is generally horizontal relative to the resting surface and rectangular in shape. Moreover, the base 61 is substantially at zero degrees relative to the resting surface. However, the

base **61** of the basin **60** is not limited to the rectangular shape or to being parallel to the resting surface. For example, the base **61** may be inclined at an angle greater than zero degrees and configured to direct irrigation fluid on the base **61** in the direction of the inner surface **62a** nearest to the convertible portion **69**. For example, the wall **62** can include downwardly protruding portions (not shown) which raise an end **67a** relative to an end **67b**. Alternatively, the base **61** can be mounted to the wall **62** such that the end of the base **61** adjacent end **67a** is higher than the end of the base **61** adjacent end **67b**. In another example, the base **61** can be configured to be adjustably inclined to a plurality of angles such that the end of the base **61** adjacent end **67a** is higher than the end of the base **61** adjacent the end **67b**.

[0209] The peripheral wall **62** defines a thickness, which preferably is uniform along the periphery of the wall **62**. The thickness is configured to provide the wall **62** with adequate structural rigidity to prevent excessive flexing of the wall **62**. Accordingly, the thickness can optionally have various sizes, each of which is capable of providing the wall **62** with adequate structural rigidity. For example, the thickness can be between 1 mm and 5 cm.

[0210] The wall **62** defines a maximum height **62d** along the periphery of the wall **62**. The maximum height **62d** is defined as the distance from the resting surface to the upper periphery **64** of the wall **62**. The wall **62** also defines a minimum height **62e** at the end **67b** of the basin. The minimum height **62e** is defined as the distance from the resting surface to a minimum point **65a** of the recess **65**. The heights **62d**, **62e** are configured to be sufficiently large to allow the cavity **63** to hold a substantial volume of fluid.

[0211] The upper periphery **64** in the illustrated embodiment is generally parallel to the resting surface. However, the upper periphery **64** can optionally be inclined inwardly so as to drain liquid falling on the periphery **64** back into the cavity **63**. Additionally, the periphery **64** can have a curved surface so that the periphery **64** does not have the edge **64b** to provide a seamless junction between the upper periphery **64** and the outer surface **62b**.

[0212] The recess **65**, as illustrated in FIG. 11, extends from the edges **64c** of the upper periphery **64** to the minimum point **65a**. Moreover, the recess **65** has a curved shape. However, the recess **65** may optionally have any contoured shape configured to receive a human extremity. Accordingly, the recess **65** is not limited to the arcuate shape illustrated in FIG. 11. The recess **65** further comprises a recess surface **65b** and edges **65c**, **65d**. The recess **65** preferably joins to the wall **62** at the edge **65d**. Optionally, the recess **65** can join to the wall **62** at the edge **65c**. In the illustrated embodiment, the recess surface **65b** extends horizontally from the edge **65c** to the edge **65d** adjacent the outer surface **62b**. The recess surface **65b** can optionally be curved between the inner surface **62a** and the outer surface **62b** to provide a seamless junction between the surface **65b** and the surfaces **62a**, **62b** without the edge **65d**. The recess surface **65b** can also optionally be inclined inwardly so as to drain liquid falling on the surface **65b** back into the cavity **63**. The recess **65** may also have a contoured juncture with the upper periphery **64** to provide a seamless junction between the recess surface **65b** and the upper periphery **64**, without the edges **64c**.

[0213] As described above with respect to the basin **10**, the convertible portion **69** can similarly comprise a variety of

structures and combination of structures. Moreover, a plurality of convertible portions **69** can optionally be disposed along the periphery of the wall **62** and the base **61**. For example, but without limitation, the convertible portion **69** can comprise a hole **69** formed on wall **62** covered with a removable cover, such as, but not limited to, a peel-off seal. The cover can be attached to the outer wall **62b**, for example, with an adhesive.

[0214] In another example, the convertible portion **69** can comprise a threaded hole **69** formed on the wall **62** with a threaded plug that covers the hole **69**. In still another example, a removable cork can be used to cover the hole **69**.

[0215] In yet another example, the convertible portion **69** can comprise a nipple **69** having a removable cap, the nipple **69** extending outward from the outer wall **62b**. The nipple **69** can be molded onto the outer wall **62b**. Optionally, the nipple **69** can be removably screwed onto the outer wall **62b**. In another example, the convertible portion **69** can comprise a nipple **69** having a strainer and a removable cover, such as, but not limited to a peel-off seal.

[0216] In still another example, the convertible portion **69** can comprise a clamp **69** configured to receive a suction hose, such as a conventional suction hose found in a medical facility, where the clamp **69** is integrally molded or removably attached to the inner surface **62a** of the basin **60**. In another example, the convertible portion **69** can comprise a removable holder having at least one clip disposed over the wall **62** of the basin **60**. In another example, the convertible portion can comprise an aperture on the upper periphery **64** configured to receive a cannula.

[0217] According to the illustrated embodiment of the basin **60**, the convertible portion **69** is in the form of an annularly extending score defining a frangible portion disposed on the outer surface **62b**. However, the score **69** may be disposed on any portion of the wall **62** or the base **61**. Additionally, a plurality of scores **69** can optionally be disposed on the basin **60**. The score **69** is configured to form an aperture through the wall **62** or base **61** to drain the cavity **63** following the removal of the material bounded by the score **69** from the wall **62**. The score **69** is preferably disposed near the bottom of the surface **62b**, close to the resting surface. However, the score **69** can be disposed in any location capable of providing an effective drain for the cavity **63** upon the removal of the material bounded by the score **69** from the wall **62**. Additionally, though the score **69** preferably comprises a circular shape, as shown in the illustrated embodiment, the score **69** can comprise any shape that provides an effective drain for the cavity **63**. For example, the score **69** can comprise a slit.

[0218] In preparation for the irrigation of a wound on a human extremity, if the wound is located below the patient's elbow, medical personnel place the basin **60** below the patient's arm such that the patient's forearm rests on the recess **65**. Alternatively, if the wound is located below the patient's knee, personnel place the basin **60** below the patient's leg such that the patient's calf rests on the recess **65**. Accordingly, the patient's wound is disposed over the cavity **63** of the basin **60**.

[0219] If personnel wish to actively drain the basin **60** during the irrigation procedure, personnel modify the convertible portion **69**, as described above with respect to the

basin 10, to create a drain in the basin 60. The basin 60 is then ready to be actively drained. In the illustrated embodiment, where the convertible portion 69 comprises a frangible portion 69, personnel can break the frangible portion 69 to create a drain for the basin 60. Personnel can optionally insert a draining device, such as the grommet 20, into the drain and attach a suction hose to the draining device. Personnel can then attach a second end of the suction hose to a suction device to actively drain the basin 60. As noted above, the basin 60 can comprise a plurality of convertible portions 69 disposed along the periphery of the basin 60, allowing personnel to choose the convertible portion 69 that best accommodates the draining of the basin 60 or create additional drains.

[0220] Medical personnel can also actively drain the basin 60 by attaching the adhesive surface 5a of the cannula 5 to the inner surface 62a of the basin 60 such that an end of the cannula 5 is proximal to the base 61. Optionally, the cannula 5 is configured to self-support against the inner surface 62a of the basin 60 without an adhesive surface. Personnel can then attach a second end of the cannula 5 to a suction device, as described above.

[0221] Irrigation fluid is then directed to the wound region to remove any contaminants from the wound region. The irrigation fluid directed to the wound region subsequently collects in the cavity 63 of the basin 60. The recess 65 advantageously improves the fluid-collection ability of the cavity 63 by reducing escape of irrigation fluid through the juncture of the extremity with the recess 65.

[0222] With reference to FIG. 12, an irrigation shield 70 is illustrated therein. The irrigation shield 70 comprises a sheet 71 and an aperture 73 disposed at a central portion of the sheet 71. The aperture 73 is configured to be stretched from a resting state to an enlarged state. The sheet 71 is flexible and thus can be shaped to define an open end 74.

[0223] An elastic member 73b preferably attaches circumferentially to the sheet 71, around the aperture 73 and is configured to be modified from a resting state to an enlarged state for use with an irrigation device such as the one disclosed in U.S. Pat. No. 6,156,004, discussed below. The member 73b is further configured to generate a gripping force. In the illustrated embodiment, the elastic member 73b is an elastic band. The elastic member 73b can optionally be a latex portion attached circumferentially around the aperture 73, the latex portion having an elastically enlargeable opening configured to receive the irrigation device. The member 73b is preferably attached to the sheet 71 with glue. However, the member 73b can be attached to the sheet 71 in a number of ways, such as, but without limitation, by being sewn to the sheet 71.

[0224] The sheet 71 is preferably transparent and made of a flexible material. For example, the sheet 71 can be made of polyurethane or polypropylene. In the illustrated embodiment, the sheet defines an umbrella shape extending along an axis 72 and has a plurality of pleats 75 extending between the aperture 73 at the longitudinal end 72a and the open end 74 at the longitudinal end 72b. However, the sheet 71 can optionally have no pleats 75. Moreover, the sheet 71 is not limited to defining an umbrella shape, but can define one of a variety of shapes. For example, but without limitation, the sheet 71 can define a circular shape, a square shape, a rectangular shape, a star shape, a diamond shape, and a half-circle shape.

[0225] The sheet 71 comprises a length 76 defined as the distance between the aperture 73 at the longitudinal end 72a to the open end 74 at the longitudinal end 72b. The length 76 is preferably four feet. The length 76 of the sheet 71 can optionally be shortened, for example with scissors, as desired during an irrigation procedure. The sheet 71 also comprises a thickness 77. The thickness 77 may be any thickness that adequately provides the sheet 71 with the necessary flexibility, and allows the sheet 71 to be folded compactly to fit in the cover 2 of the kit 1. For example, the thickness 77 preferably is from 0.001 inch to 0.02 inch.

[0226] A typical irrigation device 80 is illustrated in FIG. 13. The device 80 comprises an irrigation handpiece 81, and a suction irrigation tip 82 that is detachably connected to the handpiece 81. The handpiece 81 is connected to a suction source 83 through a flexible suction tubing 84, and to an irrigation source 85 through flexible irrigation tubing 86. A suction lumen 87 and an irrigation lumen 88, both shown in phantom, extend through the entire length of the handpiece 81. The suction lumen 87 connects to the suction source 83 at one end and to a suction port 89 at a second end. The irrigation lumen 88 connects to the irrigation source 85 at one end and to an irrigation port 90 at a second end. Both ports 89, 90 are formed in a fitting 91 at the distal end of the handpiece 81.

[0227] When the tip 82 is connected to the handpiece 81 and the handpiece 81 is energized, irrigation fluid passes through the irrigation port 90 and into the tip 82. The irrigation fluid is emitted from a distal end 92 of the tip 82 at a frequency controlled by the handpiece trigger 93. The tip 82 includes a flexible splash shield 95 and connector 96. The connector 96 is disposed at a proximal end 94 of the tip 82 and detachably connects the tip 82 to the handpiece 81. The flexible shield 95 includes a proximal collar 97 and a conical body that diverges in a distal direction to a distal rim 98. The collar 97 is slidably mounted to an irrigation tube 99 comprised by the tip 82. Vent holes 100 disposed on the shield 95 are configured to prevent the shield from collapsing when the irrigation device 80 is operated in a suction mode. A stop ridge 102 may circumscribe the proximal end of the irrigation tube 99 to prevent the splash shield 95 from being retracted into contact with the connector 96.

[0228] During operation, medical personnel connect the handpiece 81 to the tip 82 and fit the rim 98 of the shield 95 through the aperture 73 in its enlarged state so that the elastic member 73b preferably rests around the collar 97. The elastic member 73b preferably generates a gripping force on the collar to substantially prevent the elastic member 73b from sliding along the collar 97. Personnel optionally shorten the length 76 of the sheet 71 as desired. For example, personnel can cut the sheet 71 a desired distance circumferentially around the axis 72. Medical personnel preferably cut the sheet 71 with scissors, but may optionally use any sharp object.

[0229] Medical personnel then place the open end 74 of the sheet 71 so that it is disposed over the wound region of the patient. For example, if the wound is on the knee-area, as discussed above, personnel can place the sheet 71 over the injured leg of the patient so that it covers the wound area and the basin 10. Personnel then actuate the irrigation device by pressing the trigger 93 to emit irrigation fluid from the tip 82. Irrigation fluid is then directed to the wound area of the patient, which is then collected in the basin.

[0230] It is to be noted that the illustrated irrigation device **80** is merely an example of irrigation devices used in the surgical arts. The aperture **73** can be sized to fit over and engage any type of irrigation device, including those without a suction or aspiration feature, and those with different sizes and types of splash shields, or with or without a splash shield.

[0231] With reference to **FIGS. 14-20**, a prior art suction system is described below with reference to **FIGS. 14-19**. An improved suction hose is illustrated in **FIG. 20**, in section view and identified generally by the reference numeral **5'**.

[0232] With reference to **FIG. 14**, a typical suction system used in an operating room includes a suction source **110**, a suction hose **112** having a first end connected to the suction source and a second end **114** which includes a female adapter configured to releasably engage a fluid and debris collection device **116**.

[0233] The fluid and debris collection device **116** is typically in the form of a glass jar **118** having a lid **120**. The lid **120** includes a connector **122** configured to create a seal with the adapter **114**. The lid **120** typically includes at least one other adapter **124** that is configured to connect with a female connector typically included with suction hose typically used in an operating room.

[0234] **FIG. 15** shows an enlarged side elevational view of a female connector **126** connected to an end of suction hose **128**. The suction hose **128** has an inner diameter **130** of about 6 millimeters. The outer diameter **132** of the hose **128** is about 9 millimeters.

[0235] The female adapter **126** includes a first annular recess **134** that is configured to mate with the outer surface of the tubing **128**. The female adapter **126** also includes a stop member **136** that is configured to abut the inner end of the hose **128**. The inner surface **138** of the stop **136** is sized so as to define an inner diameter that is approximately equal to the inner diameter **130**. The female adapter **126** also includes an inner recess **140** that is configured to receive the adapter **124** (**FIG. 14**). The opposite end of the hose **128** can include another female adapter similar or identical to the female adapter **126**.

[0236] As shown in **FIG. 16**, a suction device **142** which is commonly used in medical procedures, includes an inlet end **144** and a discharge end **146**. The inlet end **144** includes a plurality of openings **148**, opening into an inner lumen **150**. The openings **148** are sized to prevent large clumps of tissue and bone chips from entering the lumen **150**. For example, one known suction device includes openings that are about 4 m long and 1-2 mm wide.

[0237] The lumen **150** extends along the length of the suction device **142** and terminates at a discharge **146**. The discharge **146** is configured to fit into a recess of a female adapter such as the recess **140** in the female adapter **126** (**FIG. 15**).

[0238] In an operation, the vacuum hose **128** connects the suction device **142** with the adapter **124** of the debris collector **116**. With the suction source **110** activated, a vacuum is created in the interior of the collection device **116**, thereby drawing a vacuum through the adapter **124**, through the vacuum hose **128** and through the suction device **142**. As

such, fluid and debris is drawn through the apertures **148**, through the lumen **150**, through the hose **128** and into the interior of the collection device **116**. Because the adapter **122** is mounted to the lid **120**, the fluid and debris collected within the jar **18** does not enter the hose **112** or the suction source **110**.

[0239] However, it has been found that the suction hose **128** that is typically used in operating rooms can become clogged more easily than the suction device **142**. Further, it is also been found that clogs within the suction hose **128** can be initiated at deformed portions of the hose **128**.

[0240] For example, with reference to **FIG. 17**, a suction hose kit **152** is illustrated therein and includes a sterilized package **154** and the suction tubing **128**. It has been found that such conventional suction tubing **128** can become deformed. For example, some portions of such suction tubing **128** remains round in sections.

[0241] As shown in **FIG. 18**, the cross-sectional shape of the tubing **128** in certain areas remains round. However, as shown in **FIG. 19**, certain portions of the tubing **128** can become constricted. This deformation can sometimes be found in the curve of the tubing **128** that has been folded for packaging purposes so that the tubing **128** fits within the package **154**. Additionally, various portions of the tubing **128** can include indentations that may have been formed by machines used to manufacture the tubing **128** or from the weight of other articles stacked on top of the package **154** during stocking. Regardless of the mechanism causing such deformation, an inner dimension **156** of the deformed portion of the tube **128** can become sufficiently restricted that the likelihood of clogging at the deformed portion is increased.

[0242] Thus, in accordance with an aspect of at least one of the inventions disclosed herein, a suction tubing **5'** illustrated in **FIG. 20** includes an inner diameter of at least about 8 millimeters. More preferably, the inner diameter of the tubing **5'** is from about 8 millimeters to about 15 millimeters.

[0243] As such, the tubing **5'** can include the same type of deformations occurring in the known suction tubing **128**, yet retain a sufficient clearance within its inner dimension that the likelihood of clogging is not increased as greatly as that resulting from the deformed portions of the tubing **128** illustrated in **FIG. 19**. For example, were the suction tubing **5'** is formed with an inner diameter of about 8 millimeters in a relaxed state, the suction tubing **5'** can be deformed to some extent resulting in a minimum inner dimension identified by the reference numeral **158**. Because the diameter of the suction tubing **5'** in a relaxed state is at least 8 millimeters, the reduced inner dimension **158** caused by a deformation can still be as large as 6 millimeters. Thus, where the tubing **5'** has been damaged or deformed in the same manner as the known tubing **128**, the tubing **5'** is less likely to cause clogging in the same manner as the known tubing **128**.

[0244] Optionally, the tubing **5'** can include the same female connectors **126** described above with reference to **FIG. 15**. However, such female adapters can also include slight modifications to the inner recess **134** so as to more readily accept the outer diameter of the tubing **5'**.

[0245] In another modification, a female adapter included with the tubing **5'** can define a larger inner diameter than the

inner surface **138** of the adapter **126**. In use, it may be preferable to cut the adapter **124** so as to avoid the formation of a bottle neck in the vacuum circuit leading to the container **116**.

[0246] Although the inventions disclosed herein have been disclosed in the context of certain preferred embodiments and examples, it will be understood by those skilled in the art that the inventions disclosed herein extend beyond the specifically disclosed embodiments to other alternative embodiments and/or uses of the inventions and obvious modifications and equivalents thereof. Thus, it is intended that the scope of the inventions disclosed herein should not be limited by the particular disclosed embodiments described above, but should be determined only by a fair reading of the embodiments that follow.

1-121. (Canceled).

122. A medical kit comprising a sterilized package containing a sterilized length of suction hose, the suction hose having an inner diameter of at least about 8 millimeters.

123. The medical kit according to claim 122, wherein the length of suction hose includes first and second ends, and first and second female adapters connected to the first and second ends, respectively.

124. The medical kit according to claim 123, wherein the first female adapter is configured to be connectable with an outlet of a suction device, the outlet having an inner diameter of about 6 millimeters.

125. The medical kit according to claim 124, wherein the suction device comprises a hand-held wound aspiration device.

126. The medical kit according to claim 125, wherein the hand-held wound aspiration device is configured to remove

tissue and bone debris from a wound with suction, and to guide the debris into the suction hose.

127. A medical suction hose kit comprising a sterilized package containing a sterilized length of suction hose, the suction hose having first and second hose ends and a first hose inner diameter, at least a first connector disposed at the first end, the first connector having a first connector end defining first connector inner diameter that is about the same as the first hose inner diameter, the first connector having a second connector inner diameter that is smaller than the first connector inner diameter.

128. The medical kit according to claim 127, wherein the second connector inner diameter is about 6 millimeters and the first connector inner diameter is about 8 millimeters.

129. The medical kit according to claim 127, wherein the suction hose is coiled within the sterilized package.

130. The medical kit according to claim 127, wherein the suction hose is configured to draw tissue and bone debris from a wound under vacuum.

131. The medical kit according to claim 127, wherein the first connector is configured to be connectable with an outlet of a suction device.

132. The medical kit according to claim 131, wherein the suction device comprises a hand-held wound aspiration device.

133. The medical kit according to claim 132, wherein the hand-held wound aspiration device is configured to remove tissue and bone debris from a wound with suction, and to guide the debris into the suction hose.

* * * * *