

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 August 2001 (16.08.2001)

PCT

(10) International Publication Number
WO 01/58587 A1

(51) International Patent Classification⁷: **B01J 31/00**,
37/00, 27/135, C08F 4/02, 4/60, 4/44, 2/00, C08G 85/00

(21) International Application Number: PCT/US01/04380

(22) International Filing Date: 12 February 2001 (12.02.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/502,277 11 February 2000 (11.02.2000) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 09/502,277 (CON)
Filed on 11 February 2000 (11.02.2000)

(71) Applicant (for all designated States except US):
PHILLIPS PETROLEUM COMPANY [US/US];
4th and Keeler, Bartlesville, OK 74004 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MCDANIEL**,

Max, P. [US/US]; 1601 Melmart Drive, Bartlesville, OK 74006 (US). **COLLINS, Kathy, S.** [US/US]; 3915 Silver Lake Drive, Bartlesville, OK 74006 (US). **JOHNSON, Marvin, M.** [US/US]; 4413 Woodland Road, Bartlesville, OK 74006 (US). **RANDOLPH, Bruce, B.** [US/US]; 233 Turkey Creek Road, Bartlesville, OK 74006 (US). **BENHAM, Elizabeth, A.** [US/US]; 9310 Katie Grace Circle, Spring, TX 77379 (US). **JENSEN, Michael, D.** [US/US]; 2008 Skyline Place, Bartlesville, OK 74006 (US). **HAWLEY, Gil, R.** [US/US]; 1022 N. Wyandotte, Dewey, OK 74029 (US). **MARTIN, Joel, L.** [US/US]; 636 Kenwood Drive, Bartlesville, OK 74006 (US).


(74) Agents: **RICHARDS, John**; Ladas & Parry, 26 West 61st Street, New York, NY 10023 et al. (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: ORGANOMETAL CATALYST COMPOSITION

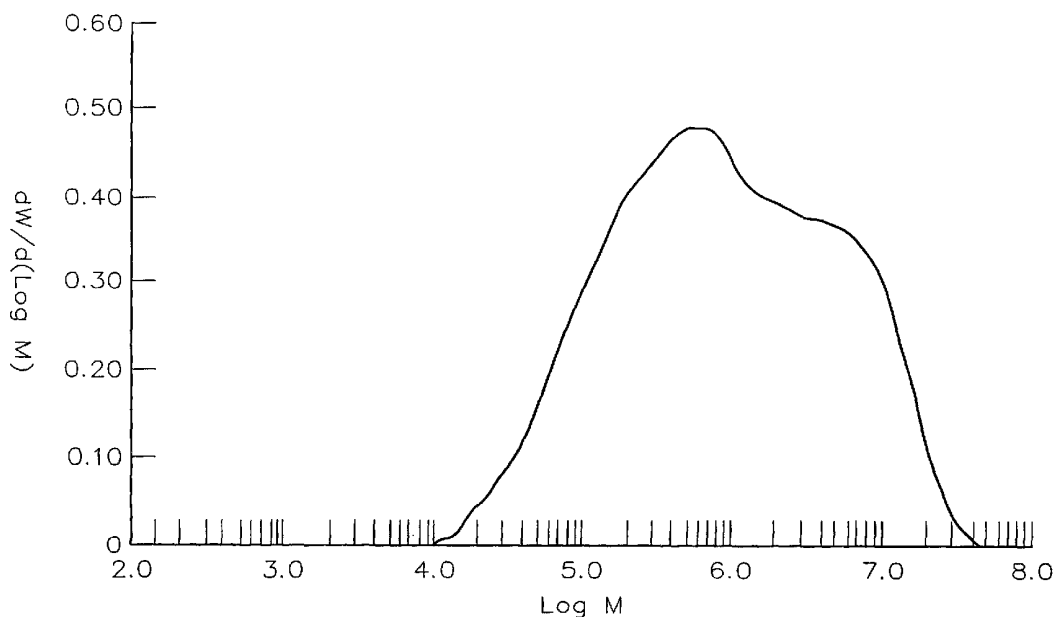

(57) Abstract: Group 4 metallocene compounds are supported on titanium tetrafluoride, zirconium tetrafluoride, or solid oxides treated with said fluorides, with activation by an organoaluminum compound to result in anolefin polymerization catalyst. The catalyst is usable for forming homopolymers or copolymers of alpha olefins.

WO 01/58587 A1



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

- 1 -

ORGANOMETAL CATALYST COMPOSITION

This invention is related to the field of organometal catalyst compositions.

The production of polymers is a multi-billion dollar business. This
5 business produces billions of pounds of polymers each year. Millions of dollars have
been spent on developing technologies that can add value to this business.

One of these technologies is called metallocene catalyst technology.
Metallocene catalysts have been known since about 1958. However, their low
productivity did not allow them to be commercialized. About 1974, it was discovered
10 that contacting one part water with one part trimethylaluminum to form methyl
aluminumoxane, and then contacting such methyl aluminumoxane with a metallocene
compound, formed a metallocene catalyst that had greater activity. However, it was
soon realized that large amounts of expensive methyl aluminumoxane were needed to
form an active metallocene catalyst. This has been a significant impediment to the
15 commercialization of metallocene catalysts.

Fluoro organic borate compounds have been used in place of large
amounts of methyl aluminumoxane. However, this is not satisfactory, since these borate
compounds are very sensitive to poisons and decomposition, and can also be very
expensive.

20 It should also be noted that having a heterogeneous catalyst is
important. This is because heterogeneous catalysts are required for most modern
commercial polymerization processes. Furthermore, heterogeneous catalysts can lead
to the formation of substantially uniform polymer particles that have a high bulk
density. These types of substantially uniform particles are desirable because they
25 improve the efficiency of polymer production and transportation. Efforts have been
made to produce heterogeneous metallocene catalysts; however, these catalysts have
not been entirely satisfactory.

The present invention provides a process that produces a catalyst
composition that can be used to polymerize at least one monomer to produce a

- 2 -


polymer.

The invention also provides the catalyst composition.

The invention also deals with a process comprising contacting at least one monomer and the catalyst composition under polymerization conditions to produce the polymer.

In accordance with one embodiment of this invention, a process to produce a catalyst composition is provided. The process comprises (or optionally, "consists essentially of," or "consists of") contacting at least one organometal compound, at least one organoaluminum compound, and at least one solid to produce the catalyst composition,

wherein the organometal compound has the following general formula:



wherein M^1 is selected from the group consisting of titanium, zirconium, and hafnium;

wherein (X^1) is independently selected from the group consisting of cyclopentadienyls, indenyls, fluorenyls, substituted cyclopentadienyls, substituted indenyls, and substituted fluorenyls;

wherein substituents on the substituted cyclopentadienyls, substituted indenyls, and substituted fluorenyls of (X^1) are selected from the group consisting of aliphatic groups, cyclic groups, combinations of aliphatic and cyclic groups, silyl groups, alkyl halide groups, halides, organometallic groups, phosphorus groups, nitrogen groups, silicon, phosphorus, boron, germanium, and hydrogen;

wherein at least one substituent on (X^1) can be a bridging group which connects (X^1) and (X^2) ;

wherein (X^3) and (X^4) are independently selected from the group consisting of halides, aliphatic groups, substituted aliphatic groups, cyclic groups, substituted cyclic groups, combinations of aliphatic groups and cyclic groups, combinations of substituted aliphatic groups and cyclic groups, combinations of aliphatic groups and substituted cyclic groups, combinations of substituted aliphatic groups and substituted cyclic groups, amido groups, substituted amido groups, phosphido groups, substituted phosphido groups, alkyloxy groups, substituted

- 3 -


alkyloxy groups, aryloxy groups, substituted aryloxy groups, organometallic groups, and substituted organometallic groups;

wherein (X^2) is selected from the group consisting of cyclopentadienyls, indenyls, fluorenyls, substituted cyclopentadienyls, substituted indenyls, substituted fluorenyls, halides, aliphatic groups, substituted aliphatic groups, cyclic groups, substituted cyclic groups, combinations of aliphatic groups and cyclic groups, combinations of substituted aliphatic groups and cyclic groups, combinations of aliphatic groups and substituted cyclic groups, combinations of substituted aliphatic groups and substituted cyclic groups, amido groups, substituted amido groups, phosphido groups, substituted phosphido groups, alkyloxy groups, substituted alkyloxy groups, aryloxy groups, substituted aryloxy groups, organometallic groups, and substituted organometallic groups;

wherein substituents on (X^2) are selected from the group consisting of aliphatic groups, cyclic groups, combinations of aliphatic groups and cyclic groups, silyl groups, alkyl halide groups, halides, organometallic groups, phosphorus groups, nitrogen groups, silicon, phosphorus, boron, germanium, and hydrogen;

wherein at least one substituent on (X^2) can be a bridging group which connects (X^1) and (X^2);

wherein the organoaluminum compound has the following general formula:



wherein (X^5) is a hydrocarbyl having from 1-20 carbon atoms;

wherein (X^6) is a halide, hydride, or alkoxide;

wherein the solid is selected from the group consisting of titanium tetrafluoride, zirconium tetrafluoride, and a treated solid oxide compound;

wherein the treated solid oxide compound comprises a solid oxide compound having titanium tetrafluoride or zirconium tetrafluoride deposited on the surface of the solid oxide compound; and

wherein the solid oxide comprises oxygen and at least one element selected from the group consisting of groups IIA-VIIIA and IB-VIIB of the Periodic Table of Elements, including lanthanides and actinides.

- 4 -

By use of the term "consists essentially of", it is intended that the process to produce a catalyst composition does not contain any further steps beyond the enumerated steps which would have an adverse affect on the desired object of the invention. Moreover, the composition thus-produced does not include any further component which would adversely affect the desired properties imparted to the composition by the components recited after their expression.

In accordance with another embodiment of this invention, a process is provided comprising contacting at least one monomer and the catalyst composition under polymerization conditions to produce a polymer.


In accordance with another embodiment of this invention, an article is provided. The article comprises the polymer produced in accordance with this invention.

BRIEF DESCRIPTION OF DRAWING

Figure 1 is a graph showing the polymer molecular weight distribution (MWD) of the polymer in Example 1. It was obtained by gel permeation chromatography (GPC). The normalized weight fraction per increment of $\log M$ [$dW/d(\log M)$] is plotted as a function of the molecular weight (M) in grams per mole (g/mol), plotted on a logarithmic (log) scale. In other words the x-axis represents the log of the molecular weight of each section of the polymer while the y-axis represents the amount by weight of polymer in the composition at that molecular weight.

A process to produce a catalyst composition is provided. The process comprises contacting at least one organometal compound, at least one organoaluminum compound, and at least one solid.

Organometal compounds used in this invention have the following general formula:



In this formula, M^1 is selected from the group consisting of titanium, zirconium, and hafnium. Currently, it is most preferred when M^1 is zirconium.

In this formula, (X^1) is independently selected from the group consisting of (hereafter "Group OMC-I") cyclopentadienyls, indenyls, fluorenyls, substituted cyclopentadienyls, substituted indenyls, such as, for example, tetrahydro-

- 5 -

indenyls, and substituted fluorenyls, such as, for example, octahydrofluorenyls.

Substituents on the substituted cyclopentadienyls, substituted indenyls, and substituted fluorenyls of (X¹) can be selected independently from the group consisting of aliphatic groups, cyclic groups, combinations of aliphatic and cyclic
5 groups, silyl groups, alkyl halide groups, halides, organometallic groups, phosphorus groups, nitrogen groups, silicon, phosphorus, boron, germanium, and hydrogen, as long as these groups do not substantially, and adversely, affect the polymerization activity of the catalyst composition.

Suitable examples of aliphatic groups are hydrocarbyls, such as, for
10 example, paraffins and olefins. Suitable examples of cyclic groups are cycloparaffins, cycloolefins, cycloacetylenes, and arenes. Substituted silyl groups include, but are not limited to, alkylsilyl groups where each alkyl group contains from 1 to about 12 carbon atoms, arylsilyl groups, and arylalkylsilyl groups. Suitable alkyl halide groups have
15 alkyl groups with 1 to about 12 carbon atoms. Suitable organometallic groups include, but are not limited to, substituted silyl derivatives, substituted tin groups, substituted germanium groups, and substituted boron groups.

Suitable examples of such substituents are methyl, ethyl, propyl, butyl, tert-butyl, isobutyl, amyl, isoamyl, hexyl, cyclohexyl, heptyl, octyl, nonyl, decyl, dodecyl, 2-ethylhexyl, pentenyl, butenyl, phenyl, chloro, bromo, iodo, trimethylsilyl,
20 and phenyloctylsilyl.

In this formula, (X³) and (X⁴) are independently selected from the group consisting of (hereafter "Group OMC-II") halides, aliphatic groups, substituted
aliphatic groups, cyclic groups, substituted cyclic groups, combinations of aliphatic groups and cyclic groups, combinations of substituted aliphatic groups and cyclic
25 groups, combinations of aliphatic groups and substituted cyclic groups, combinations of substituted aliphatic and substituted cyclic groups, amido groups, substituted amido groups, phosphido groups, substituted phosphido groups, alkyloxy groups,
substituted alkyloxy groups, aryloxy groups, substituted aryloxy groups, organometallic groups, and substituted organometallic groups, as long as these groups
30 do not substantially, and adversely, affect the polymerization activity of the catalyst composition.

- 6 -

Suitable examples of aliphatic groups are hydrocarbyls, such as, for example, paraffins and olefins. Suitable examples of cyclic groups are cycloparaffins, cycloolefins, cycloacetylenes, and arenes. Currently, it is preferred when (X³) and (X⁴) are selected from the group consisting of halides and hydrocarbyls, where such hydrocarbyls have from 1 to about 10 carbon atoms. However, it is most preferred when (X³) and (X⁴) are selected from the group consisting of fluoro, chloro, and methyl.

In this formula, (X²) can be selected from either Group OMC-I or Group OMC-II.


At least one substituent on (X¹) or (X²) can be a bridging group that connects (X¹) and (X²), as long as the bridging group does not substantially, and adversely, affect the activity of the catalyst composition. Suitable bridging groups include, but are not limited to, aliphatic groups, cyclic groups, combinations of aliphatic groups and cyclic groups, phosphorous groups, nitrogen groups, organo-metallic groups, silicon, phosphorus, boron, and germanium.

Suitable examples of aliphatic groups are hydrocarbyls, such as, for example, paraffins and olefins. Suitable examples of cyclic groups are cycloparaffins, cycloolefins, cycloacetylenes, and arenes. Suitable organometallic groups include, but are not limited to, substituted silyl derivatives, substituted tin groups, substituted germanium groups, and substituted boron groups.

Various processes are known to make these organometal compounds. See, for example, U.S. Patents 4,939,217; 5,210,352; 5,436,305; 5,401,817; 5,631,335, 5,571,880; 5,191,132; 5,480,848; 5,399,636; 5,565,592; 5,347,026; 5,594,078; 5,498,581; 5,496,781; 5,563,284; 5,554,795; 5,420,320; 5,451,649; 5,541,272; 5,705,478; 5,631,203; 5,654,454; 5,705,579; and 5,668,230.





Specific examples of such organometal compounds are as follows:

bis(cyclopentadienyl)hafnium dichloride;




- 7 -

bis(cyclopentadienyl)zirconium dichloride;

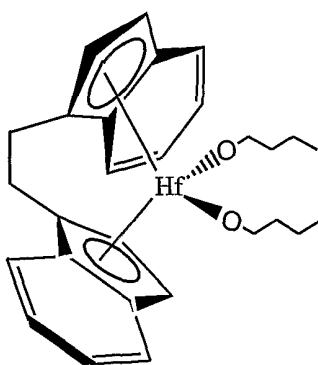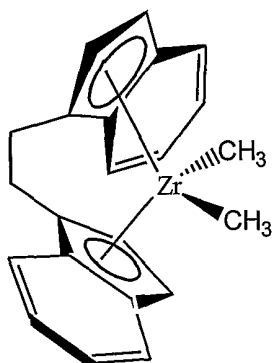
1,2-ethanediylbis(η^5 -1-indenyl)di-*n*-butoxyhafnium;1,2-ethanediylbis(η^5 -1-indenyl)dimethylzirconium;3,3-pentanediyylbis(η^5 -4,5,6,7-tetrahydro-1-indenyl)hafnium dichloride;

- 8 -


methylphenylsilylbis(η^5 -4,5,6,7-tetrahydro-1-indenyl)zirconium
dichloride;

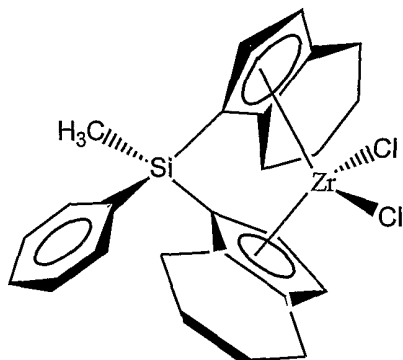

bis(*n*-butylcyclopentadienyl)bis(di-*t*-butylamido)hafnium;

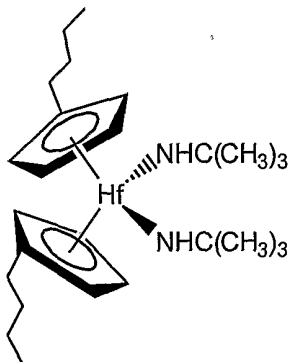


bis(*n*-butylcyclopentadienyl)zirconium dichloride;


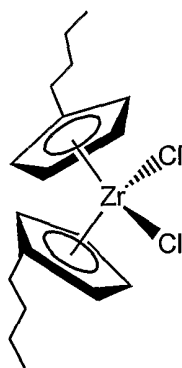


- 9 -

dimethylsilylbis(1-indenyl)zirconium dichloride;

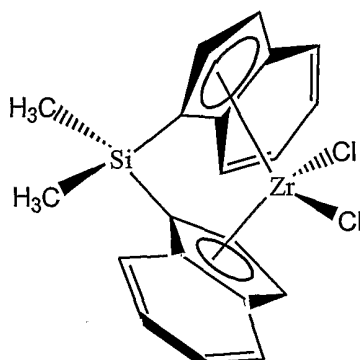


octylphenylsilylbis(1-indenyl)hafnium dichloride;

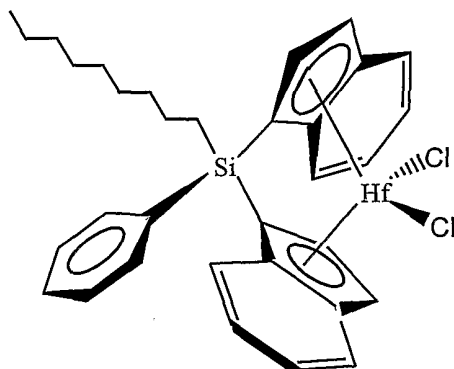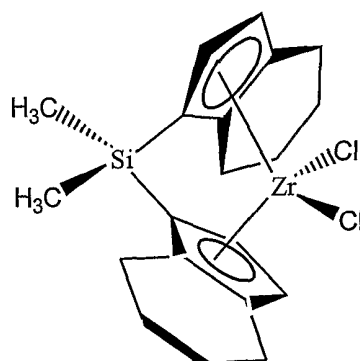
dimethylsilylbis(η^5 -4,5,6,7-tetrahydro-1-indenyl)zirconium dichloride;

- 10 -


dimethylsilylbis(2-methyl-1-indenyl)zirconium dichloride;

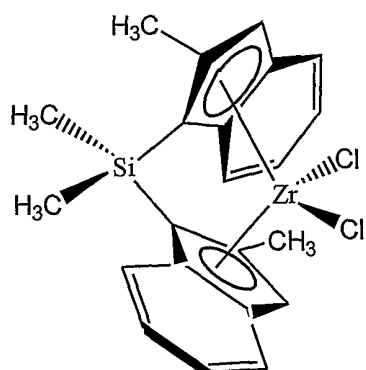


1,2-ethanediylbis(9-fluorenyl)zirconium dichloride;



indenyl diethoxy titanium(IV) chloride;




(isopropylamidodimethylsilyl)cyclopentadienyltitanium dichloride;




- 11 -


bis(pentamethylcyclopentadienyl)zirconium dichloride;



bis(indenyl) zirconium dichloride;

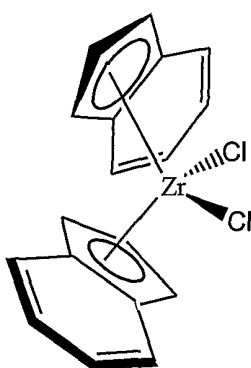


methyloctylsilyl bis (9-fluorenyl) zirconium dichloride;

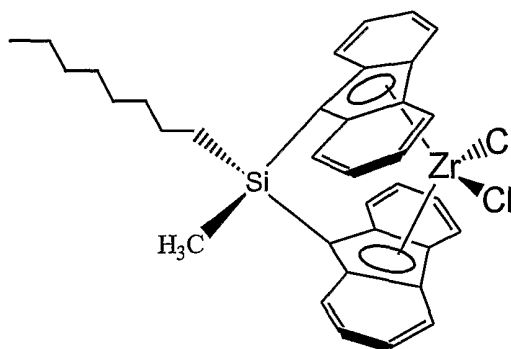

and


- 12 -

bis-[1-(*N,N*-diisopropylamino)boratabenzene]hydrido-
zirconium trifluoromethylsulfonate

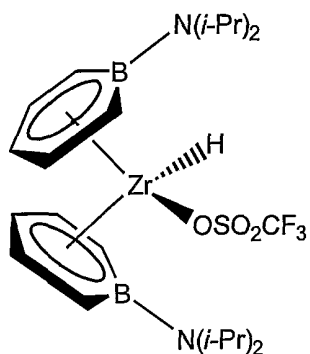


Preferably, the organometal compound is selected from the group
consisting of

bis(*n*-butylcyclopentadienyl)zirconium dichloride;

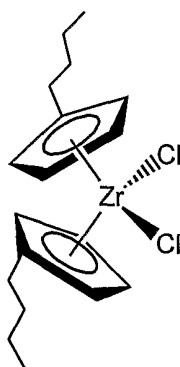


bis(indenyl)zirconium dichloride;

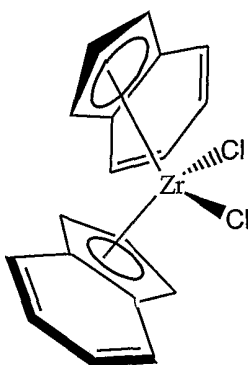


- 13 -

dimethylsilylbis(1-indenyl) zirconium dichloride;

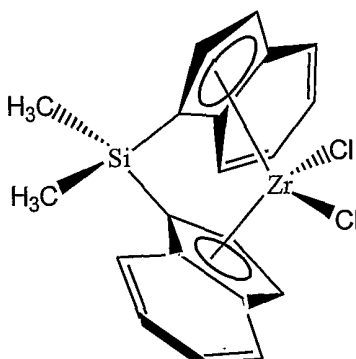


and

methyloctylsilyl bis (9-fluorenyl) zirconium dichloride;

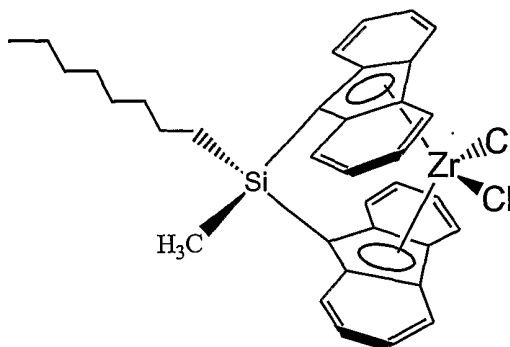

Organoaluminum compounds have the following general formula:



In this formula, (X^5) is a hydrocarbyl having from 1 to about 20 carbon atoms. Currently, it is preferred when (X^5) is an alkyl having from 1 to about 10
 5 carbon atoms. However, it is most preferred when (X^5) is selected from the group consisting of methyl, ethyl, propyl, butyl, and isobutyl.

In this formula, (X^6) is a halide, hydride, or alkoxide. Currently, it is preferred when (X^6) is independently selected from the group consisting of fluoro and chloro. However, it is most preferred when (X^6) is chloro.

10 In this formula, "n" is a number from 1 to 3 inclusive. However, it is preferred when "n" is 3.

Examples of such compounds are as follows:

trimethylaluminum;

triethylaluminum (TEA);

- 14 -

tripropylaluminum;
diethylaluminum ethoxide;
tributylaluminum;
diisobutylaluminum hydride;
5 triisobutylaluminum hydride;
triisobutylaluminum; and
diethylaluminum chloride.

Currently, TEA is preferred.

The solid used in this invention is selected from the group consisting of
10 titanium tetrafluoride (TiF_4), zirconium tetrafluoride (ZrF_4), and a treated solid oxide
compound. The treated solid oxide compound comprises a solid oxide compound
having titanium tetrafluoride or zirconium tetrafluoride deposited on the surface of the
solid oxide compound. Generally, any high surface area, high porosity, solid oxide
compound can be used. The solid oxide compound comprises oxygen and at least one
15 element selected from the group consisting of groups IIA-VIIIA and IB-VIIB of the
Periodic Table of Elements, including lanthanides and actinides. However, it is
preferred when the element is selected from the group consisting of Al, B, Be, Bi, Cd,
Co, Cr, Cu, Fe, Ga, La, Mn, Mo, Ni, Sb, Si, Sn, Sr, Th, Ti, V, W, P, Y, Zn and Zr.
Preferably, the solid oxide compound is selected from the group consisting of alumina,
20 silica, silica-alumina, aluminophosphate, aluminoborate, silica-zirconia, silica-titania,
thoria, and mixtures thereof. Most preferably, the solid oxide compound is alumina,
silica, or silica-alumina. The solid oxide compound can be produced by any method
known in the art, such as, for example, by gelling, co-gelling, impregnation of one
compound onto another, and flame hydrolysis.

25 Generally, the specific surface area of the solid oxide compound is from
about 100 to about 1000 m^2/g , preferably, from about 200 to about 800 m^2/g , and most
preferably, from 250 to 600 m^2/g after calcining at 500°C.

The specific pore volume of the solid oxide compound is typically
greater than about 0.5 cm^3/g , preferably, greater than about 0.8 cm^3/g , and most
30 preferably, greater than 1.0 cm^3/g .

Calcining is conducted at various steps in the production of the treated

- 15 -

solid oxide compound. Generally, calcining of the solid oxide compound is conducted at a temperature in the range of about 200°C to about 900°C, preferably in a range of about 300° to about 700°C, and most preferably in a range of 350°C to 600°C.

Typically, calcining is conducted for about 1 minute to about 100 hours, preferably for about 1 hour to about 50 hours, and most preferably, for 3 hours to 20 hours.

Calcining is performed typically in an inert atmosphere. Alternatively, an oxidizing atmosphere, such as, for example, oxygen or air, or a reducing atmosphere, such as, for example, hydrogen or carbon monoxide, can be utilized.

When the treated solid oxide compound is utilized to produce the catalyst composition, the TiF_4 or ZrF_4 can be deposited on the solid oxide compound by any means known in the art. Generally, the TiF_4 or ZrF_4 can be deposited on the solid oxide compound by a process of impregnation, sublimation, or decomposition of a salt. For best results, the solid oxide compound contains between about 0.01 and about 10 millimoles of TiF_4 or ZrF_4 per gram of solid oxide compound before calcining or contained on a precalcined solid oxide compound, preferably between about 0.1 and about 5 millimoles, and most preferably between 0.5 and 3.0 millimoles.

When an impregnation process is utilized, the process comprises first calcining the solid oxide compound to remove moisture to produce a calcined solid oxide compound. Calcining was discussed previously in this disclosure. Secondly, TiF_4 or ZrF_4 is dissolved in any aprotic polar solvent, such as, for example, acetonitrile, carbon tetrachloride, dimethyl sulfoxide, ethylene glycol alkoxides, glymes, and mixtures thereof, to produce a metal fluoride solution. The metal fluoride solution then is contacted with the calcined solid oxide compound to produce a metal fluoride/solid oxide compound mixture. Then, the aprotic polar solvent is evaporated from the metal fluoride/solid oxide compound mixture leaving the TiF_4 or ZrF_4 deposited on the solid oxide compound, thereby, producing the treated solid oxide compound. Optionally, for best results, the treated solid oxide compound can be dried thoroughly, even calcined up to a temperature in a range of about 300°C to about 500°C, to remove traces of the aprotic polar solvent.

When a sublimation process is utilized to produce the treated solid oxide compound, the process comprises depositing TiF_4 onto the solid oxide

- 16 -

compound by gas phase deposition. ZrF_4 cannot be deposited by sublimation onto the solid oxide compound. In this process, TiF_4 , which sublimates at about $284^\circ C$ at ambient pressure, is evaporated in the presence of the solid oxide compound and then condensed onto the solid oxide compound either through adsorption, or in some cases, through reaction with the solid oxide compound. Typically, the solid oxide compound is calcined to produce a calcined solid oxide compound. The calcined solid oxide compound is dry mixed with TiF_4 to produce a TiF_4 /solid oxide compound mixture. The calcining of the solid oxide compound is conducted as discussed previously in this disclosure. This TiF_4 /solid oxide compound mixture then is calcined at a temperature in a range of about $250^\circ C$ to about $600^\circ C$, preferably $300^\circ C$ to $500^\circ C$. Generally, calcining time is in the range of about 1 minute to about 10 hours, preferably, 1 hour to 5 hours.

The process of depositing TiF_4 or ZrF_4 by decomposition of a salt comprises impregnating the solid oxide compound with a solution comprising ammonium hexafluorotitanate ($(NH_4)_2TiF_6$) or ammonium hexafluorozirconate ($(NH_4)_2ZrF_6$) and a solvent to produce an ammonium metal fluoride-containing solid oxide compound. The solvent is evaporated, and the ammonium metal fluoride-containing solid oxide compound is calcined at sufficiently high temperature to decompose the ammonium salt to TiF_4 or ZrF_4 , thereby, releasing ammonium fluoride (NH_4F) in the process to produce the treated solid oxide compound. In this embodiment, the solid oxide compound can be virgin or previously calcined as discussed previously in this disclosure. The solvent can be water or a polar organic solvent, such as, for example alcohol or acetone. The calcining of the ammonium metal fluoride-containing solid oxide compound is in a range of about 250° to 600° , preferably 300° to 550° and over a time of one minute to 10 hours, preferably one to five hours.

The catalyst compositions of this invention can be produced by contacting the organometal compound, the organoaluminum compound, and the solid, together. This contacting can occur in a variety of ways, such as, for example, blending. Furthermore, each of these compounds can be fed into a reactor separately, or various combinations of these compounds can be contacted together before being

- 17 -

further contacted in the reactor, or all three compounds can be contacted together before being introduced into the reactor.

Currently, one method is to first contact the organometal compound and the solid together, for about 1 minute to about 24 hours, preferably, 1 minute to 1 hour, at a temperature from about 10°C to about 200°C, preferably 15°C to 80°C, to form a first mixture, and then contact this first mixture with an organoaluminum compound to form the catalyst composition.

Another method is to precontact the organometal compound, the organoaluminum compound, and the solid before injection into a polymerization reactor for about 1 minute to about 24 hours, preferably, 1 minute to 1 hour, at a temperature from about 10°C to about 200°C, preferably 20°C to 80°C.

A weight ratio of the organoaluminum compound to the solid in the catalyst composition ranges from about 5:1 to about 1:1000, preferably, from about 3:1 to about 1:100, and most preferably, from 1:1 to 1:50.

A weight ratio of the solid to the organometal compound in the catalyst composition ranges from about 10,000:1 to about 1:1, preferably, from about 1000:1 to about 10:1, and most preferably, from 250:1 to 20:1. These ratios are based on the amount of the components combined to give the catalyst composition.

After contacting, the catalyst composition comprises a post-contacted organometal compound, a post-contacted organoaluminum compound, and a post-contacted solid. Preferably, the post-contacted solid is the majority, by weight, of the catalyst composition. Often times, specific components of a catalyst are not known, therefore, for this invention, the catalyst composition is described as comprising post-contacted compounds.

A weight ratio of the post-contacted organoaluminum compound to the post-contacted solid in the catalyst composition ranges from about 5:1 to about 1:1000, preferably, from about 3:1 to about 1:100, and most preferably, from 1:1 to 1:50.

A weight ratio of the post-contacted treated solid to the post-contacted organometal compound in the catalyst composition ranges from about 10,000:1 to about 1:1, preferably, from about 1000:1 to about 10:1, and most preferably, from 250:1 to 20:1. These ratios are based on the amount of the components combined to

- 18 -

give the catalyst composition.

The activity of the catalyst composition of this invention is greater than about 50 grams of polymer per gram of solid per hour, more preferably greater than about 75, and most preferably greater than 100. This activity is measured under slurry
5 polymerization conditions, using isobutane as the diluent, and with a polymerization temperature of 90°C, and an ethylene pressure of 550 psig. The reactor should have substantially no indication of any wall scale, coating or other forms of fouling.

One of the important aspects of this invention is that no aluminoxane needs to be used in order to form the catalyst composition. Aluminoxane is an
10 expensive compound that greatly increases polymer production costs. This also means that no water is needed to help form such aluminoxanes. This is beneficial because water can sometimes kill a polymerization process. Additionally, it should be noted that no fluoro organic borate compounds need to be used in order to form the catalyst composition. In summary, this means that the catalyst composition, which is
15 heterogenous, and which can be used for polymerizing monomers, can be easily and inexpensively produced because of the substantial absence of any aluminoxane compounds or fluoro organic borate compounds. It should be noted that organo-chromium compounds and MgCl₂ are not needed in order to form the catalyst composition. Although aluminoxane, fluoro organic borate compounds, organo-
20 chromium compounds, or MgCl₂ are not needed in the preferred embodiments, these compounds can be used in other embodiments of this invention.

In another embodiment of this invention, a process comprising contacting at least one monomer and the catalyst composition to produce a polymer is provided. The term "polymer" as used in this disclosure includes homopolymers and
25 copolymers. The catalyst composition can be used to polymerize at least one monomer to produce a homopolymer or a copolymer. Usually, homopolymers are comprised of monomer residues, having 2 to about 20 carbon atoms per molecule, preferably 2 to about 10 carbon atoms per molecule. Currently, it is preferred when at least one monomer is selected from the group consisting of ethylene, propylene, 1-butene, 3-
30 methyl-1-butene, 1-pentene, 3-methyl-1-pentene, 4-methyl-1-pentene, 1-hexene, 3-ethyl-1-hexene, 1-heptene, 1-octene, 1-nonene, 1-decene, and mixtures thereof.

- 19 -

When a homopolymer is desired, it is most preferred to polymerize ethylene or propylene. When a copolymer is desired, the copolymer comprises monomer residues and one or more comonomer residues, each having from about 2 to about 20 carbon atoms per molecule. Suitable comonomers include, but are not limited to, aliphatic 1-olefins having from 3 to 20 carbon atoms per molecule, such as, for example, propylene, 1-butene, 1-pentene, 4-methyl-1-pentene, 1-hexene, 1-octene, and other olefins and conjugated or nonconjugated diolefins such as 1,3-butadiene, isoprene, piperylene, 2,3-dimethyl-1,3-butadiene, 1,4-pentadiene, 1,7-hexadiene, and other such diolefins and mixtures thereof. When a copolymer is desired, it is preferred to polymerize ethylene and at least one comonomer selected from the group consisting of 1-butene, 1-pentene, 1-hexene, 1-octene, and 1-decene. The amount of comonomer introduced into a reactor zone to produce a copolymer is generally from about 0.01 to about 10 weight percent comonomer based on the total weight of the monomer and comonomer, preferably, about 0.01 to about 5, and most preferably, 0.1 to 4. Alternatively, an amount sufficient to give the above described concentrations, by weight, in the copolymer produced can be used.

Processes that can polymerize at least one monomer to produce a polymer are known in the art, such as, for example, slurry polymerization, gas phase polymerization, and solution polymerization. It is preferred to perform a slurry polymerization in a loop reaction zone. Suitable diluents used in slurry polymerization are well known in the art and include hydrocarbons which are liquid under reaction conditions. The term "diluent" as used in this disclosure does not necessarily mean an inert material; it is possible that a diluent can contribute to polymerization. Suitable hydrocarbons include, but are not limited to, cyclohexane, isobutane, n-butane, propane, n-pentane, isopentane, neopentane, and n-hexane. Furthermore, it is most preferred to use isobutane as the diluent in a slurry polymerization. Examples of such technology can be found in U.S. Patents 4,424,341; 4,501,885; 4,613,484; 4,737,280; and 5,597,892.

The catalyst compositions used in this process produce good quality polymer particles without substantially fouling the reactor. When the catalyst composition is to be used in a loop reactor zone under slurry polymerization

- 20 -

conditions, it is preferred when the particle size of the solid oxide compound is in the range of about 10 to about 1000 micrometers, preferably about 25 to about 500 micrometers, and most preferably, 50 to 200 micrometers, for best control during polymerization.

5 In a more specific embodiment of this invention, a process is provided to produce a catalyst composition, the process comprising (optionally, "consisting essentially of", or "consisting of"):

(1) calcining silica-alumina at a temperature in a range of about 300 to about 500°C for about 3 hours to produce a calcined silica-alumina;

10 (2) cooling the calcined silica-alumina and mixing 5 to 20 % by weight of titanium tetrafluoride based on the weight of the calcined silica-alumina to produce a titanium tetrafluoride-containing silica-alumina; and

(3) calcining the titanium tetrafluoride-containing silica-alumina at a temperature in a range of about 300 to about 500°C for about 1 hour to produce a
15 treated solid oxide compound; and

(4) contacting an organometal compound, an organoaluminum compound, and the treated solid oxide compound to produce the catalyst composition.

Hydrogen can be used with this invention in a polymerization process to control polymer molecular weight.

20 One of the features of this invention is that the TiF_4 , ZrF_4 , or treated solid oxide compound is itself an active catalyst for polymerization without the organometal compound, and it tends to produce very high molecular weight polymer relative to polymer produced by an organometal compound. Thus, when the TiF_4 , ZrF_4 , or the treated solid oxide compound is utilized with an organometal compound, it
25 tends to produce bimodal polymers.

After the polymers are produced, they can be formed into various articles, such as, for example, household containers and utensils, film products, drums, fuel tanks, pipes, geomembranes, and liners. Various processes can form these articles. Usually, additives and modifiers are added to the polymer in order to provide
30 desired effects. It is believed that by using the invention described herein, articles can be produced at a lower cost, while maintaining most, if not all, of the unique properties

- 21 -

of polymers produced with metallocene catalysts.

EXAMPLES

Test Methods

A "Quantachrome Autosorb-6 Nitrogen Pore Size Distribution Instrument" was used to determine the specific surface area ("surface area") and specific pore volume ("pore volume") of the solid oxide compounds. This instrument was acquired from the Quantachrome Corporation, Syosset, N.Y.

Melt Index (MI) in grams of polymer per ten minutes was determined in accordance with ASTM D1238, condition 190/2, at 190°C with a 2,160 gram weight.

High load melt index (HLMI, g/10 min) was determined in accordance with ASTM D1238, Condition 190/2.16, at 190°C with a 21,600 gram weight.

Molecular weights and molecular weight distributions were obtained using a Waters 150 CV gel permeation chromatograph with trichlorobenzene (TCB) as the solvent, with a flow rate of 1 milliliter/minute at a temperature of 140°C. BHT (2,6-di-tert-butyl-4-methylphenol) at a concentration of 1.0 gram/liter was used as a stabilizer in the TCB. An injection volume of 220 microliters was used with a nominal polymer concentration of 0.3 gram/liter (at room temperature). Dissolution of the sample in stabilized TCB was carried out by heating at 160-170°C for 20 hours with occasional, gentle agitation. The column was two Waters HT-6E columns (7.8mm x 300mm). The columns were calibrated with a broad linear polyethylene standard (Phillips Marlex® BHB 5003) for which the molecular weight had been determined.

Solid Oxide Compounds

Silica was obtained from W.R. Grace, grade 952, having a pore volume of about 1.6 cc/g and a surface area of about 300 m²/g.

Alumina sold as Ketjen grade B alumina was obtained from Akzo Nobel Chemical having a pore volume of about 1.78 cc/g and a surface area of about 350 m²/g.

Silica-alumina was obtained from W.R. Grace as MS 13-110 containing 13% by weight alumina and 87% by weight silica. The silica-alumina had a pore volume of about 1.2 cc/g and a surface area of about 450 m²/g.

- 22 -

Calcining

To calcine the solid oxide compound, about 10 grams were placed in a 1.75 inch quartz tube fitted with a sintered quartz disk at the bottom. While the solid oxide compound was supported on the disk, air or nitrogen that had been dried by
5 passing through a 13X molecular sieve column was blown up through the disk at a rate of about 1.6 to about 1.8 standard cubic feet per hour. An electric furnace around the quartz tube was then turned on, and the temperature was raised at the rate of 400°C per hour to the indicated temperature, typically 600°C. At that temperature, the solid oxide compound was allowed to fluidize for three hours in the dry air. Afterward, the
10 solid oxide compound was collected and stored under dry nitrogen, where it was protected from the atmosphere until ready for testing. It was never allowed to experience any exposure to the atmosphere.

Polymerization Procedure

Polymerization runs were made in a 2.2 liter steel reactor equipped with
15 a marine stirrer running at 400 revolutions per minute (rpm). The reactor was surrounded by a steel jacket containing boiling methanol with a connection to a steel condenser. The boiling point of the methanol was controlled by varying nitrogen pressure applied to the condenser and jacket, which permitted precise temperature control to within half a degree celsius, with the help of electronic control instruments.

20 Unless otherwise stated, a small amount (0.01 to 0.10 grams normally) of a test compound (TiF_4 , a solid oxide compound, or a treated solid oxide compound) was first charged under nitrogen to the dry reactor. Next, 2.0 milliliters of a toluene solution containing 0.5 percent by weight of bis(n-butylcyclopentadienyl) zirconium dichloride was added, followed by 0.6 liter of isobutane liquid. Then, 1.0 milliliter of
25 a 1.0 molar solution of triethyl aluminum in heptane (TEA) was added, followed by another 0.6 liter of isobutane liquid. Then, the reactor was heated up to the specified temperature, typically 90°C, and finally ethylene was added to the reactor to equal a fixed pressure, generally 550 psig to produce a reaction mixture. The reaction mixture was allowed to stir for usually around one hour. As ethylene was consumed, more
30 ethylene flowed in to maintain the pressure. The activity was noted by recording the flow of ethylene into the reactor to maintain the set pressure.

- 23 -

After the allotted time, the ethylene flow was stopped, and the reactor slowly depressurized and opened to recover a granular polymer. In all cases, the reactor was clean with no indication of any wall scale, coating or other forms of fouling. The polymer then was removed and weighed. Activity was specified as grams of polymer produced per gram of test compound charged per hour.

Description of Results

Specific examples of this invention are described subsequently. The results of these polymerization tests are listed in Tables 1 and 2.

INVENTIVE EXAMPLE 1

Titanium Tetrafluoride

In Example 1, 0.1397 gram of anhydrous TiF_4 obtained from Aldrich Chemical Company was charged to the reactor under nitrogen. Then, 2 milliliters of bis(n-butylcyclopentadienyl) zirconium dichloride solution in heptane (0.5 wt%) was added to the reactor followed by 1 milliliter of 1 molar triethylaluminum solution in heptane. One liter of isobutane diluent was added. The temperature was heated up to 90°C , and ethylene was supplied on demand at 550 psig for 110 minutes. Afterward the reactor was depressurized, opened, and 16 grams of white polymer powder were recovered which yielded an activity of 62 grams of polymer per gram of TiF_4 per hour.

The polymer was found to have a melt index and a high load melt index of zero. The weight average molecular weight (Mw) of the polymer was found to be very high at 2,866,000 g/mol. The number average molecular weight (Mn) was found to be 243,000, and the polydispersity (Mw/Mn) was found to be very broad at 15.9. The molecular weight distribution was distinctly bimodal, probably due to the two different active components in the catalyst composition, the organometal compound and TiF_4 . The GPC distribution is shown in Figure 1.

CONTROL EXAMPLE 2

No titanium tetrafluoride

In Example 2, the same procedure as in Example 1 was repeated except that the TiF_4 was omitted. No polymer was produced.

- 24 -

INVENTIVE EXAMPLE 3Sublimation of TiF₄ onto Silica

In Example 3, 10 grams of silica described previously were calcined in dry nitrogen at 400°C for three hours to remove moisture to produce a calcined silica.

5 Then, the calcined silica was cooled to room temperature and physically mixed, by vigorous stirring in the dry state, with 0.10 gram of TiF₄ to produce a TiF₄/solid oxide compound mixture. This TiF₄/solid oxide compound mixture was then calcined again under nitrogen at 400°C for another hour to redistribute the titanium tetrafluoride through sublimation to produce a treated solid oxide compound. Then, 0.2531 gram of

10 the treated solid oxide compound was charged to the reactor along with the organometal compound and the triethylaluminum solution as in Example 1. In 91.5 minutes of polymerization, it produced 14 grams of polymer powder.

CONTROL EXAMPLE 4Silica

15 In Example 4, the same silica used in Example 3, calcined at 600°C, was charged to the reactor along with the organometal compound and triethylaluminum. It produced essentially no polymer.

INVENTIVE EXAMPLES 5-6Impregnation of TiF₄ onto Alumina

20 In Example 5, 1.64 grams of TiF₄ were dissolved in 50 milliliters of dry acetonitrile (CH₃CN) to produce a metal fluoride solution. This metal fluoride solution was then impregnated onto 9.6 grams of the alumina described previously, which had been calcined in dry nitrogen at 600°C for three hours. The metal fluoride solution was evaporated to dryness under flowing dry nitrogen with gentle warming to

25 produce a dry powder. Then, the dry powder was dried further under flowing nitrogen at 200°C for one hour to produce a treated solid oxide compound. When tested for polymerization activity with the organometal compound and triethylaluminum as in the polymerization procedure discussed previously, the treated solid oxide compound produced 78 grams of polymer per gram of treated solid oxide compound per hour.

30 In Example 6, the treated solid oxide compound of Example 5 was further dried at 300°C for one hour to help further distribute the TiF₄. When tested for

- 25 -

polymerization activity, it yielded an activity of 68 grams of polymer per gram of treated solid oxide compound per hour.

CONTROL EXAMPLES 7-9

Alumina

5 In Examples 7-9, only the alumina, devoid of TiF_4 , was charged to the reactor with the organometal compound and triethylaluminum. The alumina had been calcined at 400°C , 600°C , and 800°C respectively, but as can be seen in Table 1, activities derived from the alumina without TiF_4 were slight to none.

INVENTIVE EXAMPLES 10-16

Decomposition of Ammonium Hexafluorotitanate onto Silica

10 In Example 10, silica was impregnated with an aqueous solution of ammonium hexafluorotitanate, $(\text{NH}_4)_2\text{TiF}_6$, to incipient wetness to produce an ammonium titanium fluoride-containing silica. That is, each 10 grams of silica received 20 grams of an aqueous solution containing 5 millimoles of $(\text{NH}_4)_2\text{TiF}_6$. The
15 ammonium titanium fluoride-containing silica was then dried in a vacuum oven overnight at 100°C . A ten gram sample of the ammonium titanium fluoride-containing silica was then calcined under flowing dry nitrogen at 250°C for three hours to evaporate ammonia to produce a treated solid oxide compound. When tested following the polymerization procedure used in Example 1, an activity of 156 grams of
20 polymer per gram of treated solid oxide compound per hour was observed.

 In Examples 11 and 12, the treated solid oxide compound of Example 10 was calcined further under flowing nitrogen for three hours at 350°C and 400°C respectively. Polymerization activity was found to be 79 and 155 grams of polymer per gram of treated solid oxide compound per hour, respectively.

25 In Example 13, the same procedure of Example 10 was repeated, except that 2.0 millimoles of ammonium hexafluorotitanate per gram of silica were impregnated onto the silica to produce a treated solid oxide compound. After calcining at 250°C , it yielded an activity of 107 grams of polymer per gram of treated solid oxide compound per hour. In Examples 14, 15, and 16, the treated solid oxide
30 compound was calcined at higher temperatures, 350°C , 450°C , and 550°C respectively, yielding activities of 5, 94, and 140 grams of polymer per gram of treated

- 26 -

solid oxide compound per hour.

INVENTIVE EXAMPLES 17-23

Decomposition of Ammonium Hexafluorozirconate onto Silica

In Example 17, the same procedure of Example 10 was repeated, except
5 that ammonium hexafluorozirconate ($(\text{NH}_4)_2\text{ZrF}_6$) was used instead of ammonium
hexafluorotitanate to produce an ammonium zirconium fluoride-containing silica. 0.4
millimole of $(\text{NH}_4)_2\text{ZrF}_6$ was impregnated per gram of silica. The ammonium
zirconium fluoride-containing silica then was calcined in dry nitrogen at 250° for one
hour to produce a treated solid oxide compound. The treated solid oxide compound
10 was tested for polymerization activity and yielded 666 grams of polymer per gram of
treated solid oxide compound per hour. In Examples 18 and 19, the treated solid oxide
compound was calcined at 350° and 400° . Activities of 168 and 77 grams of polymer
per gram of treated solid oxide compound were obtained respectively.

In Example 20, the amount of ammonium hexafluorozirconate was
15 increased to 1.9 millimoles impregnated per gram of silica. After being calcined at
 250° for one hour, the treated solid oxide compound yielded an activity of 236 grams
of polymer per gram of treated solid oxide compound per hour. In Examples 21, 22,
and 23, the treated solid oxide compound in Example 20 was calcined at 350° , 450° ,
and 550° , and activities of 105, 217, and 193 grams of polymer per gram of treated
20 solid oxide compound per hour respectively were observed.

INVENTIVE EXAMPLES 24-25 AND CONTROL EXAMPLE 26

Sublimation of TiF_4 onto Silica-Alumina

In Example 24, the sublimation procedure of Example 3 was repeated
except that a silica-alumina was used instead of silica. The silica-alumina had been
25 previously calcined in dry nitrogen for three hours at 500°C to remove moisture to
produce a calcined silica-alumina. The calcined silica-alumina was then cooled and
dry mixed with 11% of its own weight of titanium tetrafluoride and calcined again at
 500°C for one hour to produce a treated solid oxide compound. When tested for
polymerization activity per the polymerization procedure discussed previously, the
30 treated solid oxide compound material yielded an activity of 8148 grams of polymer
per gram of treated solid oxide compound per hour. In Example 25, the treated solid

- 27 -

oxide compound was tested again and yielded an activity of 8202 grams of polymer per gram of treated solid oxide compound per hour. These results are shown in Table 2.

The polymer of Example 24 was found to have a melt index of 0.116 grams/ 10 minutes and a high load melt index of 2.80 grams/10 minutes giving a shear ratio (HLMI/MI) of 24.2. This is considerably broader (higher) than usually obtained from polymer produced by this organometal compound when activated by other compounds, such as MAO, which generally yields a shear ratio of 16. The higher shear ratio is probably the result of a contribution to the activity from two sources of polymerization sites. The main contribution comes from the organometal compound, but another, higher molecular weight source of activity comes from the TiF_4 itself. To demonstrate this, the treated solid oxide compound was tested again in Example 26 except that the organometal compound was omitted. The treated solid oxide compound still yielded an activity of 67 grams of polymer per gram of treated solid oxide compound, indicating an inherent activity of its own. The polymer produced by the treated solid oxide compound was found to have zero melt index and zero high load melt index.

CONTROL EXAMPLES 27 AND 28

Silica-Alumina

In Examples 27 and 28, the procedure of Example 24 was repeated with the same silica-alumina, except containing no TiF_4 . After being calcined at 350°C and 600°C respectively, it yielded an activity of only 3 and 32 grams of polymer per gram of silica-alumina per hour activity indicating that the TiF_4 is necessary for higher activity.

Control Examples 29-31

Fluorided Silica-Alumina

Finally in Examples 29, 30, and 31, other fluoriding agents were also impregnated onto the silica-alumina for comparison. In Example 29, 1.75 millimoles of ammonium bifluoride were impregnated per gram of silica-alumina, followed by calcining at 500°C. In Example 30, 1.0 millimole of ammonium hexafluorosilicate per gram of silica-alumina was impregnated followed by calcining at 450°C. In Example

- 28 -

31, 1.60 millimoles of ammonium fluoroborate per gram of silica-alumina were impregnated followed by calcining at 450°C. Although these three treatments succeeded in producing good activity, the shear ratio was unfortunately narrow (lower) in each case, as shown in Table 2.

TABLE 1

Example	Test Compound	Method of TiF_4 Deposition	Solid Oxide Compound Precalcining	Final Calcination	Organometal Compound	Test Compound (g)	Polymer (g)	Run minutes	Run Activity* g/g/h
1	TiF_4	None	None	none	Yes	0.1397	16	110.0	62
2	Control -- No Solid	None	None	none	Yes	0.0000	0	61.1	0
3	TiF_4 on Silica	Sublimation	400C	400C	Yes	0.2531	14	91.5	36
4	Control - Silica	None	None	600C	Yes	0.5686	0.1	63.0	0
5	TiF_4 on Alumina	Impregnated from CH_3CN solution	600C	200C	Yes	0.1663	13	60.0	78
6	TiF_4 on Alumina	Impregnated from CH_3CN solution	600C	300C	Yes	0.0883	7	70.0	68
7	Control - Alumina	None	None	400C	Yes	0.8475	trace	57.2	0
8	Control - Alumina	None	None	600C	Yes	1.1219	21.5	104.5	11
9	Control - Alumina	None	None	800C	Yes	0.6948	2.7	30.7	8
10	TiF_4 on Silica	Decomposition of 0.5 mmol/g $(\text{NH}_4)_2\text{TiF}_6$	None	250C	Yes	0.3640	55	58.0	156
11	TiF_4 on Silica	Decomposition of 0.5 mmol/g $(\text{NH}_4)_2\text{TiF}_6$	None	350C	Yes	0.0379	3	60.0	79
12	TiF_4 on Silica	Decomposition of 0.5 mmol/g $(\text{NH}_4)_2\text{TiF}_6$	None	400C	Yes	0.2609	40.5	60.0	155
13	TiF_4 on Silica	Decomposition of 2.0 mmol/g $(\text{NH}_4)_2\text{TiF}_6$	None	250C	Yes	0.4312	46	60.0	107
14	TiF_4 on Silica	Decomposition of 2.0 mmol/g $(\text{NH}_4)_2\text{TiF}_6$	None	350C	Yes	0.2142	1	60.0	5
15	TiF_4 on Silica	Decomposition of 2.0 mmol/g $(\text{NH}_4)_2\text{TiF}_6$	None	450C	Yes	0.0961	3	35.0	54
16	TiF_4 on Silica	Decomposition of 2.0 mmol/g $(\text{NH}_4)_2\text{TiF}_6$	None	550C	Yes	0.0998	7	30.0	140
17	ZrF_4 on Silica	Decomposition of 0.4 mmol/g $(\text{NH}_4)_2\text{ZrF}_6$	None	250C	Yes	0.4025	210	47	666
18	ZrF_4 on Silica	Decomposition of 0.4 mmol/g $(\text{NH}_4)_2\text{ZrF}_6$	None	350C	Yes	0.0920	17	65.8	168
19	ZrF_4 on Silica	Decomposition of 0.4 mmol/g $(\text{NH}_4)_2\text{ZrF}_6$	None	400C	Yes	0.1980	23	91.0	77
20	ZrF_4 on Silica	Decomposition of 1.9 mmol/g $(\text{NH}_4)_2\text{ZrF}_6$	None	250C	Yes	0.7456	176	60	236
21	ZrF_4 on Silica	Decomposition of 1.9 mmol/g $(\text{NH}_4)_2\text{ZrF}_6$	None	350C	Yes	0.1715	9	30	105
22	ZrF_4 on Silica	Decomposition of 1.9 mmol/g $(\text{NH}_4)_2\text{ZrF}_6$	None	450C	Yes	0.6411	139	60	217
23	ZrF_4 on Silica	Decomposition of 1.9 mmol/g $(\text{NH}_4)_2\text{ZrF}_6$	None	550C	Yes	0.6909	133	60	193

*Activity: (grams of polymer/grams of test compound)/hr

TABLE 2

Example	Test Compound	Method of TiF ₄ Deposition	Solid Oxide Compound Precalcining	Final Calcination	Organometal Compound	Test Compound (g)	Polymer (g)	Run minutes	Activity* g/g/h	MI (g/10min)	HLMI (g/10min)	HLMI/MI
24	TiF ₄ on Silica-Alumina	Sublimation	500C	500C	Yes	0.0135	110	60.0	8148	0.116	2.8	24.2
25	TiF ₄ on Silica-Alumina	Sublimation	500C	500C	Yes	0.1902	39	1.5	8202			
26	TiF ₄ on Silica-Alumina	Sublimation	500C	500C	No	0.0858	3	31.4	67	0	0	
27	Control -- Silica-alumina	None	None	350C	Yes	0.3102	1.1	83.5	3			
28	Control -- Silica-alumina	None	None	700C	Yes	0.3912	8.3	40.0	32			
29	Control -- F-Silica-Alumina	None (NH ₄ HF ₂)	None	500C	Yes	0.0569	273	60.0	4798	0.22	3.89	17.6
30	Control -- F-Silica-Alumina	None	None	450C	Yes	0.1309	338	30.0	5164	0.24	4.43	18.5
31	Control -- F-Silica-Alumina	None (NH ₄ BF ₄)	None	450C	Yes	0.1368	291	30.0	4254	0.25	4.10	16.4

*Activity - (grams of polymer/grams of test compound)/hour

- 31 -

While this invention has been described in detail for the purpose of illustration, it is not intended to be limited thereby but is intended to cover all changes and modifications within the spirit and scope thereof.

CLAIMS

1. A process to produce a catalyst composition, said process comprising contacting at least one organometal compound, at least one organoaluminum compound, and at least one solid,
- 5 wherein said organometal compound has the following general formula:
- $$(X^1)(X^2)(X^3)(X^4)M^1$$
- wherein M^1 is titanium, zirconium, or hafnium;
- wherein (X^1) is independently a cyclopentadienyl, an indenyl, a fluorenyl, a substituted cyclopentadienyl, a substituted indenyl, or a substituted fluorenyl;
- 10 wherein each substituent on said substituted cyclopentadienyl, said substituted indenyl, and said substituted fluorenyl of (X^1) is an aliphatic group, a cyclic group, a combination of an aliphatic and a cyclic group, a silyl group, an alkyl halide group, a halide, an organometallic group, a phosphorus group, a nitrogen group, silicon, phosphorus, boron, germanium, or hydrogen;
- 15 wherein at least one substituent on (X^1) can be a bridging group which connects (X^1) and (X^2) ;
- wherein (X^3) and (X^4) are independently a halide, an aliphatic group, a substituted aliphatic group, a cyclic group, a substituted cyclic group, a combination of an aliphatic group and a cyclic group, a combination of a substituted aliphatic group and a
- 20 cyclic group, a combination of an aliphatic group and a substituted cyclic group, a combination of a substituted aliphatic group and a substituted cyclic group, an amido group, a substituted amido group, a phosphido group, a substituted phosphido group, an alkyloxy group, a substituted alkyloxy group, an aryloxy group, a substituted aryloxy group, an organometallic group, or a substituted organometallic group;
- 25 wherein (X^2) is a cyclopentadienyl, an indenyl, a fluorenyl, a substituted cyclopentadienyl, a substituted indenyl, a substituted fluorenyl, a halide, an aliphatic group, a substituted aliphatic group, a cyclic group, a substituted cyclic group, a combination of an aliphatic group and a cyclic group, a combination of a substituted aliphatic group and a cyclic group, a combination of an aliphatic group and a substituted
- 30 cyclic group, a combination of a substituted aliphatic group and a substituted cyclic group, an amido group, a substituted amido group, a phosphido group, a substituted


- 33 -

phosphido group, an alkyloxy group, a substituted alkyloxy group, an aryloxy group, a substituted aryloxy group, an organometallic group, or a substituted organometallic group;

5 wherein each substituent on (X²) is an aliphatic group, a cyclic group, a combination of an aliphatic group and a cyclic group, a silyl group, an alkyl halide group, a halide, an organometallic group, a phosphorus group, a nitrogen group, silicon, phosphorus, boron, germanium, or hydrogen;

wherein at least one substituent on (X²) can be a bridging group which connects (X¹) and (X²);

10 wherein said organoaluminum compound has the following general formula:



wherein (X⁵) is a hydrocarbyl having from 1 to about 20 carbon atoms;

wherein (X⁶) is a halide, hydride, or alkoxide; and

15 wherein "n" is a number from 1 to 3 inclusive;

wherein said solid is titanium tetrafluoride or zirconium tetrafluoride, and a treated solid oxide compound;

20 wherein said treated solid oxide compound comprises a solid oxide compound having titanium tetrafluoride or zirconium tetrafluoride deposited on the surface of said solid oxide compound; and

wherein said solid oxide comprises oxygen and at least one group IIA-VIIIA or IB-VIIB element of the Periodic Table of Elements, including lanthanides and actinides.

2. A process according to claim 1, wherein said treated solid oxide compound is produced by a process comprising:

25 1) calcining said solid oxide compound to produce a calcined solid oxide compound;

2) dissolving titanium tetrafluoride or zirconium tetrafluoride in any aprotic polar solvent to produce a metal fluoride solution;

30 3) contacting said metal fluoride solution with said calcined solid oxide compound to produce a metal fluoride/solid oxide compound mixture; and

- 34 -

4) evaporating said aprotic polar solvent from said metal fluoride/solid oxide compound mixture to produce said treated solid oxide compound.

3. A process according to claim 2, which includes drying said treated solid oxide compound to remove substantially all of said aprotic polar solvent.

5 4. A process according to claim 1, wherein said treated solid oxide compound is produced by a process comprising:

(1) calcining a solid oxide compound to produce a calcined solid oxide compound;

10 (2) dry mixing said calcined solid oxide compound and titanium tetrafluoride to produce a titanium tetrafluoride/solid oxide compound mixture; and

(3) calcining said titanium tetrafluoride/solid oxide compound mixture at a temperature in a range of about 250°C to about 500°C for about 1 minute to about 10 hours to produce said treated solid oxide compound.

5. A process according to claim 1, wherein said treated solid oxide compound
15 is produced by a process comprising:

1) impregnating a solid oxide compound with a solution comprising ammonium hexafluorotitanate ((NH₄)₂TiF₆) or ammonium hexafluorozirconate ((NH₄)₂ZrF₆) and a solvent to produce an ammonium metal fluoride-containing solid oxide compound;

20 2) evaporating said solvent from said ammonium metal fluoride-containing solid oxide compound; and

3) calcining said ammonium metal fluoride-containing solid oxide compound at sufficiently high temperature to decompose said ammonium hexafluorotitanate or ammonium hexafluorozirconate to titanium tetrafluoride or zirconium tetrafluoride, thereby, releasing ammonium fluoride (NH₄F) in the process to
25 produce said treated solid oxide compound.

6. A process to produce a catalyst composition, said process comprising:

(1) calcining silica-alumina at a temperature in a range of about 300 to about 700°C for about 1 hour to about 50 hours to produce a calcined silica-alumina;

30 (2) cooling said calcined silica-alumina and mixing sufficient titanium tetrafluoride to yield about 0.1 to about 5 millimoles of titanium tetrafluoride per gram of

- 35 -

calcined silica-alumina to produce a titanium tetrafluoride-containing silica-alumina; and

(3) calcining the titanium tetrafluoride-containing silica-alumina at a temperature in a range of about 300 to about 500°C for about 1 hour to about 5 hours to produce a treated solid oxide compound; and

5 (4) contacting an organometal compound, an organoaluminum compound, and the treated solid oxide compound to produce the catalyst composition.

7. A process according to claim 6, wherein said process consists essentially of steps (1), (2), (3), and (4).

8. A process according to claim 6, said process comprising:

10 (1) calcining silica-alumina in dry nitrogen at 500°C for about 3 hours to produce a calcined silica-alumina;

(2) cooling said calcined silica-alumina and mixing sufficient titanium tetrafluoride to yield 0.5 to 3 millimoles of titanium tetrafluoride per gram of calcined silica-alumina to produce a titanium tetrafluoride-containing silica-alumina; and

15 (3) calcining the titanium tetrafluoride-containing silica-alumina at 500°C for about 1 hour to produce a treated solid oxide compound; and

(4) contacting bis(n-butylcyclopentadienyl) zirconium dichloride, triethylaluminum, and said treated solid oxide compound to produce the catalyst composition.

20 9. A process according to claim 8, wherein said process consists essentially of steps (1), (2), (3), and (4).

10. A process according to claim 1, wherein the catalyst composition thus-produced has an activity greater than 50 grams of polymer per gram of solid per hour under slurry polymerization conditions, using isobutane as a diluent, with a
25 polymerization temperature of 90°C, and an ethylene pressure of 3.89 MPa (550 psig).

11. A process according to claim 10, wherein said catalyst composition has an activity greater than 100 grams of polymer per gram of solid per hour under slurry polymerization conditions, using isobutane as a diluent, with a polymerization temperature of 90°C, and an ethylene pressure of 3.89 MPa (550 psig).

30 12. A process according to claim 1, wherein a weight ratio of said organoaluminum compound to said solid in said catalyst composition ranges from about

- 36 -

3:1 to about 1:100.

13. A process according to claim 12, wherein said weight ratio of said organoaluminum compound to said solid in said catalyst composition ranges from 1:1 to 1:50.

5 14. A process according to claim 1, wherein a weight ratio of said solid to said organometal compound in said catalyst composition ranges from about 1000:1 to about 10:1.

15. A process according to claim 14, wherein said weight ratio of said solid to said organometal compound in said catalyst composition ranges from 250:1
10 to 20:1.

16. A process according to claim 1, wherein the catalyst composition thus-produced, subsequent to contacting said organometal compound, said solid, and said organoaluminum compound, consists essentially of organometal compound and said solid.

15 17. A process according to claim 1, wherein the catalyst composition thus-produced, subsequent to contacting said organometal compound, said solid, and said organoaluminum compound consists essentially of organometal compound, said solid, and said organoaluminum compound.

18. A polymerization process comprising contacting at least one monomer and
20 a catalyst composition produced by a process according to claim 1, under polymerization conditions to produce a polymer.


19. A process according to claim 18, wherein said polymerization conditions comprise slurry polymerization conditions.

20. A process according to claim 19, wherein said contacting is conducted in a
25 loop reaction zone.

21. A process according to claim 20, wherein said contacting is conducted in the presence of a diluent that comprises, in major part, isobutane.

22. A process according to claim 18, wherein at least one monomer is ethylene.

30 23. A process according to claim 18, wherein at least one monomer comprises ethylene and an aliphatic 1-olefin having 3 to 20 carbon atoms per molecule.

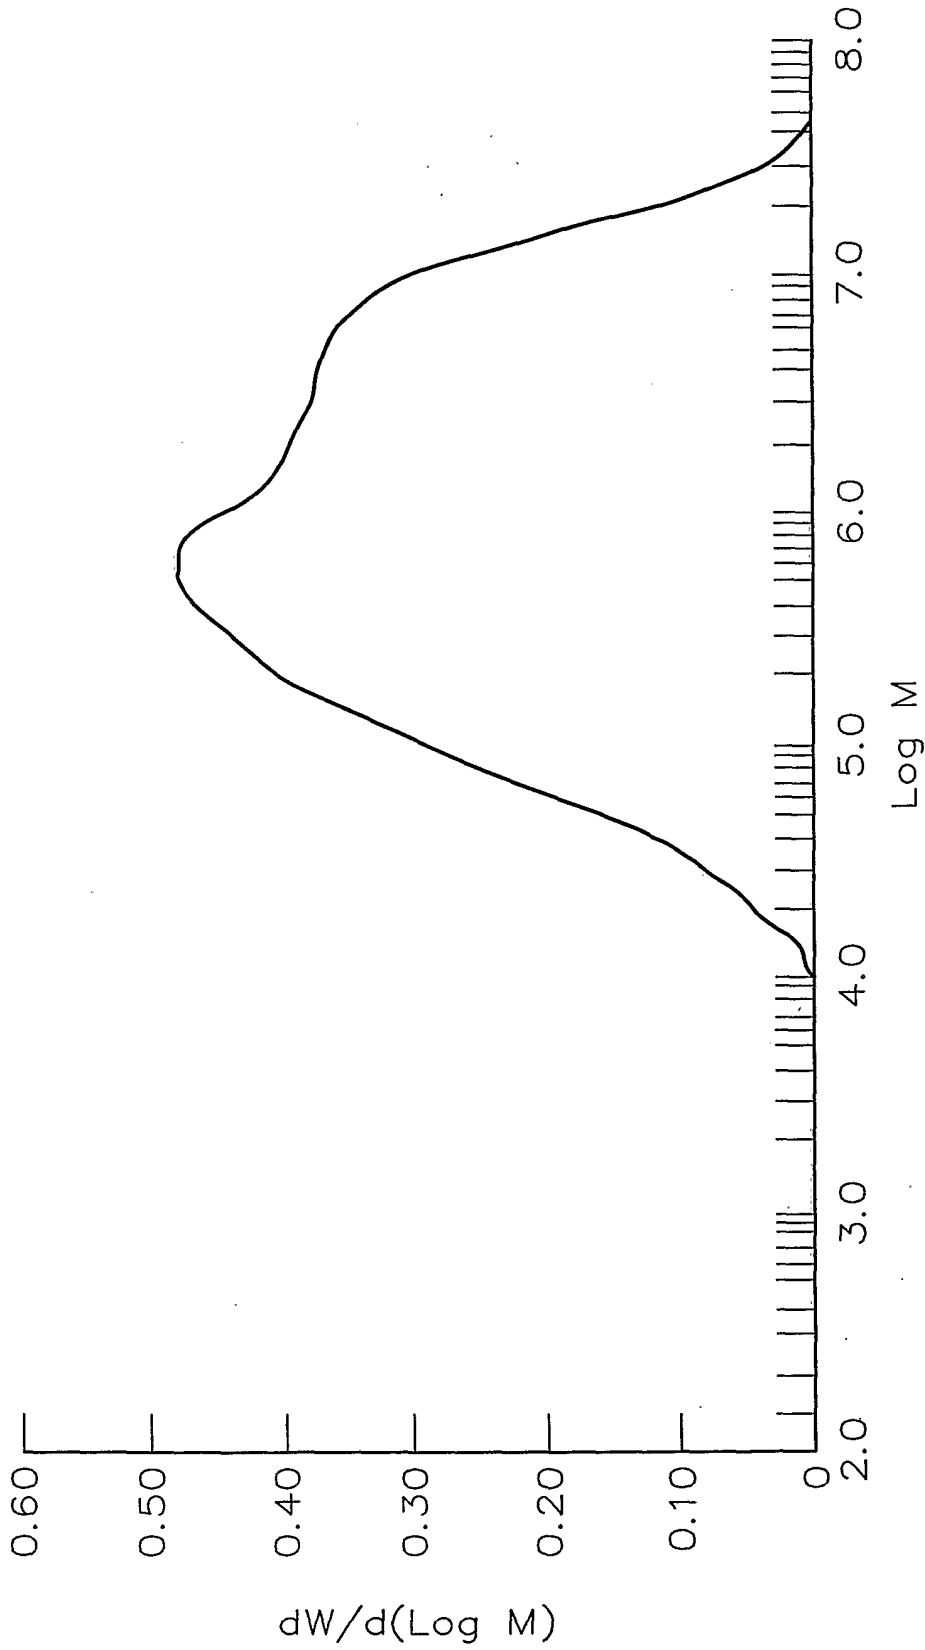

FIGURE

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/04380

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : Please See Extra Sheet.

US CL : 502/113, 129, 227; 526/64, 160, 943

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 502/113, 129, 227; 526/64, 160, 943

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,064,796 A (SPEC A) 12 November 1991, whole document.	1-23

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

02 APRIL 2001

Date of mailing of the international search report

03 MAY 2001

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

B. Handw
JAMES PASTERCZYK

Telephone No. (703) 308-3497

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/04380

A. CLASSIFICATION OF SUBJECT MATTER:

IPC (7):

B01J 31/00, 37/00, 27/135; C08F 4/02, 4/60, 4/44, 2/00; C08G 85/00