




(22) Date de dépôt/Filing Date: 2011/05/27
 (41) Mise à la disp. pub./Open to Public Insp.: 2011/12/04
 (45) Date de délivrance/Issue Date: 2013/11/19
 (30) Priorité/Priority: 2010/06/04 (US61/351,439)

(51) Cl.Int./Int.Cl. *E04B 1/68* (2006.01)
 (72) Inventeurs/Inventors:
 DOLBY, JEFFREY SCOTT, US;
 MCKENNA, GREGORY BLAKE, US
 (73) Propriétaire/Owner:
 ALCOA INC., US
 (74) Agent: BERESKIN & PARR LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : SUPPORT D'ENDOS DE JOINT SCELLANT
 (54) Title: SEALANT JOINT BACKER SUPPORT

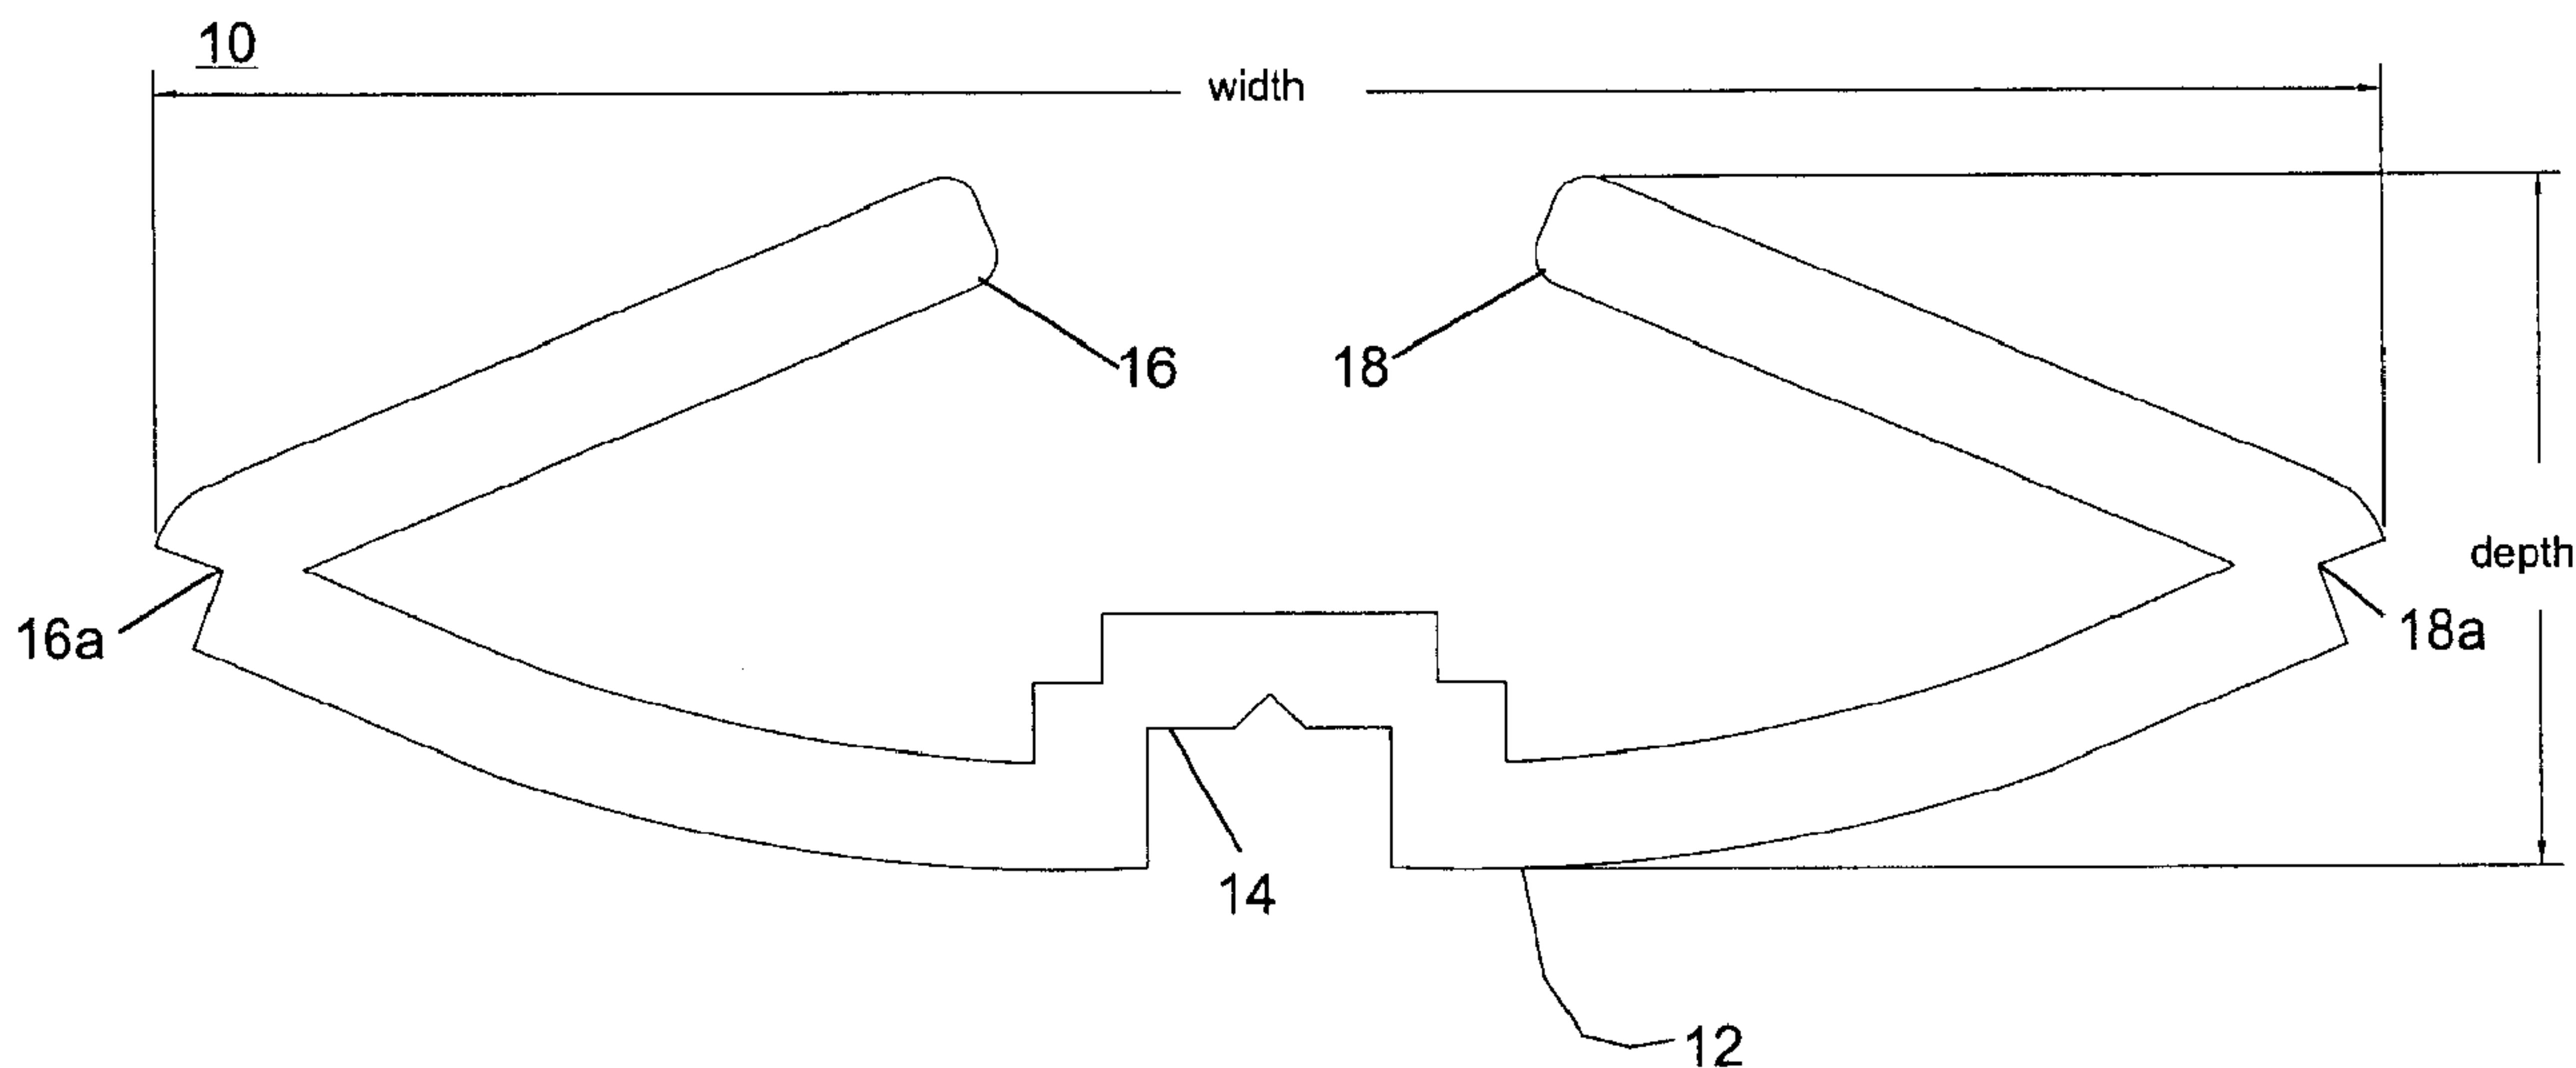

(57) Abrégé/Abstract:

The present invention relates to a sealant joint backer support that can be used to prevent three-sided adhesion at a joint when an exterior weather seal is applied. In an embodiment, a bond breaker backer support of the present invention includes a resiliently flexible front face having a groove, wherein the groove is configured for adjusting the bond breaker backer support after installation; and a pair of resiliently flexible legs extending, respectively, from a first end and a second end of the flexible front face.



SEALANT JOINT BACKER SUPPORT

ABSTRACT

The present invention relates to a sealant joint backer support that can be used to prevent three-sided adhesion at a joint when an exterior weather seal is applied. In an embodiment, a bond breaker backer support of the present invention includes a resiliently flexible front face having a groove, wherein the groove is configured for adjusting the bond breaker backer support after installation; and a pair of resiliently flexible legs extending, respectively, from a first end and a second end of the flexible front face.

TITLE**SEALANT JOINT BACKER SUPPORT**

[001] Blank.

BACKGROUND

[002] A bond breaker serves to ensure that the bottom of a sealant is bond free, thereby allowing the sealant to adhere only to the sides of a joint. The type of bond breaker used for a given application will vary depending on the situation. The most common type of bond breaker is a soft rod that can be squeezed to fit inside the joint cavity. This rod serves as a bond breaker as well as a backing material. To serve as a bond breaker the rod must be made of a material, or have a surface coating of a material, to which the sealant will not adhere or have a surface so weak that it will break apart as the sealant moves. Thus, the bond breaker provides a back side to the joint that will not hinder movement. Typical bond breakers include polyethylene adhesive tape (or any strip of polyethylene), Teflon (most often in the form of tape), waxed rope, waxed paper, rolled paper, sand, weak polyurethane foam, polyethylene foam, a butyl rubber foam with a treated surface, wax pencil, grease, light petroleum jelly, oil, and anything else that satisfies the requirement that the material provides a back side to the sealant such that the sealant will not adhere to it.

SUMMARY

[003] A sealant joint bond breaker is disclosed herein.

[004] According to aspects illustrated herein, in an embodiment there is disclosed a bond breaker backer support that includes a resiliently flexible front face having a groove, wherein the groove is configured for adjusting the bond breaker backer support after installation; and a pair of resiliently flexible legs extending, respectively, from a first end of the flexible front face and a second end of the flexible front face.

[005] According to aspects illustrated herein, in an embodiment there is disclosed an assembly that includes at least one retainer and at least one bond breaker backer support of the present invention, wherein the retainer fixes glass lites of an insulating glass unit (IGU) in place on both sides of a mullion (i.e., support two glass lites simultaneously) and wherein the bond breaker backer support provides a back side to a sealant such that the sealant will not adhere to the bond breaker backer support.

[006] According to aspects illustrated herein, in an embodiment there is disclosed a curtain wall glazing system that includes at least two insulating glass units; at least one retainer for fixing glass lites of the insulating glass units in place on both sides of a mullion; and at least one bond breaker backer support for providing a back side to a sealant such that the sealant will not adhere to the bond breaker backer support.

BRIEF DESCRIPTION OF THE DRAWINGS

[007] The present invention will be further explained with reference to the attached drawings, wherein like structures are referred to by like numerals throughout the several views. The drawings shown are not necessarily to scale, with emphasis instead generally being placed upon illustrating the principles of the present invention.

[008] **FIG. 1A** illustrates an orthographic view of an embodiment of a bond breaker backer support of the present invention for use at a sealant joint;

[009] **FIG. 1B** illustrates a perspective view of the bond breaker backer support of **FIG. 1A**;

[0010] **FIG. 1C** illustrates a partial horizontal cut-away view of a toggle glazed curtain wall system according to an embodiment of the present invention, showing installation of a bond breaker backer support of the present invention at a sealant joint.

[0011] While the above-identified drawings set forth presently disclosed embodiments, other embodiments are also contemplated, as noted in the discussion. This disclosure presents illustrative embodiments by way of representation. Numerous other modifications and embodiments can be devised by those skilled in the art.

DETAILED DESCRIPTION

[0012] In an embodiment, a bond breaker backer support of the present invention is sufficiently designed and configured to create a backstop to allow proper sealant tooling at a sealant joint. In an embodiment, a bond breaker backer support of the present invention is sufficiently designed and configured to allow proper sealant wetting of sealant joint surfaces. In an embodiment, a bond breaker backer support of the present invention is sufficiently

designed and configured to insulate the underside of a sealant at a sealant joint. In an embodiment, a bond breaker backer support of the present invention is sufficiently designed and configured to yield proper bond breaker between various components at a sealant joint. In an embodiment, a bond breaker backer support of the present invention is sufficiently designed and configured to prevent a sealant from bonding to various components at a sealant joint. In an embodiment, a bond breaker backer support of the present invention is sufficiently designed and configured to facilitate independent movement between various components of a sealant joint that would otherwise behave monolithically. In an embodiment, a bond breaker backer support of the present invention is sufficiently designed and configured to provide a back side to a joint that will not hinder movement. In an embodiment, a bond breaker backer support of the present invention can be used in the following applications, including, but not limited to, Glazing Operations, Window & Door Applications, Expansion Joints, Curtain Wall Joints, Partitions, Log Construction, Pavement Joints and Repairs, Precast Units & Copings.

[0013] A typical curtain wall includes a mullion structure in which mullions are fixed to a structural body of building, for example, such as concrete floor slab, steel framed truss or the like, transoms are stretched between adjacent mullions respectively, and panel members are mounted to a space defined by the adjacent two mullions and the transoms stretched therebetween. Such panel members are most often panes of glass, and often double pane glass sections, but other paneled building materials such as aluminum, granite, slate, or concrete are also utilized. Typically, once two adjoining panel members are secured in place, a backer rod is inserted, then joint sealant is applied between the panel members to seal against moisture and air penetration, to provide additional strength and stability to the panel members, and to provide a cushion allowing some movement by the panel members due to wind load, foundation settlement, earthquakes, hurricanes, and the like.

[0014] Some curtain wall systems utilize retainers or toggles to mechanically fasten the panel members to the mullion structure. Conventionally, the retainers intermittently interfere with the standard bond breaker backer rod application, and the backer rod must typically be cut into 6 inch to 9 inch long pieces to be located in between the retainers to back-up the exterior weather seals. Due to the backer rod being discontinuous, a gap is left at the retainers. The retainers then need to be covered by a different bond breaker, such as bond breaker tape, to prevent three-sided adhesion when the exterior weather seal is applied. Also,

due to the backer rod being discontinuous, the ends of each backer rod piece can cause an uneven look in the exterior weather seal after the sealant has cured.

[0015] While illustrative embodiments of the present invention described herein show a toggle glazed curtain wall system that includes panel members with glass pane infills, it should be understood that a sealant joint bond breaker of the present invention can be used in other applications where the panel members include other infills made up of nearly any exterior building element, including, but not limited to, fabric, metals (such as aluminum, stainless steel, and composite metals), composite materials (such as fiber-reinforced plastic), ceramics (such as travertine), and masonry (such as calcium silicate, granite, marble, slate, travertine, limestone, concrete and brick).

[0016] As illustrated in **FIG. 1A** in conjunction with **FIG. 1B**, an embodiment of a bond breaker backer support **10** of the present invention includes a resiliently flexible front face **12** having a groove **14** configured for adjusting the bond breaker backer support **10** after installation, and a pair of resiliently flexible legs **16** and **18** extending, respectively, from a first end **16a** and a second end **18a** of the flexible front face **12**. In an embodiment, the first end **16a** and the second end **18a** are flexible hinges. The resiliently flexible legs **16** and **18** are configured for pushing the bond breaker backer support **10** forward after installation. In an embodiment, the flexible legs **16** and **18** are pushed forward after installation so that the flexible front face **12** becomes approximately flush with an edge of the outer glass lites of the insulating glass units. In an embodiment, the flexible front face **12** is comprised of a bond breaker non-stick material to ensure that only the two intended sides of the joint are adhered and prevent undesirable three-sided adhesion. In an embodiment, a pre-applied bond breaker top coat is applied to the material making up the flexible front face **12** to ensure that only the two intended sides of the joint are adhered and prevent undesirable three-sided adhesion. In an embodiment, the flexible front face **12** is fabricated from, or includes a top coat of, a polyethylene or similar type plastic. The width of the bond breaker backer support **10** may vary based on a given application. In an embodiment, the width of the bond breaker backer support **10** is between about 0.800 inches and about 1.000 inches. The depth of the bond breaker backer support **10** may vary based on a given application. In an embodiment, the depth of the bond breaker backer support **10** is between about 0.250 inches and about 0.350 inches. The length of the bond breaker backer support **10** may vary based on a given application. In an embodiment, the length of the bond breaker backer support **10** is about equal to the length of the insulating glass units, and is able to run multiple lites.

[0017] In an embodiment, at least a portion of the bond breaker backer support **10** is fabricated from a material that is flexible and corrosion-resistant, such as, for example, metals, elastomers, synthetic rubbers and polymers, and can be manufactured from a single material or multiple materials. In an embodiment, at least a portion of the bond breaker backer support **10** is fabricated from a polymer material, such as a homopolymer or a copolymer. In an embodiment, the polymer is polyethylene. In an embodiment, the polymer is polyurethane. In an embodiment, the polymer is a polyamide copolymer. In an embodiment, the polymer is a copolymer derived from acrylonitrile, butadiene, and styrene, for example, acrylonitrile butadiene styrene (ABS). In an embodiment, the polymer is a polyvinyl chloride homopolymer.

[0018] FIG. 1C illustrates a partial horizontal cut-away view of a toggle glazed curtain wall system according to an embodiment of the present invention, including a bond breaker backer support **10** of the present invention at a sealant joint **25**. In an embodiment, during installation, the bond breaker backer support **10** is manually collapsed by squeezing the flexible front face **12** so that the first end **16a** and the second end **18a** flex and the flexible legs **16** and **18** fold towards each other, as illustrated in FIG. 1C. In the collapsed or folded position, the bond breaker backer support **10** is positioned through space "s" provided between two insulating glass units **100**, slid into place over a fastener **20** that maintains a retainer **30**, and then the bond breaker backer support **10** is expanded from the collapsed position. In an embodiment, the bond breaker backer support **10** rebounds back to its initial shape once it is in the installed position. In an embodiment, the retainer **30** is sufficiently designed to fix glass lites of an insulating glass unit (IGU) in place on both sides of a mullion. In an embodiment, the bond breaker backer support **10** covers the entire head of the fastener **20**. The bond breaker backer support **10** can be adjusted after installation with a flat head screw driver at groove **14** to force the face **12** of the bond breaker backer support **10** towards the edge of the glass creating a continuous back-up for an exterior weather seal. In an embodiment, the bond breaker back support **10** can be cut to fit and butt spliced as needed. As illustrated in FIG. 1C, the flexible legs **16** and **18** of the bond breaker backer support **10** press up against the fastener **20**. The bond breaker backer support **10** is sufficiently designed to be stiff enough to span the space "s" between the retainers **30** and still provide adequate support for the weather seal application.

[0019] While illustrative embodiments of the invention are disclosed herein, it will be appreciated that numerous modifications and other embodiments may be devised by those

skilled in the art. Therefore, it will be understood that the appended claims are intended to cover all such modifications and embodiments that come within the spirit and scope of the present invention.

CLAIMS

What is claimed is:

1. A bond breaker backer support comprising:
a resiliently flexible front face having a groove,
wherein the groove is configured for adjusting the bond breaker backer support after installation; and
a pair of resiliently flexible legs extending, respectively, from a first end of the flexible front face and a second end of the flexible front face.
2. The bond breaker backer support of claim 1 wherein the first end of the flexible front face and the second end of the flexible front face are flexible hinges.
3. The bond breaker backer support of claim 1 wherein the flexible front face is fabricated from a bond breaker non-stick material.
4. The bond breaker backer support of claim 1 wherein the flexible front face is fabricated from, or includes a top coat of a polyethylene.
5. The bond breaker backer support of claim 1 having a width of between about 0.800 inches and about 1.000 inches.
6. The bond breaker backer support of claim 1 having a depth of about 0.250 inches and about 0.350 inches.
7. The bond breaker backer support of claim 1 fabricated from a material that is flexible and corrosion-resistant.
8. The bond breaker backer support of claim 1 fabricated from a material selected from the group consisting of metals, elastomers, synthetic rubbers and polymers.
9. The bond breaker backer support of claim 1 fabricated from a single material.
10. The bond breaker backer support of claim 1 fabricated from multiple materials.
11. The bond breaker backer support of claim 1 wherein the groove runs along an entire length of the resiliently flexible front face.

12. An assembly comprising:
 - at least one retainer; and
 - at least one bond breaker backer support comprising:
 - a resiliently flexible front face having a groove; and
 - a pair of resiliently flexible legs extending, respectively, from a first end of the flexible front face and a second end of the flexible front face,
 - wherein the groove is configured for adjusting the bond breaker backer support after installation.
13. The assembly of claim 12 wherein the retainer is sufficiently designed to fix glass lites of an insulating glass unit (IGU) in place on both sides of a mullion, and wherein the bond breaker backer support is sufficiently designed to be positioned over the retainer to provide a continuous back-up for an exterior weather seal.
14. The assembly of claim 12 further comprising a fastener for maintaining the retainer.
15. The assembly of claim 12 wherein the flexible front face of the bond breaker backer support is fabricated from a bond breaker non-stick material.
16. The assembly of claim 12 wherein the bond breaker backer support has a width of between about 0.800 inches and about 1.000 inches.
17. The assembly of claim 12 wherein the bond breaker backer support has a depth of about 0.250 inches and about 0.350 inches.
18. The assembly of claim 12 wherein the bond breaker backer support is fabricated from a material that is flexible and corrosion-resistant.
19. The assembly of claim 12 wherein the bond breaker backer support is fabricated from a material selected from the group consisting of metals, elastomers, synthetic rubbers and polymers.
20. The assembly of claim 12 wherein the groove of the bond breaker backer support runs along an entire length of the resiliently flexible front face.

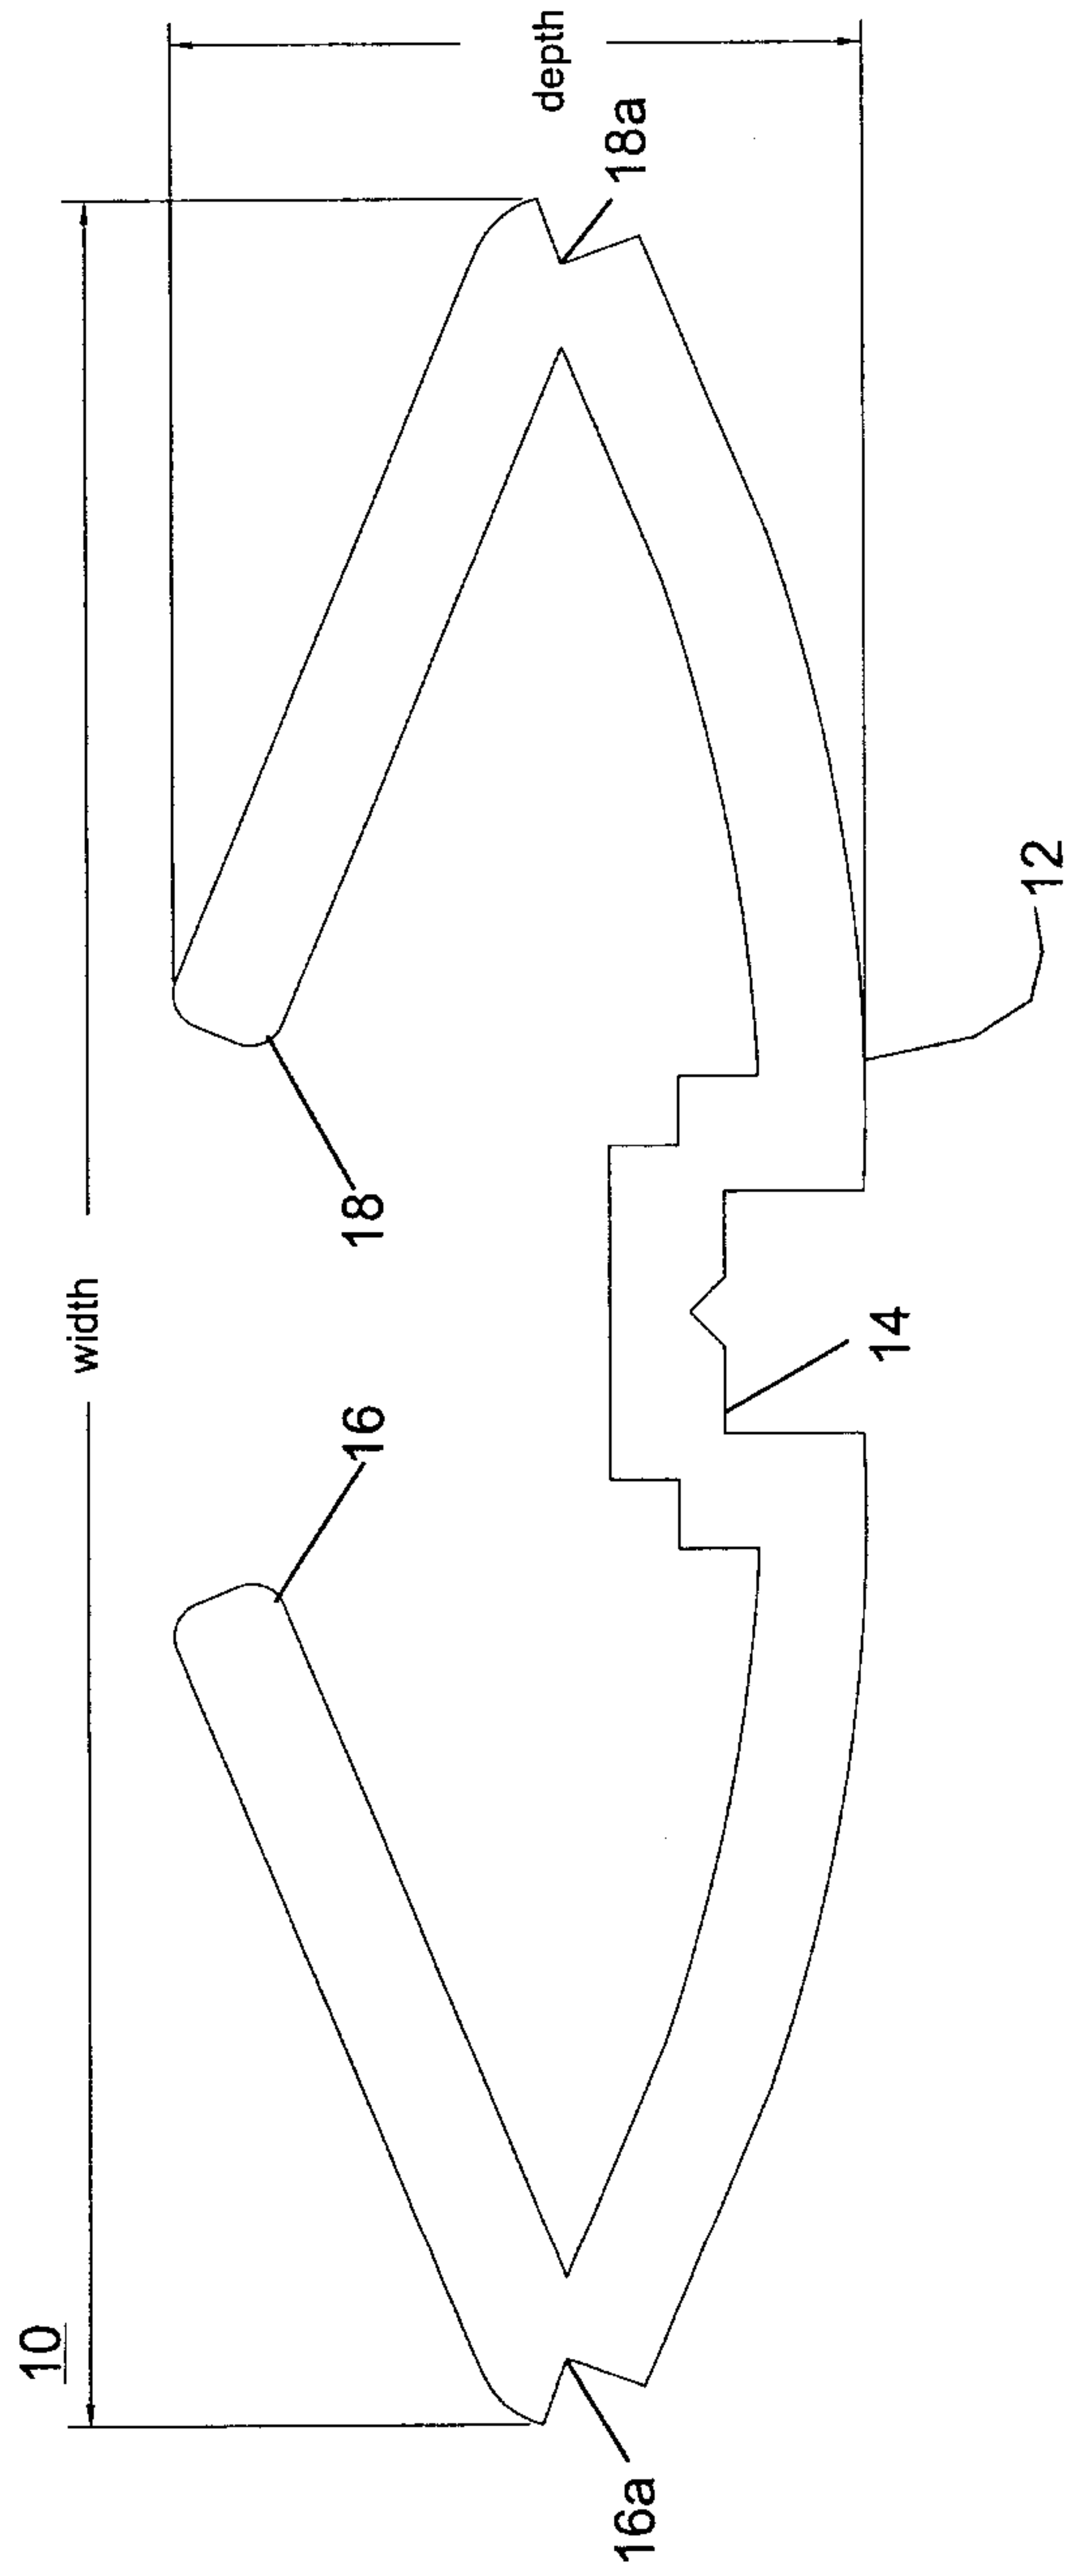


FIG. 1A

10

