




(86) Date de dépôt PCT/PCT Filing Date: 2006/07/27
 (87) Date publication PCT/PCT Publication Date: 2007/02/22
 (85) Entrée phase nationale/National Entry: 2008/01/21
 (86) N° demande PCT/PCT Application No.: US 2006/029267
 (87) N° publication PCT/PCT Publication No.: 2007/021487
 (30) Priorités/Priorities: 2005/08/11 (US11/201,799);
 2005/08/11 (US11/201,512)

(51) Cl.Int./Int.Cl. *C07C 51/44* (2006.01),
C07C 51/47 (2006.01), *C07C 63/26* (2006.01)
 (71) Demandeur/Applicant:
 EASTMAN CHEMICAL COMPANY, US
 (72) Inventeurs/Inventors:
 LIN, ROBERT, US;
 GIBSON, PHILIP EDWARD, US;
 PARKER, KENNY RANDOLPH, US
 (74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : PROCÉDE D'ÉLIMINATION D'ACIDE BENZOÏQUE PROVENANT D'UN FLUX DE PURGE D'UN OXYDANT
 (54) Title: PROCESS FOR REMOVAL OF BENZOIC ACID FROM AN OXIDIZER PURGE STREAM

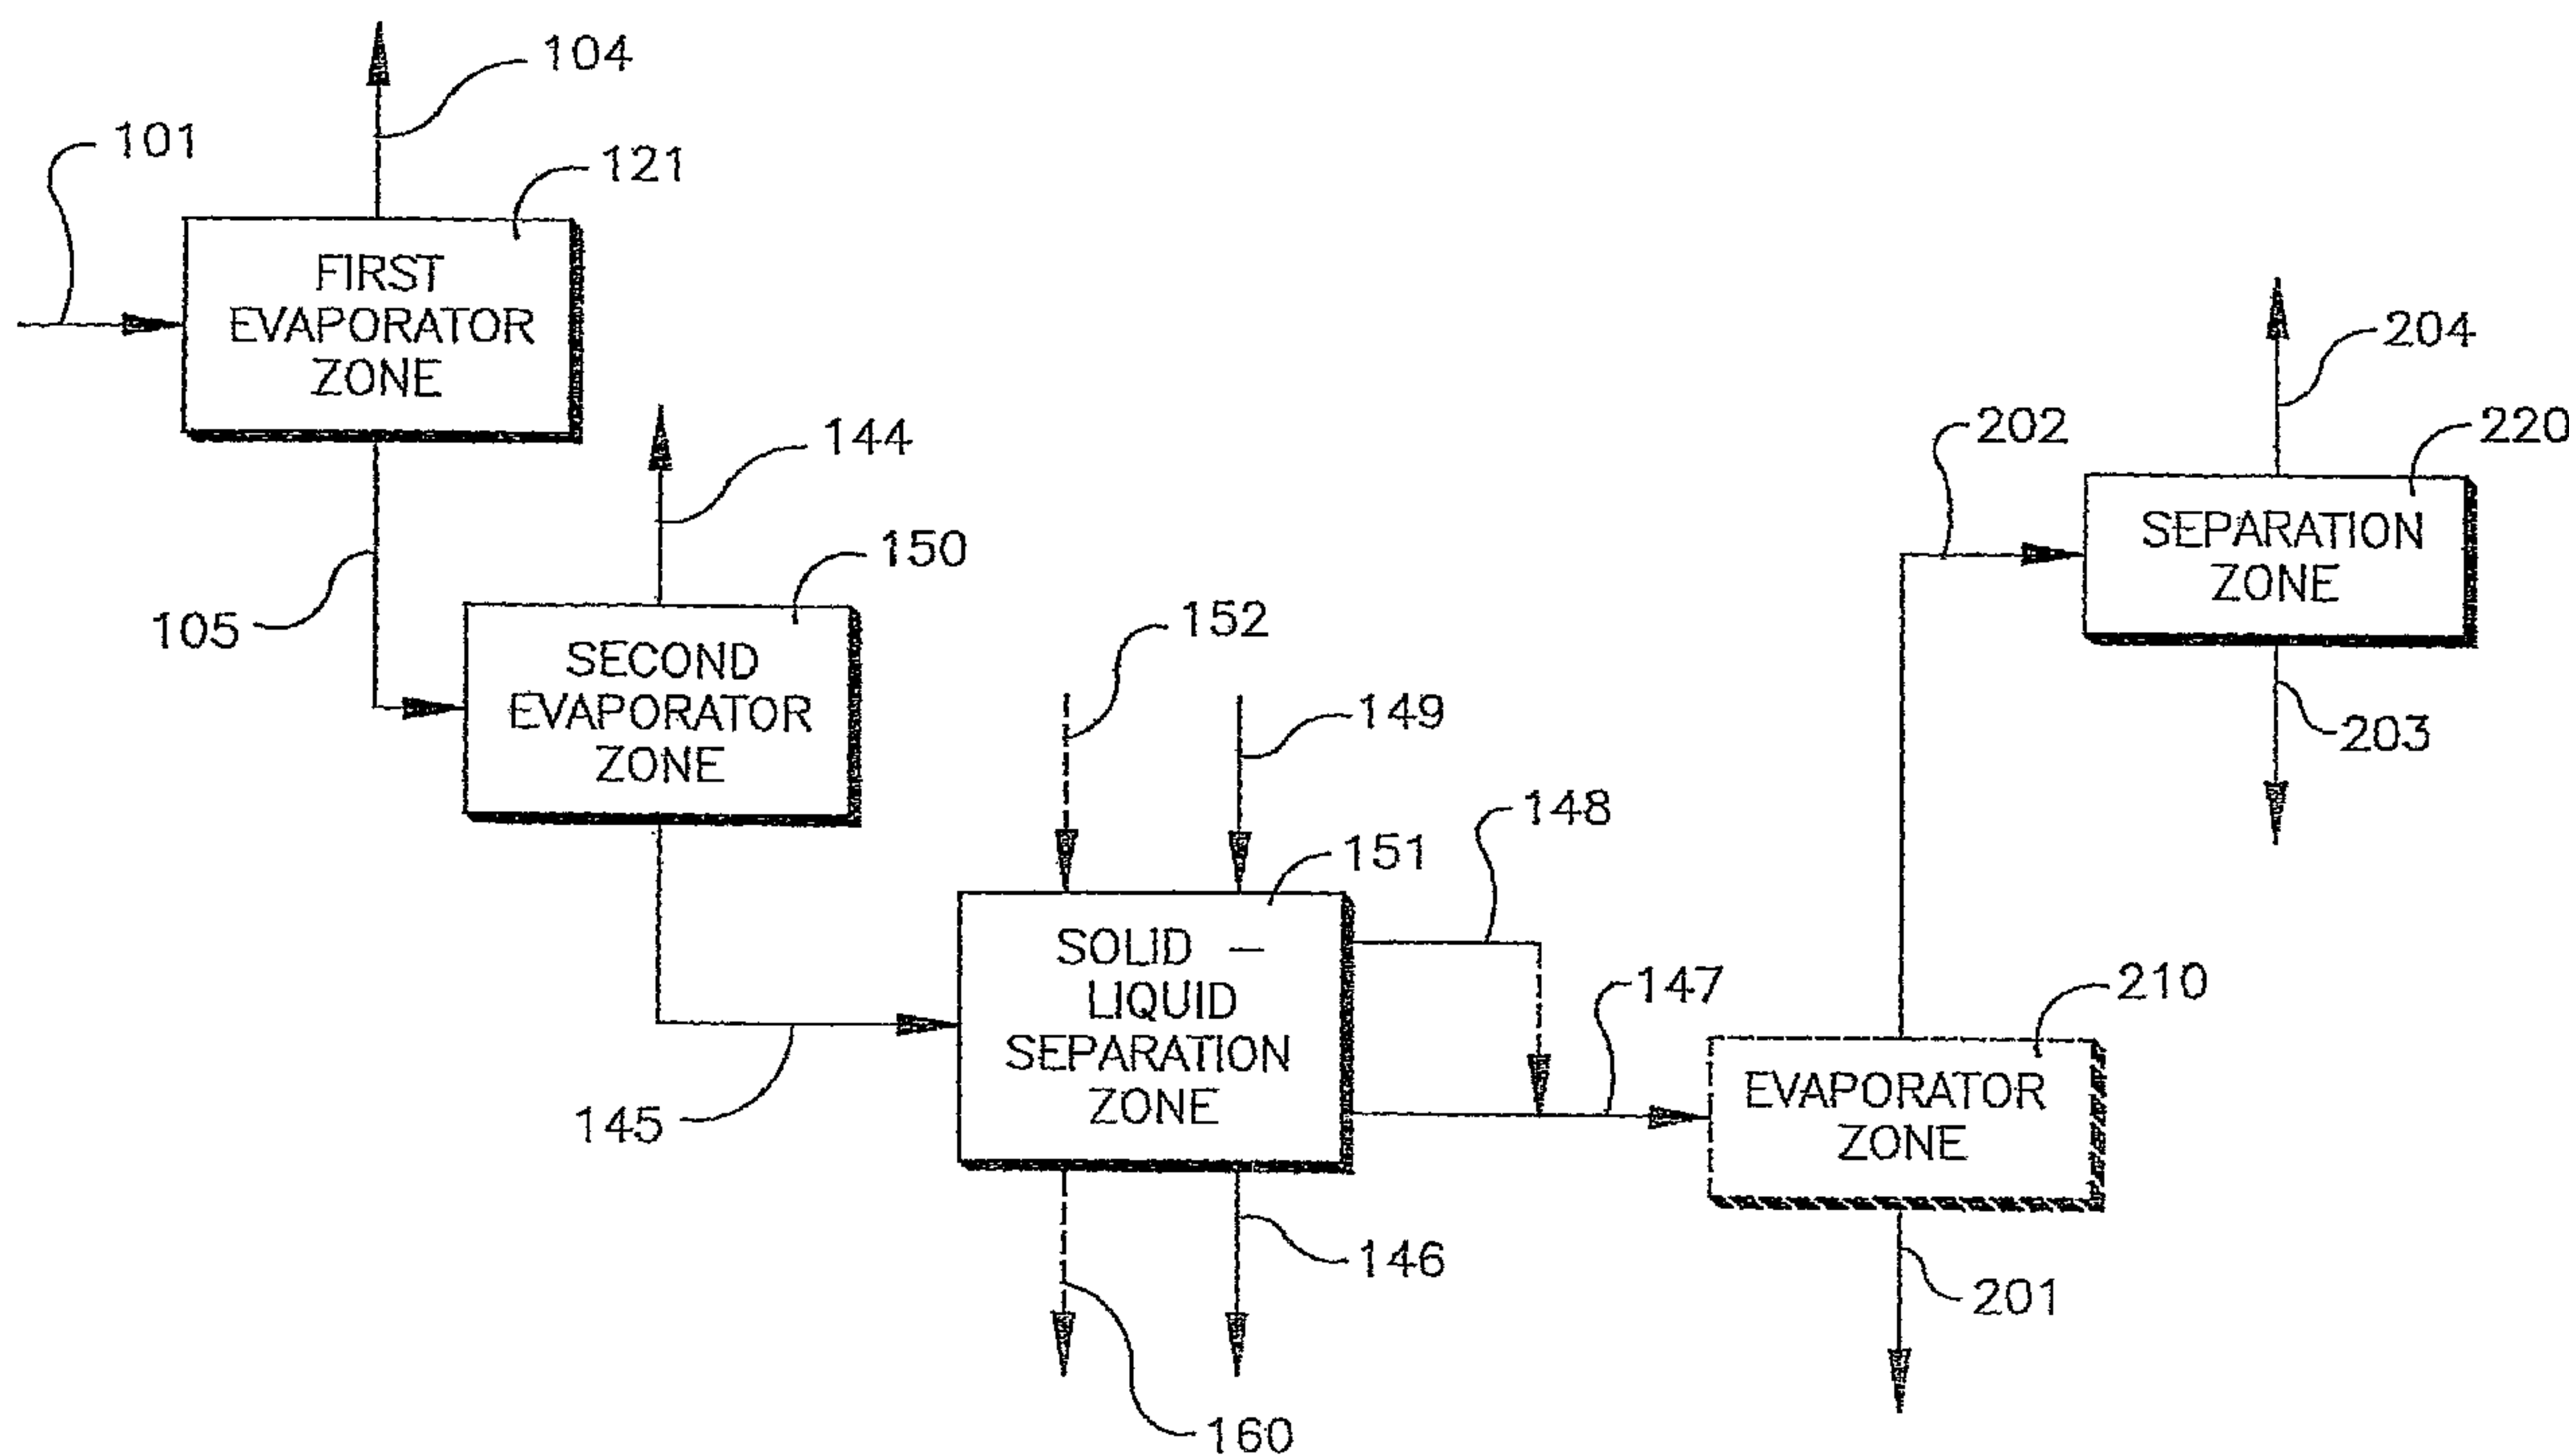

(57) **Abrégé/Abstract:**

A process is disclosed that relates to the removal of impurities, specifically benzoic acid, from a mother liquor produced in the synthesis of carboxylic acid, typically terephthalic acid.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
22 February 2007 (22.02.2007)

PCT

(10) International Publication Number
WO 2007/021487 A3

(51) International Patent Classification:

C07C 51/44 (2006.01) C07C 51/47 (2006.01)
C07C 63/26 (2006.01)

(21) International Application Number:

PCT/US2006/029267

(22) International Filing Date: 27 July 2006 (27.07.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

11/201,512 11 August 2005 (11.08.2005) US
11/201,799 11 August 2005 (11.08.2005) US(71) Applicant: EASTMAN CHEMICAL COMPANY
[US/US]; 100 North Eastman Road, Kingsport, TN 37660
(US).(72) Inventors: LIN, Robert; 4533 Palomino Drive,
Kingsport, TN 37664 (US). GIBSON, Philip, Ed-
ward; 2244 Charsley Road, Kingsport, TN 37660 (US).
PARKER, Kenny, Randolph; 599 Tyne Gray Road,
Afton, TN 37616 (US).(74) Agent: OWEN, Steven, A.; P.o. Box 511, Kingsport, TN
37662-5075 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP,
KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT,
LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA,
NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC,
SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ,
UA, UG, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:
3 May 2007(48) Date of publication of this corrected version:
14 June 2007

[Continued on next page]

(54) Title: PROCESS FOR REMOVAL OF BENZOIC ACID FROM AN OXIDIZER PURGE STREAM

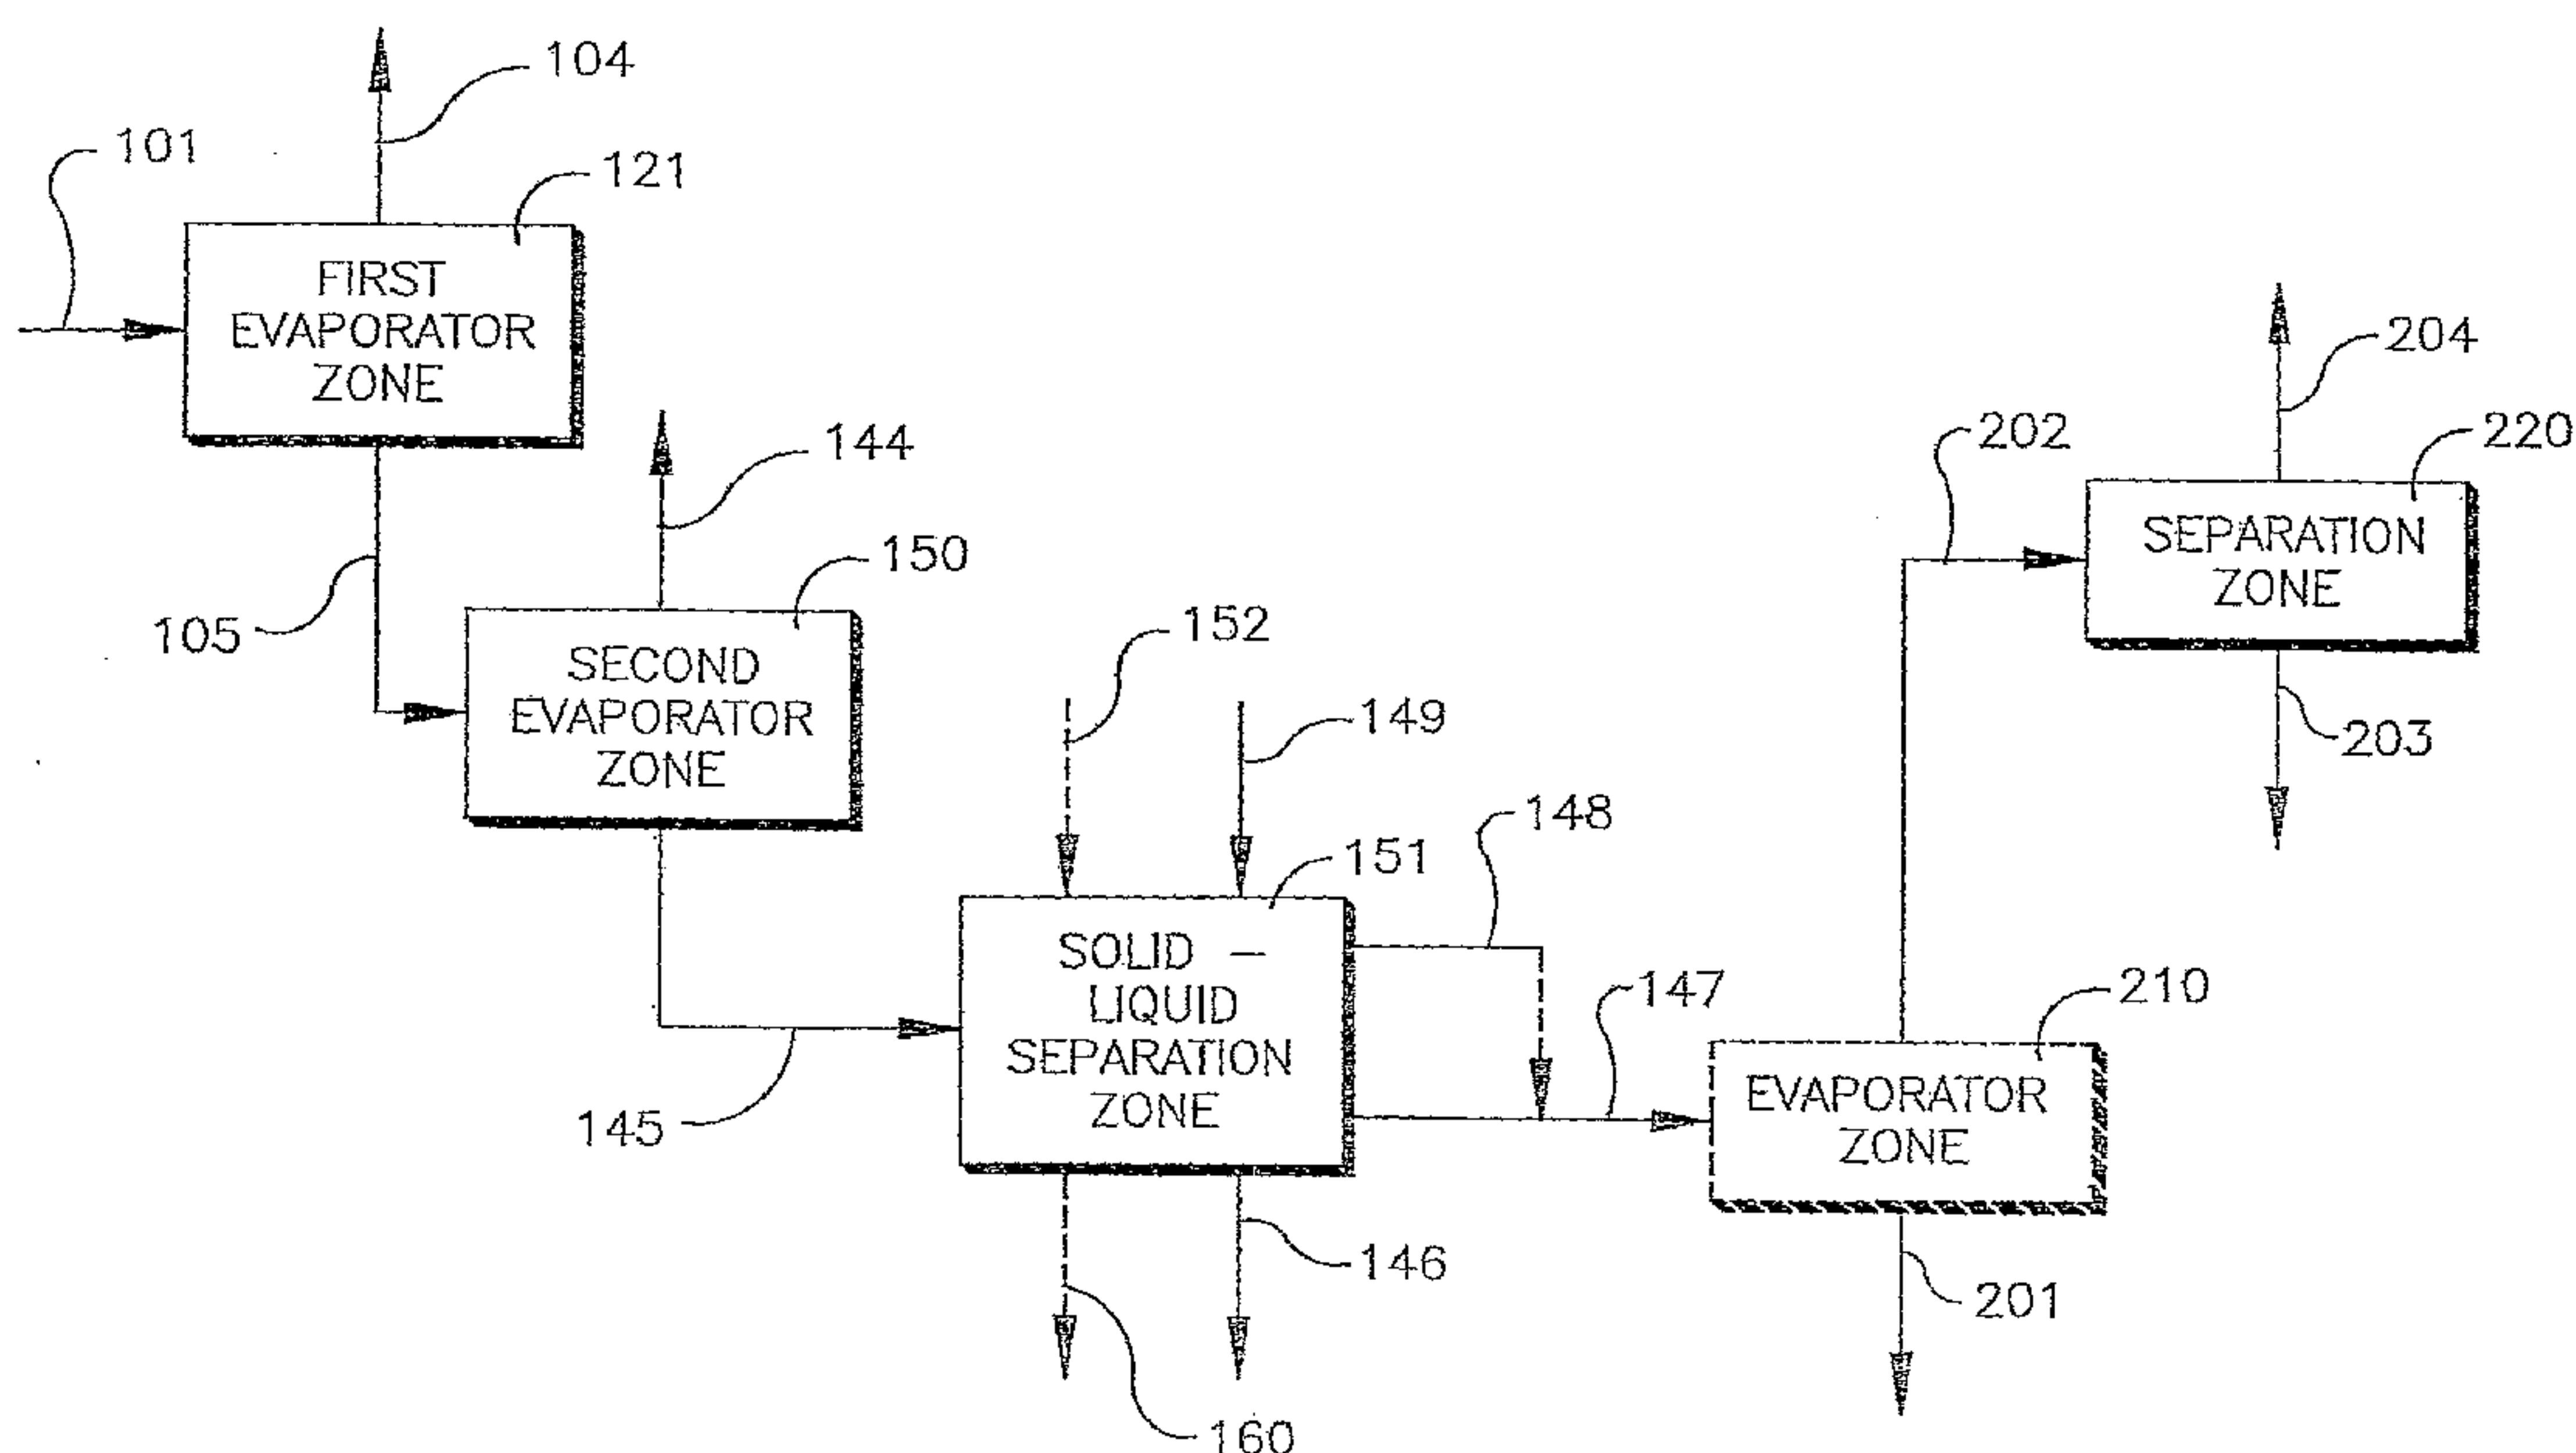

(57) Abstract: A process is disclosed that relates to the removal of impurities, specifically benzoic acid, from a mother liquor produced in the synthesis of carboxylic acid, typically terephthalic acid.

WO 2007/021487 A3

WO 2007/021487 A3



(15) Information about Correction:

see PCT Gazette No. 24/2007 of 14 June 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Process for Removal of Benzoic Acid from an Oxidizer Purge Stream

5

FIELD OF INVENTION

This invention relates to the removal of impurities, specifically benzoic acid, from a mother liquor produced in the synthesis of carboxylic acid, typically terephthalic acid. This invention also relates to the removal of impurities, specifically benzoic acid, from a benzoic acid bearing stream produced in the synthesis of carboxylic acid.

15

BACKGROUND OF THE INVENTION

20

Terephthalic acid is commercially produced by oxidation of paraxylene in the presence of a catalyst, such as, for example, Co, Mn, Br and a solvent. Terephthalic acid used in the production of polyester fibers, films, and resins must be further treated to remove impurities formed as a result of the oxidation of paraxylene.

25

Terephthalic acid (TPA) is an intermediate in the production of polyesters for plastics and fiber applications. Commercial processes for the manufacture of TPA are often based on the heavy-metal catalyzed oxidation of p-xylene, generally with a bromide promoter in an acetic acid solvent. Due to the limited solubility of TPA in acetic acid under practical oxidation conditions, a slurry of TPA crystals is usually formed in the oxidation reactor. Typically, the TPA oxidizer slurry is withdrawn from the reactor, and TPA solids are separated from the oxidizer mother

30

liquor using conventional solid-liquid separation techniques. The oxidizer mother liquor, which contains most of the catalyst and promoter used in the process, is recycled to the oxidation reactor. Aside from the catalyst and promoter, the oxidizer mother liquor stream also contains dissolved
5 TPA and many by-products and impurities. These by-products and impurities arise partially from minor impurities present in the p-xylene feed stream. Other impurities arise due to the incomplete oxidation of p-xylene resulting in partially oxidized products. Still other by-products result from competing side reactions formed as a result of the oxidation
10 of p-xylene to terephthalic acid.

The TPA solids undergo a solid-liquid separation wherein fresh solvent is utilized to displace a major portion of the liquid component of the oxidizer mother liquor. After drying, the TPA solids are contaminated with impurities that were present in the oxidizer mother liquor since
15 these impurities may be incorporated into the TPA solids. Impurities are also present due to occlusions in the TPA crystal structure and due to incomplete removal of the oxidizer mother liquor by the fresh solvent wash.

Many of the impurities in the oxidizer mother liquor stream that
20 are recycled are relatively inert to further oxidation. Such impurities include, for example, isophthalic acid, phthalic acid and trimellitic acid. Impurities, which may undergo further oxidation are also present, such as, for example, 4-carboxybenzaldehyde, p-toluic acid and p-tolualdehyde. Oxidation inert impurities tend to accumulate in the
25 oxidizer mother liquor upon recycle. The concentration of these inert

impurities will increase in the oxidizer mother liquor until an equilibria is reached whereby the rate of removal of each impurity via the TPA product balances with the rate of formation and the rate of addition to the oxidation process. The normal level of impurities in commercial crude
5 TPA makes it unsuitable for direct use in most polymer applications.

Conventionally, crude TPA has been purified either by conversion of a dimethyl ester or by dissolution in water with subsequent hydrogenation over standard hydrogenation catalysts. More recently, secondary oxidative treatments have been used to produce polymer-
10 grade TPA. It is desirable to minimize the concentration of impurities in the mother liquor and thereby facilitate subsequent purification of TPA. In some cases, it is not possible to produce a purified, polymer-grade TPA unless some means for removing impurities from the oxidizer mother liquor stream are utilized.

15 One technique for impurity removal from a recycle stream commonly used in the chemical processing industry is to draw out or "purge" some portion of the recycle stream. Typically, the purge stream is simply disposed of or, if economically justified, subjected to various treatments to remove undesired impurities while recovering valuable
20 components. One example of this process is U.S. # 4,939,297 herein incorporated by reference in its entirety to the extent it does contradict statements herein. The amount of purge required for control of impurities is process-dependent; however, a purge amount equal to 10-40 wt% of the total oxidizer mother liquor stream is usually sufficient to produce
25 TPA adequate as feedstock for commercial polymer manufacture. In the

production of TPA, the percentage of the oxidizer mother liquor stream
purge necessary to maintain acceptable impurity concentrations,
coupled with the economic value of the metal catalyst and solvent
components in the oxidizer purge stream, make simple disposal of the
5 oxidizer purge stream economically unattractive. Thus, there is a need
for a process that recovers essentially all of the valuable metal catalysts
and acetic acid contained in the oxidizer purge stream while removing a
major portion of the impurities present in the oxidizer purge stream. The
metal catalyst can be recovered in an active form suitable for reuse by
10 direct recycling to the p-xylene oxidation step.

One benefit of this invention is the energy and capital cost
savings compared with the extraction based purge process previously
described.

Another benefit of this invention is its efficacy compared with
15 extraction purge processes regarding the usefulness of the solvent
stream(s) recycled to the TPA process. The primary motivation in a
liquid extraction process is based upon the assumption that introducing
any aromatic impurities into a p-xylene oxidation process for producing
terephthalic acid has a detrimental effect on the terephthalic acid powder
20 quality (e.g. yellow color). Hence, it was assumed that a broad
spectrum removal of aromatic impurities, such as provided by liquid
extraction, was necessary to achieve appropriate terephthalic acid
powder quality.

In one embodiment of this invention, however, employs a
25 relatively simple process that separates benzoic acid from an aqueous

solvent. The efficiency of the process toward benzoic acid is high since benzoic acid is more volatile (a higher vapor pressure) than most identified aromatic impurities in the production of a carboxylic acid, typically terephthalic acid. These aromatic impurities include, but are not limited to, trimellitic acid, isophthalic acid, stilbenes, and anthraquinones. Therefore, it is rather surprising that removal of a benzoic acid in favor of the other known impurities, that are inherently colored, would be sufficient to produce a carboxylic acid, typically terephthalic acid of good quality.

10

SUMMARY OF THE INVENTION

15 In a first embodiment of this invention, a process is provided. The process comprises:

- (a) subjecting a benzoic acid bearing stream comprising water and benzoic acid to evaporation in a evaporator zone to form a solvent rich vapor and a wash filtrate residue; and
- 20 (b) subjecting said solvent rich vapor to distillation in a separation zone to form a solvent rich stream and a benzoic acid rich stream; wherein said benzoic acid rich stream comprises at least 15% by weight benzoic acid.

25 In another embodiment of this invention, a process is provided.

The process comprises:

6

- (a) subjecting a benzoic acid bearing stream comprising water and benzoic acid to evaporation in a evaporator zone to form a solvent rich vapor and a wash filtrate residue; and
- (b) subjecting said solvent rich vapor to distillation in a separation zone to form a solvent rich stream and a benzoic acid rich stream; wherein said benzoic acid rich stream comprises at least 15% by weight benzoic acid; and
- (c) recycling at least a portion of the solvent rich stream back to an oxidation reactor in an aromatic oxidation process.

In another embodiment of this invention, a process is provided.

The process comprises:

- (a) subjecting a benzoic acid bearing stream comprising water and benzoic acid to evaporation in a evaporator zone to form a solvent rich vapor and a wash filtrate residue; wherein said benzoic acid bearing stream is produced in an aromatic oxidation process;
- (b) subjecting said solvent rich vapor to distillation in a separation zone to form a solvent rich stream and a benzoic acid rich stream; wherein said benzoic acid rich stream comprises at from about 5 wt% to about 35 wt% benzoic acid; and
- (c) recycling at least 50 wt% of the solvent rich stream to an oxidation reactor in an aromatic oxidation process.

25

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates different embodiments of the invention wherein a process to recover benzoic acid from an oxidizer purge stream **101** is shown.

Figure 2 illustrates an embodiment of the process occurring in the solid-liquid separation zone **151** wherein the solid-liquid separation zone comprises a filtration zone **153**, a washing zone **155**, and optionally a dewatering zone **157**.

Figure 3 illustrates an embodiment of the invention where a rotary pressure drum filter is utilized in the solid-liquid separation zone.

Figure 4 illustrates an embodiment of the invention wherein a process to recover benzoic acid from an oxidizer purge stream **101** is shown, and the process utilizes a main evaporator zone **125**.

Figure 5 illustrates an embodiment of the invention wherein a process to recovery benzoic acid from a benzoic acid bearing stream **347** is provided.

20

DESCRIPTION OF THE INVENTION:

In one embodiment of this invention, a process to separate benzoic acid from an oxidizer purge stream **101** is provided as shown in Figure 1.

Step (a) comprises subjecting an oxidizer purge stream **101** to evaporation in a first evaporator zone **121** to produce a vapor stream **104** and a concentrated purge slurry **105**.

In an embodiment of the invention, the oxidizer purge stream **101** is withdrawn from a carboxylic acid oxidative synthesis process. The oxidizer purge stream **101** serves as the feed stream to the present process. In an embodiment of the invention, the oxidizer purge stream **101** comprises at least one carboxylic acid, at least one solvent, at least one metal catalyst and impurities. The impurities comprise at least one impurity selected from the group consisting of organic bromides, corrosion metals, p-xylene oxidation by-products, and impurities derived as a result of impurities in the p-xylene. The organic bromides may be used as promoters in the oxidation reaction. Examples of corrosion metals are iron and chromium compounds, which inhibit, reduce or entirely destroy the activity of the metal catalyst. Aside from the catalyst and promoter, the oxidizer purge stream **101** also contains by-products and impurities. These by-products and impurities arise partially from minor impurities present in the p-xylene feed stream. Other impurities arise due to the incomplete oxidation of p-xylene resulting in partially oxidized products. Still other by-products result from competing side reactions in the oxidation of p-xylene to terephthalic acid.

The carboxylic acids include any aromatic carboxylic acids produced via controlled oxidation of an organic substrate. Such aromatic carboxylic acids include compounds with at least one carboxylic acid group attached to a carbon atom that is part of an aromatic ring, preferably having at least 6 carbon atoms, even more preferably having only carbon atoms. Suitable examples of such aromatic rings include, but are not limited to, benzene, biphenyl, terphenyl, naphthalene, and

other carbon-based fused aromatic rings. Examples of suitable carboxylic acids include, but are not limited to, terephthalic acid, benzoic acid, p-toluic acid, isophthalic acid, trimellitic acid, naphthalene dicarboxylic acid, 2,5-diphenyl-terephthalic acid, and mixtures thereof.

- 5 Suitable solvents include, but are not limited to, aliphatic mono-carboxylic acids, preferably containing 2 to 6 carbon atoms, or benzoic acid and mixtures thereof and mixtures of these compounds with water. Preferably, the solvent is acetic acid mixed with water in a ratio of about 5:1 to about 25:1, preferably between about 8:1 and about 20:1.
- 10 Throughout the specification, acetic acid will be referred to as the solvent. However, it should be appreciated that other suitable solvents, such as those disclosed previously, may also be utilized.

In the first step of the present process, the oxidizer purge stream **101** is concentrated by conventional means in a first evaporator zone **121** comprising at least one evaporator to produce a vapor stream **104** and a concentrated purge slurry **105**. In an embodiment to the invention, the evaporator is operated at atmospheric or slightly super atmospheric conditions, generally from about 1 atmosphere to about 10 atmospheres. The vapor stream **104** comprises a majority of the water and solvent, and the concentrated purge slurry **105** comprises the remainder of the water and solvent not removed from the oxidizer purge stream **101**. As used herein "majority" means greater than 50% by weight. In an embodiment of the invention, the evaporation removes about 50 wt%(weight percent) to about 80 wt% of the solvent and water,

typically acetic acid and water, which are present in the oxidizer purge stream **101**.

Step (b) comprising subjecting the concentrated purge slurry **105** to evaporation in a second evaporator zone **150** to produce a solvent rich stream **144** and a super concentrated purge slurry **145**.

In an embodiment of the invention, the second evaporator zone **150** comprises at least one evaporator operated at vacuum conditions. In an embodiment of the invention, the evaporation can be conducted at a temperature from about 20°C to about 70°C; another range is from about 30°C to about 50°C. In an embodiment of the invention, the combination of evaporators **121** and **150** is operated so as to concentrate the oxidizer purge stream as represented by stream **101** to a condition wherein about 75 wt% to about 99 wt% of the solvent and water, typically acetic acid and water, are removed from the oxidizer purge stream **101** to produce the super concentrated purge slurry **145**. In another embodiment of the invention another range for operation of the combination of evaporators **121** and **150** is operated so as to concentrate the oxidizer purge stream as represented by stream **101** to a condition wherein about 85 wt% to about 99 wt% of the solvent and water, typically acetic acid and water, is removed from the oxidizer purge stream **101** to produce the super concentrated purge slurry **145**.

In another embodiment of the invention, the first evaporation zone **121** and the second evaporator zone can be combined in a main evaporation zone **125** as shown in Figure 4. The main evaporation zone

125 comprises at least one evaporator. The evaporator or evaporators in the main evaporation zone **125** are operated at a temperature and pressure sufficient to remove at least 75% by weight of the solvent and water combined from the oxidizer purge stream **101**. In another
5 embodiment of the invention, the evaporator or evaporators in the main evaporation zone **125** are operated at a temperature and pressure sufficient to remove at least 85% by weight of the solvent and water combined from the oxidizer purge stream. In another embodiment of the invention, the evaporator or evaporators in the main evaporation zone
10 **125** are operated at a temperature and pressure sufficient to remove at least 90% by weight of the solvent and water combined from the oxidizer purge stream **101**. In another embodiment of the invention, the evaporator or evaporators in the main evaporation zone **125** are operated at a temperature and pressure sufficient to remove at least
15 95% by weight of the solvent and water combined from the oxidizer purge stream.

Ranges stated in this disclosure and the claims that follow should be understood to disclose the entire range specifically and not just the end point(s). For example, disclosure of the range 0 to 10 should be
20 taken to specifically disclose 2, 2.5, 3.17 and all other number subsumed and not just 0 and 10.

In an embodiment of the invention, the condition of the super concentrated purge slurry **145** can be as a solid-liquid mixture with only enough solvent to provide pumpability.

Step (c) comprises filtering the super concentrated purge slurry **145** in a solid-liquid separation zone **151** to form a filter cake **154** and a mother liquor **147**.

Step (d) comprises washing the filter cake **154** with a wash feed **149** in the solid-liquid separation zone **151** to form a washed cake **146** and a wash filtrate **148**; and optionally dewatering the washed cake **146** in the solid-liquid separation zone **151** to form a dewatered cake **159**; wherein the solid-liquid separation zone **151** comprises at least one pressure filtration device.

In an embodiment of the invention, the super concentrated purge slurry **145** is introduced in the solid-liquid separation zone **151** where the solid-liquid separation zone comprises a filtration zone **153**, a washing zone **155**, and optionally a drying zone **157** as shown in Figure 2. The filtration zone **153** comprises a filter cell, or a series of filter cells, physically situated to permit a filter cake **154** to develop a distribution across the area of the filter cell to hinder or prevent the channeling of wash feed **149** through the filter cake **154**.

Suitably, a filter cake **154** of at least 0.25 inch in depth to about 8 inches in depth, preferably at least 0.5 inch in depth, more preferably at least 1 inch in depth, and even more preferably about 2 to about 4 inches in depth is distributed over the area of the filter cell. The washed cake, **146**, can be recovered or further treated, recycled and/or sent to waste treatment facilities.

Upon obtaining a suitable or preferred height of filter cake **154** the filter cake **154** leaves the filtration zone **153** which comprises a filter or

series of filters and enters a washing zone **155** where the filter cake **154** is contacted with a wash feed **149**. In one embodiment of the invention, there is sufficient pressure across the filter cake **154** to allow a reservoir or buildup of the wash feed **149** over the filter cake **154** to a suitable
5 depth, preferably to a minimum depth of 0.25 inch. A pressure gradient of at least 0.5 psi, preferably from about 5 psi to about 65 psi, across the filter cake **154** and the reservoir of wash feed **149** can be applied to displace any solute in the filter cake **154** with wash feed **149**.

A filter cake **154** depth of at least 0.5 inch is suitable to obtain a
10 filter cake **154** of sufficient compactness to furnish a wash vehicle, i.e. the filter cake **154**, from which a wash filtrate **148** containing a solute from the filter cake **154** can be removed efficiently by displacement washing. If the filter cake depth **154** is less than about 0.25 inch, channeling of wash feed **149** in the filter cake **154** can occur resulting in
15 non-uniform washing of the filter cake **154**.

Because of the loss of efficiency in displacement washing of the filter cake **154**, a minimum filter cake **154** depth of at least 0.25 inch of purified terephthalic acid is preferred.

A minimum liquid height above the filter cake **154** surface is
20 required to ensure that displacement washing occurs. This height must be sufficient to ensure that the filter cake **154** surface is completely covered with wash feed **149**. If the filter cake **154** surface is not covered with wash feed **149**, bypassing of the wash feed **149** can occur without adequate displacement of the solute in the filter cake **154**. Because of

irregularities in the filter cake **154** surface, a minimum liquid height of about 0.25 inch is preferred above the filter cake **154** surface.

It has been found that displacement of the solute from the filter cake **154** using the wash feed **149** at high pressure permits an efficient
5 separation of catalyst metals from the filter cake **154**. Another benefit of high pressure is the reduction of wash feed **149** required to recover cobalt as shown in the examples.

Utilization of added stages in the solid-liquid separation zone **151** can decrease the amount of wash feed **149** required to reduce the total
10 amount of metal catalyst retained in the filter cake **154**. It is convenient therefore that a suitable number of stages of positive displacement washing be used to minimize total wash feed **149** used in displacement washing to reduce need for downstream waste treatment facilities.

It is understood that multiple stages of the displacement washing
15 procedure can replace a single stage displacement washing procedure wherein the quantity of wash feed **149** is sufficient to obtain at least 80 wt% recovery of the metal catalyst from the super concentrated slurry **145** to the mother liquor **147** and the wash filtrate **148**. Additionally, a procedure utilizing multiple stages of counter-current washing can be
20 useful if reduction of the amount of wash feed **149** is determined to be advantageous.

In the process of the instant invention, a super concentrated purge slurry **145** is introduced into one or more of a series of filter cells physically situated to permit a filter cake **154** of requisite thickness to
25 develop.

15

Upon obtaining a minimum height of filter cake **154**, about 0.25 to about 4 inches, the filter cake **154** leaves the filter or series of filters and enters a washing zone **155** where the filter cake **154** is washed with a wash feed **149**. Pressure can then be applied to the wash feed **149** to

5 displace the solute (i.e. the liquid and any dissolved compounds such as metal catalyst in the filter cake) of the filter cake **154**. Upon displacement of the solute with the wash feed, the filter cake **154** can be discharged from the filtration zone **155** by any suitable means, and the cycle repeated. In an embodiment of the invention, the ratio of wash feed **149**

10 to filter cake **154** discharge is within the range of from about 1:20 to about 20:1 to reduce the level of metal catalyst in the filter cake by greater than 95 wt%.

Equipment for performing the requisite washing cycle can comprise a series of filter cells maintained in a suitable position to permit

15 a wash feed **149** reservoir to develop over the filter cells. In one embodiment of the invention, suitable equipment can comprise a rotary drum pressure filter with multiple filter cells, fitted with a means for discharging washed cake **146** from the filter cells. The filter cake **154** can be washed for as many times as required to develop a minimum

20 concentration of metal catalyst in the washed cake **146** before discharging the washed cake **146** from the filter device.

A suitable pressure filter which can be adapted to the requirements of the instant invented process is a BHS-FEST™ rotary drum pressure filter, BHS-WERK, Sonthofen, D-8972, Sonthofen, West

25 Germany, although other pressure filters which can accomplish the

required operation can be used. Examples of other devices that can be used in the solid-liquid separation zone include **151**, but are not limited to, pressure belt filters, filter presses, centrifuges, pressure leaf filters, and cross-flow filters. The pressure filter can be operated at a
5 temperature and pressure sufficient to obtain at least 80 wt% recovery of the metal catalyst from the solute of the mother liquor **147**. Preferably, the pressure filter can be operated at a temperature of about 25°C to about 160 °C, and a pressure of 1 atmospheres to 50 atmospheres.

In the operation of the BHS-FEST™ filter, a rotary drum contains
10 a series of filter cells located on the periphery of the rotating drum. As the drum rotates, the filter cells receive a super concentrated purge slurry **145** and a filter cake **154** builds to a requisite depth. The mother liquor **147** is produced by filtration of the super concentrated purge slurry **145**. Upon rotation of the drum, the filter cake **154** enters a washing
15 zone **155** where a reservoir of wash feed **149** is built up over the filter cake **154** to a required depth. The applied pressure to the wash feed reservoir forces the water through the filter cake **154** to displace the solute (with dissolved metal catalyst) retained in the super concentrated purge slurry **145** to produce a washed cake **146**. Upon further rotation of
20 the drum, the wash cycle can be repeated at least three more times if necessary in a counter current fashion, after which the system pressure is released with attendant temperature decrease to ambient conditions. Optionally, the washed cake **146** can be dewatered in a dewatering zone **157** with a vapor via conduit **152** to produce a dewatered cake **159** and

a humid vapor **160**. The resultant dewatered cake **159** can then be discharged from the drum by any conventional means.

Figure 3 illustrates an embodiment of the invention where a rotary pressure drum filter is utilized as the process filtration device. In an
5 embodiment of the invention, the rotary drum pressure filter comprises a filtration zone **153**, a wash zone **155**, optionally, a dewatering zone **157**, a discharge zone **164** and a cloth wash zone **162**. The cloth wash zone shown in Figure 3 is an embodiment of the invention where the rotary pressure drum filter comprises a cloth wash zone **162** where the filters
10 are washed after discharge of the dewatered cake **159**.

The wash filtrate **148** is produced by displacement washing the filter cake with the wash feed **149**. The filter cake **154** within the solid-liquid separation zone **151** undergoes extraction of metal catalyst by introduction of the wash feed **149** to form the wash filtrate **148**. In an
15 embodiment of the invention, at least 80 wt% of the metal catalyst is recovered in the wash filtrate **148** and the mother liquor **147**. In an embodiment of the invention, at least 90 wt% of the metal catalyst is recovered in the wash filtrate **148** and the mother liquor **147**. The wash feed **149** comprises water and optionally an additional oxidation solvent.

20 Perhaps most surprisingly by utilizing water as a wash feed **149** at temperatures in the range of about 20°C to about 70°C, preferably about 30°C to about 50°C, sufficient corrosion metal is retained in the dewatered cake **159** wherein the need for corrosion metal removal by

other means is eliminated. The dewatered cake **159** which represents solids stripped of metal catalyst can be disposed from the system.

Step (e) optionally comprises subjecting the mother liquor **147** and optionally the wash filtrate **148** to evaporation in an evaporator zone **210** to produce a solvent rich vapor stream **202** and wash filtrate residue **201**.

The evaporator zone **210** comprises at least one evaporator. In an embodiment of the invention, the evaporator is operated at atmospheric or slightly super atmospheric conditions, generally from about 1 atmosphere to about 10 atmospheres. The solvent rich vapor **202** comprises a majority of the water and solvent, and the wash filtrate residue **201** comprises the remainder of the water and solvent not removed from the mother liquor **147** and the majority of the catalyst. The evaporation removes about 90 wt% to about 99 wt% of the solvent and water from the combined stream in conduit **147**, typically acetic acid and water, which are present in the wash filtrate **148** and the majority of the benzoic acid in the mother liquor **147**. "Majority" as used herein means greater than 50% by weight.

Step (f) comprises subjecting the solvent rich vapor stream **202** to conventional distillation in distillation zone **220** to form a benzoic acid rich stream **203** and a solvent rich stream **204**.

The separation zone **220** comprises at least one liquid-vapor separator. In an embodiment of the invention, the separator operates at atmospheric or slightly super atmospheric conditions, generally from about 1 atmosphere to about 10 atmospheres. The liquid-vapor

separator comprises at least one theoretical vapor-liquid equilibrium stage. Examples of liquid-vapor separators include, but are not limited to, flash condensers and distillation columns.

In an embodiment of the invention, the benzoic rich acid stream
5 **203** has greater than 5 wt% benzoic acid. In another embodiment of the invention, the benzoic acid rich stream **203** has greater than 15 wt% benzoic acid. In another embodiment of the invention, the benzoic acid rich stream **203** has greater than 30 wt% benzoic acid. In another embodiment of the invention, the benzoic acid rich stream **203** has
10 greater than 50 wt% benzoic acid. In another embodiment of the invention, the benzoic acid rich stream **203** comprises from about 5 wt% to 75 wt% benzoic acid. In another embodiment of the invention, the benzoic acid rich stream **203** comprises from about 5 wt% to 50 wt% benzoic acid. In another embodiment of the invention, the benzoic acid
15 rich stream **203** comprises from about 5 wt% to 35 wt% benzoic acid. In another embodiment of the invention, the benzoic acid rich stream **203** comprises from about 15 wt% to 30 wt% benzoic acid.

Step (g) comprises optionally recycling at least a portion of the solvent rich stream **204** back to an oxidation reactor in an aromatic
20 oxidation process.

At least a portion of the solvent rich stream can be recycled back to an oxidation reactor in the oxidation process. "At least a portion" can mean at least 5 wt%, at least 15 wt%, at least 30 wt%, at least 50 wt%, at least 75 wt%, or all of the solvent rich stream is recycled **204** back to
25 an oxidation reactor.

An example of an aromatic oxidation process is disclosed US. Patent Application 10/156,312 herein incorporated by reference in its entirety to the extent it does not contradict statements made herein.

Although the composition of the various streams in the process
5 varies depending on the process conditions, a typical composition of the streams, using a computer simulated model (ASPEN version 12.1) of the process, are shown in Tables 1a and 1b. In Tables 1a and 1b, the components are shown in the left hand column, and the amount of these components in each stream in Figure 1 are shown in the number column
10 corresponding to the number of the stream in Figure 1.

In another embodiment of the invention, a process is provided as shown in Figure 5.

Step (a) optionally comprises subjecting a benzoic acid bearing stream **347** to evaporation in an evaporator zone **310** to produce a
15 solvent rich vapor **302** and wash filtrate residue **301**

The evaporator zone **310** comprises at least one evaporator. The benzoic acid bearing stream **347** comprises water and benzoic acid. In an embodiment of the invention, the evaporator is operated at atmospheric or slightly super atmospheric conditions, generally from
20 about 1 atmosphere to about 10 atmospheres. The solvent rich vapor **302** comprises a majority of the water and solvent, and the wash filtrate residue **301** comprises the remainder of the water and solvent not removed from the benzoic acid bearing stream **347**. In another embodiment of the invention, the evaporation removes about 90 wt% to

about 99 wt% of the solvent and water from the benzoic acid bearing stream **347**, typically acetic acid and water.

The benzoic acid bearing stream can be any stream produced in an aromatic oxidation process. An example of an aromatic oxidation
5 process is disclosed in US. Patent Application 10/156,312 herein incorporated by reference in its entirety to the extent it does not contradict statements made herein.

For example, during the course of the oxidation reaction, exothermic heat of reaction and water generated by the oxidation of the
10 dialkyl aromatic compound are removed from the reactor through the vaporization of a portion of the liquid reaction medium. These vapors, known as reactor offgas, comprise the aqueous solvent having five to thirty weight percent water and oxygen-depleted process gas containing
15 minor amounts of decomposition products including catalyst residue. The reactor offgas can be used as the benzoic acid bearing stream.

In an embodiment of the invention, the evaporator zone, **310**, is operated at atmospheric or slightly super atmospheric conditions, generally from about 1 atmosphere to about 10 atmospheres. The solvent rich vapor stream, **302**, comprises benzoic acid, and the wash
20 filtrate residue, **301**, comprises solids not captured in the solid-liquid separation zone, including any residual catalyst metals.

Step (b) comprises subjecting the solvent rich vapor stream **302** to conventional distillation in separation zone **320** to form a benzoic acid rich stream **303** and a solvent rich stream **304**.

The separation zone **320** comprises at least one liquid-vapor separator. In an embodiment of the invention, the liquid vapor separator operates at atmospheric or slightly super atmospheric conditions, generally from about 1 atmosphere to about 10 atmospheres. The liquid-vapor separator comprises at least one theoretical vapor-liquid equilibrium stage. Examples of liquid-vapor separators include, but are not limited to, flash condensers and distillation columns.

In an embodiment of the invention, the benzoic rich acid stream **303** has greater than 5 wt% benzoic acid. In another embodiment of the invention, the benzoic acid stream has greater than 15 wt% benzoic acid.

In another embodiment of the invention, the benzoic acid rich stream **303** has greater than 30 wt% benzoic acid. In another embodiment of the invention the benzoic acid rich stream **303** has greater than 50 wt% benzoic acid. In another embodiment of the invention, the benzoic acid rich stream **303** comprises from about 5 wt% to 75 wt% benzoic acid. In another embodiment of the invention, the benzoic acid rich stream **303** comprises from about 5 wt% to 50 wt% benzoic acid. In another embodiment of the invention, the benzoic acid rich stream **303** comprises from about 5 wt% to 35 wt% benzoic acid. In another embodiment of the invention, the benzoic acid rich stream **303** comprises from about 15 wt% to 30 wt% benzoic acid.

Step (c) comprises optionally recycling at least a portion of the solvent rich stream **304** back to an oxidation reactor in an aromatic oxidation process.

At least a portion of the solvent rich stream can be recycled to an oxidation reactor in the oxidation process. At least a portion can mean at least 5, at least 15 wt%, at least 30 wt%, at least 50 wt%, at least 75 wt% or all of the solvent rich stream is recycled **304** to an oxidation

5 reactor.

WE CLAIM:

1. A process comprising:
 - (a) 5 subjecting a benzoic acid bearing stream comprising water and benzoic acid to evaporation in a evaporator zone to form a solvent rich vapor and a wash filtrate residue; and
 - (b) subjecting said solvent rich vapor to distillation in a separation zone to form a solvent rich stream and a benzoic acid rich stream; wherein said benzoic acid rich
10 stream comprises at least 15% by weight benzoic acid.
2. The process according to claim 1 wherein said benzoic acid rich stream comprises benzoic acid in an amount greater than 30% by weight.
3. The process according to claim 1 wherein said benzoic acid
15 bearing stream is produced in an aromatic oxidation process.
4. The process according to claim 1 wherein said benzoic acid bearing stream is a vapor stream produced in the oxidation of an aromatic compound.
5. The process according to claim 1 wherein said evaporator zone is
20 operated between about 1 to about 10 atmospheres.
6. A process comprising:
 - (a) subjecting a benzoic acid bearing stream comprising water and benzoic acid to evaporation in a evaporator zone to form a solvent rich vapor and a wash filtrate residue; and

- (b) subjecting said solvent rich vapor to distillation in a separation zone to form a solvent rich stream and a benzoic acid rich stream; wherein said benzoic acid rich stream comprises at least 15% by weight benzoic acid;
- 5 and
- (c) recycling at least a portion of the solvent rich stream back to an oxidation reactor in an aromatic oxidation process.
7. The process according to claim 6 wherein said benzoic acid rich stream comprises benzoic acid in an amount greater than 30% by
- 10 weight.
8. The process according to claim 6 wherein said benzoic acid bearing stream is produced in an aromatic oxidation process.
9. The process according to claim 6 wherein said benzoic acid bearing stream is a vapor stream produced in the oxidation of an
- 15 aromatic compound.
10. The process according to claim 6 wherein at least 50 wt% of said benzoic acid rich stream is recycled to an oxidation reactor in an aromatic oxidation process.
11. The process according to claim 6 wherein said evaporator zone is
- 20 operated between about 1 to about 10 atmospheres.
12. A process comprising:
- (a) subjecting a benzoic acid bearing stream comprising water and benzoic acid to evaporation in a evaporator zone to form a solvent rich vapor and a wash filtrate residue;

wherein said benzoic acid bearing stream is produced in an aromatic oxidation process;

- (b) subjecting said solvent rich vapor to distillation in a separation zone to form a solvent rich stream and a benzoic acid rich stream; wherein said benzoic acid rich stream comprises at from about 5 wt% to about 35 wt% benzoic acid; and
- (c) recycling at least 50 wt% of the solvent rich stream to an oxidation reactor in an aromatic oxidation process.

- 5
- 10 13. The process according to claim 12 wherein said benzoic acid bearing stream is a vapor stream produced in the oxidation of an aromatic compound.
14. The process according to claim 12 wherein at least 75 wt% of said benzoic acid rich stream is recycled to an oxidation reactor in an aromatic oxidation process.
- 15
15. The process according to claim 12 wherein said evaporator zone is operated between about 1 to about 10 atmospheres.
16. The process according to claim 12 wherein all of the solvent rich stream is recycled to an oxidation reactor process.

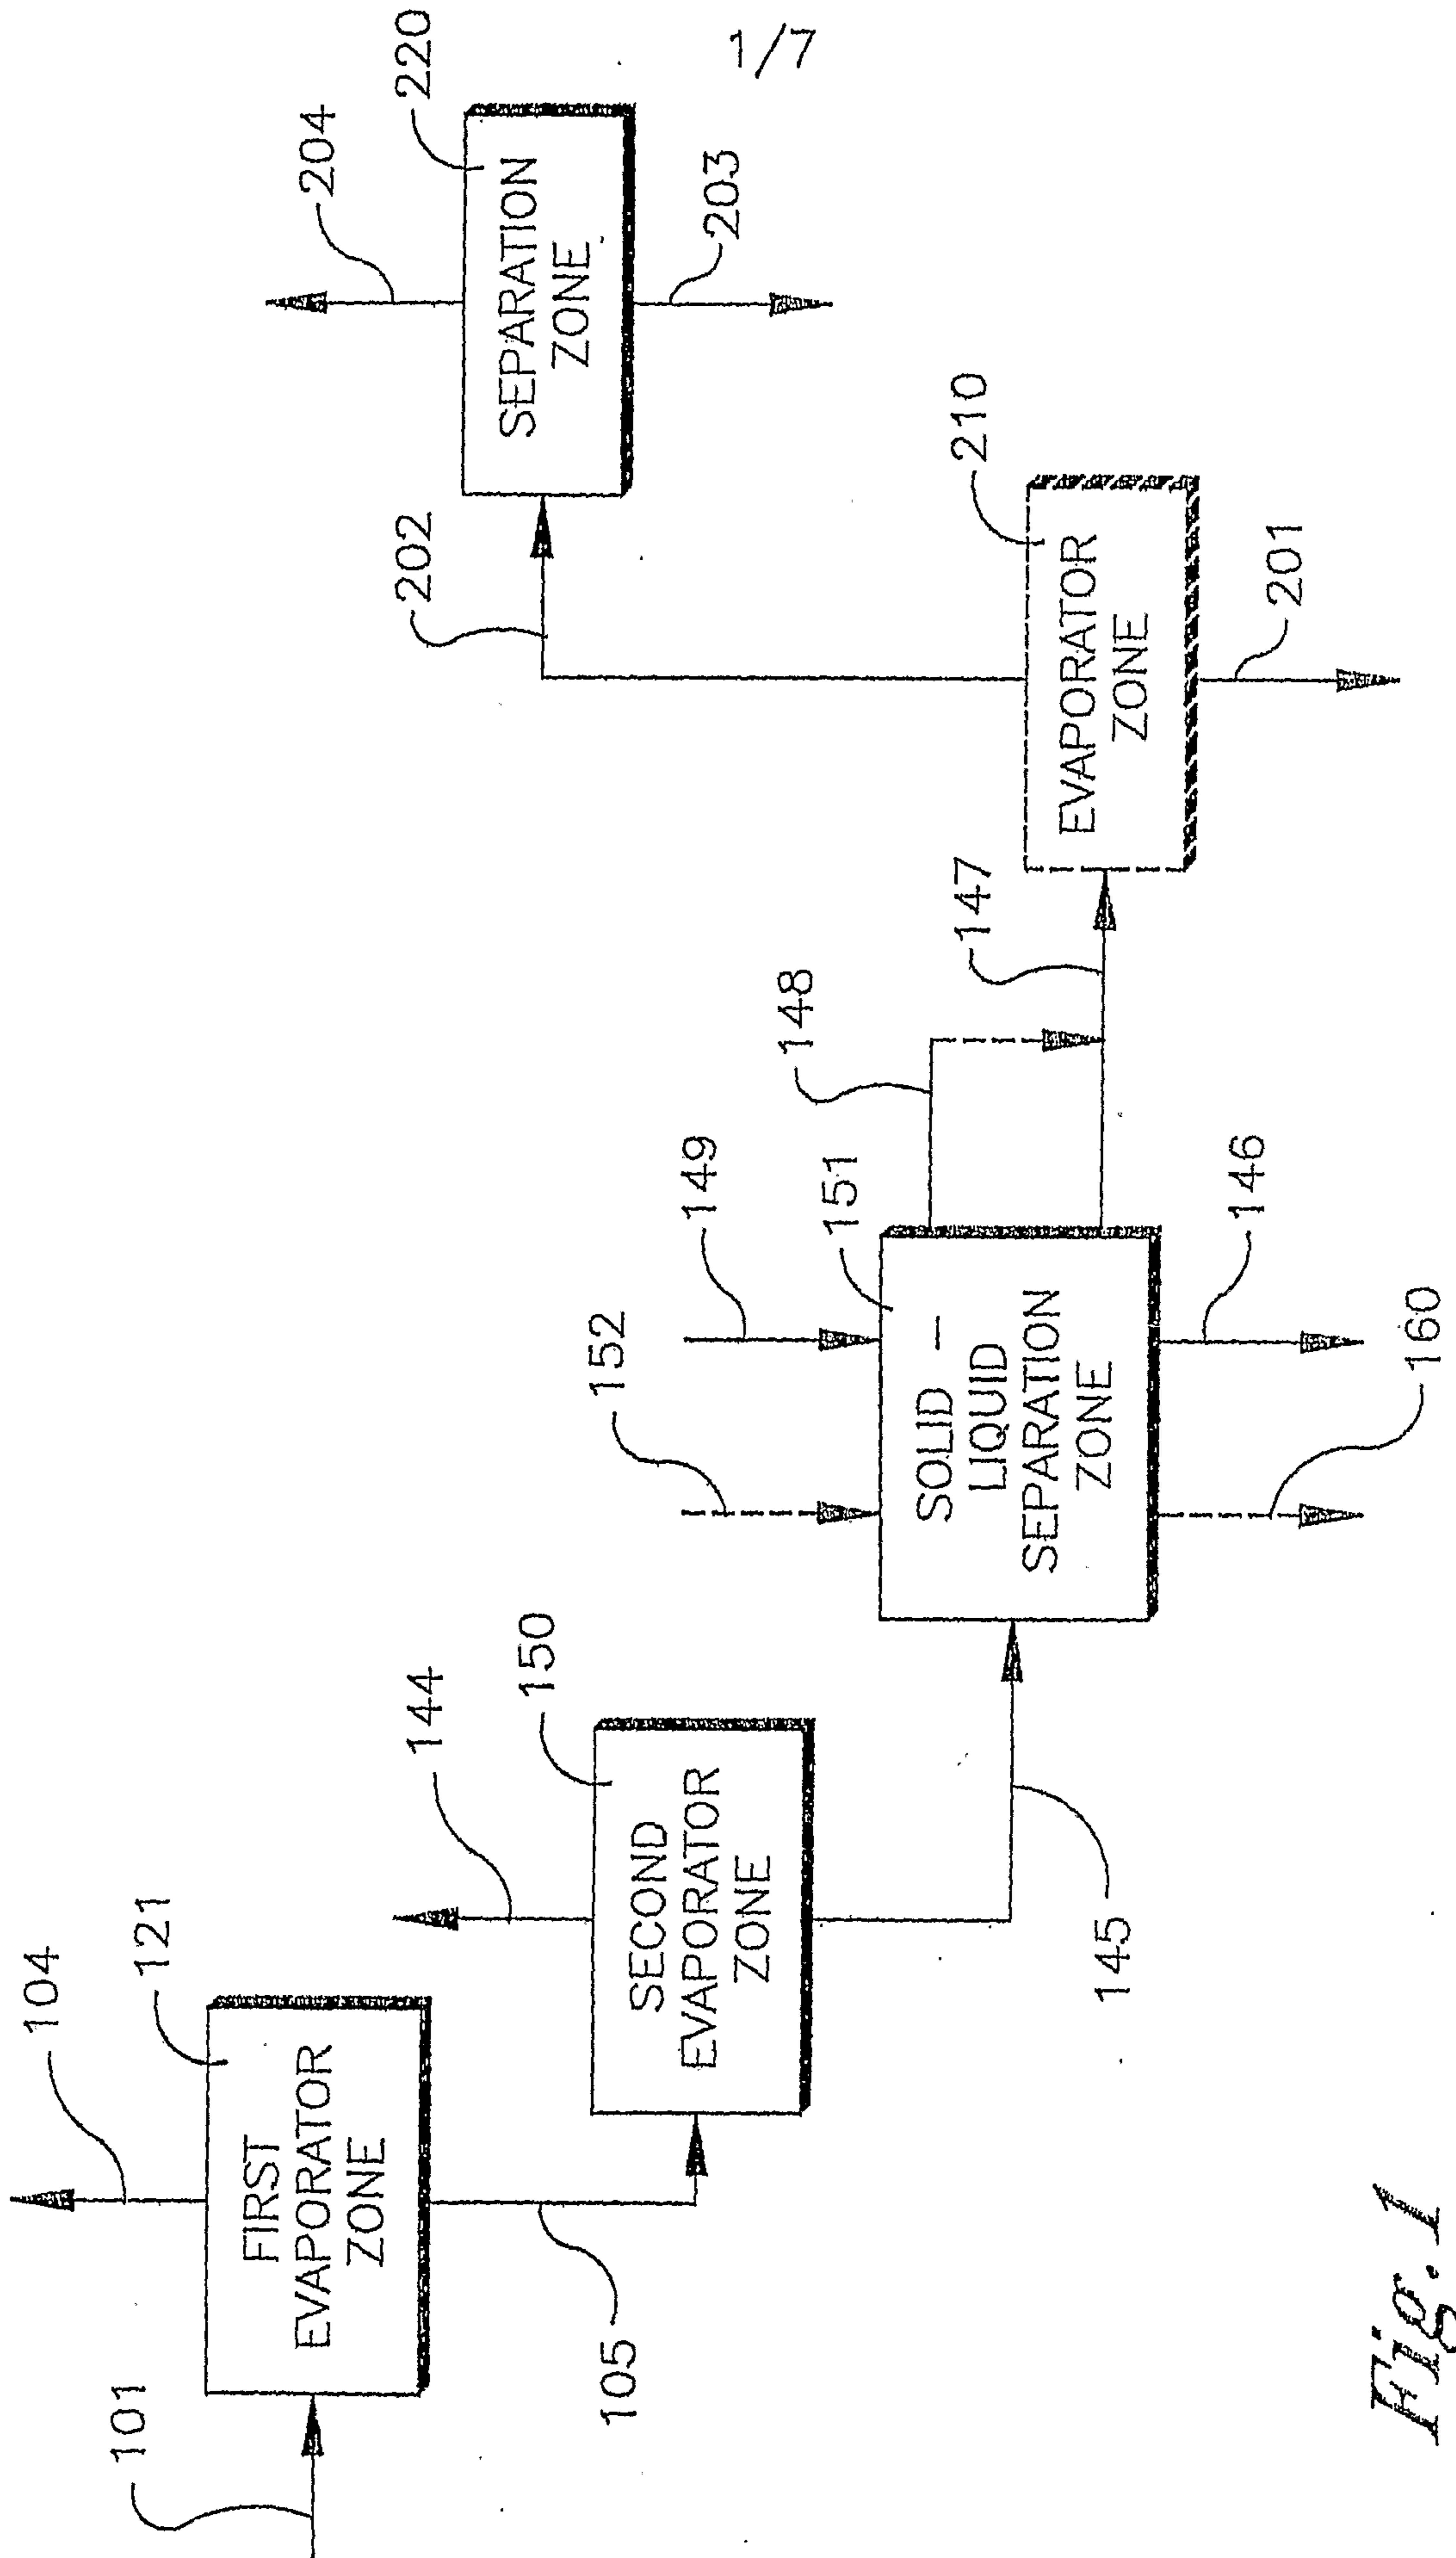


Fig. 1

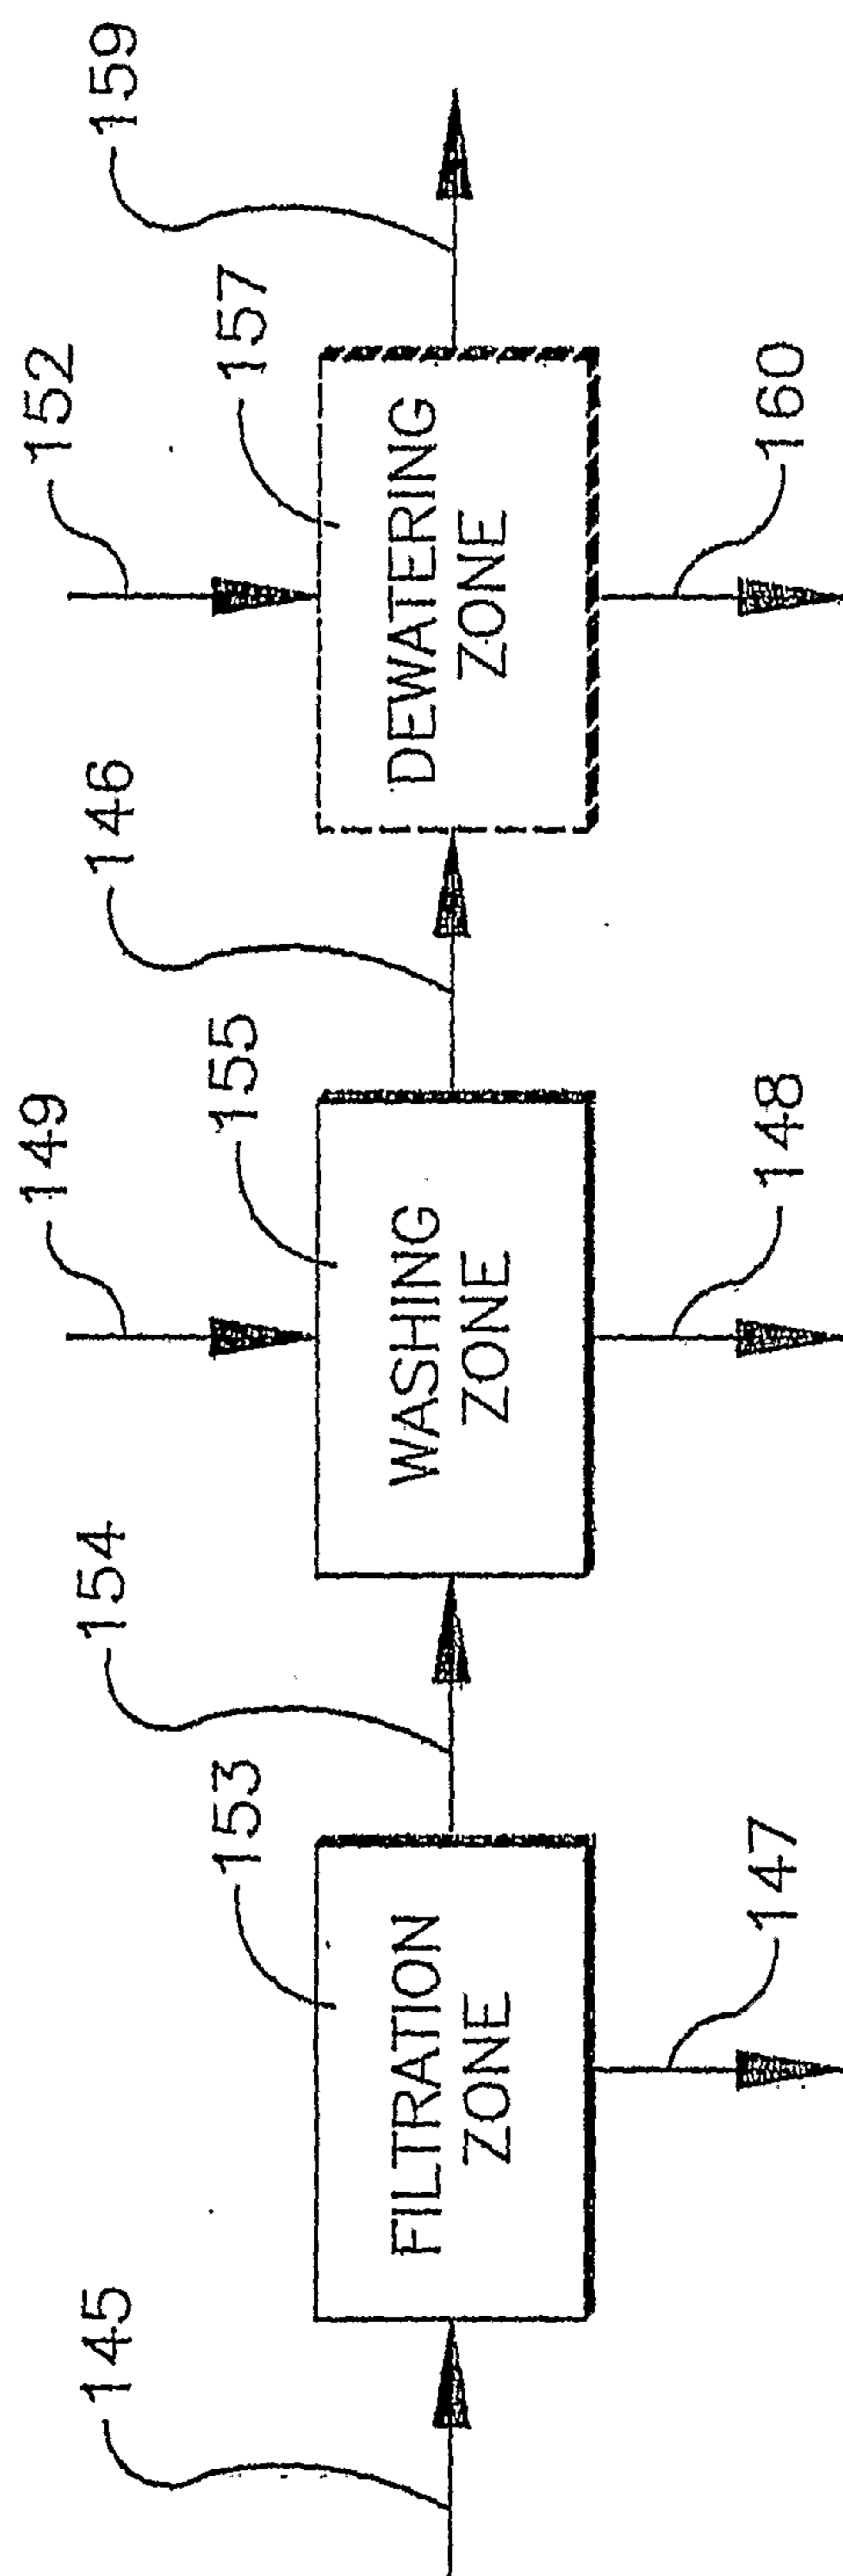


Fig. 2

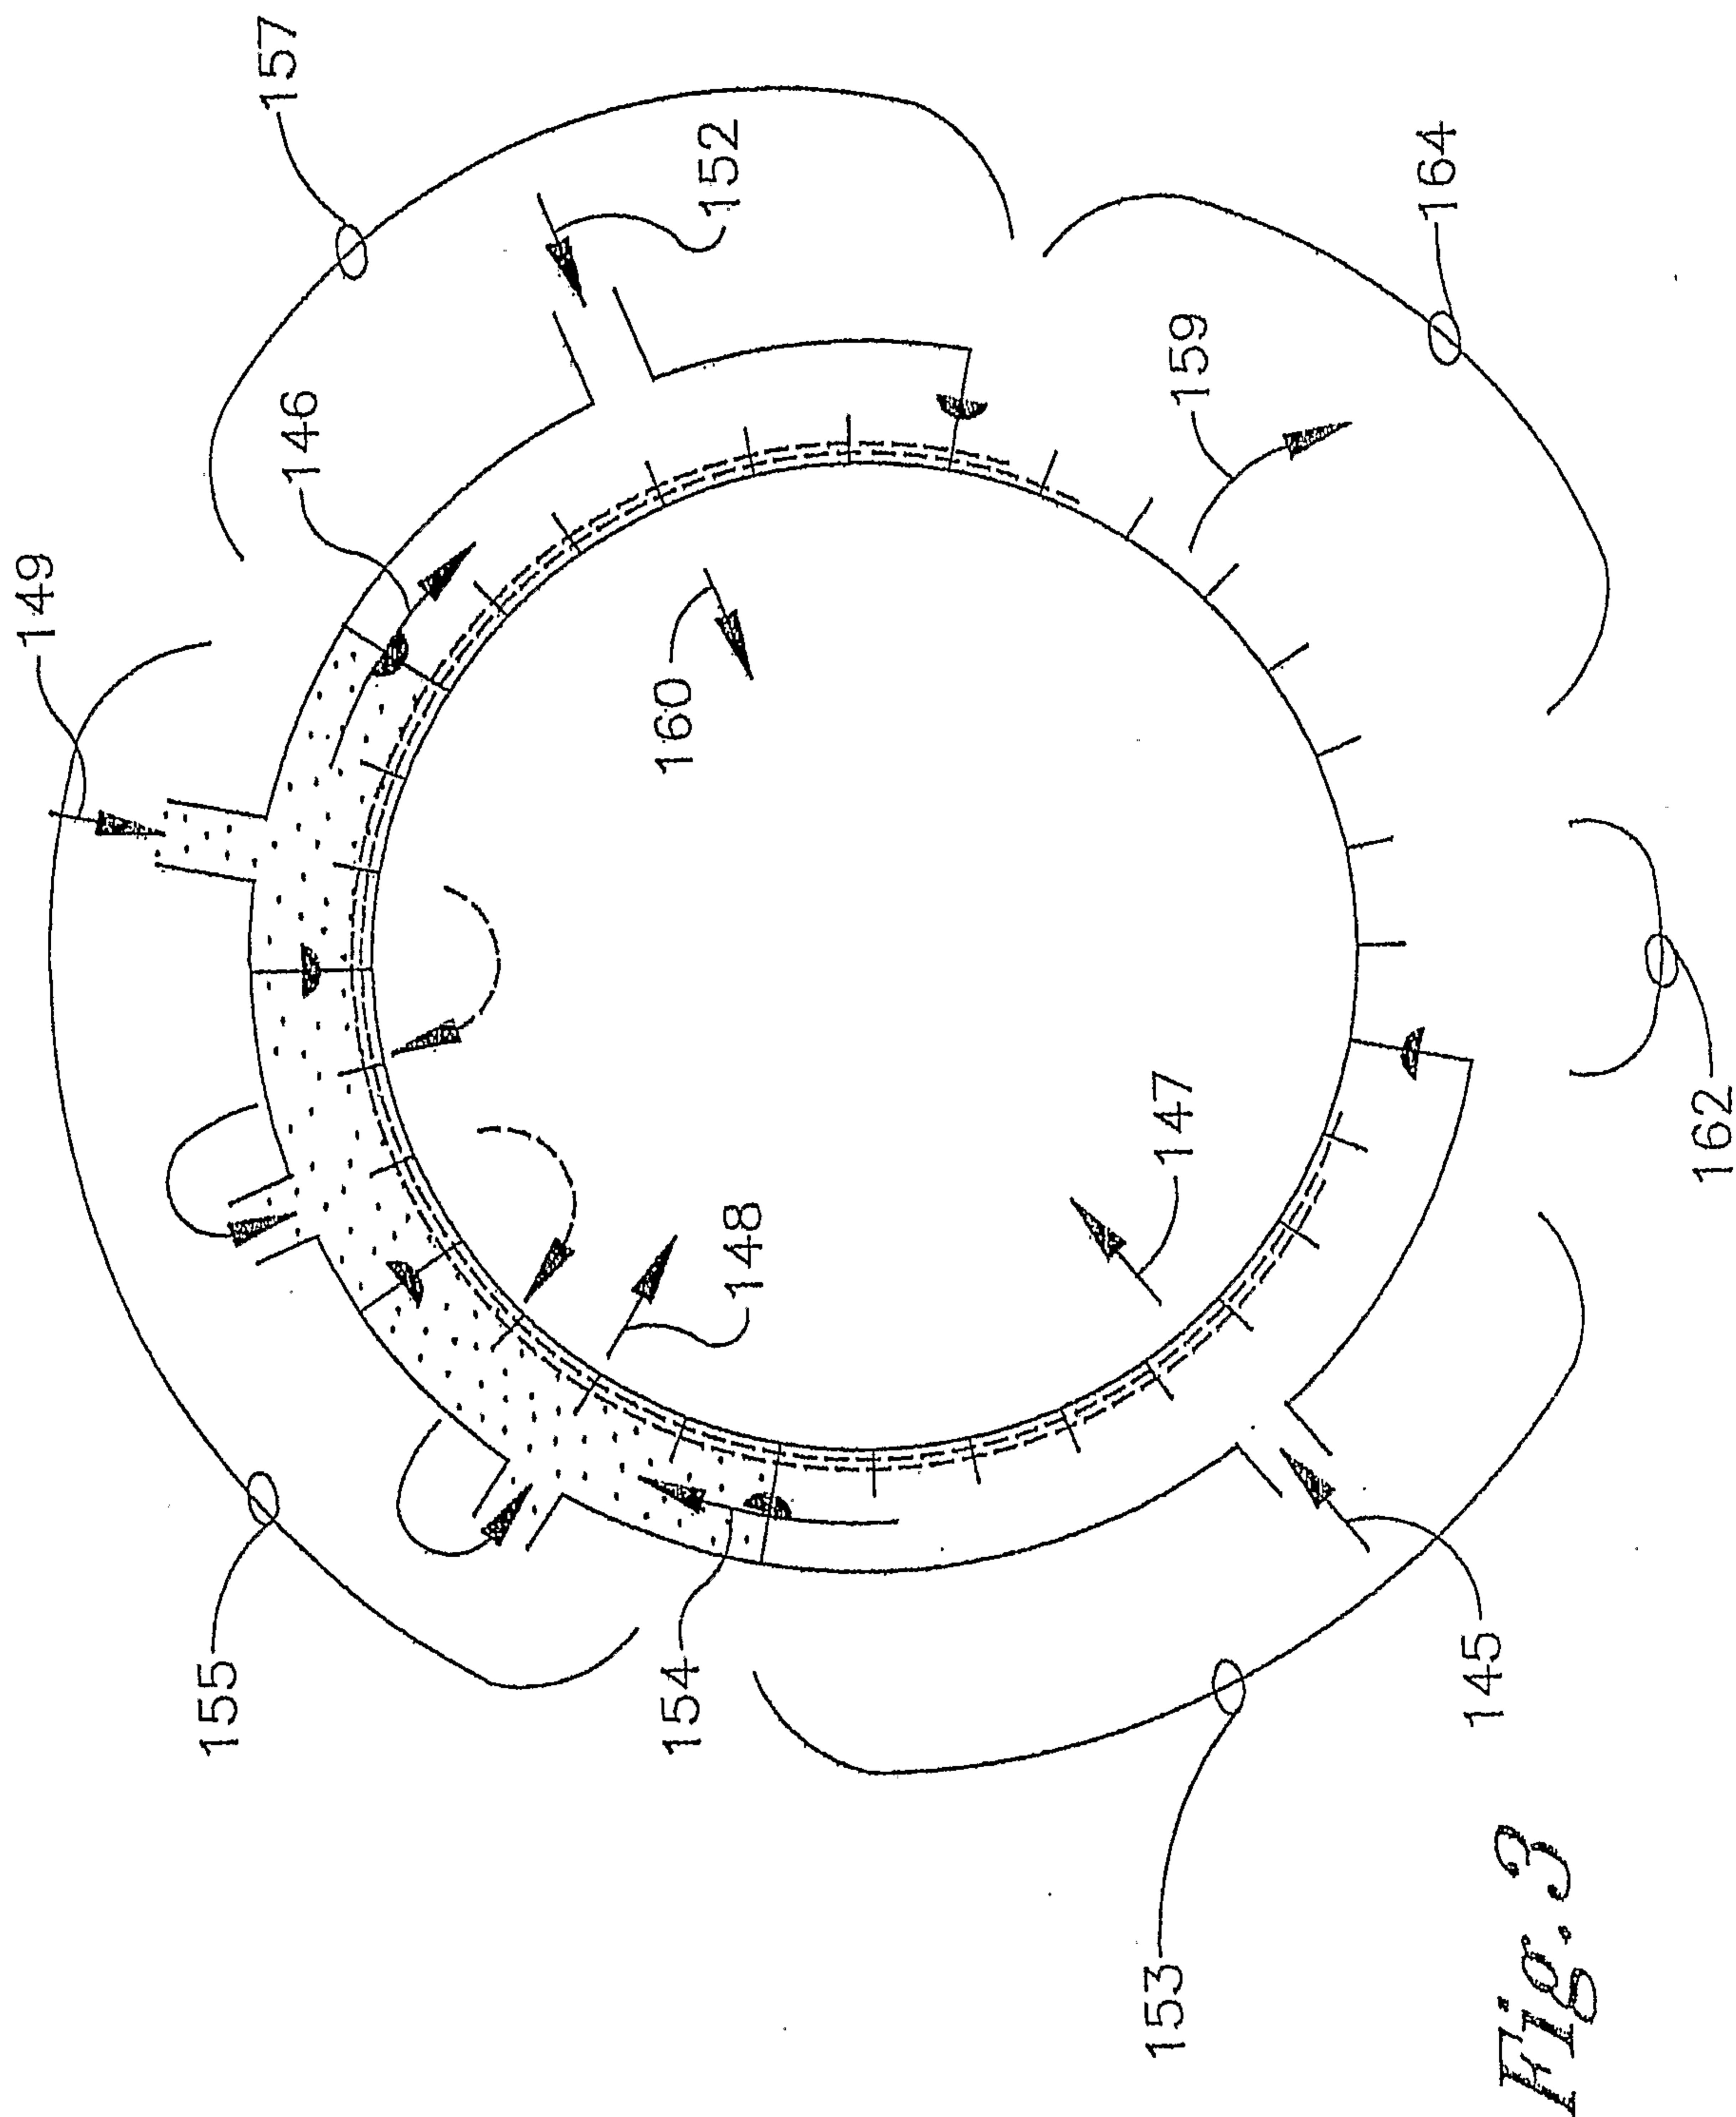


FIG. 3

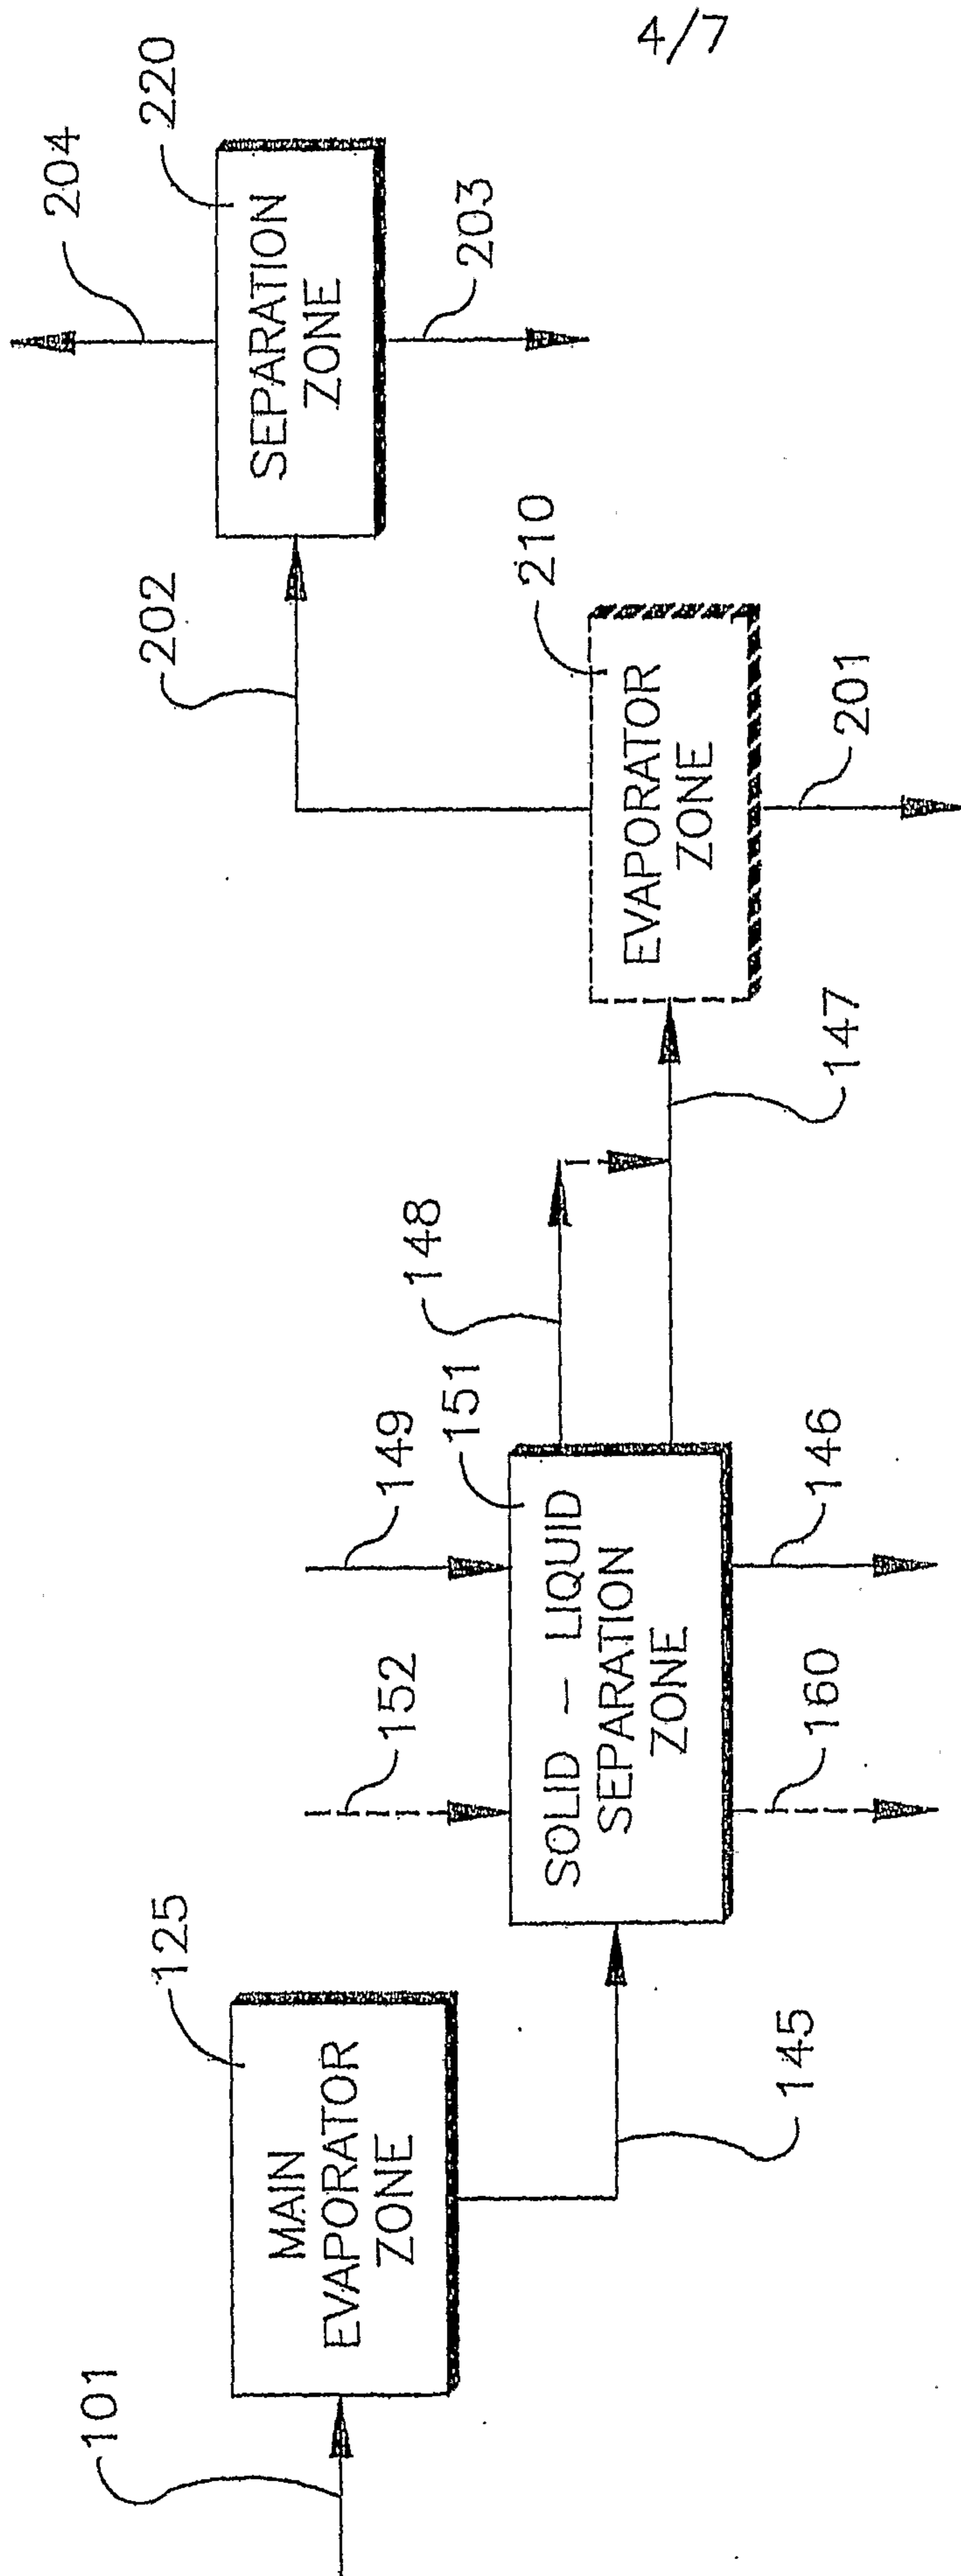


Fig. 4

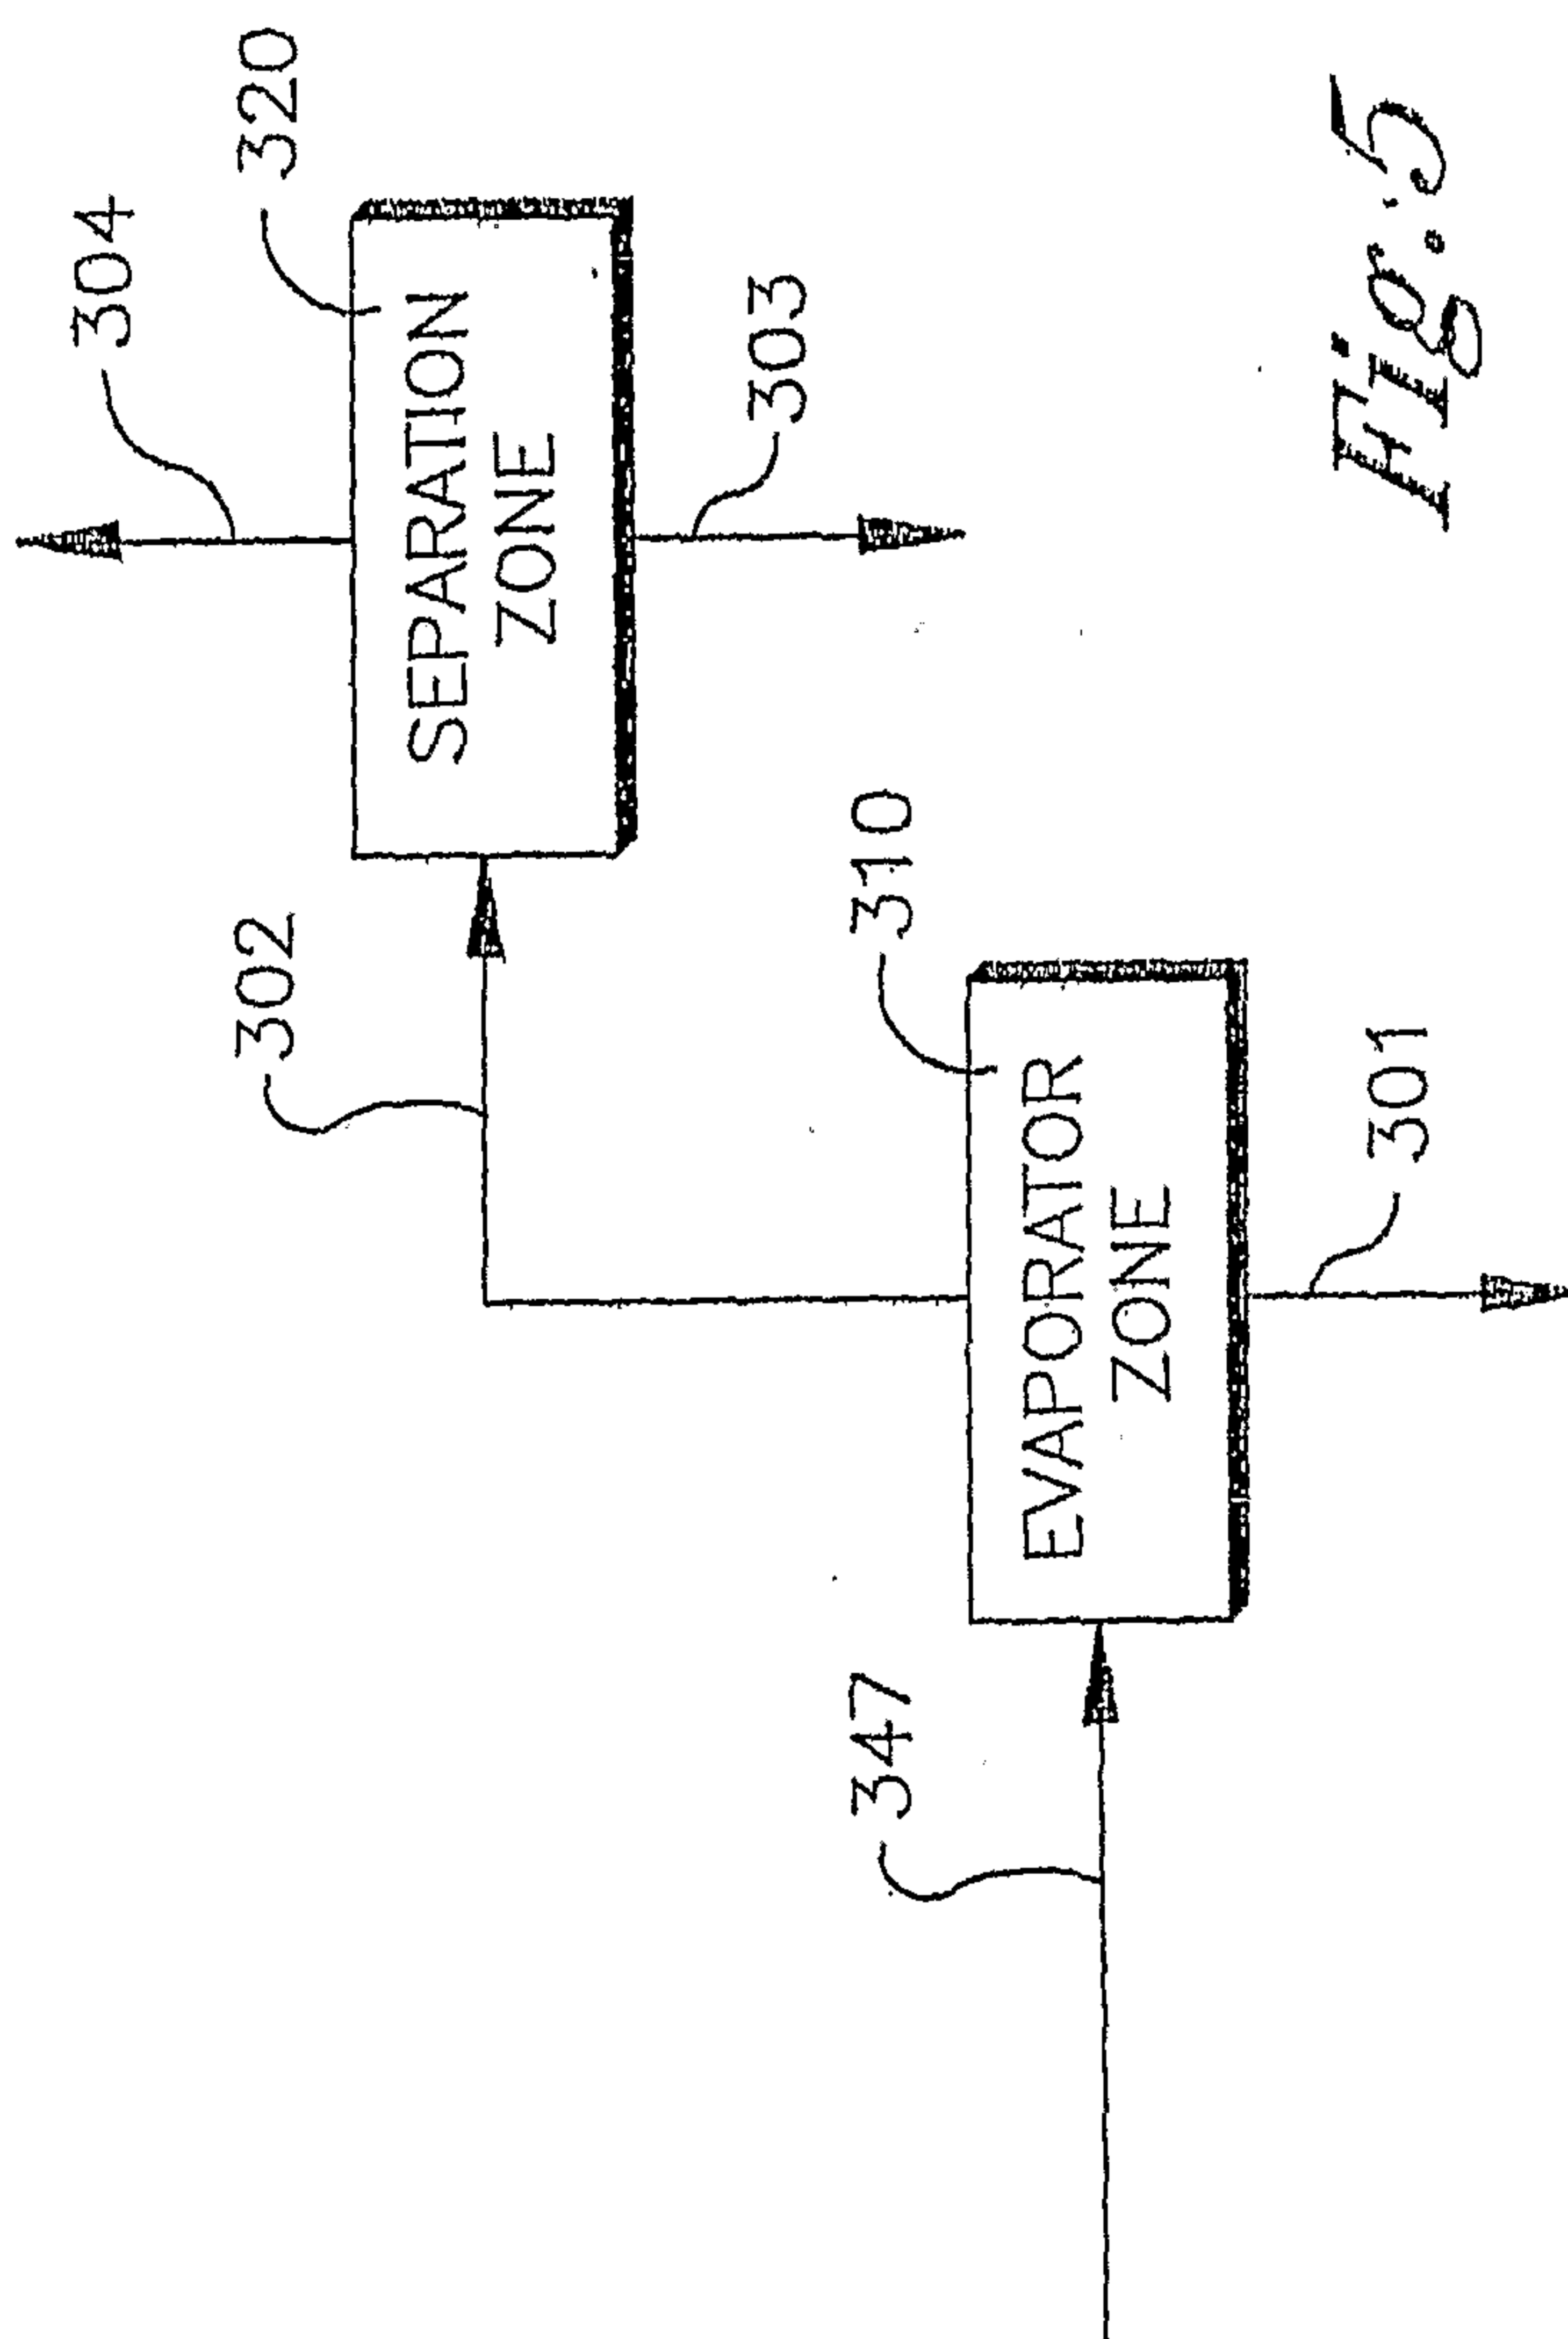


FIG. 5

6/7

	101 MASS%	104 MASS%	105 MASS%	144 MASS%	145 MASS%	146 MASS%	147 MASS%
WATER	7.7	8.9	4.3	6.0	2.7	20.0	3.5
ACETIC ACID	88.4	91.1	80.2	94.0	66.7	0.0	86.6
TEREPHTHALIC ACID	2.9	0.0	11.4	0.0	22.7	74.0	2.3
OTHER ORGANICS	0.6	0.1	2.0	0.0	4.0	5.9	3.1
BENZOIC ACID	0.3	0.0	1.1	0.0	2.1	0.0	2.8
METALS AND BROMINE COMPLEX	0.2	0.0	0.9	0.0	1.8	0.1	1.7
TOTAL FLOW kg/hr	10000	7500	2500	1241	1259	351	894
TEMPERATURE C	121.2	123.5	123.5	49.4	49.4	83.0	49.4

ASPEN SIMULATION OF PROCESS

Table 1A

7/7

	148 MASS%	149 MASS%	201 MASS%	202 MASS%	203 MASS%	204 MASS%
WATER	89.8	100.0	0.0	3.7	1.2	3.9
ACETIC ACID	8.1	0.0	1.7	91.7	47.0	94.4
TEREPHTHALIC ACID	0.7	0.0	40.2	0.0	0.0	0.0
OTHER ORGANICS	0.3	0.0	27.1	1.6	20.3	0.5
BENZOIC ACID	0.3	0.0	0.7	2.9	31.5	1.2
METALS AND BROMINE COMPLEX	0.9	0.0	30.2	0.0	0.1	0.0
TOTAL FLOW kg/hr	801	787	51	843	48	795
TEMPERATURE C	60.0	70.9	272.1	272.1	159.5	159.5

Table 1B

