



(22) Date de dépôt/Filing Date: 2004/02/12

(41) Mise à la disp. pub./Open to Public Insp.: 2004/06/17

(51) Cl.Int.⁷/Int.Cl.⁷ B21D 55/00


(71) Demandeur/Applicant:
POSER, MAURIZIO, IT

(72) Inventeur/Inventor:
POSER, MAURIZIO, IT

(74) Agent: OGILVY RENAULT

(54) Titre : DISPOSITIF DE SECURITE POUR MACHINES INDUSTRIELLES

(54) Title: SAFETY DEVICE FOR INDUSTRIAL MACHINES

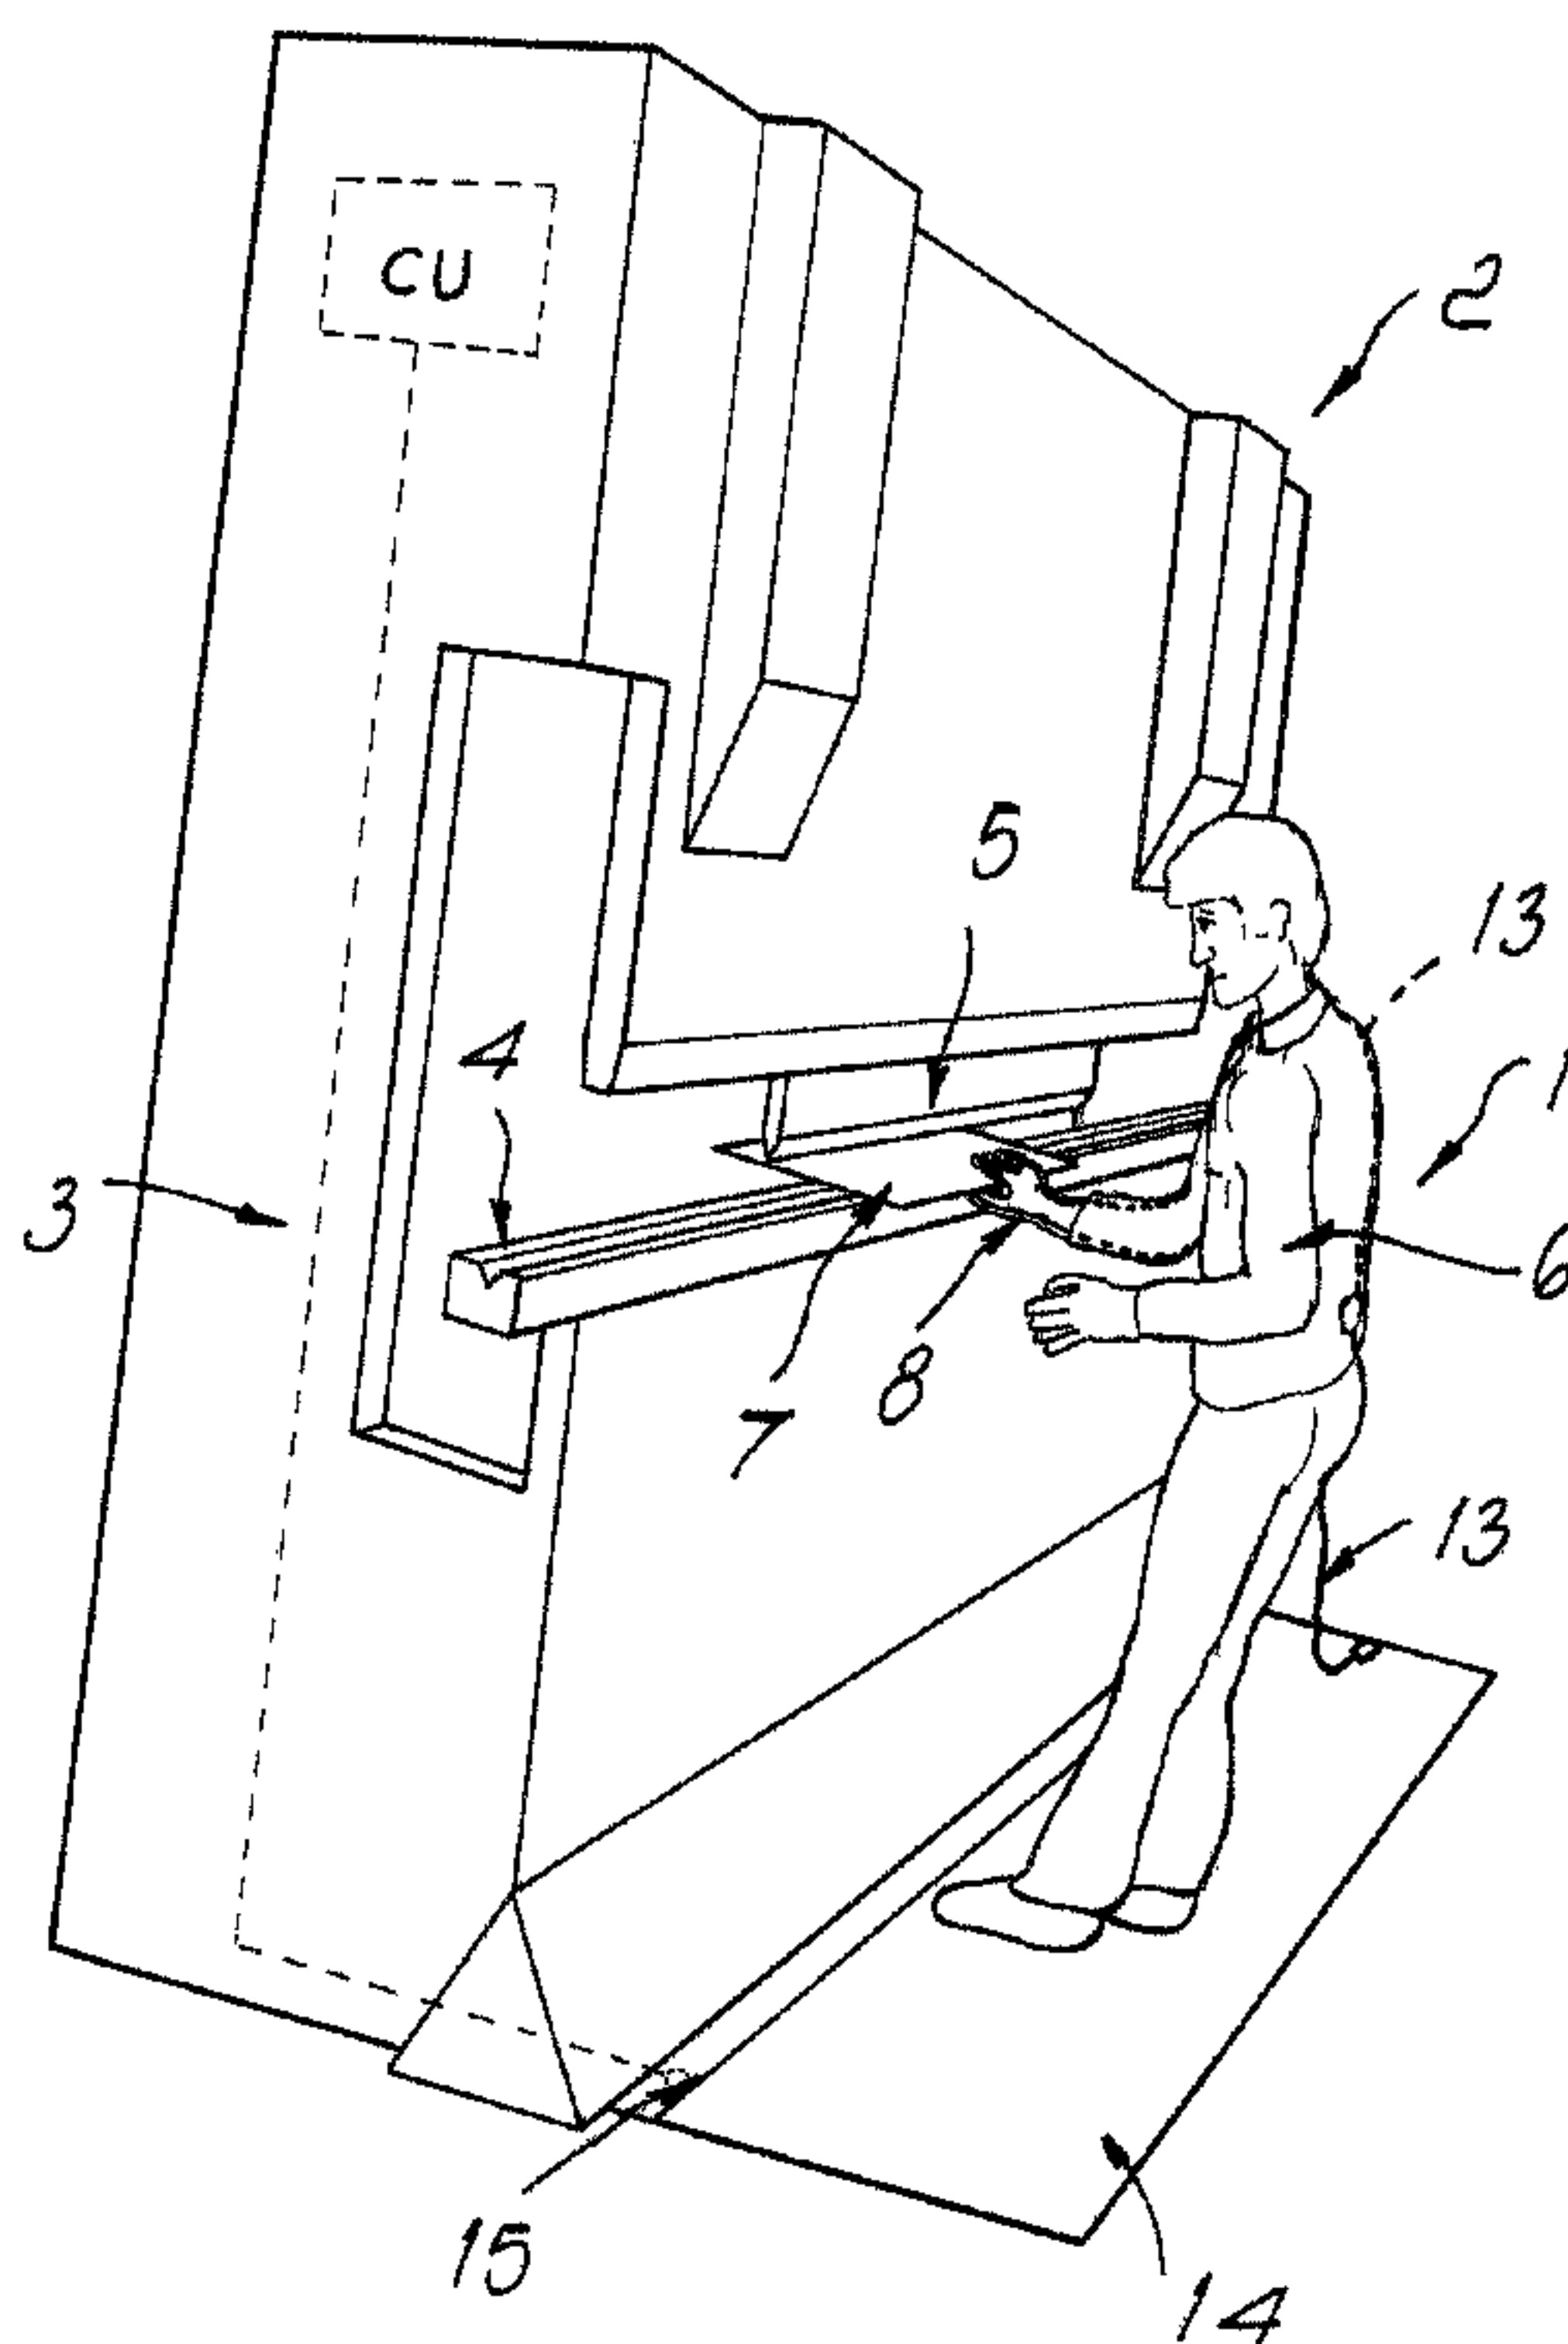

(57) Abrégé/Abstract:

A safety device, particularly for industrial machines, such as for example bending presses provided with an upper tool that is driven in abutment toward a lower die, at least one blank, such as a metal plate, a bent plate or a box-like element, being interposable between the die and the tool, the safety device comprising a glove worn by the operator, provided with first electrically conducting regions located at the back with no conducting regions at the palm; the glove constitutes, at contact with the machine and/or with the blank, an element for transmitting electrical signal between the machine and a control unit (CU) to stop descent of the tool.

SAFETY DEVICE FOR INDUSTRIAL MACHINES

ABSTRACT OF THE DISCLOSURE

5 A safety device, particularly for industrial machines, such as for
example bending presses provided with an upper tool that is driven in
abutment toward a lower die, at least one blank, such as a metal plate, a bent
plate or a box-like element, being interposable between the die and the tool,
the safety device comprising a glove worn by the operator, provided with
10 first electrically conducting regions located at the back with no conducting
regions at the palm; the glove constitutes, at contact with the machine
and/or with the blank, an element for transmitting electrical signal between
the machine and a control unit (CU) to stop descent of the tool.

(Figure 1)

SAFETY DEVICE FOR INDUSTRIAL MACHINES

The present invention relates to a safety device, particularly for industrial machines, such as bending presses for cold working of metal
5 plates.

Said bending presses are usually constituted by a supporting frame for a die, which is arranged approximately horizontally and is conveniently shaped; a tool, such as a blade or punch, is arranged above said die and is slidingly associated with said frame.

10 If a blank, such as a metal plate, a bent plate or a box-like component is positioned above the die, it is possible to actuate the descent of the tool so as to force a given deformation of said blank.

The blank can be subjected to a plurality of successive bending operations, one for each descent of the tool, even along axes that are not
15 mutually perpendicular, until it assumes the intended shape.

In order to protect the safety of the operator assigned to positioning the blank on the die, safety devices are currently used which are based for example on the use of photocells.

In particular, it is known to arrange a pair of transducers, a transmitter
20 and a receiver, along a line that crosses longitudinally the industrial machine at a height from the die that is slightly greater than the thickness of the metal plate and at a short distance from the region occupied by the blade or punch during descent.

The photocells are connected to a control center that is suitable to
25 block the descent of the tool when the signal transmitted between said photocells is interrupted, accordingly indicating the presence of a foreign object proximate to said tool.

The main drawback of this conventional safety device is that said known type of photocell device in some circumstances halts the industrial
30 machine even when the operator is completely safe.

In particular, one case that occurs frequently relates to the working of box-like components or in any case of blanks that have one or more bends for example at 90°.

5 In this circumstance, the portion of the blank that has already been worked protrudes above the flat portion to be worked, interposing between the two photocells and therefore causing an incorrect stop of production.

In such cases there is therefore the important drawback of having to deactivate said known type of protection device, performing the operation without any assurance for the safety of the operator.

10 This is a severe problem for protecting operator safety; said operators, in order to work certain parts, are forced to work for most of the time without any safety device.

This problem is worsened by the fact that after a few hours of work the attention of the operator necessarily decreases, entailing an increase in
15 the already high danger level of the use of the machine.

In any case, the lack of safety regarding certain machining operations requires great attention in performing said operations and therefore a greater expenditure of resources and increased slowness with respect to an identical machining process performed in safe conditions.

20

The aim of the present invention is to solve the above-mentioned problems, eliminating the drawbacks of the cited known art, by providing a safety device that allows the operator to work at all times in safe conditions regardless of the shape of the blank to be manufactured.

25 Within this aim, an object of the present invention is to provide a safety device that ensures the operator that the industrial machine is stopped in case of accidental contact, for example of one's fingers, with the tool, allowing the operator to work without worries.

Another object is to provide a safety device that allows to improve
30 work speed, with a consequent increase in the efficiency of the industrial

machine.

Another object is to provide a safety device that is structurally simple and has low manufacturing costs.

This aim and these and other objects that will become better apparent hereinafter are achieved by a safety device particularly for industrial machines such as for example bending presses provided with an upper tool that is driven in abutment toward a lower die, at least one blank being interposable between said die and said tool, characterized in that it comprises a glove that can be worn by the operator and is provided with first electrically conducting regions that are located approximately at the back and is not provided with conducting regions at the palm, said glove constituting, in case of contact with said industrial machine and/or with said blank, a means for transmitting an electrical signal between said industrial machine and a control unit in order to stop the descent of said tool.

15

Further characteristics and advantages of the present invention will become better apparent from the following detailed description of a particular but not exclusive embodiment thereof, illustrated by way of non-limiting example in the accompanying drawings, wherein:

20 Figure 1 is a perspective view of an industrial machine such as a bending press;

Figures 2 to 4 are front views of a glove according to the present invention that can be used by the operator of the industrial machine of Figure 1;

25 Figure 5 is a perspective view of a detail of the industrial machine of Figure 1, used in safe conditions;

Figure 6 is a perspective view of a detail of the industrial machine of Figure 1, used in conditions that are dangerous for the operator.

30 In the embodiments that follow, individual characteristics, given in

relation to specific examples, may actually be interchanged with other different characteristics that exist in other embodiments.

With reference to the figures, the reference numeral 1 designates a safety device particularly for industrial machines, such as for example a bending press 2 of the type with slow descent, shown in Figure 1.

The bending press 2 comprises a supporting frame 3 for a first fixed part, such as a die, designated by the reference numeral 4.

The die 4 is usually arranged approximately horizontally and its upper surface is conveniently shaped according to a preset geometry that depends on the blank to be machined or in any case on the operation to be performed.

Above the die 4 a tool 5 is provided that constitutes a movable part, such as for example a blade or a punch, that is slidingly associated with the frame 3 along a working axis that is advantageously perpendicular to the plane of arrangement of the die 4.

Actuation means, included in the machine 2, for controlling the movement of the tool 5 are provided.

An operator 6 can interpose manually, between the die 4 and the tool 5, a blank such as for example a metal plate 7.

In this manner, every time the tool 5 descends into abutment toward the die 4, the metal plate 7 undergoes deformation and in particular is bent along the line formed by the shape and position of said tool.

The safety device 1 comprises a glove 8 that can be worn by the operator 6 and is provided with first electrically conducting regions, generally designated by the reference numeral 9, that are arranged approximately at the back of the glove 8.

Moreover, the glove 8 has no conducting regions at its palm.

In particular, Figures 2 to 4 illustrate some possible embodiments of the glove 8, in each of which the first conducting regions 9 are constituted by a strip 10 that is conveniently shaped to form a winding path so as to

affect or extend over approximately the entire region of the back of the glove 8.

Such first conducting regions 9 are therefore differentiated from second nonconducting regions 11 of the back of the glove 8, which are
5 made of a material that is not electrically conductive.

The provision of such first conducting regions 9 on the glove 8 can be achieved for example by interconnecting thereto the strip 10, which is made of an electrically conducting material, such as a metallic material or a particular conducting plastic material.

10 The strip 10 can be associated with the back of the glove 8, which does not conduct, for example by sewing, gluing, thermal bonding or by way of a molding operation.

As an alternative, it is possible to use electrically conducting paints that are sprayed onto the glove by interposing suitable mechanical or
15 electrostatic masks.

It is also possible for example to provide in a single operation the direct molding of the glove including the strip 10.

In any case, the connection of the first conducting regions 9 must not modify substantially the mechanical characteristics of the glove 8,
20 particularly finger flexing.

In this particular embodiment, illustrated merely by way of example, the strip 10 has two ends, designated by the reference numerals 12a and 12b, that are arranged approximately in the wrist region.

One or more first cables, generally designated by the reference
25 numeral 13, can be connected detachably to the ends 12a and 12b and can be coupled temporarily to the item of clothing of the operator 6 in order to constitute a transmitting means that transmit a signal, preferably an electric signal, between the bending press 2 and a control unit CU and controls the stopping of the descent of the tool 5.

30 In particular, the control unit CU is suitable to control for example

any flow of electrical current in a first circuit that is normally open and therefore without current and comprises the bending press 2, the first conducting regions 9 of the glove 8, the cable 13 and any means for transmitting the electrical signal that can be interposed between the cable 13
5 and the control unit.

For example, in the embodiment of Figure 1 the first cable 13 transmits the signal to a mat 14, which is made of conducting material and is in turn electrically connected by means of a second cable 15 to the control unit, which is advantageously accommodated and connected to the bending
10 press 2.

If the glove 8 makes contact with the tool 5, the first circuit closes and therefore the descent of the tool 5 is halted.

The shape of the glove 8 advantageously entails the provision of a single strip 10 of conducting material, since the control unit monitors the
15 flow of current within a second circuit that comprises indeed the strip 10.

In this manner, if the first conducting regions 9 are partially damaged, with breakage of the strip 10 in one or more points, the control unit detects an interruption or a considerable reduction in the current in the second circuit, accordingly stopping the press 2 or indicating in various manners to
20 the operator or to the department manager the possible failure of the safety device 1.

Such safety device 1 according to the present invention can be used alone but it can be preferably associated with a separate safety device of a known type, such as the photocell safety device described above, that
25 intervenes whenever it is necessary to deactivate said device.

Operation is therefore as follows: with reference to Figure 1, the operator 6 must wear, during work, at least one glove 8 that is conveniently connected to the conducting mat 14 and to the control unit.

Such control unit checks the correct functionality of the glove by
30 detecting the current in the second circuit and indicates, in case of failure,

the need to replace the glove being used with a new one.

The operator can work normally at the bending press 2, touching the die 4 and the blank 7, since the palm of the glove is nonconducting and therefore does not close the first circuit.

5 However, if the operator accidentally inserts his hand between the tool 5 and the die 4, the contact of the back of the glove with said tool forces the halting of the press 2, accordingly protecting the integrity of the operator.

10 It has thus been shown that the invention has achieved the intended aim and objects, a safety device having been devised that allows the operator to work in safe conditions regardless of the shape of the blank to be manufactured.

15 The safety device in fact halts the industrial machine immediately, as soon as contact occurs between the conducting regions of the glove and the descending tool, accordingly allowing the operator to work in absolute confidence.

Said safety device further allows to improve the operating speed, with a consequent increase in the efficiency of the industrial machine.

20 The invention is of course susceptible of numerous modifications and variations, all of which are within the scope of the appended claims.

25 Thus, for example, it is possible to provide a safety device in which the first circuit comprises wireless transmission means for transmission of the signal, for example by means of radio frequencies, ultrasound or infrared beams, so that each operator wears a transmitter that is electrically connected to the glove and communicates with the control unit.

In this manner one might avoid the hindrance due to the first cable.

Moreover, the second circuit for detecting correct functionality of the glove might optionally be omitted, or might not be connected to the control unit.

30 For example, it is possible to provide a second circuit that is

completely accommodated within the glove and comprises a sensor constituting indication means for detecting the flow of current and for providing an indication if the circuit is open.

The invention may of course also be applied to other industrial
5 machines, preferably slow-moving ones, such as for example bending presses provided with an upper fixed punch and with a lower movable die that can be moved so as to abut against the punch.

The materials used, as well as the dimensions that constitute the individual components of the invention, may of course be more pertinent
10 according to specific requirements.

The various means for performing certain different functions need not certainly coexist only in the illustrated embodiment but can be present per se in many embodiments, including ones that are not illustrated.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGES IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A safety device for an industrial machine provided with a control
5 unit and with at least a first and a second parts, said first part being movable
in abutment toward the second part that is provided fixed, and with at least
one blank being interposable between said first and second parts, the device
comprising: at least one glove worn by an operator, said glove being
provided with first electrically conducting regions and with second
10 nonconducting regions, and constituting, in case of contact with the
industrial machine and/or with the blank, a transmitting means for
transmitting an electrical signal between the industrial machine and the
control unit, in order to stop movement of said first movable part.

2. A safety device for an industrial machine that is provided with a
15 control unit, with an upper tool driven into abutment toward a lower die,
and with at least one blank that is interposable between said die and said
tool, the device comprising at least one glove that is worn by an operator, is
provided with first electrically conducting regions that are located at a back
region of the glove and is free from conducting regions at a palm region
20 thereof, said glove constituting, in case of contact with the industrial
machine and/or with the blank, a transmitting means for transmitting an
electrical signal between the industrial machine and the control unit in order
to block movement of the tool.

3. The safety device of claim 2, comprising a first circuit, between
25 said at least one glove, said control unit and said industrial machine, said
first circuit being closeable electrically upon contact of said first conducting
regions with said tool.

4. The safety device of claim 3, wherein said first conducting regions
of said at least one glove comprise a strip of electrically conducting material
30 that extends over at least a finger region of the back region of said glove.

5. The safety device of claim 4, wherein said strip is shaped contoured along an open and winding path, so as to extend over all of the regions of the back region of said glove.

6. The safety device of claim 4, wherein said strip forms on the back region of said at least one glove second electrically non-conducting regions that are connected to the palm region of said glove.

7. The safety device of claim 4, wherein said first conducting regions of said at least one glove are provided by connection of said strip to the glove, said strip being made of electrically conducting material, selected from a group comprising metallic materials and particular conducting plastic materials.

8. The safety device of claim 7, wherein said strip is associated with the back region of said at least one nonconducting glove with a sewing or gluing connection.

9. The safety device of claim 7, wherein said strip is associated with the back region of said at least one nonconducting glove with a thermal bonding or molding connection.

10. The safety device of claim 7, wherein said at least one glove, comprising a back region with first conducting regions and second nonconducting regions and a nonconducting palm region, is provided as a single molded piece.

11. The safety device of claim 4, wherein said first conducting regions are provided by electrical deposited conducting paints deposited onto the back region of said at least one glove.

12. The safety device of claim 4, comprising a plurality of first cables, said first conducting regions being connected electrically, by way of said first cables, to the control unit that is further connected to the industrial machine, so as to form said first circuit between said tool and said glove.

13. The safety device of claim 12, wherein at closure of said first circuit, the control unit stops movement of said tool and optionally

deactivates the industrial machine.

14. The safety device of claim 12, comprising at least one second electric circuit for applying and controlling a separate control current that circulates in said first conducting regions.

5 15. The safety device of claim 14, wherein said control unit includes malfunction indication means, partial damage of said first conducting regions with breakage of said strip in one or more points forcing activation of said indication means for indicating malfunction of said glove.

10 16. The safety device of claim 15, wherein said indication means are accommodated in said control unit, which is part of said second circuit, so as to allow stopping of said industrial machine upon detection of a fault in said at least one glove.

15 17. The safety device of claim 14, comprising wireless transmission means, included in said control unit for transmission of the signal between said glove and said tool, said transmission means comprising a transmitter that is electrically connected to said at least one glove and communicates with said control unit.

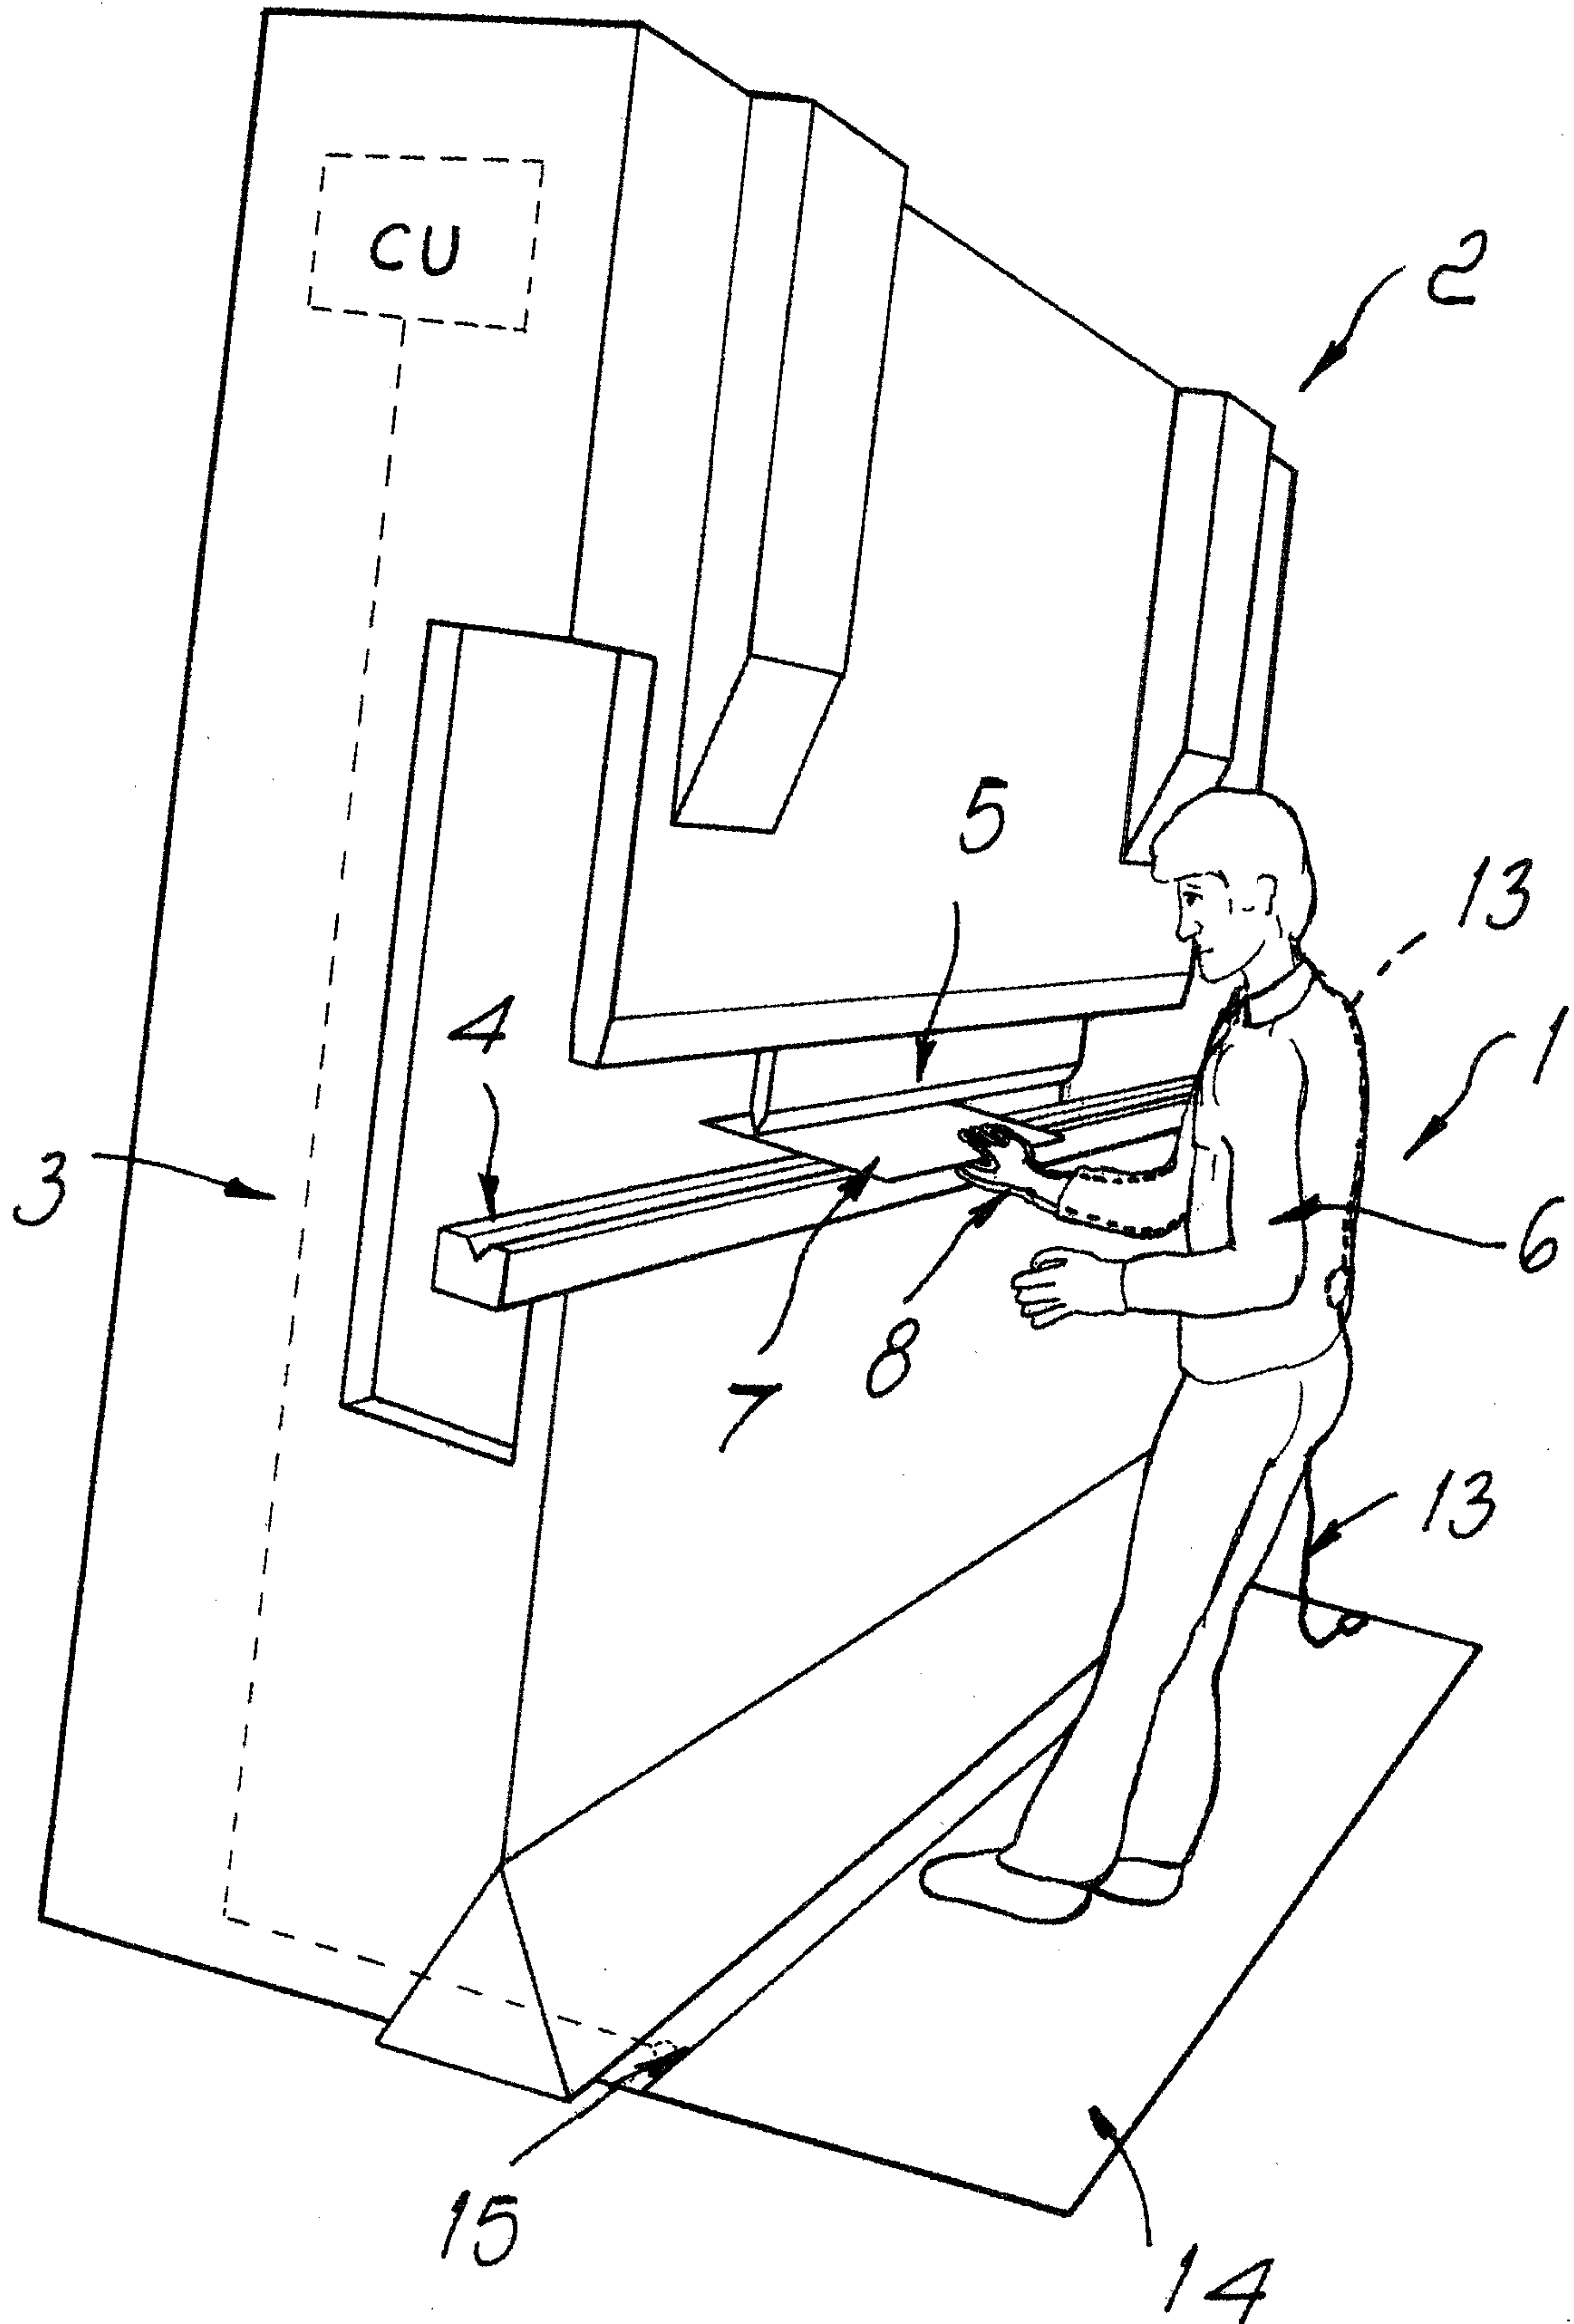


Fig. 1

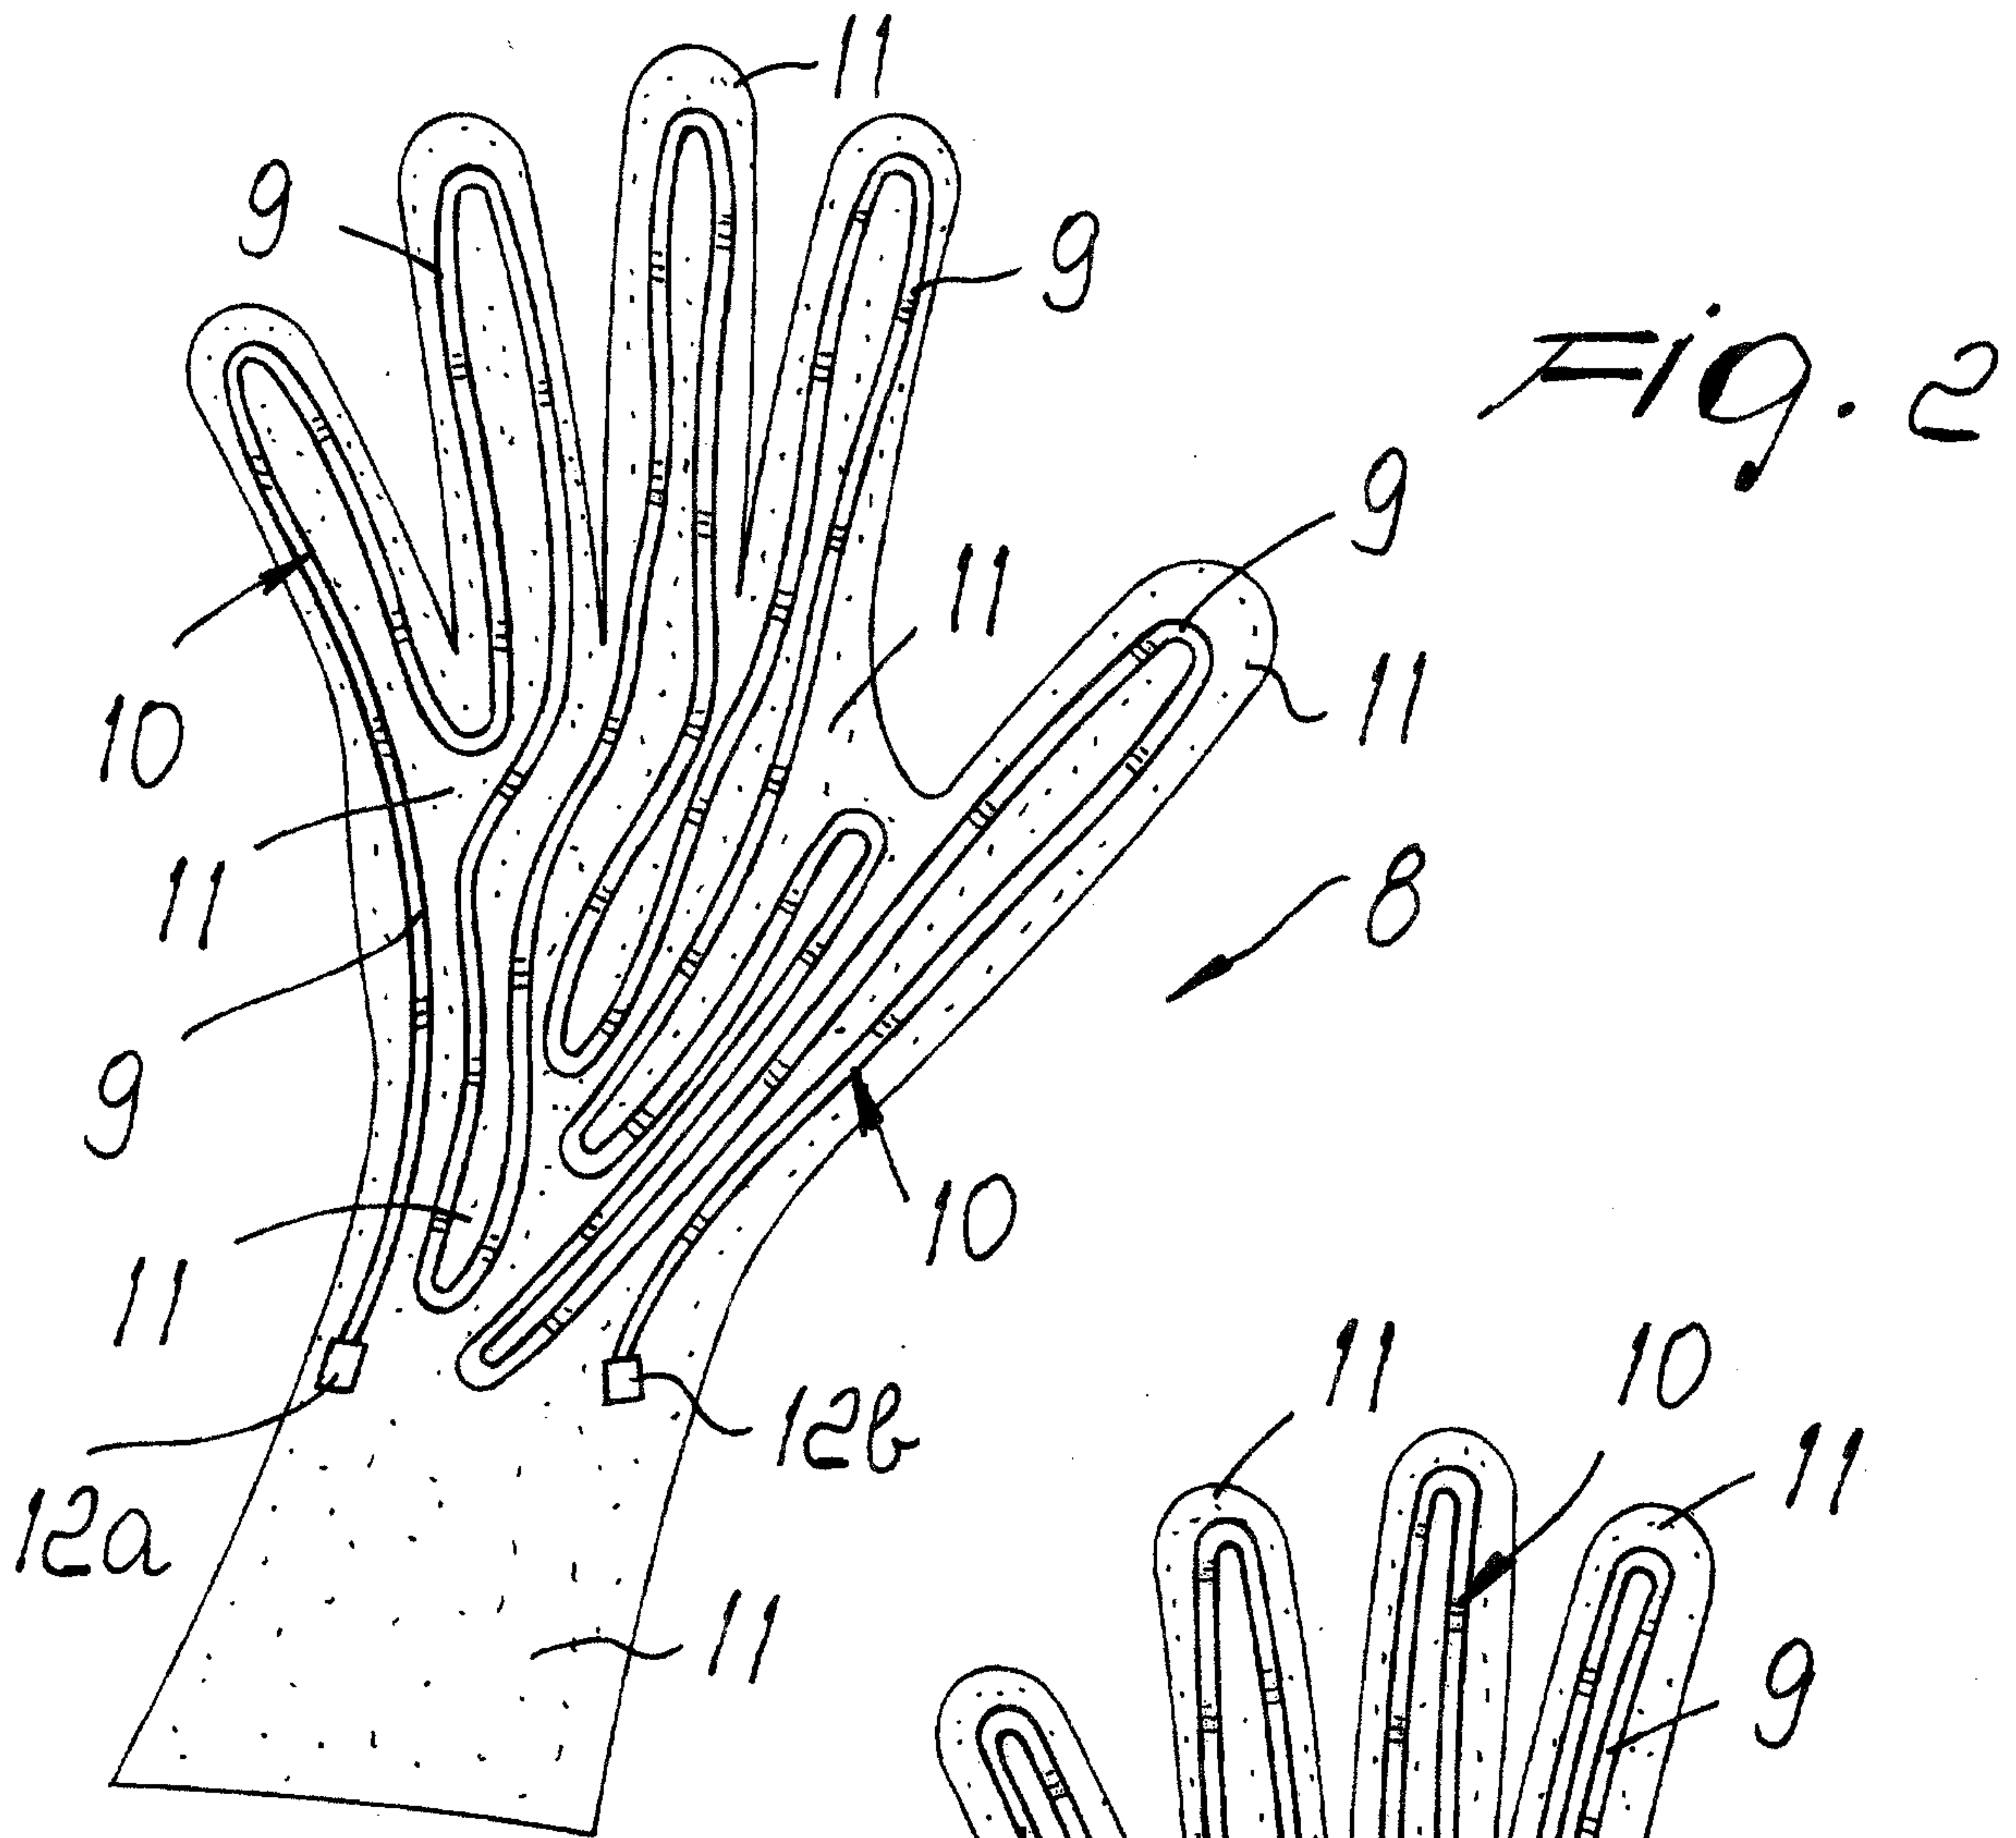
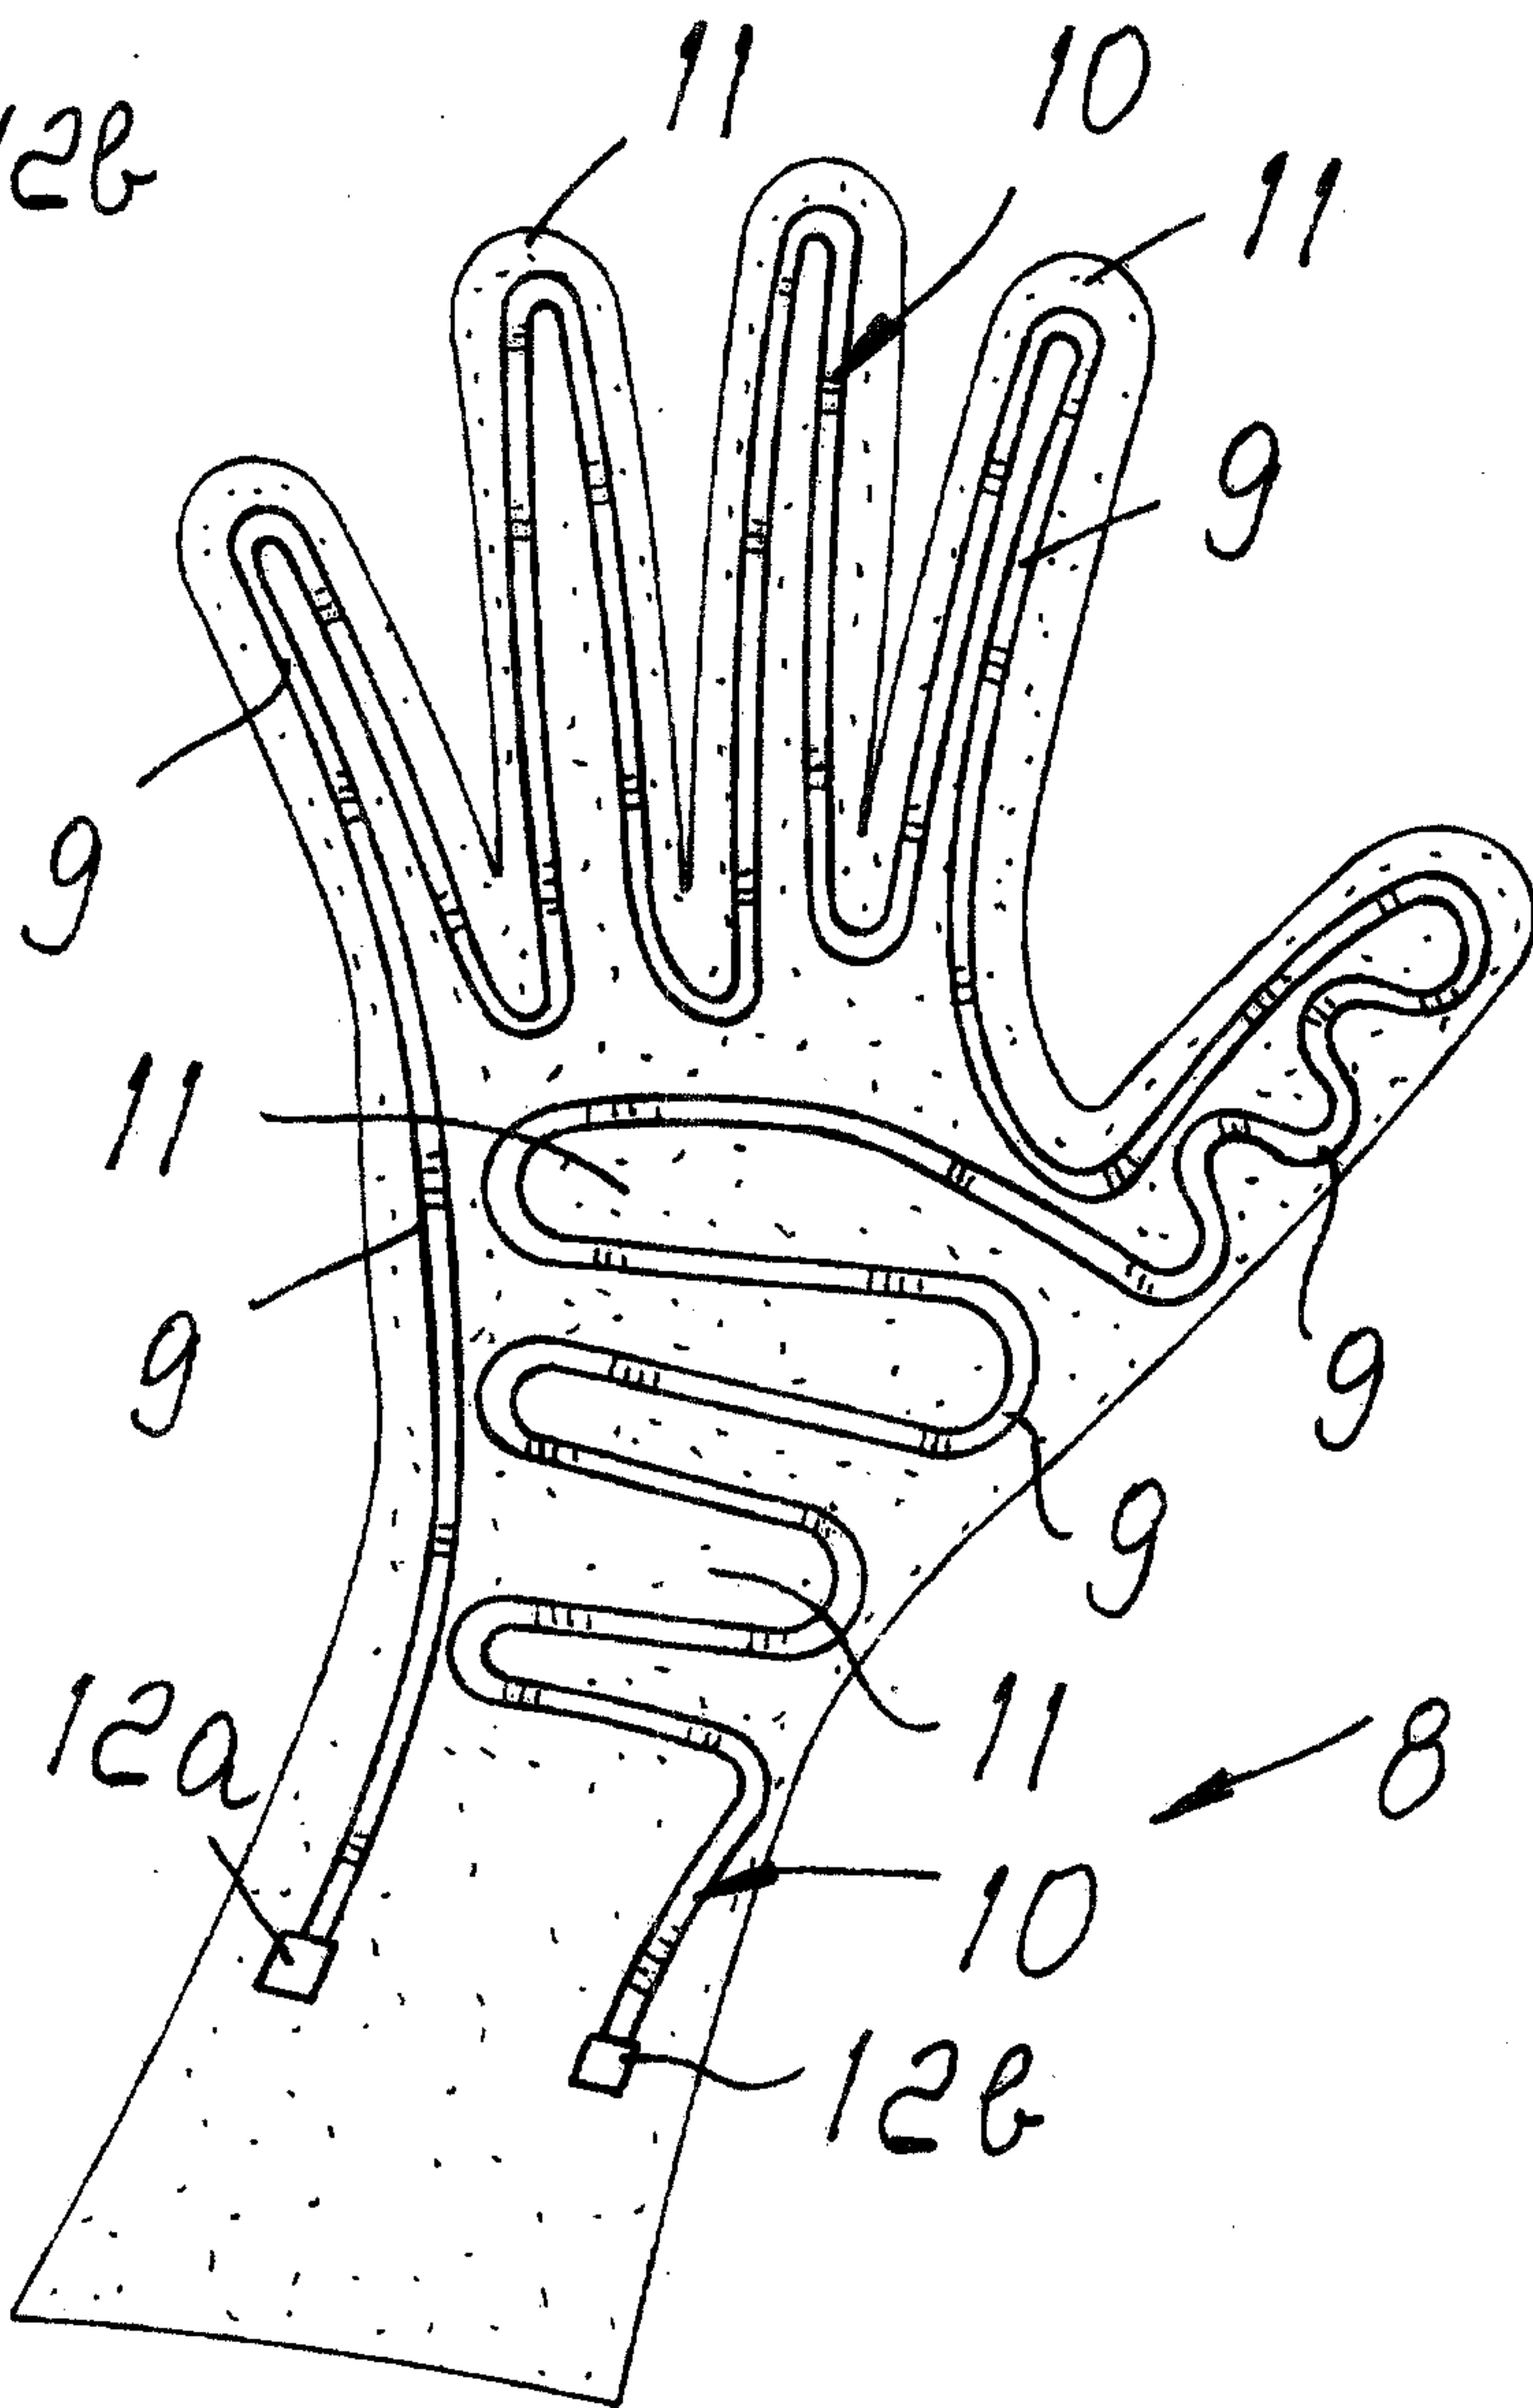


Fig. 3



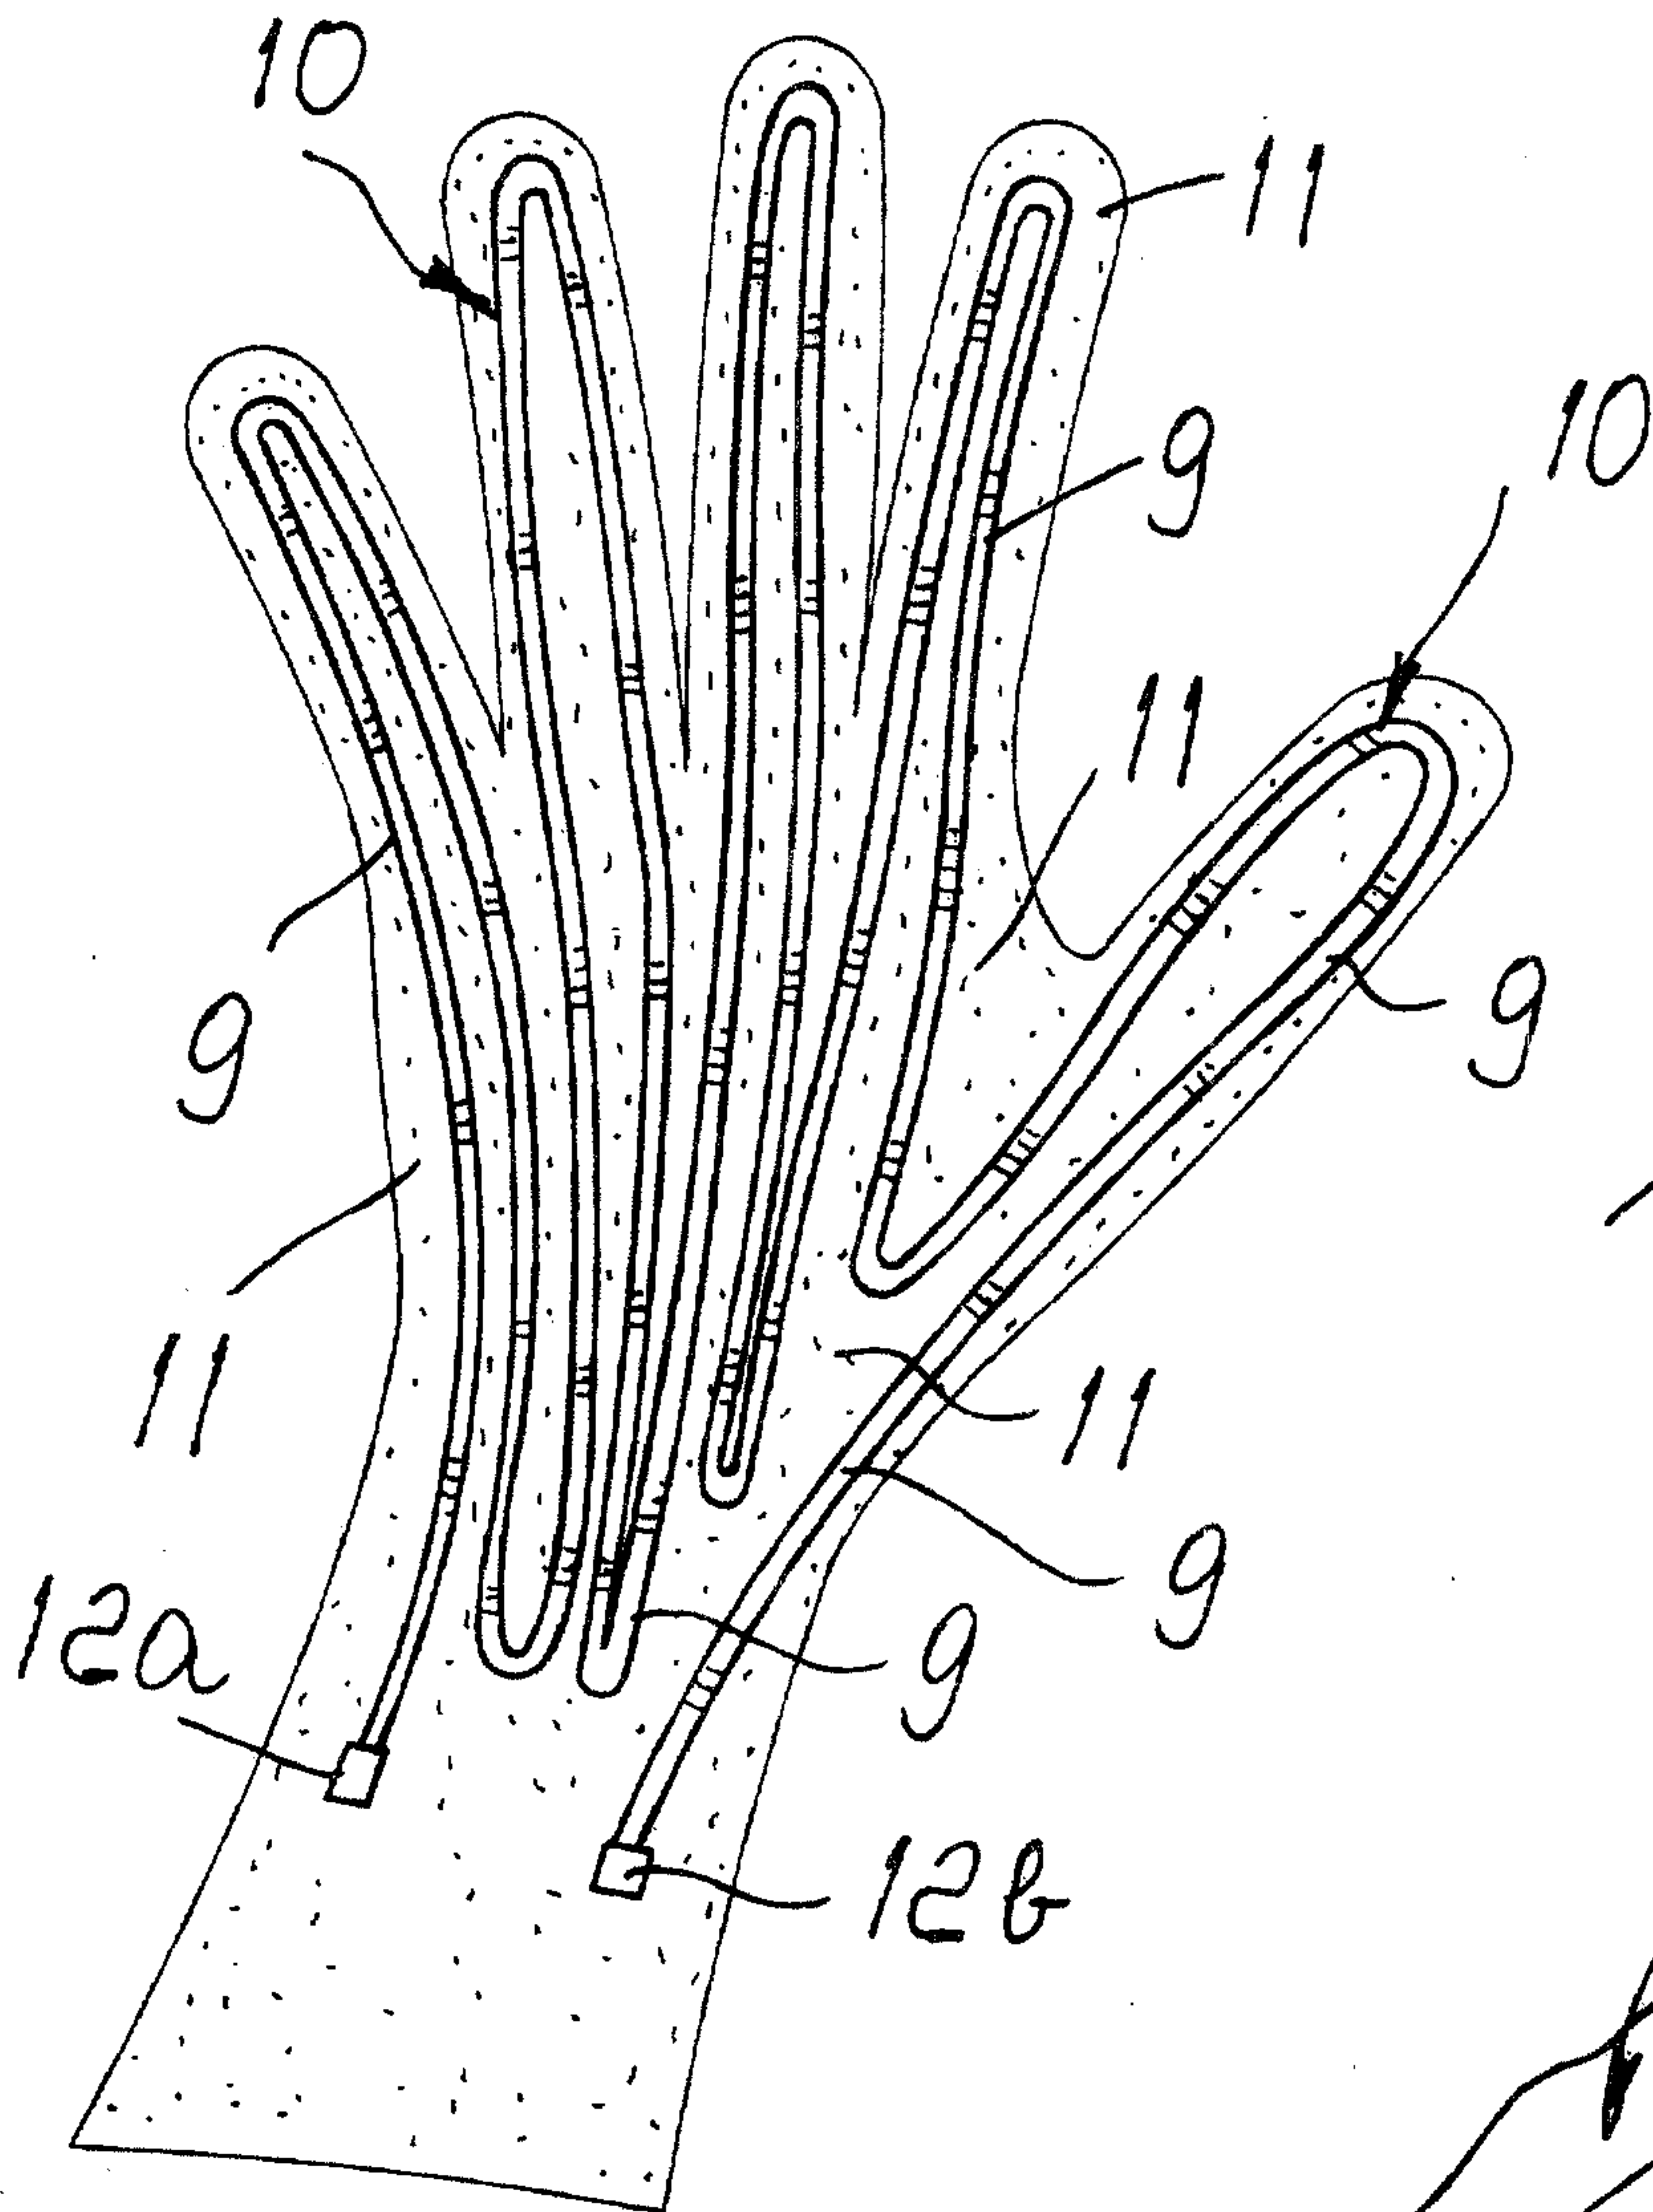


FIG. 4

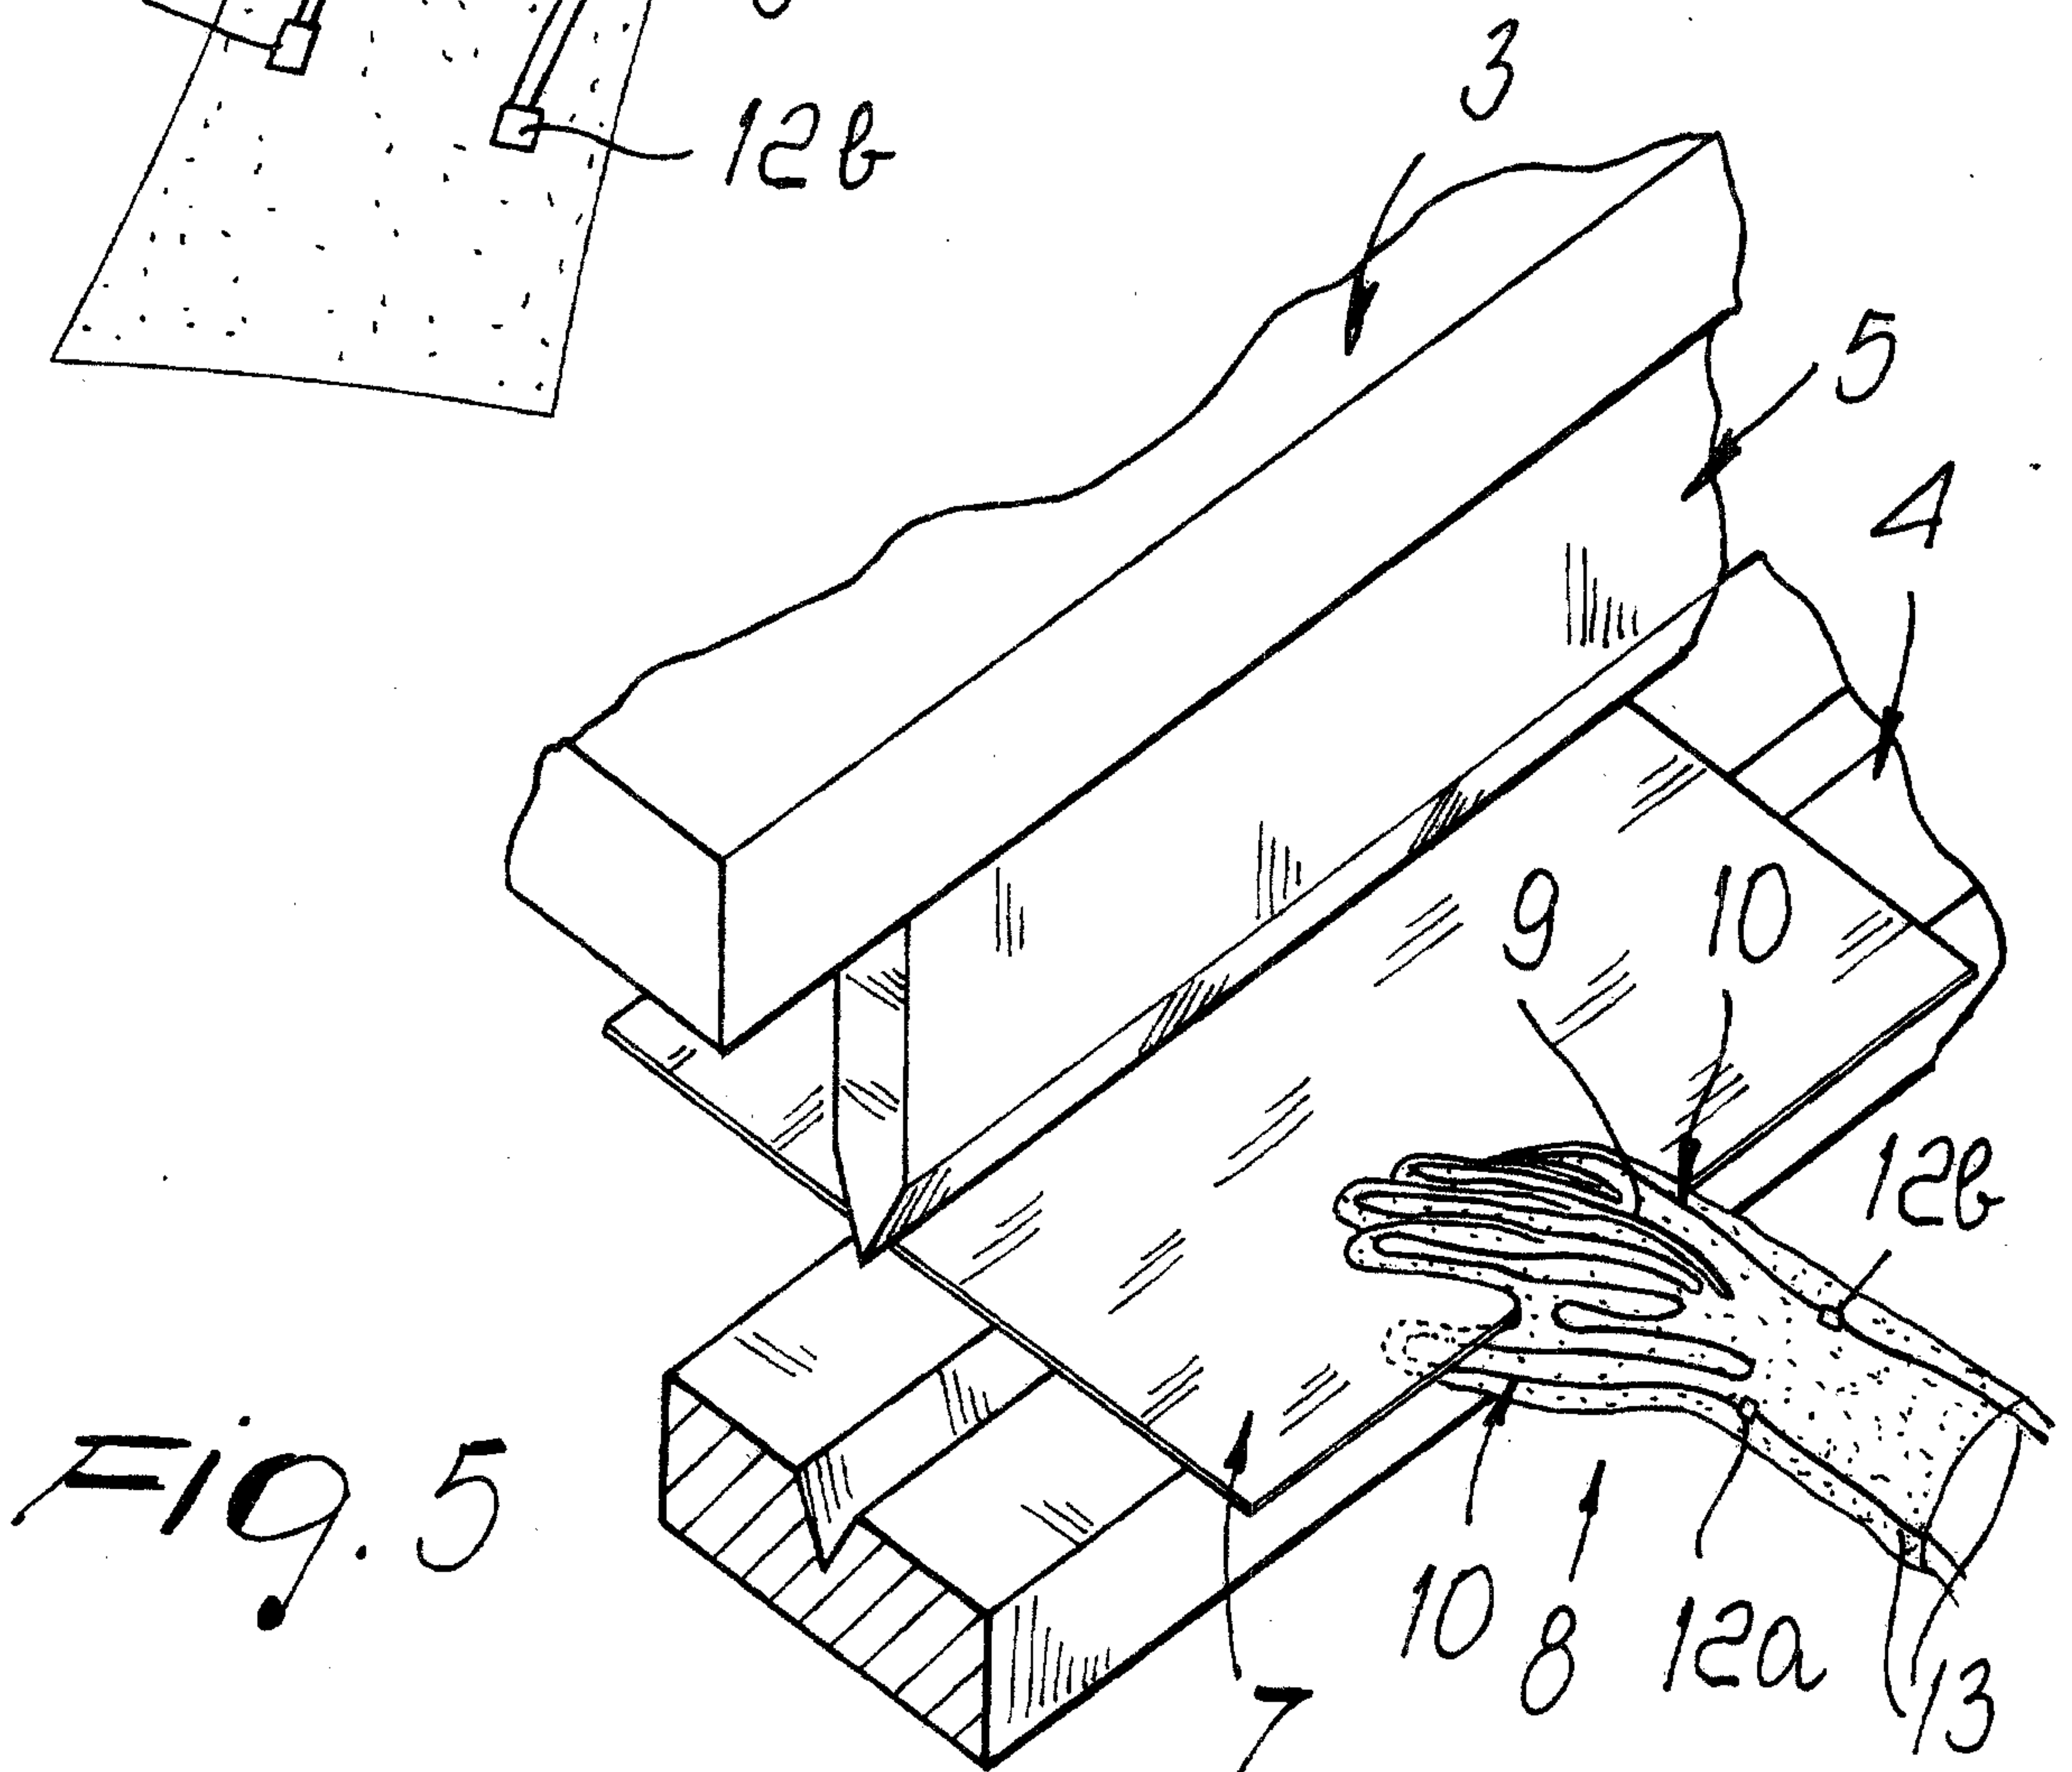


FIG. 5

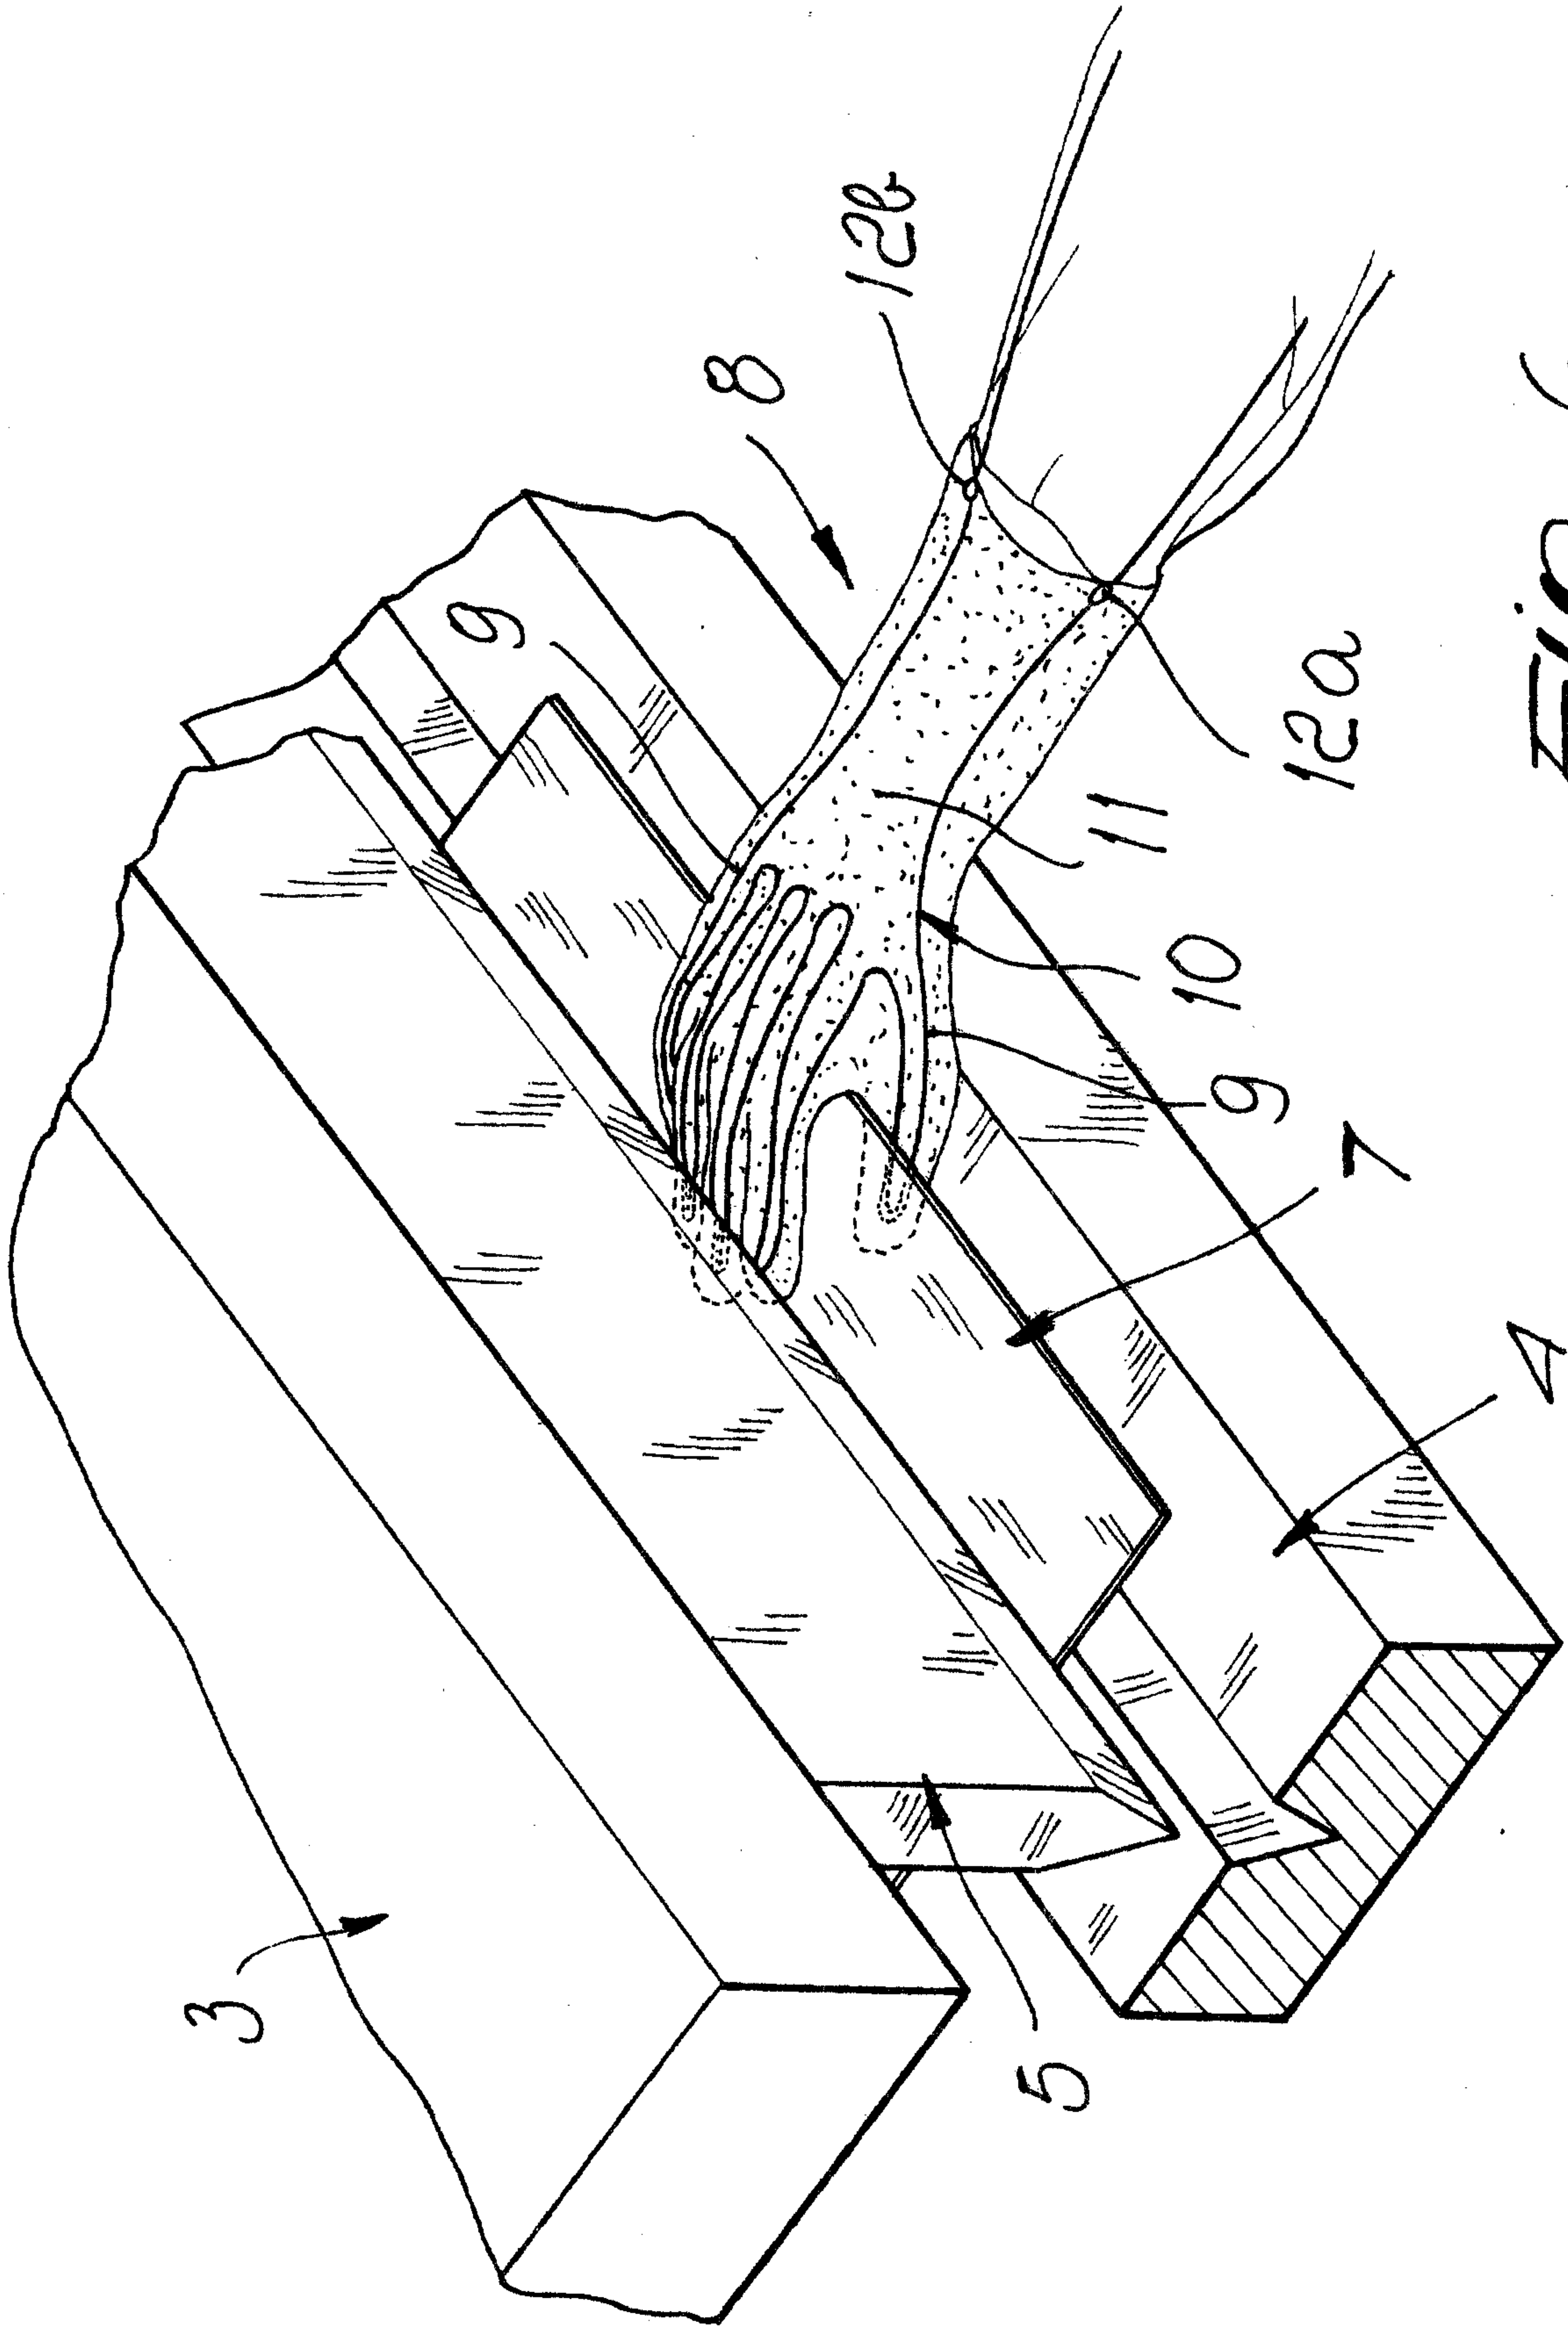


FIG. 6

