

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 July 2006 (06.07.2006)

PCT

(10) International Publication Number
WO 2006/069753 A1

(51) International Patent Classification:

H01M 8/02 (2006.01) *C03C 27/04* (2006.01)
C04B 37/02 (2006.01) *B21D 39/00* (2006.01)

(74) Agent: **GOLDBACH, Klara**; Grünecker, Kinkeldey,
Stockmair & Schwanhäusser, Maximilianstrasse 58, 80538
München (DE).

(21) International Application Number:

PCT/EP2005/013968

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:

23 December 2005 (23.12.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PA 2004 02011 28 December 2004 (28.12.2004) DK

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **RISOE NATIONAL LABORATORY** [DK/DK]; Frederiksborgvej 399, P.O. Box 49, DK-4000 Roskilde (DK).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **NIELSEN, Karsten, Agersted** [DK/DK]; Kattinge Bygade 14, DK-4000 Roskilde (DK). **SOLVANG, Mette** [DK/DK]; Laerkevej 53, DK-4000 Roskilde (DK). **LARSEN, Peter, Halvor** [DK/DK]; Risoe Huse 13, DK-4000 Roskilde (DK).

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF PRODUCING METAL TO GLASS, METAL TO METAL OR METAL TO CERAMIC CONNECTIONS

(57) Abstract: A method of manufacturing metal to glass, metal to metal and metal to ceramic connections to be used in SOFC applications, said connections being produced as a mixture of a base glass powder and a metal oxide powder. As a result, the inherent properties of the glass used in the composite seals may be altered locally in the metal-coating interface by adding e.g. MgO in order to control the viscosity and wetting, and at the same time maintain the bulk properties such as high coefficient of thermal expansion of the basic glass towards the seal components.



WO 2006/069753 A1

**Method of producing metal to glass, metal to metal
or metal to ceramic connections**

5 The present invention relates to a method of producing metal to glass, metal to metal and metal to ceramic connections. Said connections may, for example, be used in solid oxide fuel cell (SOFC) applications.

10 Typically, SOFCs of the flat plate design comprise a stack of multiple cells, each of them comprising an electrolyte sandwiched by two electrodes. The electrodes of each cell are in contact with interconnect layers which make the series connection between the individual cells. Gas tight sealings are virtually important for the performance, durability and safely operation of a fuel cell.

15 Glasses are suitable as sealing materials for SOFCs since the physical and chemical properties of glasses can be tailored within a wide range. Different glass and glass-ceramic compositions have been examined within the group of alkali silicate, alkali aluminosilicates, alkaline earth silicates, alkaline earth aluminoborosilicates, phosphate and borosilicate glasses. However, even
20 though promising results have been reported, none of them have been able to fulfill all the requirements of mechanical performance, e.g. viscosity and match of thermal expansion and chemical compatibility, e.g. wetting and bonding.

25 Composite seals with crystalline filler materials dispersed into base glass, e.g. alkali borosilicate glass, or in sodium aluminosilicate glass, have shown promising results in relation to exact matching the coefficient of thermal expansion (CTE) between the sealant and the seal surfaces. At the same time, suitable viscosities at the sealing temperature have been obtained.

30 However, an optimization of the bonding to metal surfaces is still required, and particularly a bonding to the corrosion scales formed on the metal surfaces as these depend on operation temperature, composition and microstructure of the pristine metals.

Bonding between the metal and a glass based seal has been demonstrated, cf. Yang, Z.; Coyle, C.A.; Baskaran, S.; Chick, L.A. "Making metal-to-metal and metal-to-ceramic interconnections for use in high temperature electrochemical devices by forming bond coat on first metal part, applying sealing material to bond coat, and adhering second part to sealing material" US 2004060967-A1, by forming a single element metallic bond coat (M = Fe, Ni or Co) or by the preferred solution where a composite bond coat phase (M-CrAlY) is applied to the metallic surface prior to adhering the seal and further elements. The alumina content of the bond coat, either stemming from the steel or from the bond coat, is claimed to be essential for the bond coat performance.

Oxides of the metallic elements themselves (V, Fe, Ni, Cu, Co and Mo) are well known constituents in the so-called ground coats when bonding vitreous enamels to ferrous alloys and are characterized by their ability to partially oxidize metallic Fe and form vitreous or mixed oxide phases, often characterized by dendrite formation at various oxidation states, cf. Donald, I. W., "Preparation, properties and chemistry of glass and glass-ceramic-to-metal seals and coatings, J. Mat, Sci. 28 (1993), p. 2841-86 and Eppler, R. A "Glazes and glass coatings", The American Ceramic Society, Westerville, Ohio (2000).

In view of the disadvantages of the prior art, it is the object of the present invention to provide metal to glass, metal to metal and metal to ceramic connections to be used in, for instance, SOFC applications, with which the boundary phases can be engineered so as to obtain a strong bond.

Said object is achieved by a method of manufacturing metal to glass, metal to metal, and metal to ceramic connections and which is able to engineer the boundary phases, so as to obtain a strong bond independent of the metal alloy composition and a protective oxidation scale developed during use characterized by said connections being produced to a desired layer thickness as a mixture of a base glass powder and a metal oxide powder, preferably of predetermined particle sizes and in a binder system, referred to as a glassy

connection layer, the bonding being provided at elevated temperatures under controlled conditions,

wherein the metal oxide powder is selected from the group consisting of:

- 0 to 10 wt% boron oxide with a grain size $d_{50} < 2 \mu\text{m}$;
- 5 - 0 to 10 wt% magnesium oxide with a grain size $d_{50} < 2 \mu\text{m}$;
- 0 to 8 wt% sodium and potassium oxides with a grain size $d_{50} < 2 \mu\text{m}$;
- 1 to 10 wt% manganese oxide with a grain size $d_{50} < 1.5 \mu\text{m}$;
- 1 to 10 wt% nickel oxide with a grain size $d_{50} < 1.5 \mu\text{m}$;
- 0 to 10 wt% vanadium oxide with a grain size $d_{50} < 1.5 \mu\text{m}$;
- 10 - 0 to 5 wt% cobalt oxide with a grain size $d_{50} < 1.5 \mu\text{m}$; and
- 0 to 5 wt% molybdenum oxide with a grain size $d_{50} < 1.5 \mu\text{m}$.
- 0 to 5 wt% copper oxide with a grain size $d_{50} < 1.5 \mu\text{m}$.

Said object is moreover achieved by a method of manufacturing metal to glass,
15 metal to metal, and metal to ceramic connections,
characterized by said connections being produced with a mixture comprising a base glass powder and a metal oxide powder having a grain size of $5 \mu\text{m}$ or less.

20 Preferred embodiments are set forth in the subclaims.

The invention will be explained in the following with reference to the drawings wherein:

25 Fig. 1 illustrates the general concept and method.

Fig. 2A-2E illustrate the method of manufacturing the connections and specific embodiments of the method.

Fig. 3A-3B illustrate a special embodiment of the method.

30 In the following, the invention will be described in more detail.

According to the invention the base glass powder is a glass matrix with a high coefficient of thermal expansion. The base glass powder is preferably selected

from the group consisting of alkali aluminosilicates, (NAS), alkaline earth aluminoborosilicates, (CAS), and phosphate glasses, (MAP), to which metal oxides are added, e.g. magnesium oxide, in order to control the local wetting properties, henceforth referred to as a glassy connection layer.

5

Particularly high chemical stability and slow crystallization behavior have been reported in connection with the sodium aluminosilicates (NAS) glass, cf. *Höland, W. and Beall, G., "Glass-Ceramic Technology", The American Ceramic Society, Westerville, Ohio (2002)*, and the residual vitreous glass has proved particularly
10 beneficial in seal applications which may experience large thermal variations, e.g, rapid cycling between room temperature and operational temperatures close to the glass softening temperature.

Alkali aluminosilicates, (NAS), suitable for the present invention comprise 10-25
15 mole % sodium oxide, 40-80 mole % silicon dioxide, 5-20 mole % aluminium oxide, and may optionally comprise 0-10 mole % boric oxide, 0-10 mole % magnesium oxide, 0-10 mole % calcium oxide, 0-10 mole % barium oxide, 0-2 mole % fluorine, and 0-5 mole % phosphor oxide.

20 Alkaline earth aluminoborosilicates (CAS), suitable for the present invention comprise 40-80 mole % silicon dioxide, 5-20 mole % aluminium oxide, 20-45 mole % calcium oxide, and may optionally comprise 0-5 mole % sodium oxide, 0-10 mole % boric oxide, 0-10 mole % magnesium oxide, 0-2 mole % barium oxide, 0-2 mole % fluorine, and 0-5 mole % phosphor oxide.

25

Phosphate glasses (MAP) suitable for the present invention comprise 5-25 mole % aluminium oxide, 10-30 mole % magnesium oxide, 5-20 mole % calcium oxide, 40-60 mole % phosphor oxide and may optionally comprise 0-5 mole % sodium oxide, 0-12 mole % silicon dioxide, 0-10 mole % boric oxide, 0-5 mole %
30 barium oxide, and 0-2 mole % fluorine.

Table 1 illustrates the compositional range for the base glasses used as defined above.

Table 1.

Mole %	"NAS"	"MAP"	"CAS"
Sodium oxide	10-25	0-5	0-5
Silicon dioxide	40-80	0-12	40-70
Aluminium oxide	5-20	5-25	5-20
Boric oxide	0-10	0-10	0-10
Magnesium oxide	0-10	10-30	0-10
Calcium oxide	0-10	5-20	20-45
Barium oxide	0-10	0-5	0-02
Fluorine	0-2	0-2	0-2
Phosphor oxide	0-5	40-60	0-5

Interconnects develop a protective chromium-containing scale having a
 5 microstructure and composition which depend on the intrinsic alloy. In order to
 control the wetting and adhesion between the scale and the composite seal part,
 surface coatings are applied onto the interconnect which form strong and
 chemically compatible interfaces between the two components. Further, the
 inherent properties of the glass used in the composite seal parts have been
 10 altered locally at the metal-coat interface by addition of e.g. MgO, in order to
 control the viscosity and wetting, and at the same time maintain the bulk
 properties, e.g. high coefficient of thermal expansion of the base glass towards
 the seal components. The base glass composition has been selected so that a
 considerable amount of residual glass remains after bonding and partially
 15 crystallization of the glass composite seal and the glassy connection layer.

The grain size of the base glass powder to be used in accordance with the
 present invention is preferably from 0.05 μm to 100 μm , more preferably from
 0.05 μm to 50 μm , and most preferred from 0.05 μm to 30 μm .

20 The grain size of the metal oxide powder to be used with the base glass powder
 in accordance with the present invention is 5 μm or less, preferably from
 0.05 μm to 5 μm , more preferably from 0.05 μm to 3 μm , and most preferred
 from 0.05 μm to 1.5 μm .

25 The bonding in accordance with the present invention is provided under elevated

temperatures, depending on the specific components used, particularly the base glass powder. Preferred temperatures for the bonding are from 400°C to 1100°C. It is also preferred to select the temperature to be from 200 to 400°C above the glass transition temperature in question and even more preferred from
5 250 to 350°C above the glass transition temperature in question.

The conditions for the bonding are controlled to achieve optimal bonding strength of the connections by firstly supplying air to the joint for oxidizing the organic binder during heat up through a temperature range from room
10 temperature to 550°C. Secondly, at higher temperatures an orthogonal sealing pressure, typically between 0.1 kPa and 1000 kPa and preferably between 10 kPa and 400 kPa is applied and held constant during the bonding process, which typically lasts from 0.1 to 10 hours.

15 Preferably, prior to applying the base glass powder together with the metal oxide on the metal surface, the metal surface is coated with a metallic coating. Said coating may be alloyed into the surface by heating to high temperature, preferably between 750 to 950°C for relatively short time, preferably 0.5 to 5 hours in a controlled atmosphere, where the oxygen and nitrogen partial
20 pressures are held lower than $\sim 10^{-20}$ bar.

Alternatively, a transition-metal oxide coating may be applied to the metal surface by spraying or dip-coating prior to the application of the base glass powder and the metal oxide.

25

The combined action of transition metal oxides, in particular cobalt-, nickel-, and manganese oxide, which are preferably applied as a surface coating on the metal, together with the glassy connection layer, encompasses a tunable base coat, which is used for instance in a SOFC environment for providing a strong
30 bonding component between the metal parts and the neighbor components in form of glassy composite seal parts, other metal parts or ceramic parts. The transition metal oxides may also be added to the glass in smaller amounts.

Specific connections are produced by coating a composite seal part with a dispersed metal oxide suspension. This may be carried out by, for example, dip coating or spraying.

- 5 Examples of the metal oxides to be added to the base glass powder in order to control the glass wetting properties are boron oxide, magnesium oxide, sodium oxide, potassium oxide and vanadium oxide, with boron oxide, magnesium oxide and sodium oxide being particularly preferred. Examples of the metal oxides to be added to the base glass powder or preferably as a surface coat on the
- 10 metallic part in order to control the glass bonding and adhesion properties are manganese oxide, nickel oxide, cobalt oxide, molybdenum oxide, copper oxide or mixtures thereof. Preferred oxides are manganese oxide, nickel oxide, and cobalt oxide, with nickel oxide and cobalt oxide being particularly preferred.
- 15 Furthermore, in a preferred embodiment the connections are produced as a mixture of a base glass powder and a metal oxide powder in a binder system.

The invention will in the following be illustrated with reference to the detailed examples which are however not limiting the invention.

20

Examples:

- 25 Metallic materials have been divided into three groups; one which develops a duplex seal of chromia and Cr-Mn-spinel (exemplified by Krupp-Thyssen, Crofer 22APU), a second which develops a single layer scale of chromia (exemplified by Sandvik 0YC44), and a third which develops a protective alumina scale (exemplified by Fe Cr alloy). Interconnect materials of ferritic chromium steel were cut to shape before treated with surface coatings. In case of metallic
- 30 coatings, except for nickel, the surface oxides on the interconnect metal were removed prior to coating by rinsing specimens in a ultrasonic aqueous HF/HNO₃-bath, followed by a rinse in ethanol and finally dried at 60°C in air. Other coatings were applied after degreasing the metal surface in acetone and drying at 60°C in air.

Glass sample mixtures:

Silicate glass samples were produced by melting analytical grade chemicals
 5 Na₂CO₃, SiO₂, Al₂O₃, B₂O₃, MgO, NaF, and CaCO₂ in a platinum crucible at
 1500°C for 4 hr. The glass was quenched, crushed, re-melted and finally milled
 into powder (d₅₀ < 5 µm, as measured by a Beckman coulter I/S particle size
 analyser). Phosphate glasses were prepared by mixing analytical grade
 10 MgHPO₄(3H₂O), Al(PO₃)₃, H₃BO₃ and SiO₂ by ball milling, melting in alumina
 crucibles at 1500°C for 30 minutes while stirring before quenching, crushing and
 final milling into powder (d₅₀ < 5 µm). Thin films having a dried thickness of 5-45
 µm were made by screen-printing of glass powder or mixtures of glass powder
 and metal oxide powders. Glass foils, typically in the range of 200-400 µm were
 made by tape casting of glass powder or mixtures of glass powder and metal
 15 oxide powder. Large bodies of glass composite sealing, for which the CTE was
 matched to the CTE of the steels, were prepared from MgO powder (d = 90-200
 µm) or metal powder (Fe Cr alloy, d = 10-200 µm) mixed in a ball mill with glass
 powder for 18 h before filled into graphite moulds and sintered at 750°C for 2 h
 at a pO₂ < 3 · 10⁻⁹ atm. The sintered seals were finally machined to obtain
 20 parallel, smooth surfaces. Three prepared base glass samples are illustrated in
 table 2.

Table 2 illustrates the three prepared base glass samples.

Table 2.

Mole %	Glass No 1 ("NAS")	Glass No 2 ("MAP")	Glass No 3 ("CAS")
Sodium oxide	17.8	-	0.5
Silicon dioxide	72.8	8.0	39.4
Aluminium oxide	9.4	15.0	10.1
Boric oxide	-	2.0	4.5
Magnesium oxide	-	30.0	4.6
Calcium oxide	-	-	40.1
Fluorine	-	-	0.8
Phosphor oxide	-	55.0	-

Example 1:

A Crofer 22APU (c) was coated with a 15 μm thick layer of glass No 3/MgO/CO₃O₄ (4 wt% MgO, 0.5 wt% Co₃O₄) glassy connection layer by screen-printing, (b) in Fig. 2A. Glass No 3 was prepared and combined with 72 wt% metal powder (Fe Cr alloy, 90 μm < d < 120 μm) for the composite seal part (a). Metal and composite seal were held together by 400 kPa during heating to 950° for 4 h before cooling to 750°C, where the connection was aged for 500 h before being thermally cycled twice to room temperature.

10

Example 2:

A Sandvik 0YC44 (c) was coated with nominally 0.1 μm metallic nickel (d) and by screen-printing coated with a 45 μm thick layer of glass No 1/MgO glassy connection layer (2 wt% MgO, d < 1.1 μm (b), cf. Fig. 2 B). Glass No 1 was prepared and combined with 55 wt% coarse MgO for the composite seal part (a). Metal and composite seal were held together by 400 kPa during heating to 950° for 4 h before cooling to 750°C in an argon/hydrogen mixture, where the connection was aged for 500 h before being thermally cycled twice to room temperature.

20

Example 3:

A Sandvik 0YC44 (c) was coated with nominally 0.1 μm Mn-metal (d) and preheated in argon ($p\text{O}_2 < 10^{-20}$ atm.) to alloy the coating into the surface and after cooling to room temperature coated with a 15 μm thick layer of glass No 3/MgO/NaO glassy connection layer (10 wt% MgO, d < 1.3 μm ; 1 wt% Na₂O, (d < 2 μm) by screen printing (b), cf. Fig. 2B. Glass No 3 was prepared and combined with 79 wt% metal powder (SS316) for the composite seal part (a). Metal and composite seal were held together by 400 kPa during heating to 950° for 4 h before cooling to 750°C in an argon/hydrogen mixture, where the connection was aged for 500 h before being thermally cycled twice to room temperature.

30

Example 4:

A Crofer 22 APU (c) was coated with metallic cobalt (d), cf. Fig. 2B, preheated at 900°C for 2h in argon ($p_{O_2} < 10^{-20}$ atm.) to alloy the coating into the surface and after cooling to room temperature coated with a thin thick layer of glass No 1/MgO glassy connection layer (20 wt% MgO) by screen printing (b). Glass No 1 was prepared and combined with 55 wt% coarse MgO for the composite seal part (a). Metal and composite seal were heated to 400°C in air and then held together by 400 kPa during heating to 950° for 4 h and cooling to 750° in an argon/hydrogen mixture, where the connection was aged for 500 h before being thermally cycled twice to room temperature.

Example 5:

A Sandvik 0YC44 (c) was coated with Mn-metal and preheated (d) at 850°C for 0.5 h in argon ($p_{O_2} < 10^{-20}$ atm.) to alloy the coating into the surface and after cooling to room temperature coated with a 45 µm thick layer of glass No 1/MgO glassy connection layer (2 wt% MgO) by screen printing, (b) in Fig. 2 B. Glass No 1 was prepared and combined with 55 wt% coarse MgO for the composite seal part (a). Metal and composite seal were heated to 400°C in air and then held together by 400 kPa during heating to 750° for 4 h before cooling to 550°C, where the connection was aged for 500 h before being thermall cycled twice to room temperature.

Example 6:

A Crofer 22 APU (c) was coated with a 5 µm thick layer of cobalt oxide (e) and then coated with a 15 µm thick layer of glass No 1/MgO glassy connection layer (5 wt% MgO) by screen-printing (b), cf. Fig. 2C. Glass No 1 was prepared and combined with 55 wt% coarse MgO for the composite seal part (a). Metal and composite seal were heated to 400°C in air and then held together by 400 kPa during heating lo 950° for 4 h before cooling to 750°C, where the connection was aged for 500 h before being thermally cycled twice to room temperature.

Example 7

A Sandvik 0YC44 (c) was coated with Mn-metal, (d) in Fig. 2D and preheated at 850°C for 0.5 h in argon ($pO_2 < 10^{-20}$ atm.) to ally the coating into the surface. The metal was then slurry coated with a 10 μ m thick cobalt oxide (e). preheated
5 in air to 500°C for 0.5 h to alloy and oxidize the coating and after cooling to room temperature coated with 45 μ m thick layer of glass No 1/MgO/ B₂O₃ glassy connection layer (2 wt% MgO, $d < 1.1 \mu$ m, 4 wt% B₂O₃, $d < 0.8 \mu$ m) by screen printing (b). Glass No 1 was prepared and combined with 55 wt% coarse MgO for the composite seal part (a). Metal and composite seal were held together by
10 400 kPa during heating to 880°C for 4 h before cooling to 750°C, where the connection was aged for 500 h before being thermally cycled twice to room temperature.

Example 8

15 A Sandvik 0YC44 (c) was coated with nominally 0.1 μ m metallic nickel, (d) In Fig. 2B and by screen-printing coated with a 45 m thick layer of glass No 3/MgO/Na₂O (10 wt% MgO, 2 wt% Na₂O) glassy connection layer (b). Glass No 3 was prepared and combined with 70 vol% metal powder (SS316, 50μ m $< d < 140 \mu$ m) for the composite seal part (a). Metal and composite seal were held
20 together by 400 kPa during heating to 950°C for 4 h in air before cooling to 750°C in an argon/hydrogen mixture, where the connection was aged for 500 h before being thermally cycled twice to room temperature.

Example 9

25 A Sandvik 0YC44 (c) was spray-coated with nominally 10 μ m layer of nickel oxide ($d_{25} < 1.5 \mu$ m) (e) dispersed in a binder system, dried and coated with a 45 μ m thick layer of glass No 3/MgO/NaO glassy connection layer (3 wt% MgO; 4 wt% NaO) by screen printing. (b), cf. Fig- 3 A. Magnesium aluminate spinel ceramic was cut to rectangular shape and ground to obtain plane parallel
30 surfaces (h). Metal and ceramic parts were held together by 400 kPa during heating to 950° for 4 h before cooling to 750° in an argon/hydrogen mixture, where the connection was aged for 500 h before being thermally cycled twice to room temperature.

Example 10

A glass No 1, cf. table 2, was prepared and combined with 55 wt% coarse MgO (a) in 5 Fig. 2E-1. The powders were mixed with an organic vehicle (paraffin dissolved in EtOH) and composite seal parts made by uniaxial pressing. Magnesium manganese spinel (MgMn_2O_4) powder ($d_{50} = 2 \mu\text{m}$) was dispersed and mixed with an organic vehicle. The composite seal parts were subsequently coated with the spinel-slurry by dip-coating (e). Crofer 22APU (c) and the coated seal pan were held together by approximately 10 kPa and heated to 900°C where the load was increased to 40 kPa while keeping the temperature. After 2 h the temperature was reduced to 750°C, where the connection was aged for 500 h before being thermally cycled twice to room temperature.

Example 11

A glass No 1, cf. table 2, was prepared and combined with 55 wt% coarse MgO (a) in Fig. 2E-2, The powders were mixed with an organic vehicle (paraffin dissolved in EtOH) and composite seal parts made by uniaxial pressing. Magnesium manganese spinel (MgMn_2O_4) powder ($d_{50} = 2 \mu\text{m}$) was dispersed and mixed with an organic vehicle. The composite seal parts were subsequently coated with the spinel-slurry by dip-coating (e). A Crofer 22 APU (c) was coated with metallic cobalt ($25 \mu\text{m}/\text{cm}^2$) (d) and preheated at 900°C for 2h in argon ($p_{\text{O}_2} < 10^{-20}$ atm.) to alloy the coating into the surface. After cooling to room temperature, the metal and the coated seal part were held together by approximately 10 kPa and heated to 900°C, where the load was increased to 40 kPa while keeping the temperature. After 2 h the temperature was reduced to 750°C, where the connection was aged for 500 h before being thermally cycled twice to room temperature.

Example 12

A Sandvik 0YC44 (e) was coated with nominally 0.1 μm metallic nickel, (d) in fig. 3B and by screen-printing coated with a 5 μm thick layer of cobalt oxide (e). Crofer 22APU (g) was coated with a 15 my thick layer of glass No 3/MgO/Co₃O₄ glassy connection layer by screen-printing (b). A 200 μm , thick tape cast foil (i)

of glass No 5 3/MgO/Na₂O/CaO glassy connection layer was sandwiched in between these two metal parts. The compound was held together by 400 kPa during heating to 750°C for 4 h in air before cooling to 550°C, where the connection was aged for 500 h before being thermally cycled twice to room
5 temperature.

Example 13

A Crofer 22APU (c) in Fig. 2A was coated with a 15 µm thick layer of glass No 2/CO₃O₄ glassy connection layer (5wt% Co₃O₄, d < 1.5 µm) by screen-printing
10 (b). Glass No 2 was prepared and combined with 79 wt% metal powder (0YC44) for the composite seal part (a). Metal and composite seal were held together by 200 kPa during heating to 700°C for 4 h before cooling to 550°C, where the connection was aged for 500 h before being thermally cycled twice to room temperature.

15

Example 14

A Sandvik 0YC44 (c) was coated with Mn-metal, (d) in Fig. 2D and preheated at 850°C for 0.5 h in argon/hydrogen (pO₂ < 10⁻²⁰ atm.) to alloy the coating into the surface. The metal was then slurry coated with a 10 µm thick cobalt oxide layer
20 (e), preheated in air to 800°C for 0.5 h to alloy and oxidize the coating, and after cooling to room temperature coated with 45 µm thick layer of glass No 2/MgO (2 wt% MgO) glassy connection layer by screen printing (b). Glass No 2 was prepared and combined with 55 wt% coarse MgO for the composite seal part (a). Metal and composite seal were held together by 100 kPa during heating to
25 700°C for 4 h before cooling to 550°C, where the connection was aged for 500 h before being thermally cycled twice to room temperature.

It should be apparent to those skilled in the art that various changes in form and detail of the invention as shown and described above may be made. It is
30 intended that such changes be included within the spirit and scope of the claims appended hereto.

Claims

1. A method of manufacturing metal to glass, metal to metal, and metal to ceramic connections and which is able to engineer the boundary phases, so as to obtain a strong bond independent of the metal alloy composition and a protective oxidation scale developed during use characterized by said connections being produced to a desired layer thickness as a mixture of a base glass powder and a metal oxide powder, the bonding being provided at elevated temperatures under controlled conditions,

wherein the metal oxide powder is selected from the group consisting of:

- 0 to 10 wt% boron oxide with a grain size $d_{50} < 2 \mu\text{m}$;
- 0 to 10 wt% magnesium oxide with a grain size $d_{50} < 2 \mu\text{m}$;
- 0 to 8 wt% sodium and potassium oxides with a grain size $d_{50} < 2 \mu\text{m}$;
- 1 to 10 wt% manganese oxide with a grain size $d_{50} < 1.5 \mu\text{m}$;
- 1 to 10 wt% nickel oxide with a grain size $d_{50} < 1.5 \mu\text{m}$;
- 0 to 10 wt% vanadium oxide with a grain size $d_{50} < 1.5 \mu\text{m}$;
- 0 to 5 wt% cobalt oxide with a grain size $d_{50} < 1.5 \mu\text{m}$; and
- 0 to 5 wt% molybdenum oxide with a grain size $d_{50} < 1.5 \mu\text{m}$.
- 0 to 5 wt% copper oxide with a grain size $d_{50} < 1.5 \mu\text{m}$.

2. The method according to claim 1, characterized by said connections produced as a base glass powder with addition of metal oxide powders in a binder system being combined with metallic surface coating on the metallic part, said coating being alloyed into the surface by heating in a controlled atmosphere prior to application of the glassy connection layer.

3. The method according to claim 1, characterized by said connections produced as a base glass powder with addition of metal oxide powders in a binder system being combined with metal oxide coatings on the metallic part, said coatings being deposited prior to application of the glassy connection layer.

4. The method according to claim 1, characterized by said connections produced as a base glass powder with additions of the metal oxide powders in a binder system and being combined with metallic surface coatings on the metallic

part, which are alloyed into the surface by heating in a controlled atmosphere prior to application of a metal oxide coating on the metallic part, said coating being deposited prior to bringing together the metal and the glassy connection layer.

5. The method according to claim 1, characterized by said connections being produced by coating a composite seal part with a dispersed metal oxide suspension.

6. The method according to claim 1, characterized by said connections being produced by coating a composite seal part with a dispersed metal oxide suspension in combination with metallic surface coatings on the metal components which are alloyed into the surface by heating in a controlled atmosphere prior to bringing together the metal and the seal composite components.

7. The method according to any one of claims 1-6, characterized by the amount of glassy connection layer material per surface area being sufficient to dissolve any protective chromia scale which may develop on the metallic parts.

8. The method according to any one of claims 1-6, characterized by the base glass being selected from glasses of earth alkaline aluminosilicates at compositions resulting in eutectic crystallization behavior, or from sodium aluminosilicates at compositions within the primary crystallization field of Albite, or from magnesium aluminophosphate glasses.

9. The method according to any one of claims 1-6, characterized by metal coatings which are oxidized in situ after application and then controls the scale composition on the metallic part, said metallic part being selected from the following:

- Manganese, nickel, and cobalt.

10. The method according to claim 9, wherein said metallic part is selected from the following:

- <80 $\mu\text{g}/\text{cm}^2$ manganese;
- <90 $\mu\text{g}/\text{cm}^2$ nickel,
- <40 $\mu\text{g}/\text{cm}^2$ cobalt.

11. The method according to any one of claims 1-8, characterized by using a base glass in the glass composite seal with a slow or eutectic crystallization behavior in order to maintain a compliant seal at operating temperatures higher than the glass softening temperature.

12. The method according to claim 10 or 11, characterized by adding high expansion materials said base glass in order to adapt the thermal expansion of the seal composite material to the thermal expansion of the substrate.


13. The method according to claim 12, characterized by said high expansion material being fine grained enough so as to prevent excessive micro cracking of the seal, and is coarse enough so as to prevent excessive reaction and dissolution into the glass matrix.

14. The method according to claim 12, wherein said high expansion material has a grain size of $d = 10 - 200 \mu\text{m}$.


15. Use of the metal to glass connection components obtained with the method of any of claims 1 to 14 for bonding metal to glass composite, bonding metal to ceramic components or bonding metal to metal components.

16. A method of manufacturing metal to glass, metal to metal, and metal to ceramic connections,
characterized by said connections being produced with a mixture comprising a base glass powder and a metal oxide powder having a grain size of $5 \mu\text{m}$ or less.


1

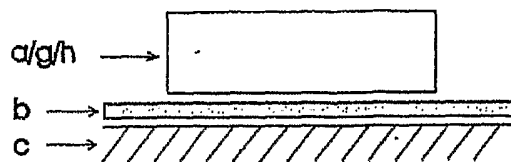


2A

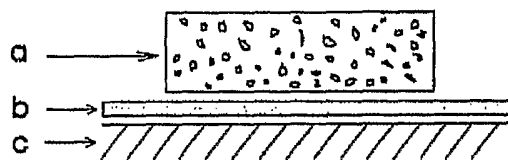


2B

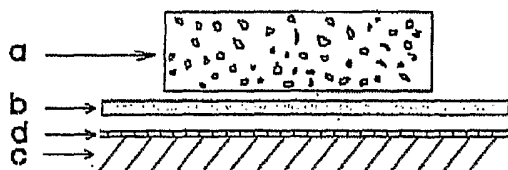


2C

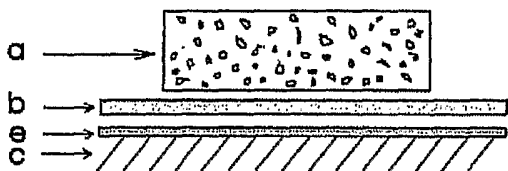


2D

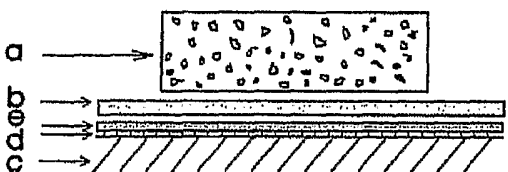


2E-1

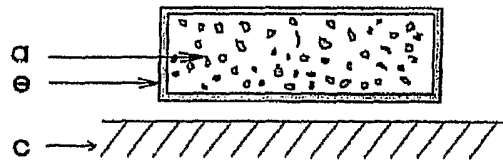

2E-2

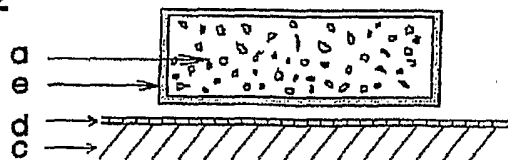

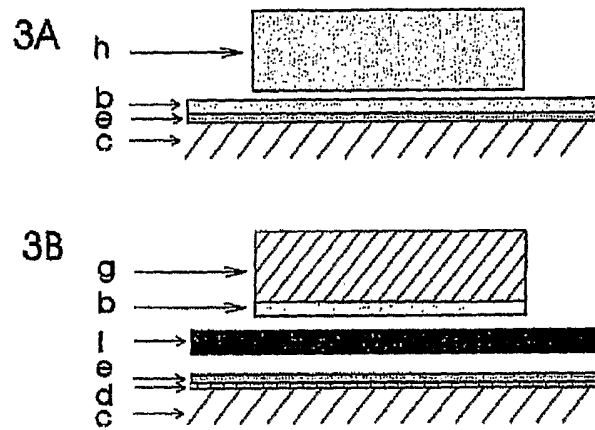

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2005/013968

A. CLASSIFICATION OF SUBJECT MATTER H01M8/02 C04B37/02 C03C27/04 B21D39/00				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) C03C C04B H01M B21D				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	DE 197 10 345 C1 (FORSCHUNGSZENTRUM JUELICH GMBH, 52428 JUELICH, DE) 21 January 1999 (1999-01-21) column 3, line 52 - column 5, line 68	1, 15, 16		
Y	----- claims 1-16	1-16		
Y	US 2003/082434 A1 (WANG CONGHUA ET AL) 1 May 2003 (2003-05-01) page 2, paragraph 21-28 page 3, paragraph 54 page 4, paragraph 57-64 claims 1-36 ----- -/--	1-16		
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none;"><input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.</td> <td style="width: 50%; border: none;"><input checked="" type="checkbox"/> See patent family annex.</td> </tr> </table>			<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.	<input checked="" type="checkbox"/> See patent family annex.
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.	<input checked="" type="checkbox"/> See patent family annex.			
* Special categories of cited documents :				
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family			
Date of the actual completion of the international search	Date of mailing of the international search report			
28 March 2006	05/04/2006			
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Maurer, R			

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2005/013968

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 196 50 704 A1 (FORSCHUNGSZENTRUM JUELICH GMBH, 52428 JUELICH, DE; FORSCHUNGSZENTRUM J) 10 June 1998 (1998-06-10) column 6, lines 39-65; figure 6	1,15,16
Y	claims 1-11	1-16
A	EP 0 446 680 A (ASEA BROWN BOVERI AG) 18 September 1991 (1991-09-18) column 2, line 44 - column 3, line 17; claim 1; examples 1,6	1-16

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2005/013968

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
DE 19710345	C1	21-01-1999	AU	7204598 A	29-09-1998
			WO	9840921 A1	17-09-1998
			DK	966771 T3	07-10-2002
			EP	0966771 A1	29-12-1999
US 2003082434	A1	01-05-2003	EP	1444747 A2	11-08-2004
			WO	03036739 A2	01-05-2003
DE 19650704	A1	10-06-1998	WO	9825316 A1	11-06-1998
EP 0446680	A	18-09-1991	JP	4220954 A	11-08-1992