



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**06.05.2020 Bulletin 2020/19**

(51) Int Cl.:  
**G03G 15/08 (2006.01)** **G03G 21/16 (2006.01)**  
**G03G 21/18 (2006.01)**

(21) Application number: **19193712.7**

(22) Date of filing: **27.08.2019**

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**  
 Designated Extension States:  
**BA ME**  
 Designated Validation States:  
**KH MA MD TN**

(72) Inventors:  
 • **AKIBA, Yu**  
**Tokyo, 146-8501 (JP)**  
 • **TAKEUCHI, Toshiaki**  
**Tokyo, 146-8501 (JP)**  
 • **OOISHI, Koichi**  
**Tokyo, 146-8501 (JP)**  
 • **ASANUMA, Naoya**  
**Tokyo, 146-8501 (JP)**

(30) Priority: **29.08.2018 JP 2018160408**  
**02.08.2019 JP 2019142871**

(74) Representative: **TBK**  
**Bavariaring 4-6**  
**80336 München (DE)**


(71) Applicant: **CANON KABUSHIKI KAISHA**  
**Ohta-ku**  
**Tokyo 146-8501 (JP)**

(54) **REMANUFACTURING METHOD FOR DEVELOPING APPARATUS AND CARTRIDGE**

(57) A remanufacturing method of a developing apparatus including: a communicating step of removing a part of a frame of the developing apparatus to form a communication hole such that an outside of the frame

and a developing chamber of the frame are connected each other; a refilling step of refilling an inside of the frame with developer via the communication hole; and a sealing step of sealing the communication hole.

**FIG.1**

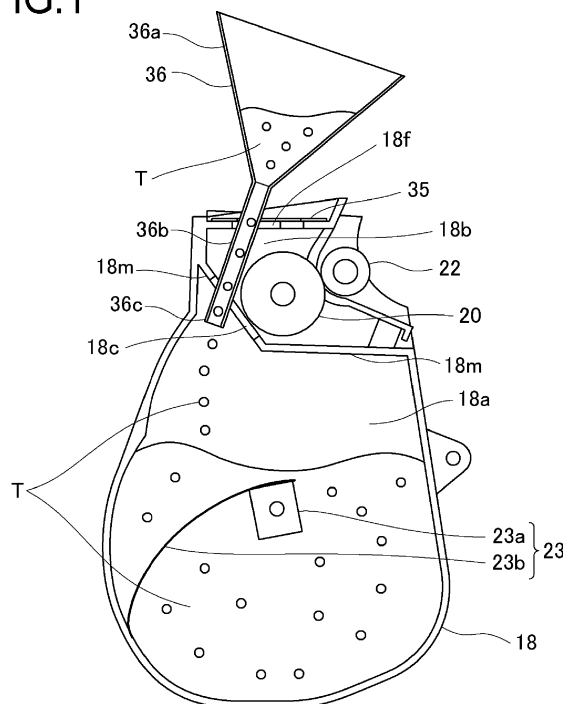

**Description**

## BACKGROUND OF THE INVENTION

## Field of the Invention

**[0001]** The present invention relates to a developer storage container provided in an image forming apparatus such as a copier or a printer and to remanufacturing of a cartridge such as a developing apparatus or a process cartridge provided with the developer storage container.

## Description of the Related Art

**[0002]** Among image forming apparatuses using an electrophotographic image formation system (an electrophotographic process), image forming apparatuses with superior usability in which various process means are integrated as a cartridge configured so as to be attachable to and detachable from an image forming apparatus main body are being put to practical use for the purpose of facilitating maintenance. With such a cartridge system image forming apparatus, an image is formed on a recording material (a recording medium) using toner stored in a cartridge (a developing apparatus formed as a cartridge or a process cartridge). The toner stored in the cartridge is consumed as image formation is performed, and once the toner is consumed to such an extent that images of high enough quality to satisfy a user having purchased the cartridge can no longer be formed, the cartridge loses its commercial value.

**[0003]** In recent years, cartridges having lost their commercial values once their toner has been consumed are being remanufactured (recycled). As such a remanufacturing method, for example, a method has been proposed which involves boring a hole at one end in a longitudinal direction of a developer storage chamber in a cartridge, refilling the developer storage chamber with toner from the bored hole, and sealing the hole with a sealing member once the refill is completed (Japanese Patent Application Laid-open No. 2002-328588). In addition, as a remanufacturing method of a cartridge, a method has also been proposed which involves boring a hole on a surface parallel to a photosensitive member axis of a developer storage chamber in a cartridge, refilling the developer storage chamber with toner from the bored hole, and sealing the hole with a sealing member once the refill is completed (Japanese Patent Application Laid-open No. 2002-251119).

**[0004]** The cartridges described above include those that have a stirring member for stirring toner inside a developer storage chamber. With such cartridges, the stirring member arranged inside the developer storage chamber may sometimes interfere with the remanufacturing process described above.

**[0005]** The present invention provides a remanufacturing method of a cartridge which prevents work from being

disturbed by a stirring member of the cartridge.

## SUMMARY OF THE INVENTION

5 **[0006]** The remanufacturing method according to the present invention is

a remanufacturing method for remanufacturing a developing apparatus as specified in claims 1 to 8, and 15 to 19.

10 **[0007]** In addition, the remanufacturing method according to the present invention is

a remanufacturing method for remanufacturing a developing apparatus as specified in claims 9 to 19,

**[0008]** Furthermore, the cartridge according to the present invention is

15 a cartridge as specified in claim 20.

**[0009]** Further features of the present invention will become apparent from the following description of exemplary embodiments (with reference to the attached drawings).

20

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0010]**

25

FIG. 1 is a sectional view showing a refilling process in remanufacturing of a developer storage container according to a first embodiment;

30

FIG. 2 is a sectional view of an electrophotographic image forming apparatus according to the first embodiment;

35

FIG. 3 is a perspective view of a process cartridge according to the first embodiment when mounting the process cartridge to an apparatus main body;

40

FIG. 4 is a sectional view of the process cartridge according to the first embodiment;

45

FIG. 5 is a sectional view showing a configuration of the developer storage container according to the first embodiment;

50

FIGS. 6A and 6B are an exploded view and a perspective view showing a configuration of the developer storage container according to the first embodiment;

55

FIGS. 7A and 7B are explanatory diagrams of a communicating process in a remanufacturing method of a cartridge according to the first embodiment;

FIGS. 8A and 8B are explanatory diagrams of the communicating process in the remanufacturing method of a cartridge according to the first embodiment;

60

FIG. 9 is an explanatory diagram of a refilling process in the remanufacturing method of a cartridge according to the first embodiment;

FIGS. 10A and 10B are explanatory diagrams of a sealing process in the remanufacturing method of a cartridge according to the first embodiment;

FIGS. 11A and 11B are explanatory diagrams of the sealing process in the remanufacturing method of a cartridge according to the first embodiment;

FIGS. 12A and 12B are explanatory diagrams of the sealing process in the remanufacturing method of a cartridge according to the first embodiment; and FIG. 13 is an explanatory diagram of a communicating process according to a second embodiment.

## DESCRIPTION OF THE EMBODIMENTS

**[0011]** Hereinafter, a description will be given, with reference to the drawings, of embodiments (examples) of the present invention. However, the sizes, materials, shapes, their relative arrangements, or the like of constituents described in the embodiments may be appropriately changed according to the configurations, various conditions, or the like of apparatuses to which the invention is applied. Therefore, the sizes, materials, shapes, their relative arrangements, or the like of the constituents described in the embodiments do not intend to limit the scope of the invention to the following embodiments.

### First Embodiment

**[0012]** Configurations of a process cartridge 7 and an image forming apparatus 100 according to an embodiment of the present invention will be described with reference to FIGS. 2 to 4. FIG. 2 is a schematic sectional view of the image forming apparatus 100 according to the present embodiment. FIG. 3 is a schematic perspective view showing a situation where the process cartridge 7 is mounted to an image forming apparatus main body, in which illustration of components such as a cover that closes a storage portion of the process cartridge 7 in the apparatus main body is omitted. FIG. 4 is a schematic sectional view of the process cartridge 7 according to the present embodiment.

### Electrophotographic Image Forming Apparatus

**[0013]** First, an overall configuration of an electrophotographic image forming apparatus (hereinafter, referred to as an "image forming apparatus") according to the present embodiment will be described with reference to FIGS. 2, 3, and 4. As a plurality of image forming portions, the image forming apparatus 100 includes first, second, third, and fourth image forming portions SY, SM, SC, and SK for respectively forming images of the colors yellow (Y), magenta (M), cyan (C), and black (K). In the present embodiment, configurations and operations of the first to fourth image forming portions are substantially the same with the exception of differences in colors of formed images. Therefore, unless a specific distinction must be made, Y, M, C, and K will be omitted and the image forming portions will be collectively described.

**[0014]** The image forming apparatus 100 according to the present embodiment includes four electrophotographic photosensitive drums (hereinafter, referred to as "photosensitive drums") 1 (1Y, 1M, 1C, and 1K) as four image bearing members. The photosensitive drum 1 ro-

tates in a direction of an arrow A in the drawings. A charging roller 2 and a scanner unit 3 are arranged around the photosensitive drum 1. In this case, the charging roller 2 is charging means which uniformly charges a surface of the photosensitive drums 1. In addition, the scanner unit 3 is exposing means which irradiates a laser based on image information and forms an electrostatic image on the photosensitive drums 1. Developing apparatuses (hereinafter, referred to as "developing units") 4 (4Y, 4M, 4C, and 4K) and cleaning blades 6 (6Y, 6M, 6C, and 6K) as cleaning means are arranged in a periphery of the photosensitive drums 1. Furthermore, an intermediate transfer belt 5 as an intermediate transfer member for transferring a toner image on the photosensitive drums 1 to a recording material 12 is arranged so as to oppose the four photosensitive drums 1.

**[0015]** In the present embodiment, the developing units 4 use toners T (TY, TM, TC, and TK) which are non-magnetic single component developers as developers. In the present embodiment, the developing units 4 perform contact development by bringing a developer bearing member (hereinafter, referred to as a "developing roller") 22 as developing means into contact with the photosensitive drums 1.

**[0016]** In the present embodiment, photosensitive units 13 (13Y, 13M, 13C, and 13K) are formed by the photosensitive drums 1, the charging roller 2, the cleaning blades 6, and a waste toner storage portion 14a for storing primary transfer residual toner that remains on the photosensitive drum 1.

**[0017]** Furthermore, in the present embodiment, the process cartridges 7 (7Y, 7M, 7C, and 7K) are formed by integrating the developing unit 4 and the photosensitive unit 13 into a cartridge. The process cartridges 7 are configured so as to be attachable to and detachable from the image forming apparatus 100 via mounting means such as a mounting guide or a positioning member (not shown) provided on the image forming apparatus 100. In the present embodiment, the process cartridges 7 are attachable to and detachable from the image forming apparatus 100 in an axial direction of the photosensitive drums 1 as indicated by an arrow G in FIG. 3.

**[0018]** In the present embodiment, the process cartridges 7 for the respective colors all have the same shape. The process cartridges 7 for the respective colors store toners T (TY, TM, TC, and TK) of the respective colors of yellow (Y), magenta (M), cyan (C), and black (K).

**[0019]** The intermediate transfer belt 5 is in contact with all photosensitive drums 1 and rotates in a direction of an arrow B in FIG. 2. The intermediate transfer belt 5 is stretched over a plurality of supporting members (a driver roller 26, a secondary transfer opposing roller 27, and a driven roller 28). Four primary transfer rollers 8 (8Y, 8M, 8C, and 8K) as primary transfer means are arranged side by side on a side of an inner peripheral surface of the intermediate transfer belt 5 so as to oppose each photosensitive drum 1. In addition, a secondary transfer roller 9 as secondary transfer means is arranged at a position

opposing the secondary transfer opposing roller 27 on a side of an outer peripheral surface of the intermediate transfer belt 5.

#### Image Forming Process

**[0020]** During image formation, first, the surface of the photosensitive drum 1 is uniformly charged by the charging roller 2. Next, due to laser light in accordance with image information emitted from the scanner unit 3, the charged surface of the photosensitive drum 1 is subjected to scanning exposure and an electrostatic latent image in accordance with the image information is formed on the photosensitive drum 1. The electrostatic latent image formed on the photosensitive drum 1 is then developed by the developing unit 4 as a toner image (a developer image). The toner image formed on the photosensitive drum 1 is transferred (primarily transferred) onto the intermediate transfer belt 5 by an action of the primary transfer roller 8.

**[0021]** For example, when forming a full-color image, the process described above is sequentially performed in the first to fourth image forming portions SY, SM, SC, and SK, and toner images of the respective colors are primarily transferred onto the intermediate transfer belt 5 by being sequentially superimposed on one another. Subsequently, the recording material 12 is transported to a secondary transfer portion in synchronization with a movement of the intermediate transfer belt 5. In addition, due to an action of the secondary transfer roller 9 in contact with the intermediate transfer belt 5 via the recording material 12, the four-color toner images on the intermediate transfer belt 5 are collectively secondarily transferred onto the recording material 12.

**[0022]** The recording material 12 onto which the toner images have been transferred is transported to a fixing apparatus 10 as fixing means. Heat and pressure are applied to the recording material 12 by the fixing apparatus 10 to fix the toner images onto the recording material 12. Subsequently, the recording material 12 on which the toner images have been fixed is discharged to outside of the machine.

**[0023]** Primary transfer residual toner that remains on the photosensitive drum 1 after the primary transfer process is removed by the cleaning blade 6. In addition, secondary transfer residual toner that remains on the intermediate transfer belt 5 after the secondary transfer process is removed by an intermediate transfer belt cleaning apparatus 11. The removed secondary transfer residual toner is discharged to a waste toner box (not shown) of the image forming apparatus 100.

**[0024]** The image forming apparatus 100 is also configured so as to be capable of forming a single-color or multi-color image using only a single or some (not all) desired image forming portions.

#### Process Cartridge

**[0025]** An overall configuration of the process cartridge 7 to be mounted to the image forming apparatus 100 according to the present embodiment will now be described with reference to FIGS. 4, 6A, and 6B. FIG. 6A is an exploded view of the developing unit 4 and FIG. 6B is a perspective view of the developing unit 4.

**[0026]** As shown in FIG. 4, the photosensitive unit 13 includes a cleaning frame 14 as a frame that supports various elements inside the photosensitive unit 13. The photosensitive drum 1 is attached to the cleaning frame 14 via a bearing member so that the photosensitive drum 1 is rotatable in a direction of an arrow A. In addition, a charging roller bearing 15 is attached to the cleaning frame 14 along a line that passes through a center of rotation of the charging roller 2 and a center of rotation of the photosensitive drum 1 so as to be movable in a direction of an arrow C. The charging roller 2 is rotatably attached to the charging roller bearing 15. In addition, the charging roller bearing 15 is biased toward the photosensitive drum 1 by a charging roller pressure spring 16 as biasing means.

**[0027]** The cleaning blade 6 is integrally formed by an elastic member 6a for removing primary transfer residual toner that remains on the surface of the photosensitive drum 1 after primary transfer and a supporting member 6b for supporting the elastic member. The primary transfer residual toner having been removed from the surface of the photosensitive drum 1 by the cleaning blade 6 drops in a direction of gravity in a space formed by the cleaning blade 6 and the cleaning frame 14 and is stored in the waste toner storage portion 14a.

**[0028]** As shown in FIGS. 6A and 6B, the developing unit 4 includes a developing frame 18 which supports various elements inside the developing unit 4 and which is also a developer storage container. The developing unit 4 is provided with a developing roller 22 which comes into contact with the photosensitive drum 1 and rotates in a direction of an arrow D. The developing roller 22 is rotatably supported at both ends in a direction of a rotational axis thereof by the developing frame 18 via bearing units 32 and 33.

**[0029]** The developing unit 4 has a developer storage chamber (a storage chamber) 18a for storing toner, a developing chamber 18b in which the developing roller 22 is arranged, and an opening (an internal opening or a first opening) 18c which connects the developer storage chamber 18a and the developing chamber 18b each other. More specifically, the developing frame 18 has a partition portion (a partition wall) 18m which partitions the developer storage chamber 18a and the developing chamber 18b of the developing frame 18. The opening 18c is provided in the partition portion 18m. In addition, the developing frame 18 is provided with a developer opening (a second opening) for exposing a part of the developing roller 22 to outside of the developing frame 18. In the present embodiment, when the process car-

tridge 7 is in a posture when the developing unit 4 being used (when the process cartridge 7 is mounted to the image forming apparatus 100), the developing chamber 18b is positioned above the developer storage chamber 18a. A developer supplying member (a supplying roller) 20 which comes into contact with the developing roller 22 and rotates and a developer restricting member (a developing blade) 21 for restricting a toner layer of the developing roller 22 are arranged in the developing chamber 18b.

**[0030]** The developer storage chamber 18a of the developing frame 18 is provided with a stirring member 23 for stirring stored toner T and transporting the toner to the developer supplying member 20 via the opening 18c. The stirring member 23 has a rotating shaft 23a extending in a rotational axis direction of the stirring member 23 (a first direction) and a stirring sheet 23b which is a flexible sheet member having one end attached to the rotating shaft 23a and which stirs and transports toner. In other words, the stirring member 23 is configured so as to be rotatable around an axis extending in the rotational axis direction (a center of the rotating shaft 23a).

**[0031]** In the present embodiment, a longitudinal direction of the process cartridge 7 and the axial direction of the developing unit 4 are parallel to the rotational axis direction of the stirring member 23. In addition, the rotational axis directions of the developing roller 22, the supplying roller 20, and the photosensitive drum 1 are parallel to the rotational axis direction of the stirring member 23.

**[0032]** The stirring member 23 rotates in a direction of an arrow F in a state where a side of another end of the stirring sheet 23b which is a free end has come into contact with an inner wall surface of the developer storage chamber 18a and is deflected. The developer storage chamber 18a has a release position 18e at which the stirring sheet 23b is released from the deflected state. When passing the release position 18e, the stirring sheet 23b flips up toner present on the stirring sheet 23b due to a release force from the deflected state and transports the toner to the developer supplying member 20 inside the developing chamber 18b via the opening 18c. Specifically, the stirring sheet 23b is configured so as not to come into contact with the inner wall surface of the developer storage chamber 18a in at least a rotational phase from the release position 18e to a position opposing the opening 18c in a clockwise direction in FIG. 5 but capable of coming into contact with the inner wall surface of the developer storage chamber 18a in other rotational phases. In other words, due to a movement (a rotation) of the stirring member 23, a distance between the inner wall surface of the developing frame 18 and the stirring member 23 varies. In the present embodiment, the stirring sheet 23b comes into contact with the partition portion 18m after passing the release position 18e. In other words, the partition portion 18m restricts entry of the stirring member 23 (the stirring sheet 23b) to the developing chamber 18b.

#### Detailed Configuration of Developer Storage Container

**[0033]** A detailed configuration of the developing frame 18 which is a developer storage container will be described with reference to FIGS. 5, 6A, and 6B. FIG. 5 is a schematic sectional view of the developing frame 18.

**[0034]** In the present embodiment, as shown in FIG. 5, in addition to the developer storage chamber 18a, the developing chamber 18b, the opening 18c, and the stirring member 23 described above, the developing frame 18 is provided with a filter 35 which reduces internal air pressure of the developing chamber 18b at a position opposing the opening 18c of the developing chamber 18b.

**[0035]** As shown in FIG. 6A, the developing roller 22 and the toner supplying roller 20 are supported via a first developing bearing unit 32 and a second developing bearing unit 33 with respect to the developing frame 18. The first developing bearing unit 32 is constituted by the developing roller 22, a developing bearing member 32a for supporting the toner supplying roller 20, a gear train 32b for transmitting drive to a stirring gear 30, and a side cover 32c. Two ventilation openings (vent holes) 18g which extend along an axial line of the developing roller 22 are arranged in parallel at positions opposing the opening 18c of the developing chamber 18b in the developing frame 18 in order to prevent internal pressure rise of the developing frame 18, and the filter 35 is bonded so as to cover the ventilation openings 18g. The ventilation openings 18g connect the inside of the developing chamber 18b and the outside of the developing frame 18. In addition, with respect to the axial direction of the stirring member 23, positions of the ventilation openings 18g and a position of the opening 18c overlap with each other. The filter 35 is formed by a material which restricts passage of toner but allows passage of air.

**[0036]** As shown in FIG. 6B, the side cover 32c is fixed to the developing frame 18 and the developing bearing member 32a by three screws 34 in a state where the side cover 32c covers a toner cap 31.

**[0037]** The toner cap 31 seals a toner filling port (not shown) which is provided at a longitudinal end portion of the developing frame 18 and which is used to fill the developer storage chamber 18a of the developing frame 18 with toner T during manufacture of the developing unit 4.

#### Remanufacturing Method of Process Cartridge

**[0038]** A remanufacturing method of the process cartridge 7 will be described in detail with reference to FIGS. 1 and 5 to 12B. FIG. 1 is a schematic sectional view of the developing frame 18 in a process of refilling toner. FIG. 5 is a schematic sectional view of the developing frame 18 prior to refilling toner.

**[0039]** FIG. 7A is a sectional view of the developing frame 18 after boring a hole, and FIG. 7B is a perspective view of the developing frame 18 in an example of a communicating process of the developing frame 18.

**[0040]** FIG. 8A is a sectional view of the developing frame 18 after boring a hole, and FIG. 8B is a perspective view of the developing frame 18 in an example of the communicating process of the developing frame 18.

**[0041]** FIG. 9 is a sectional view of the developing frame 18 in an example of a process of refilling toner.

**[0042]** FIG. 10A is an exploded view of an example of a sealing process for sealing the communication hole 18f of the developing frame 18, and FIG. 10B is a perspective view of an example in which the communication hole 18f of the developing frame 18 has been sealed.

**[0043]** FIG. 11A is an exploded view of an example of the sealing process for sealing the communication hole 18f of the developing frame 18, and FIG. 11B is a perspective view of an example in which the communication hole 18f of the developing frame 18 has been sealed.

**[0044]** FIG. 12A is an exploded view of an example of the sealing process for sealing the communication hole 18f of the developing frame 18, and FIG. 12B is a perspective view of an example in which the communication hole 18f of the developing frame 18 has been sealed.

**[0045]** The developing unit 4 according to the present embodiment may sometimes be remanufactured independently (separated from the photosensitive unit 13) or may sometimes be remanufactured in an integrated state with the photosensitive unit 13 (in other words, as the process cartridge 7). In other words, cartridges in the remanufacturing method of a cartridge according to the present invention may sometimes be the developing unit 4 (a developing apparatus) having been independently made into a cartridge or may sometimes be the process cartridge 7 as described in the present embodiment.

**[0046]** The remanufacturing method of a cartridge according to the present embodiment generally includes the following three steps:

- Step 1: communicating process of the developing frame 18,
- Step 2: toner refilling process, and
- Step 3: sealing process for sealing a hole of the developing frame 18.

**[0047]** It should be noted that the remanufacturing method according to the present embodiment includes a preparing step of preparing a cartridge (the developing unit 4 or the process cartridge 7) to be a material before performing the steps 1 to 3 described above. As the developing unit 4 or the process cartridge 7 to be a material, for example, a used developing unit 4 or a used process cartridge 7 in a state where toner has been consumed by performing image forming operations is used. In other words, the remanufacturing method according to the present embodiment is a method of remanufacturing a new developing unit (a second developing apparatus) from the developing unit 4 (a first developing apparatus) to be a material. In still other words, the remanufacturing method according to the present embodiment is a method of remanufacturing a new process cartridge (a second

process cartridge) from the process cartridge 7 (a first process cartridge) to be a material.

**[0048]** Hereinafter, each step will be described in sequence.

#### Step 1: Communicating Process of Developing Frame 18

**[0049]** The communicating process of the developing frame 18 will be described with reference to FIGS. 7A, 7B, 8A, and 8B.

**[0050]** As shown in FIG. 7A, a communication hole (a third opening) 18f for communicating the developing chamber 18b and the outside of the developing frame 18 is bored at a position opposing the opening 18c of the developing chamber 18b in the developing frame 18. The communication hole 18f is bored using an ultrasonic cutter, laser machining, or the like. In other words, a part of the developing frame 18 is removed to form the communication hole 18f on the developing frame 18. Due to the communication hole 18f, the developer storage chamber 18a communicates with the outside of the developing frame 18 via the opening 18c, the developing chamber 18b, and the communication hole 18f. The communication hole 18f is formed so as to open on a wall surface in an upper part of the developing chamber 18b when the process cartridge 7 is in the posture when the developing unit 4 being used.

**[0051]** A shape and a size of the communication hole 18f and a position at which the communication hole 18f is provided are preferably a shape, a size, and a position which enable a funnel 36 (to be described later) to be inserted so that a leg portion of the funnel 36 reaches the developer storage chamber 18a. In addition, the shape and the size of the communication hole 18f are preferably a shape and a size which enable the communication hole 18f to be closed by a sticker member 37a or a cap member 37b (to be described later).

**[0052]** In the example of the communicating process shown in FIGS. 7A and 7B, the communication hole 18f is formed so as to penetrate the filter 35 and an affixing portion of the filter 35 in the developing frame 18. In other words, a through-hole is also formed in the filter 35, and the communication hole 18f is formed by the through-hole of the filter 35 and an expanded ventilation opening 18g (to be described later). In the developing frame 18 according to the present embodiment, since a size of the ventilation opening 18g provided in the affixing portion of the filter 35 is not large enough to enable the leg portion of the funnel 36 to be inserted thereto, the communication hole 18f of a desired size is formed by also partially cutting away a periphery of the ventilation opening 18g. In other words, it can be argued that the communicating process includes a process of expanding a size of the ventilation opening 18g as the communication hole originally provided in the developing frame 18 to a size that enables the leg portion of the funnel 36 to be inserted thereto. In the case of a configuration in which the ventilation opening 18g has a sufficient size, a through-hole

may only be formed in the filter 35 and the communication hole 18f may be formed by the through-hole of the filter 35 and the ventilation opening 18g. Using the ventilation opening 18g enables generation of shavings to be suppressed as compared to a case where a new communication hole 18f is formed in the developing frame 18.

**[0053]** Alternatively, as in the example of the communicating process shown in FIG. 8A, at least a part of the filter 35 may be peeled away from the developing frame 18 to form the communication hole 18f. In other words, a removing process of peeling the filter 35 away from the developing frame 18 is first performed and, subsequently, a process of boring the communication hole 18f with a desired size in the developing frame 18 is performed. A peripheral portion of the ventilation opening 18g is partially cut away when forming the communication hole 18f in a similar manner to the example shown in FIGS. 7A and 7B described above. In the case of a configuration in which the ventilation opening 18g has a sufficient size, the communicating process may be completed by only an action of peeling the filter 35 away from the developing frame 18. In other words, in the communicating process, the ventilation opening 18g may be used as the communication hole 18f without removing a part of the developing frame 18. Accordingly, work for removing a part of the developing frame 18 can be omitted and generation of shavings can be suppressed. It should be noted that, as shown in FIG. 8B, the communication hole 18f may be formed by connecting a plurality of ventilation openings 18g. Expanding the ventilation opening 18g or connecting a plurality of ventilation openings 18g can also improve degassing performance of the ventilation opening 18g. Even in this case, it can be argued that the ventilation opening 18g is being expanded.

**[0054]** The communicating process of the developing frame 18 is not limited to the methods described above. Other methods can be appropriately adopted as long as a communication hole which establishes communication between the developer storage chamber 18a and the outside of the developing frame 18 and which enables an introduction path of refill toner to be secured during toner refill (to be described later) can be formed in the developing frame 18.

#### Step 2: Toner Refilling Process

**[0055]** The toner refilling process of filling the developing frame 18 with new toner will be described with reference to FIGS. 1 and 9.

**[0056]** FIG. 1 is a schematic sectional view showing a situation where toner refill is performed with respect to the developing frame 18 in which the communication hole 18f has been formed so as to penetrate the filter 35 and the affixing portion of the filter 35 in the developing frame 18 by the communicating process shown in FIGS. 7A and 7B. Toner refill to the developer storage chamber 18a is performed by inserting the funnel 36 into the communication hole 18f and pouring toner T into the funnel

36 from a toner bottle (not shown) or the like. The funnel 36 has a conical portion 36a for receiving the toner T poured from the toner bottle and a tubular leg portion 36b which extends from a small-diameter leading end portion of the conical portion 36a, and the funnel 36 is inserted into the developing frame 18 to a position where an opening leading end portion 36c of the leg portion 36b reaches the developer storage chamber 18a. In the present embodiment, with respect to the axial direction of the stirring member 23, positions of the ventilation openings 18g and the position of the opening 18c overlap with each other. Therefore, the opening leading end portion 36c of the leg portion 36b can be readily inserted to a position where the opening leading end portion 36c reaches the developer storage chamber 18a. Accordingly, a refill introduction path of the toner T is formed which reaches the developer storage chamber 18a from the outside of the developing frame 18 via the communication hole 18f, the developing chamber 18b, and the opening 18c. While the toner T can also be refilled from other portions, filling the developer storage chamber 18a with the toner T from the communication hole 18f which is proximal to the developer storage chamber 18a makes it easier for the toner to enter the developer storage chamber 18a.

**[0057]** FIG. 9 is a schematic sectional view showing a situation where toner refill is performed with respect to the developing frame 18 in which the communication hole 18f has been formed by peeling away the filter 35 according to the communicating process shown in FIGS. 8A and 8B. As shown in FIG. 9, toner refill to the developer storage chamber 18a is performed by peeling away the filter 35, inserting the funnel 36 into the formed communication hole 18f, and pouring toner into the funnel 36 from a toner bottle (not shown) or the like.

**[0058]** It should be noted that toner refill is not limited to methods using the funnel 36 described above as a tool for refilling the developer storage chamber 18a with the toner T. For example, a method may be adopted in which refill is performed by inserting a tubular portion of a dispenser or a hose-like tubular member being connected to a toner supply source.

**[0059]** Refill need not necessarily involve directly filling the developer storage chamber 18a with toner. In other words, the developing chamber 18b may be filled with toner from the outside of the developing frame 18 via the communication hole 18f. In doing so, the stirring member 23 is preferably moved so as not to cover the opening 18c. Accordingly, the developer storage chamber 18a can be filled with the toner having filled the developing chamber 18b through the opening 18c.

#### Step 3: Sealing Process for Sealing Hole of Developing Frame 18

**[0060]** The sealing process for sealing the communication hole 18f of the developing frame 18 will be described with reference to FIGS. 10A, 10B, 11A, 11B, 12A, and 12B.

**[0061]** In the sealing process according to the present embodiment, the communication hole 18f can be sealed using various sealing members 37.

**[0062]** As shown in FIG. 10A, the sticker member 37a may be used as the sealing member 37. An adhesive surface of the sticker member 37a is attached to the filter 35 at a position where the communication hole 18f is to be sealed to provide a seal so that toner T does not leak from the communication hole 18f.

**[0063]** Alternatively, as shown in FIG. 11A, the cap member 37b may be used as the sealing member 37. After attaching the cap member 37b to the filter 35 so as to close the communication hole 18f, an adhesive member 38 is injected to bonding surfaces of the cap member 37b and the filter 35 or the adhesive member 38 is applied to the bonding surfaces in advance, and the cap member 37b and the filter 35 are bonded to each other. Bonding methods are not limited and a pressure sensitive adhesive or a silicone bond may be used.

**[0064]** Alternatively, as shown in FIG. 12A, the filter 35 may be replaced with a new filter 37c and the new filter 37c may be attached to the developing frame 18 so as to cover the communication hole 18f (the ventilation opening 18g). In doing so, the filter 35 may be reused. In the communicating process shown in FIGS. 8A and 8B, the filter 35 is peeled away, the communication hole 18f is formed and, after refill, the new filter 37c is attached and the new filter 37c and the developing frame 18 are bonded to each other. Bonding methods are not limited and heat-welding or a double-sided tape may be used.

#### Advantages of Present Embodiment

**[0065]** As described above, with steps 1 to 3 described above, a remanufacturing method of a cartridge which prevents work from being disturbed by a stirring member of the cartridge can be provided.

**[0066]** Specifically, the communication hole 18f is formed so as to open to the developing chamber 18b which is partitioned by the partition portion 18m with respect to the developer storage chamber 18a in which the stirring member 23 is stored. Accordingly, the stirring member 23 is prevented from closing the communication hole 18f. In other words, work for filling the inside of the developing frame 18 with toner from the outside of the developing frame 18 is not impeded by the stirring member 23. In addition, even in cases where a part of the developing frame 18 is removed in the process of forming the communication hole 18f or expanding the communication hole 18f (the ventilation opening 18g), the stirring member 23 is prevented from being damaged. Therefore, there is no need to move the stirring member 23 in order to prevent damage to the stirring member 23. In other words, work for removing a part of the developing frame 18 is not impeded by the stirring member 23.

**[0067]** In addition, with the remanufacturing method of a cartridge according to the present embodiment, the communication hole 18f (the ventilation opening 18g)

opens in a direction (a second direction) that intersects with a direction of the rotational axis of the stirring member 23. Therefore, an insertion direction of the funnel 36 is a direction that approximately matches a direction in which the stirring sheet 23b is likely to exhibit flexibility. While the funnel 36 and the stirring sheet 23b preferably do not come into contact with each other, even when the funnel 36 and the stirring sheet 23b come into contact with each other, since the contact occurs in a direction in which the stirring sheet 23b is likely to exhibit flexibility, the stirring sheet 23b is less likely to be damaged. Furthermore, even when the stirring sheet 23b stops at a position where the stirring sheet 23b closes the opening 18c between the developer storage chamber 18a and the developing chamber 18b, the leg portion 36b of the funnel 36 can be inserted to the developer storage chamber 18a by utilizing the flexibility of the stirring sheet 23b and causing the stirring sheet 23b to deflect (by pushing back the stirring sheet 23b). As described above, since the stirring sheet 23b is in a released state where the stirring sheet 23b is not in contact with the inner wall surface of the developer storage chamber 18a at the position where the stirring sheet 23b closes the opening 18c, it is not difficult to push the leg portion 36b of the funnel 36 into the communication hole 18f and cause the stirring sheet 23b to deform so as not to damage the stirring sheet 23b.

#### Second Embodiment

**[0068]** A remanufacturing method of the process cartridge 7 according to a second embodiment will now be described in detail with reference to FIG. 13. In the second embodiment, descriptions of matters in common with those of the first embodiment will be generally omitted.

**[0069]** FIG. 13 is an explanatory diagram of a communicating process according to the second embodiment. The second embodiment differs from the first embodiment in an arrangement of the ventilation opening 18g and an arrangement of the communication hole 18f.

**[0070]** An arrow in FIG. 13 indicates a longitudinal direction of the process cartridge 7 (a rotational axis direction of the developing roller 22). As shown in FIG. 13, the developing frame 18 according to the second embodiment includes a plurality of ventilation openings 18g. It should be noted that the ventilation openings 18g according to the second embodiment are arranged at positions opposing the opening 18c in a similar manner to the first embodiment (refer to FIGS. 5, 6A, and 6B). In addition, the ventilation openings 18g are covered by the filter 35 in a similar manner to the first embodiment.

**[0071]** The plurality of the ventilation openings 18g include a plurality of first ventilation openings 18g1 and a plurality of second ventilation openings 18g2. In a direction perpendicular to the rotational axis direction of the developing roller 22, positions of the first ventilation openings 18g1 and positions of the second ventilation openings 18g2 differ from and do not overlap with each other.



In the rotational axis direction of the developing roller 22, the positions of the first ventilation openings 18g1 and the positions of the second ventilation openings 18g2 differ from each other. However, the positions of at least a part of the first ventilation openings 18g1 and the positions of at least a part of the second ventilation openings 18g2 overlap with each other.

**[0072]** The communication hole 18f is formed so as to connect the first ventilation openings 18g1 and the second ventilation openings 18g2. In doing so, the communication hole 18f can be formed so as to connect one first ventilation opening 18g1 and one second ventilation opening 18g2 (18f1). In addition, the communication hole 18f can also be formed so as to connect one first ventilation opening 18g1 and a plurality of the second ventilation openings 18g2 (18f2). The communication hole 18f can also be formed so as to connect a plurality of the first ventilation openings 18g1 and a plurality of the second ventilation openings 18g2. Furthermore, a plurality of communication holes 18f can be formed in the developing frame 18. For example, a communication hole denoted by 18f1 and a communication hole denoted by 18f2 can be formed in the developing frame 18. Alternatively, any one of a communication hole denoted by 18f1 and a communication hole denoted by 18f2 can be formed in the developing frame 18. In doing so, in order to form the communication hole 18f, a part of the developing frame 18 positioned between the respective ventilation openings 18g is removed.

**[0073]** According to the arrangement of the ventilation openings 18g (the plurality of first ventilation openings 18g1 and the plurality of second ventilation openings 18g2) described in the present embodiment, the communication hole 18f can be readily formed. In addition, by increasing the number of ventilation openings 18g which become connected by forming the communication hole 18f, the communication hole 18f can be readily expanded. Accordingly, the degassing performance of the ventilation openings 18g can also be improved.

**[0074]** Since the refilling process of toner and the sealing process of sealing the communication hole 18f are the same as those of the first embodiment, descriptions thereof will be omitted. In other words, in the same manner as in the first embodiment, the communication hole 18f (the ventilation openings 18g) can be sealed by a sealing member such as the filter 35, the new filter 37c, or the cap member 37b.

**[0075]** According to the present invention, a cartridge can be remanufactured while preventing work from being disturbed by a stirring member of the cartridge.

**[0076]** While the present invention has been described with reference to exemplary embodiments, it is to be understood that the invention is not limited to the disclosed exemplary embodiments. The scope of the following claims is to be accorded the broadest interpretation so as to encompass all such modifications and equivalent structures and functions.

**[0077]** A remanufacturing method of a developing ap-

paratus including: a communicating step of removing a part of a frame of the developing apparatus to form a communication hole such that an outside of the frame and a developing chamber of the frame are connected each other; a refilling step of refilling an inside of the frame with developer via the communication hole; and a sealing step of sealing the communication hole.

10 **Claims**

1. A remanufacturing method for remanufacturing a developing apparatus,  
the developing apparatus including:

a frame having a storage chamber for storing a developer, a developing chamber in which a developer bearing member for bearing the developer is to be arranged, and a partition portion that partitions the storage chamber and the developing chamber, the frame being provided with an opening in the partition portion such that the storage chamber and the developing chamber are connected each other; and  
a stirring member for stirring the developer, the stirring member being arranged in the storage chamber so as to be capable of coming into contact with a wall surface of the frame that forms the storage chamber,  
the remanufacturing method comprising:

a communicating step of removing a part of the frame to form a communication hole such that an outside of the frame and the developing chamber are connected each other;  
a refilling step of refilling an inside of the frame with the developer via the communication hole; and  
a sealing step of sealing the communication hole.

2. The remanufacturing method according to claim 1, wherein  
the developing apparatus includes the frame provided with a ventilation opening which connects an outside of the frame and the developing chamber each other, and a filter which is attached to the frame so as to cover the ventilation opening.

3. The remanufacturing method according to claim 2, comprising a step of exposing the ventilation opening to the outside of the frame by peeling away at least a part of the filter from the frame.

4. The remanufacturing method according to claim 3, wherein in the sealing step, the filter peeled away from the frame or a new filter is attached to the frame

so as to cover the ventilation opening.

5. The remanufacturing method according to claim 2, wherein the communicating step includes a step of forming a through-hole in the filter, and the communication hole includes the ventilation opening and the through-hole.
6. The remanufacturing method according to claim 5, wherein in the sealing step, a sealing member for closing the through-hole is bonded to the filter.
7. The remanufacturing method according to any one of claims 2 to 6, wherein the communicating step includes a step of expanding a size of the ventilation opening.
8. The remanufacturing method according to claim 7, wherein the frame is provided with a plurality of the ventilation openings, and the communicating step includes a step of connecting the plurality of the ventilation openings.
9. A remanufacturing method for remanufacturing a developing apparatus, the developing apparatus including:

a frame having a storage chamber for storing a developer, a developing chamber in which a developer bearing member for bearing the developer is to be arranged, and a partition portion that partitions the storage chamber and the developing chamber, the frame being provided with an opening in the partition portion such that the storage chamber and the developing chamber are connected each other; and a stirring member for stirring the developer, the stirring member being arranged in the storage chamber so as to be capable of coming into contact with a wall surface of the frame that forms the storage chamber, the frame being provided with a ventilation opening which connects an outside of the frame and the developing chamber each other, and a filter which is attached to the frame so as to cover the ventilation opening,  
the remanufacturing method comprising:

a communicating step of forming a communication hole which connects the outside of the frame and the developing chamber each other by peeling away at least a part of the filter from the frame;  
a refilling step of refilling an inside of the frame with the developer; and  
a sealing step of sealing the communication

hole.

10. The remanufacturing method according to claim 9, wherein in the sealing step, the filter peeled away from the frame or a new filter is attached to the frame so as to cover the ventilation opening.
11. The remanufacturing method according to claim 9 or 10, wherein the communicating step includes a step of forming a through-hole in the filter, and the communication hole includes the ventilation opening and the through-hole.
12. The remanufacturing method according to claim 11, wherein in the sealing step, a sealing member for closing the through-hole is bonded to the filter.
13. The remanufacturing method according to any one of claims 9 to 12, wherein the communicating step includes a step of expanding a size of the ventilation opening.
14. The remanufacturing method according to claim 9 to 13, wherein the frame is provided with a plurality of the ventilation openings, and the communicating step includes a step of connecting the plurality of the ventilation openings.
15. The remanufacturing method according to any one of claims 1 to 14, wherein the communication hole is arranged at a position opposing the opening.
16. The remanufacturing method according to any one of claims 1 to 15, wherein the partition portion is configured to restrict entry of the stirring member into the developing chamber.
17. The remanufacturing method according to any one of claims 1 to 16, wherein in the refilling step, the storage chamber is filled with the developer via the communication hole and the opening.
18. The remanufacturing method according to any one of claims 1 to 17, wherein the stirring member has a rotating shaft and a sheet member in which one end of the sheet member is fixed to the rotating shaft and another end is capable of coming into contact with the wall surface.
19. The remanufacturing method according to any one of claims 1 to 18, wherein when the developing apparatus is in an posture when the developing apparatus being used, the developing chamber is positioned above the storage chamber and the communication hole is positioned on a wall surface in an upper part of the developing chamber.

20. A cartridge that is attachable to and detachable from an image forming apparatus, the cartridge comprising:

a developing apparatus remanufactured by the  
remanufacturing method according to any one  
of claims 1 to 19; and  
a restricting member for restricting the develop-  
er borne by the developer bearing member.

5

10

15

20

25

30

35

40

45

50

55

FIG.1

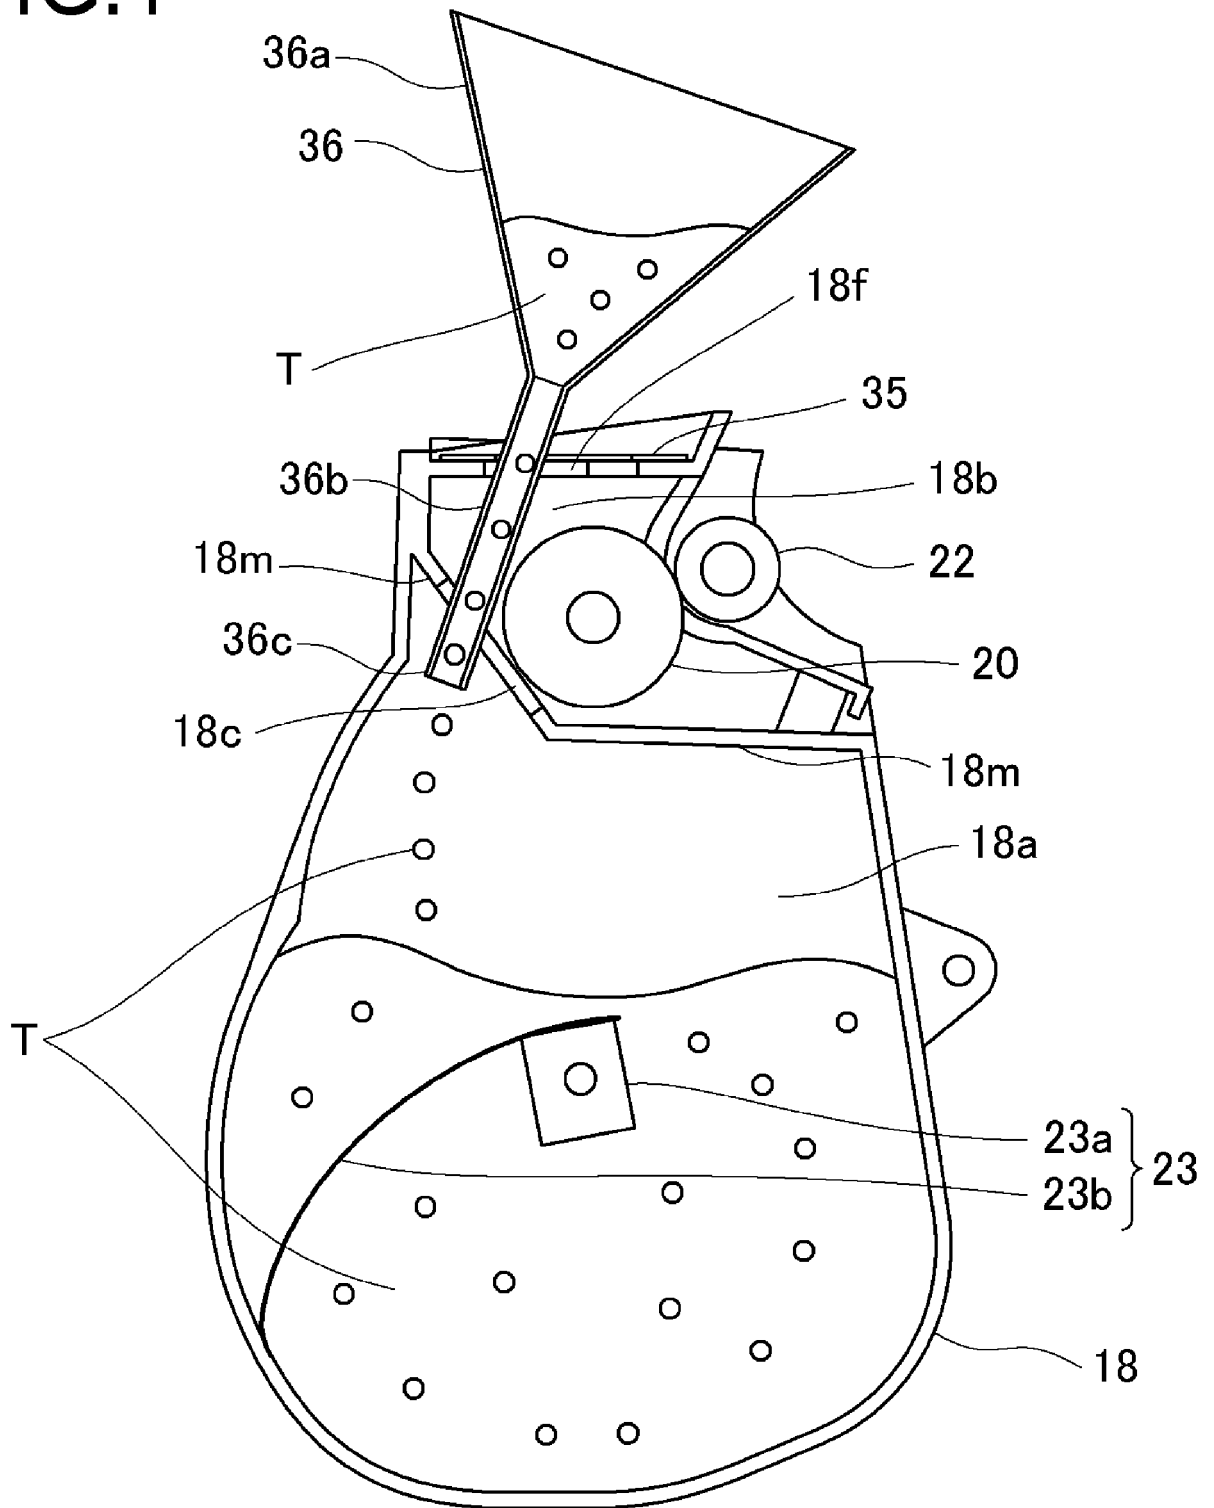


FIG.2

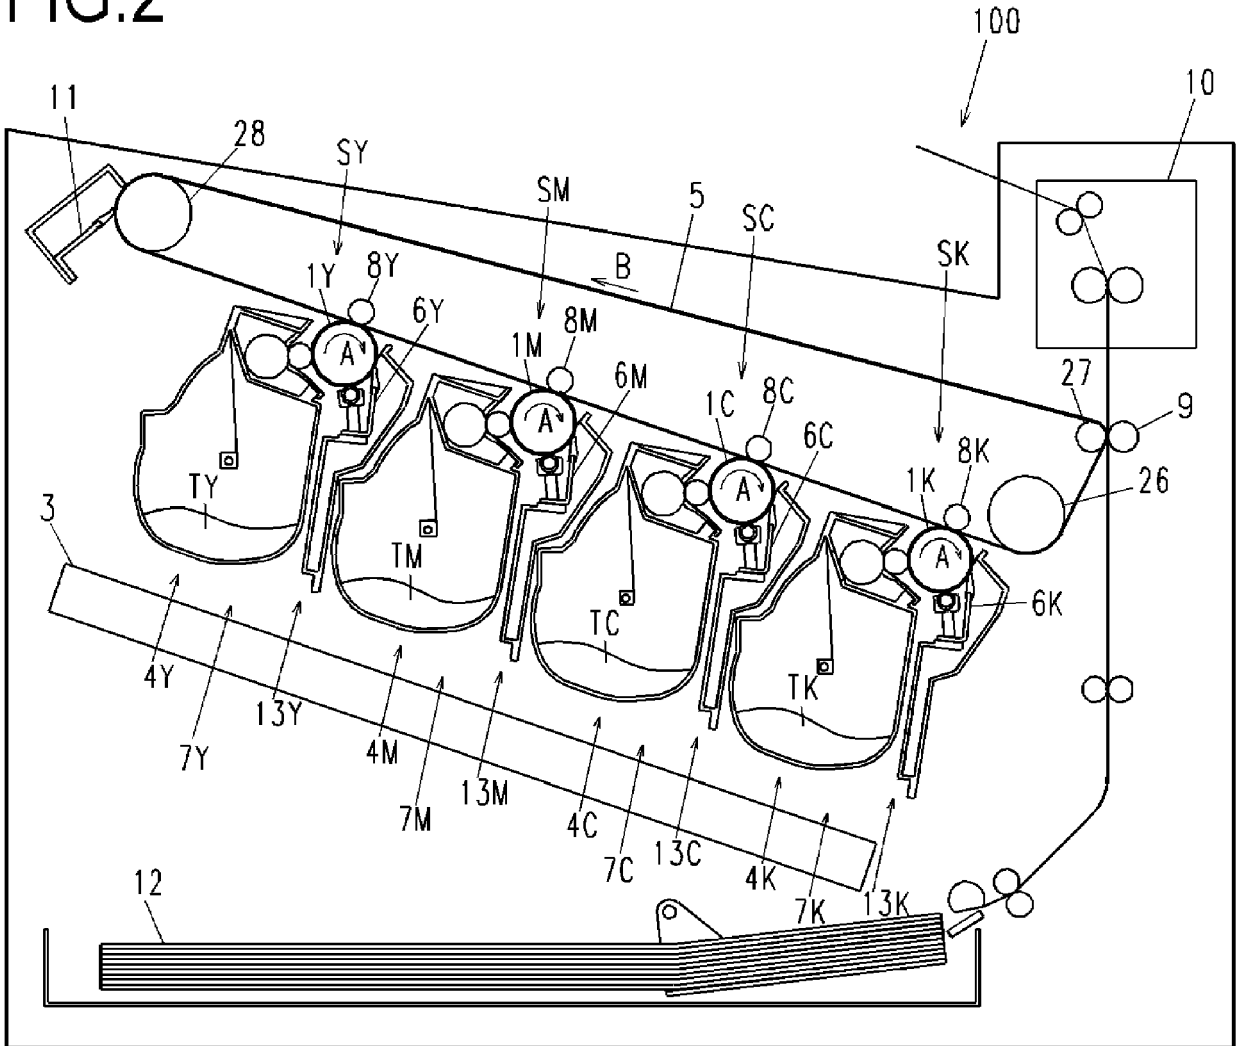


FIG.3


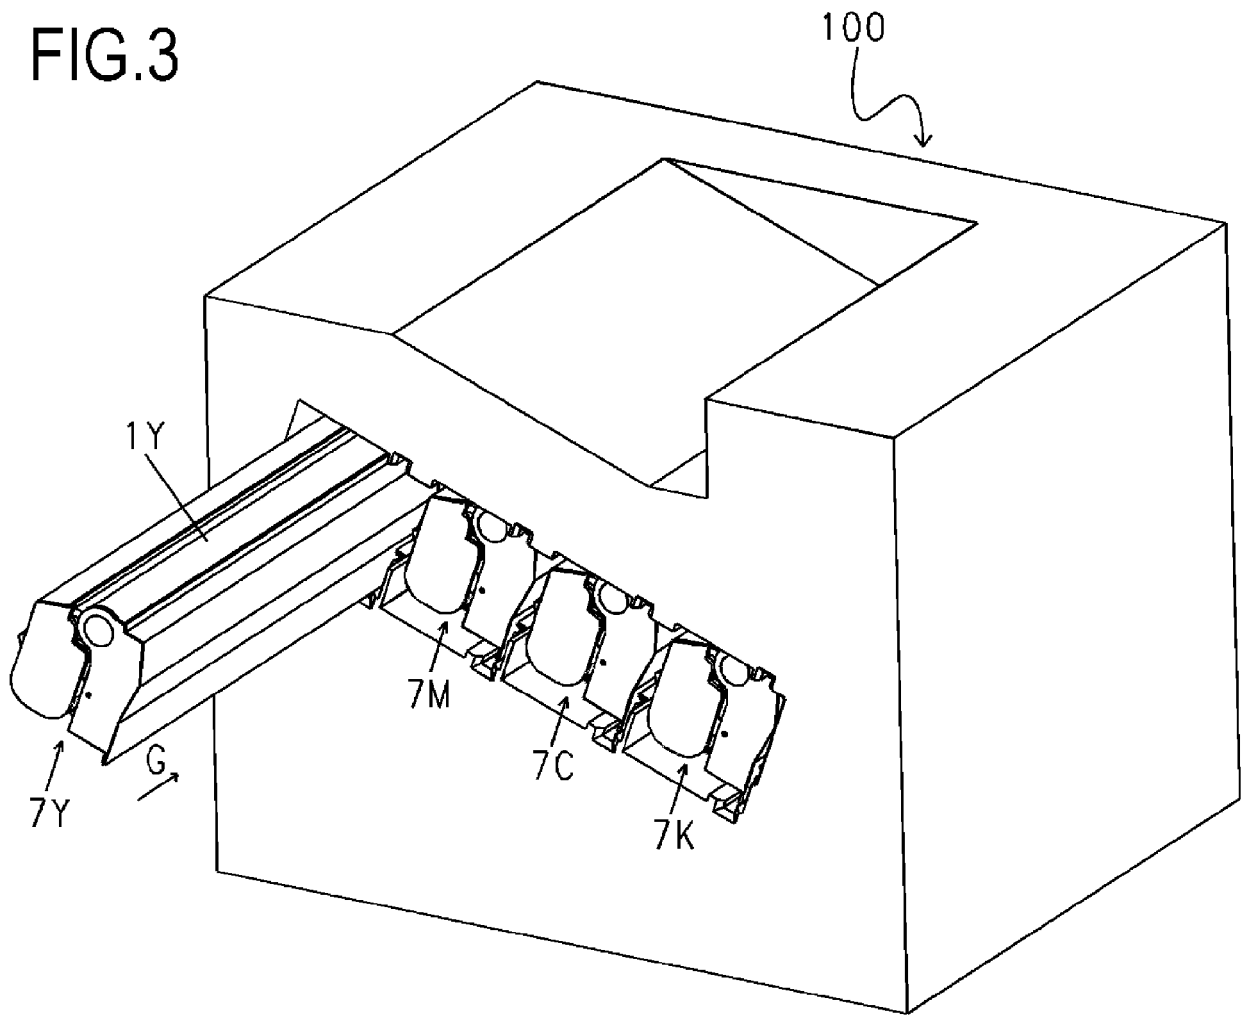


FIG.4

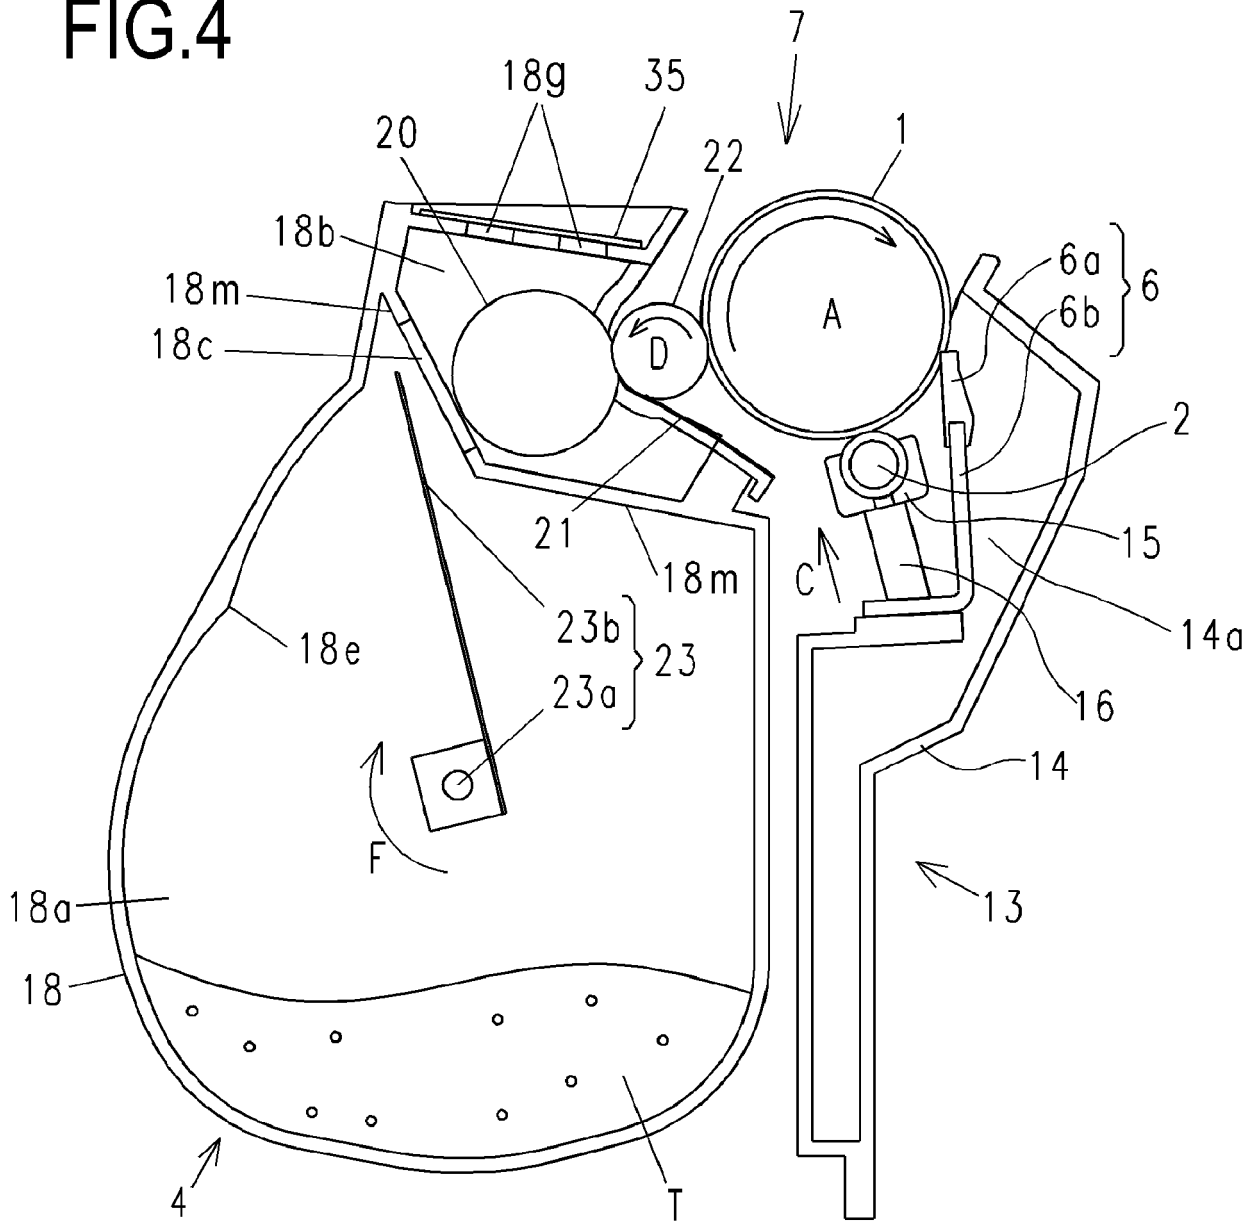

# FIG.5

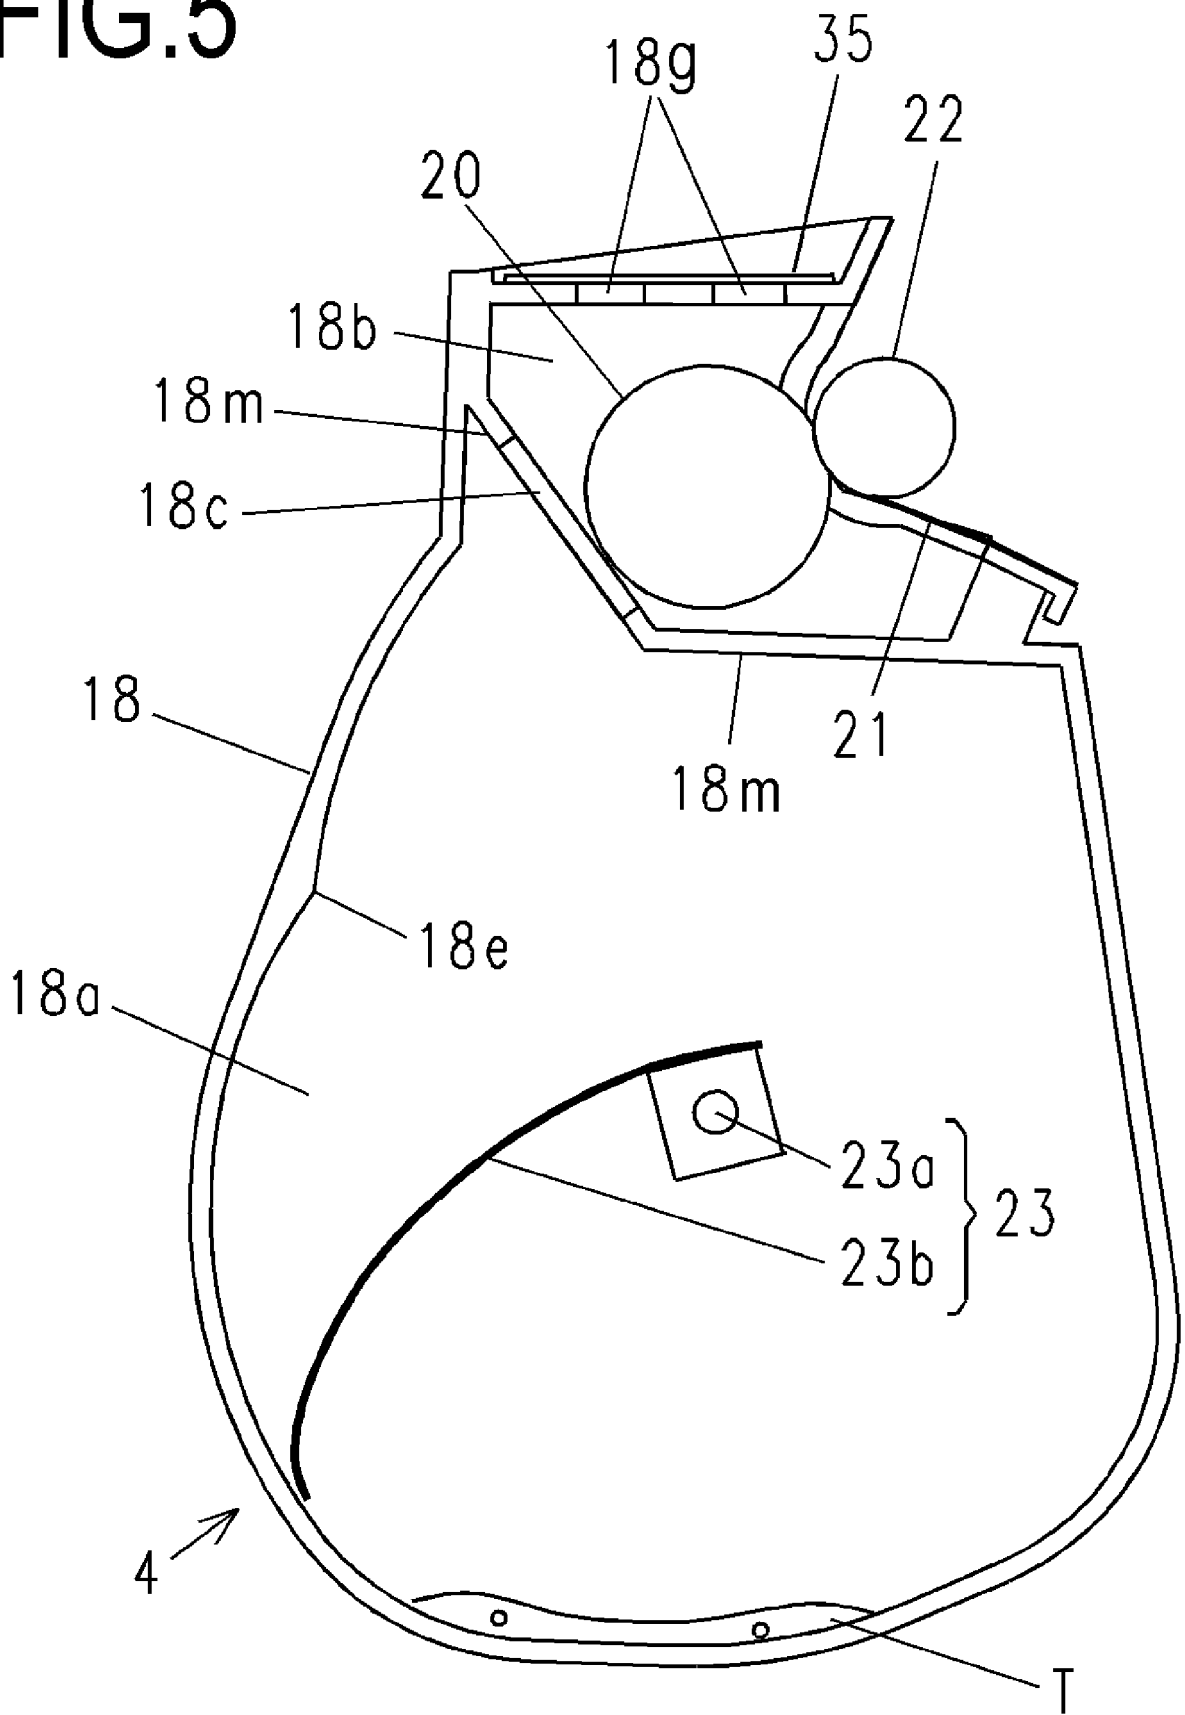




FIG.6A

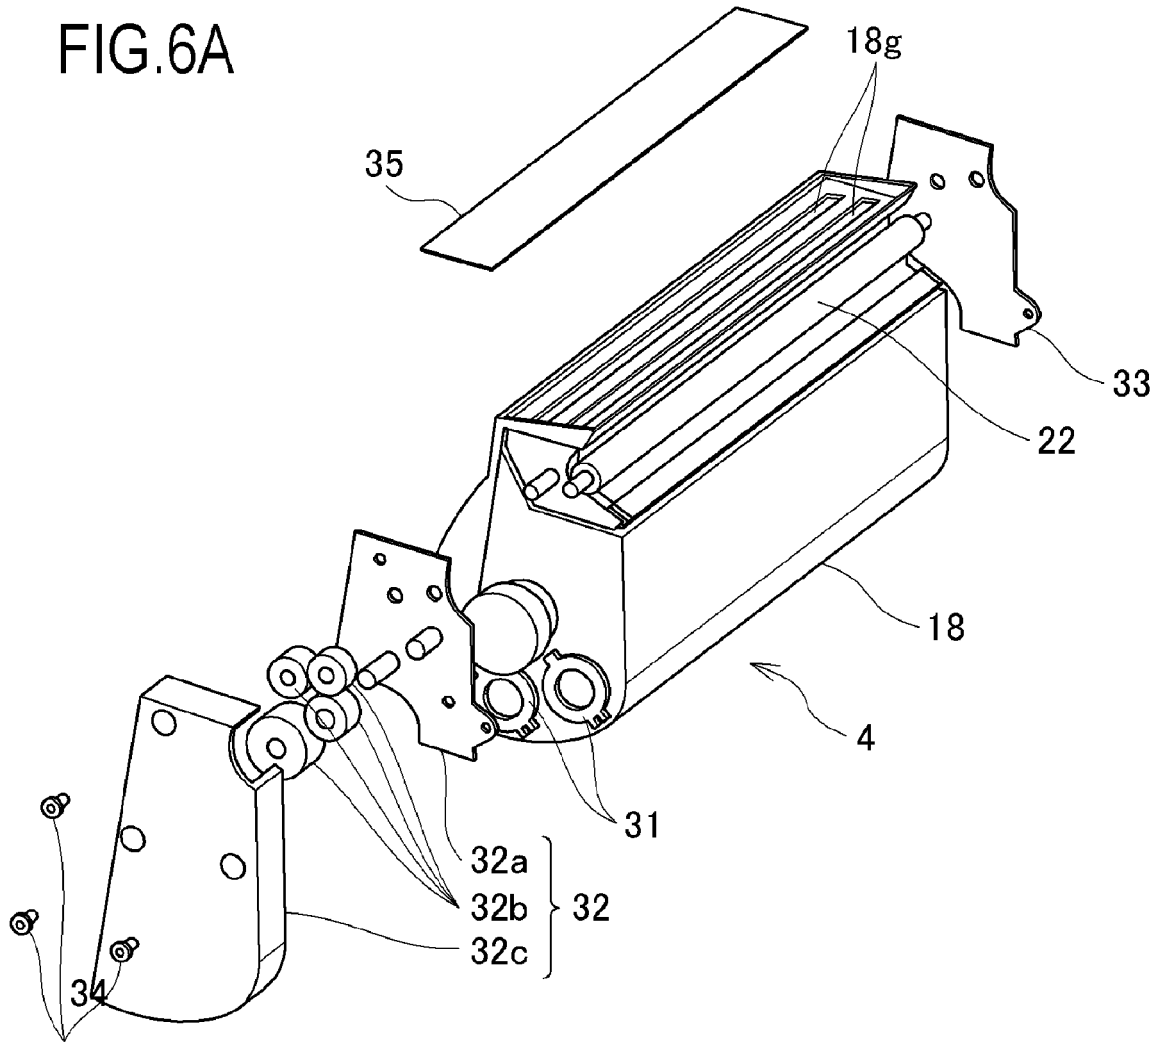


FIG.6B

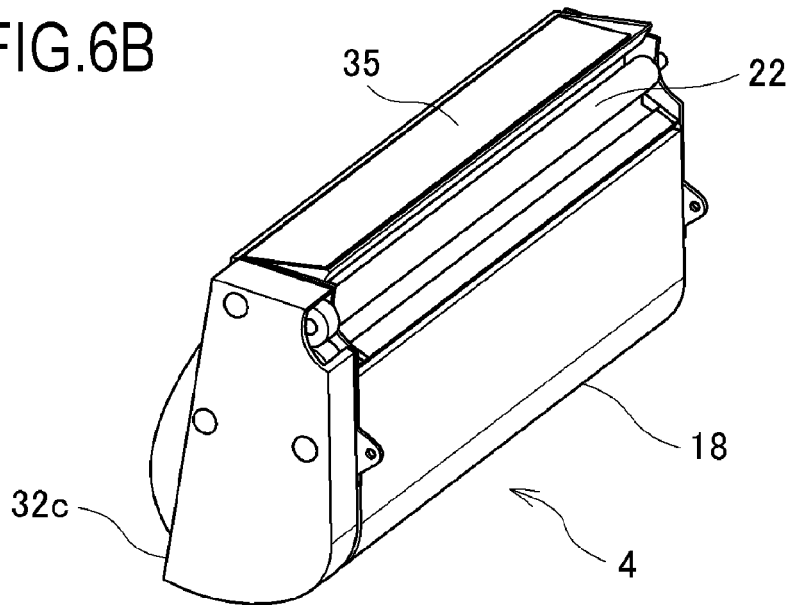


FIG.7A

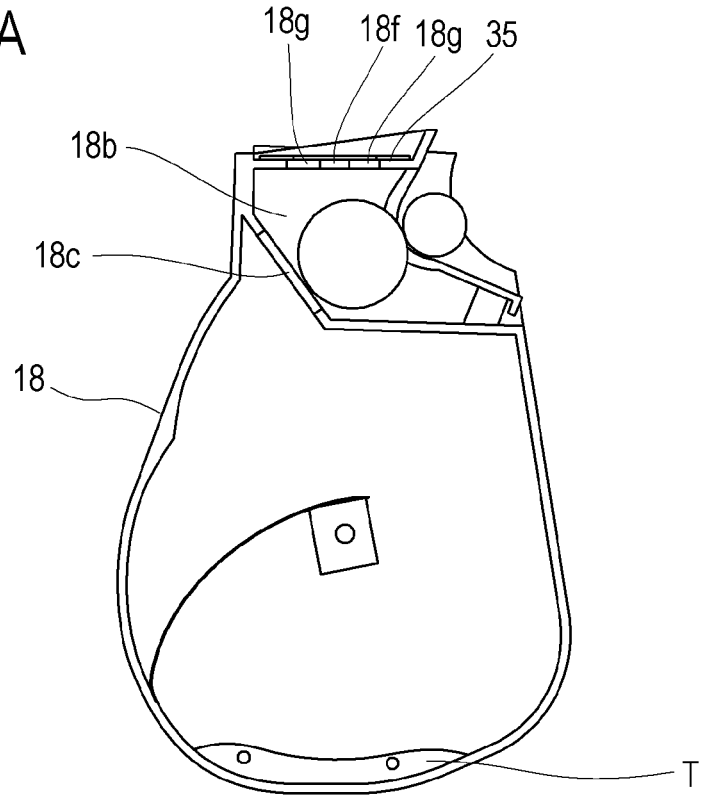


FIG.7B

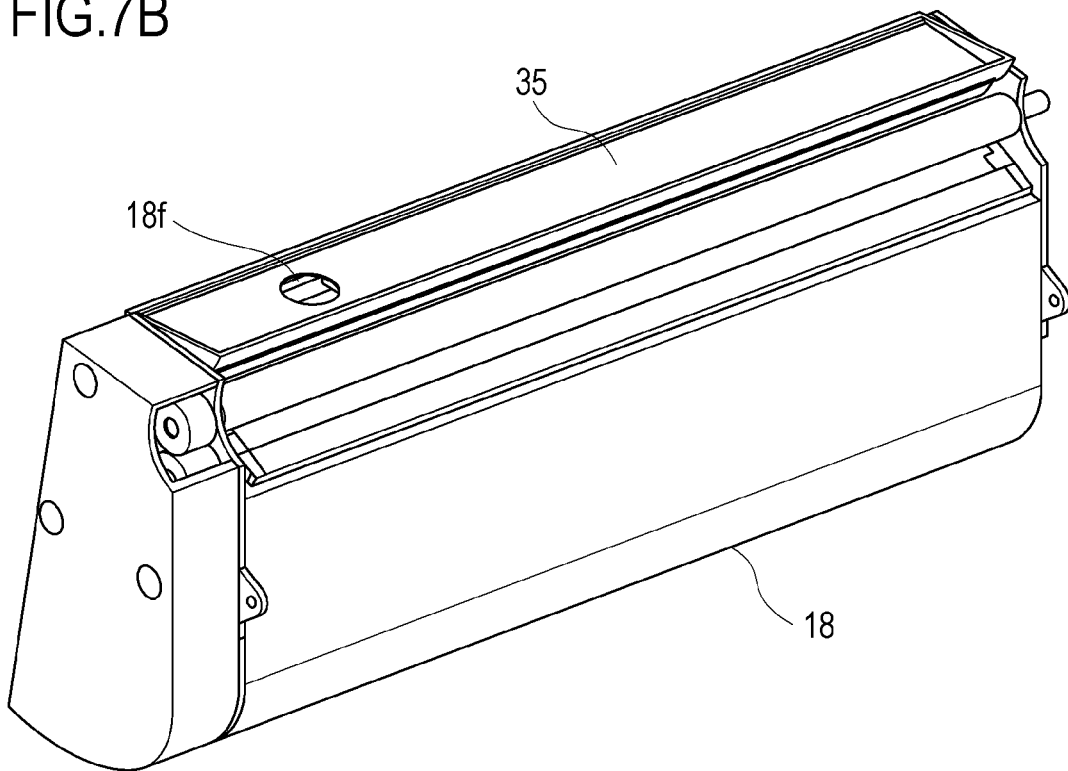


FIG.8A

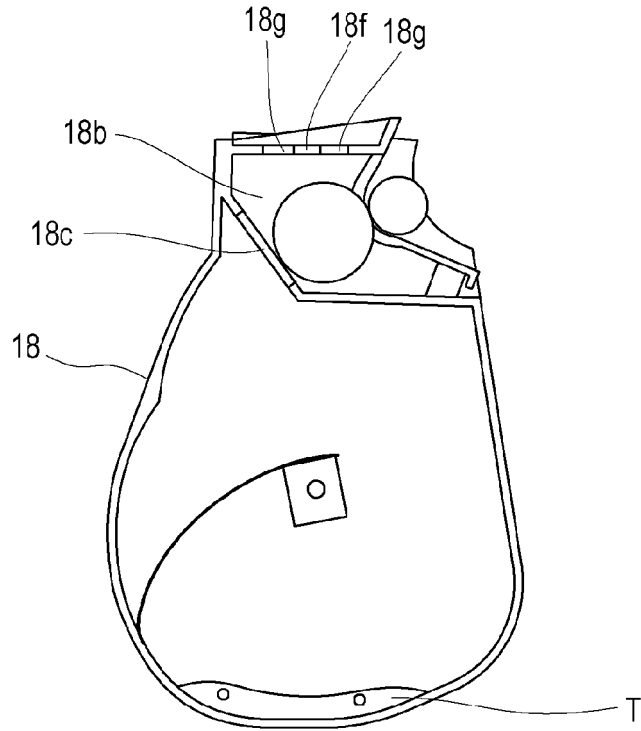


FIG.8B

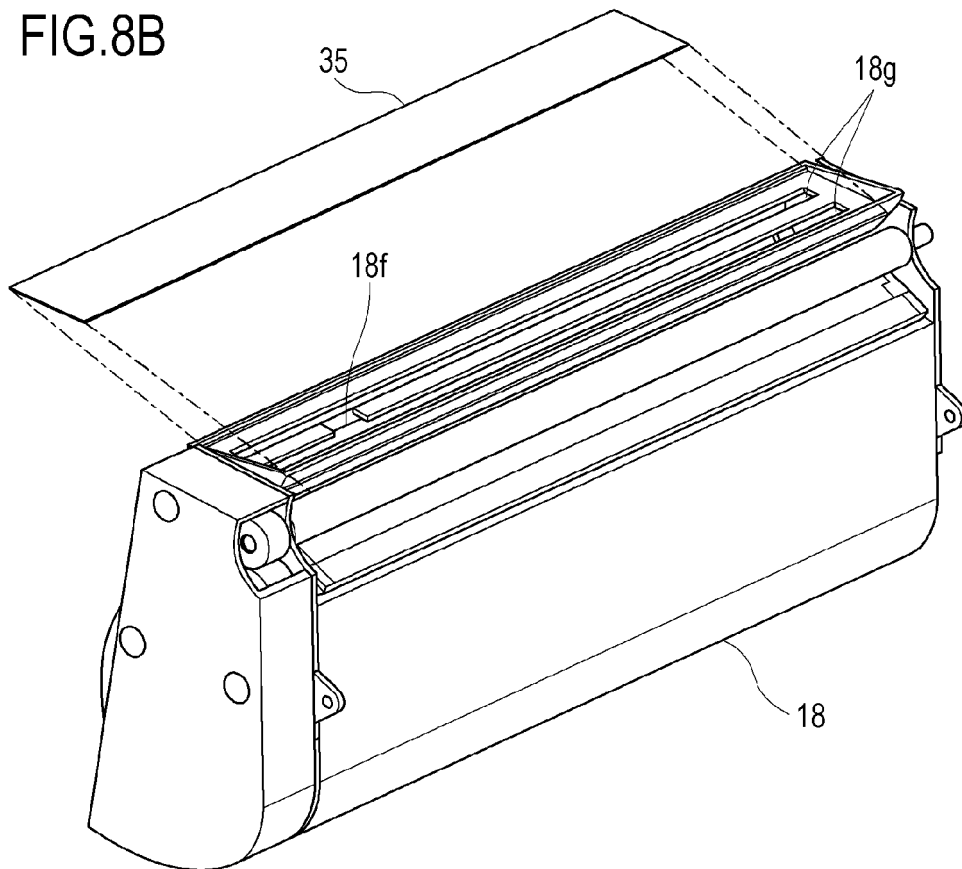


FIG.9

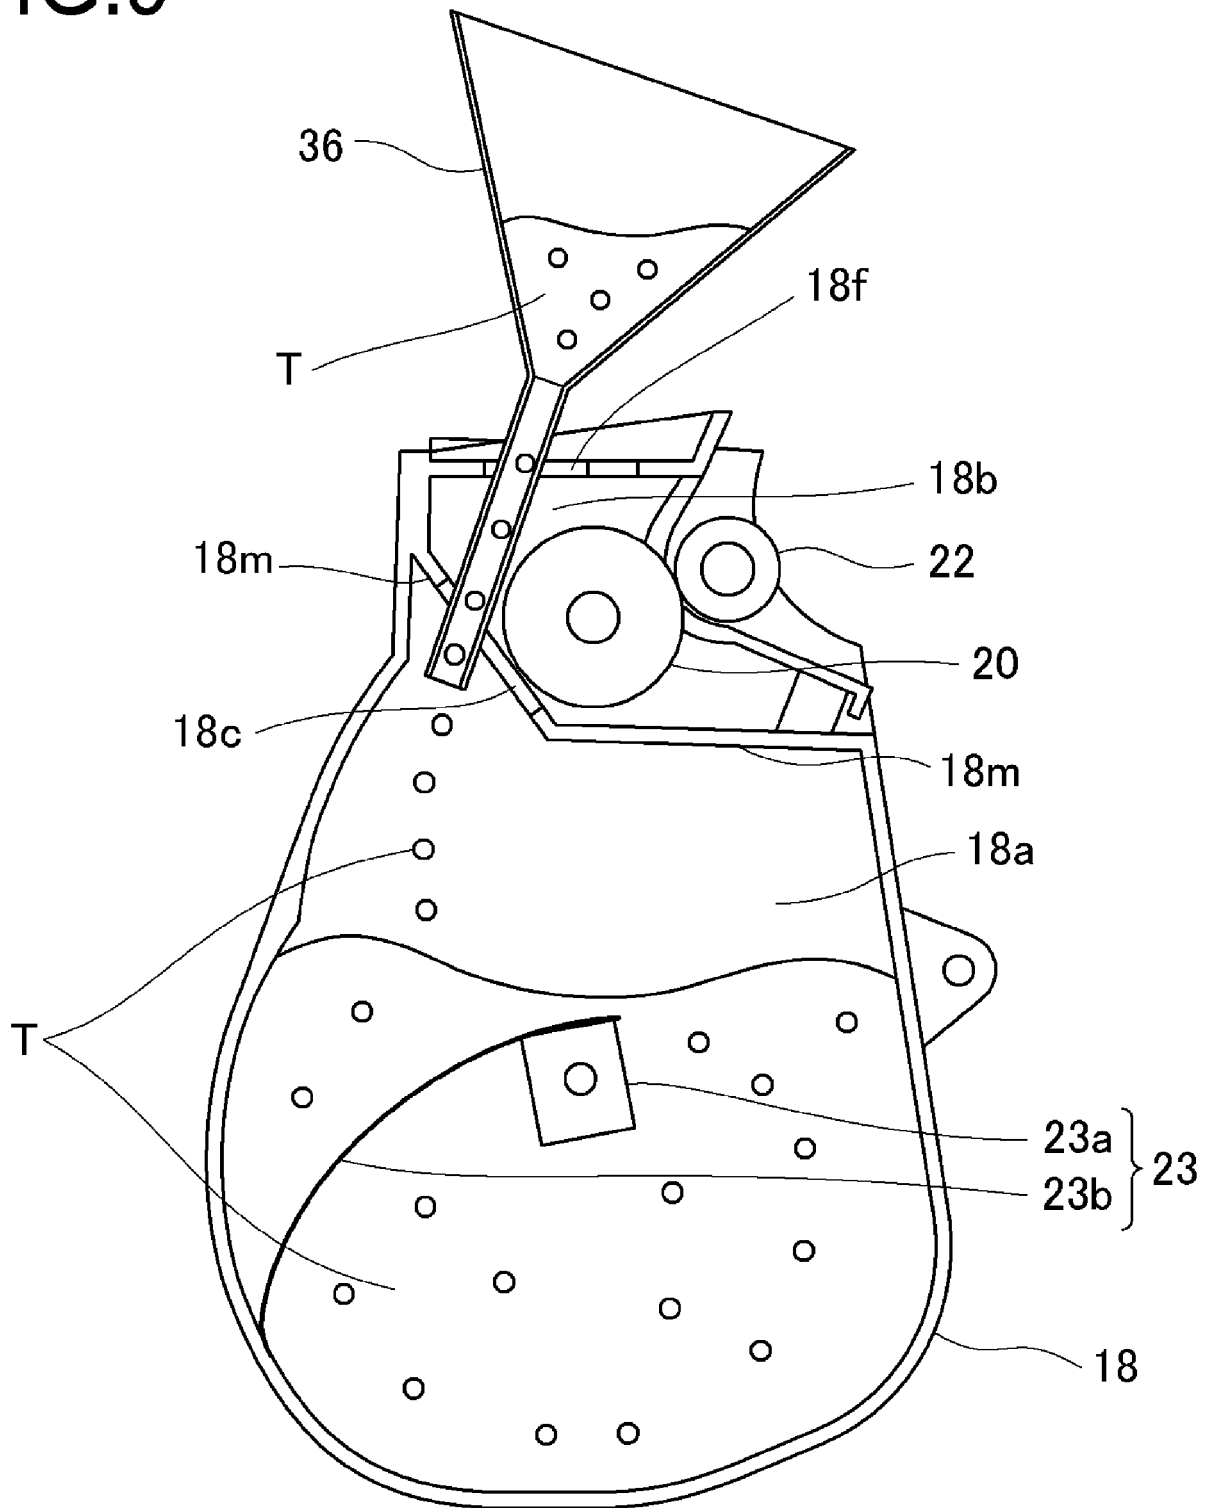


FIG.10A

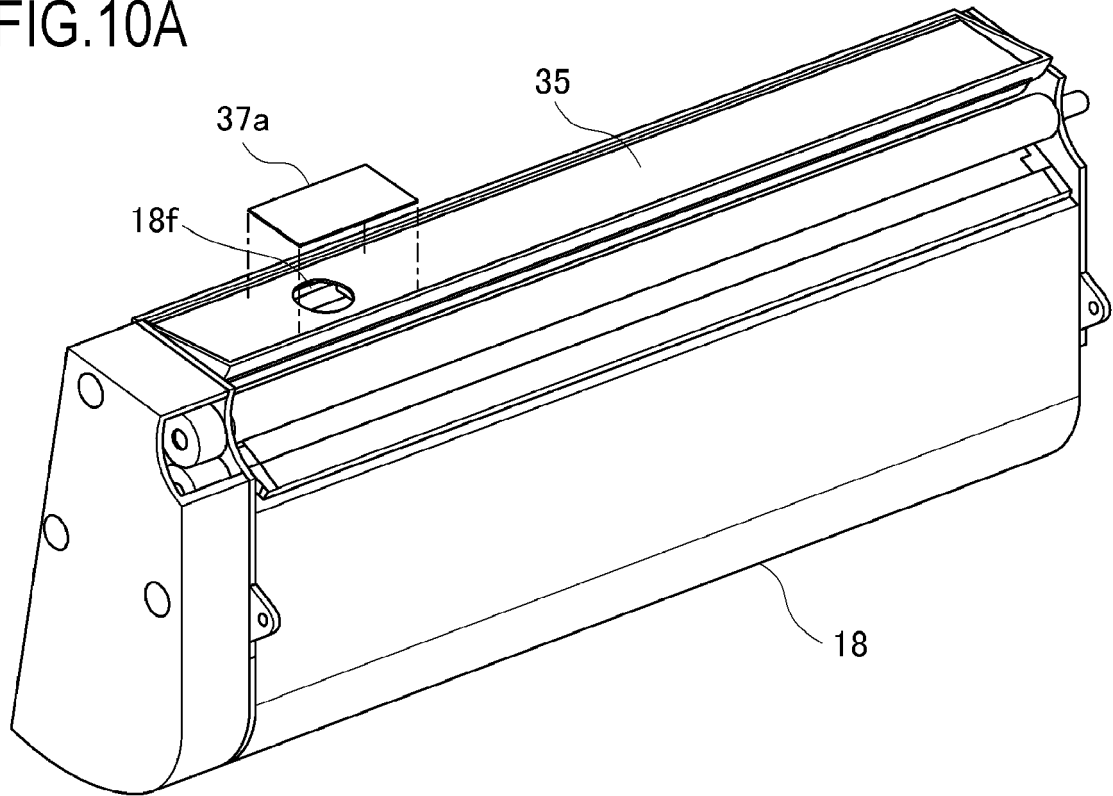


FIG.10B

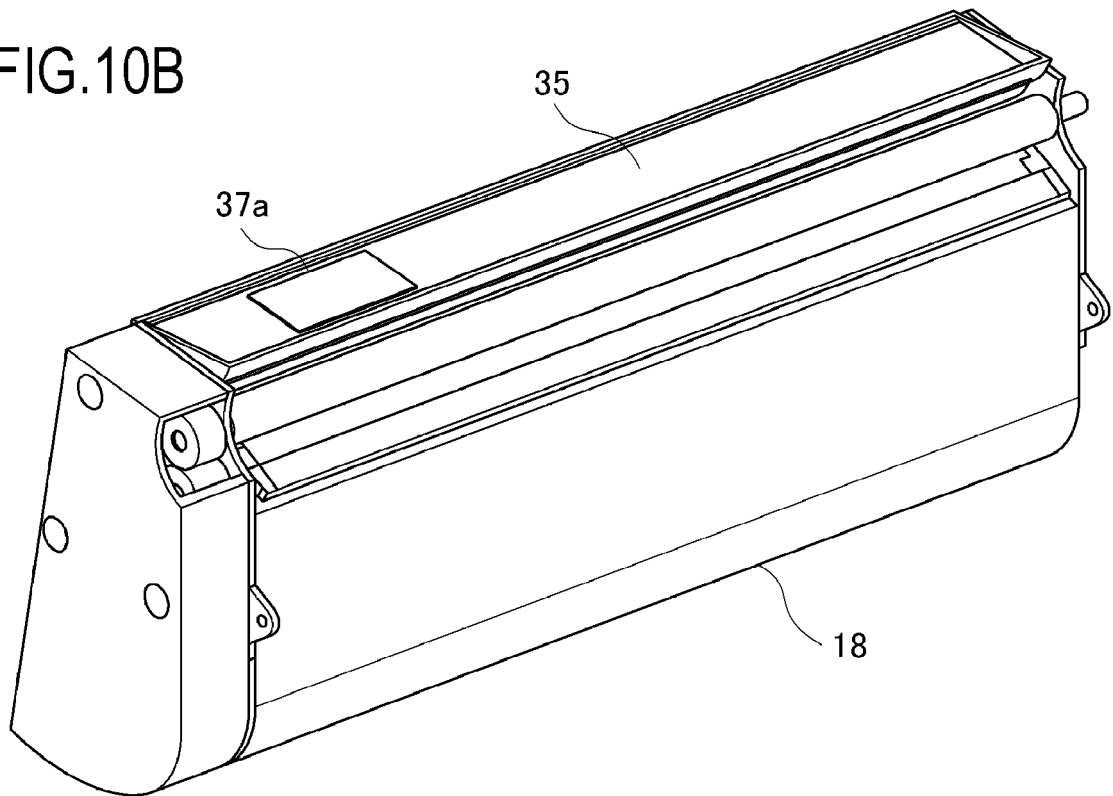


FIG.11A

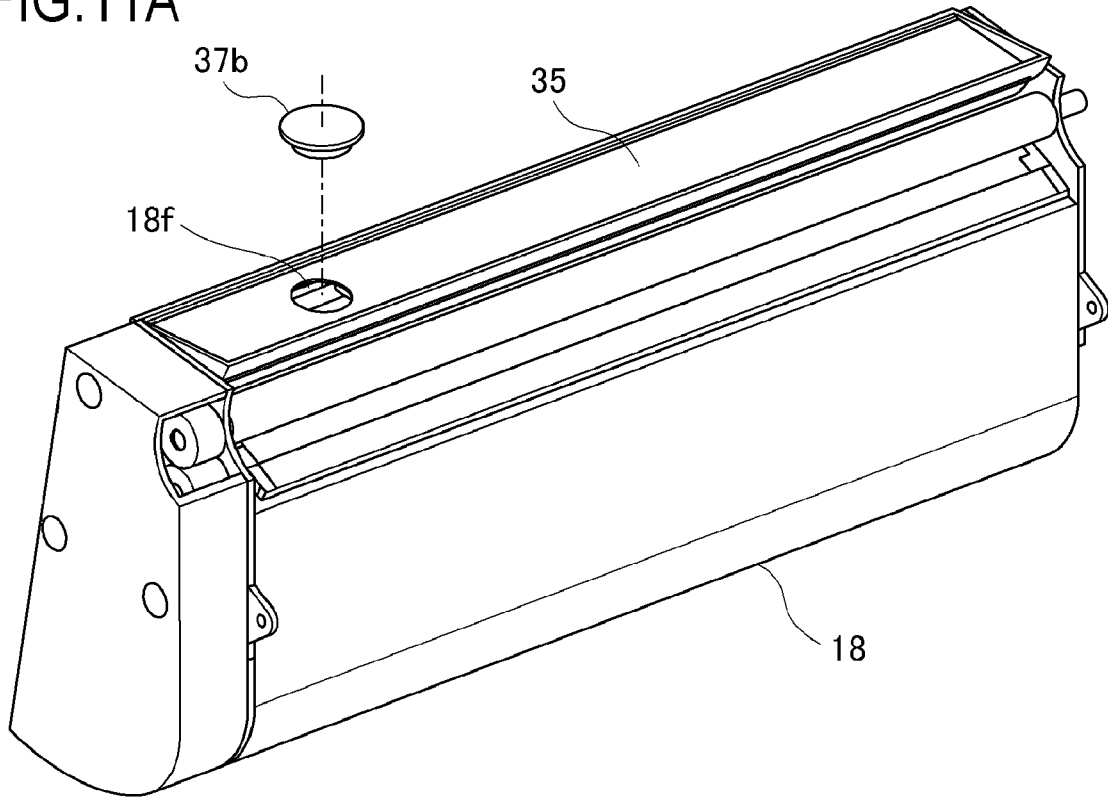


FIG.11B

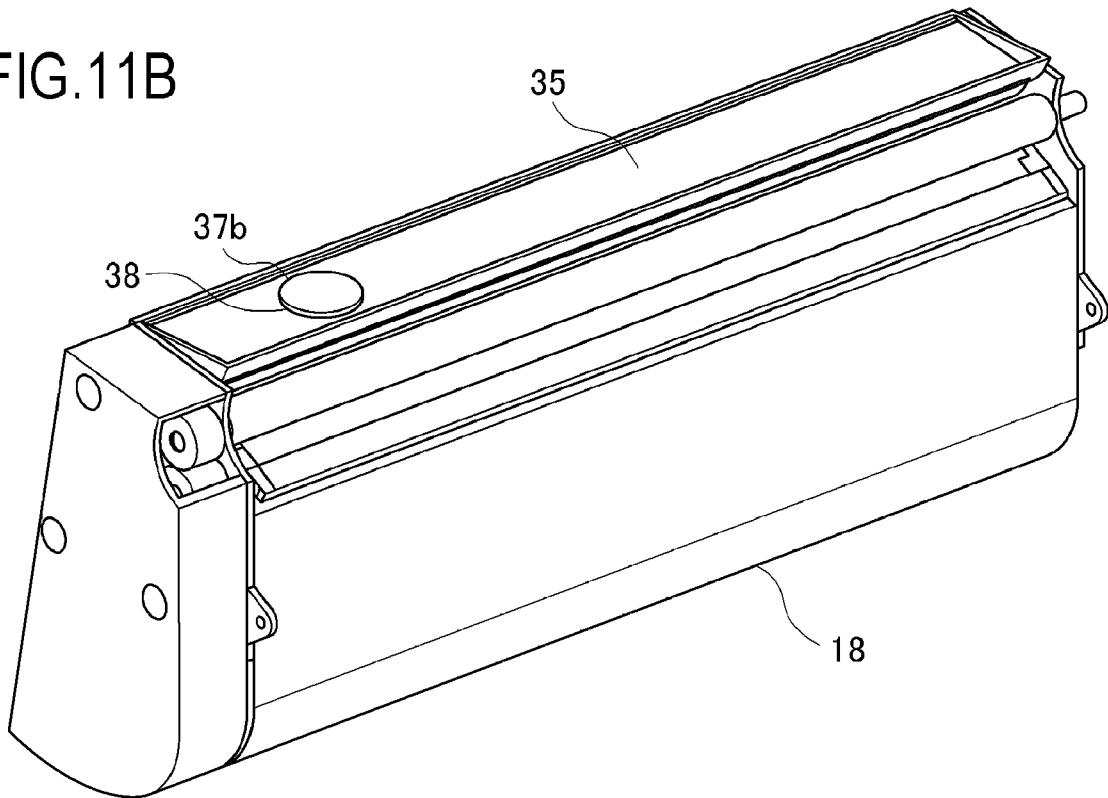


FIG.12A

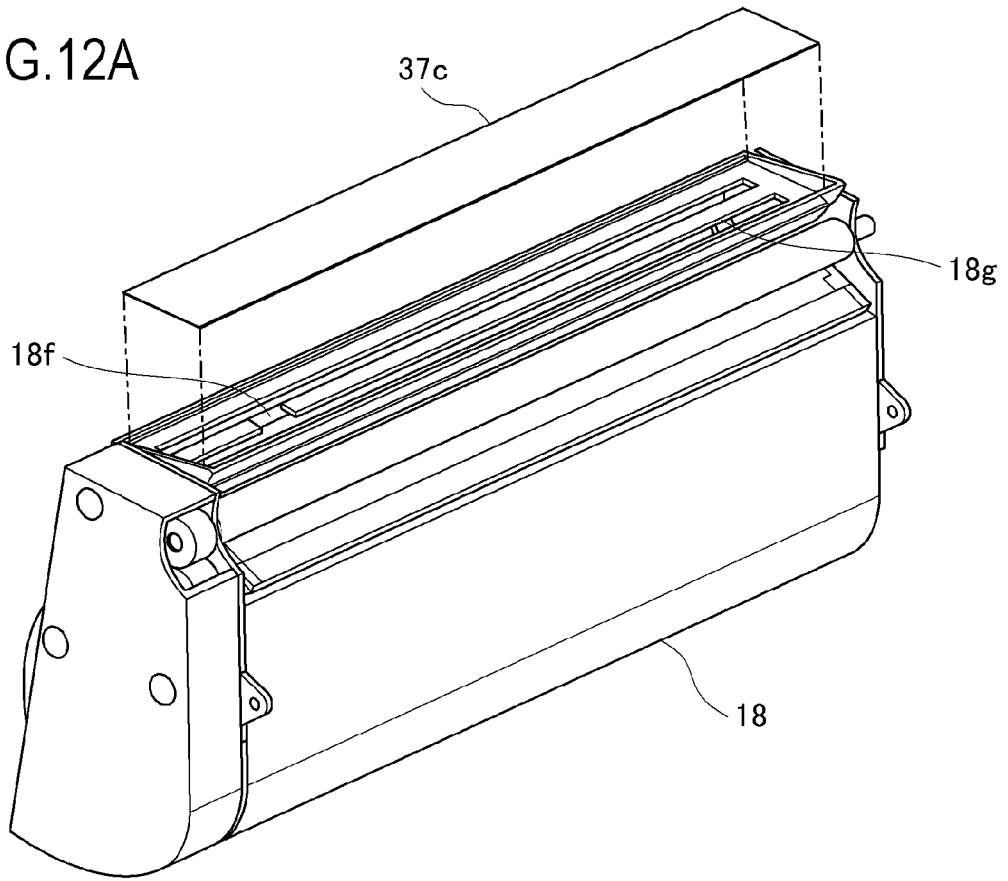


FIG.12B


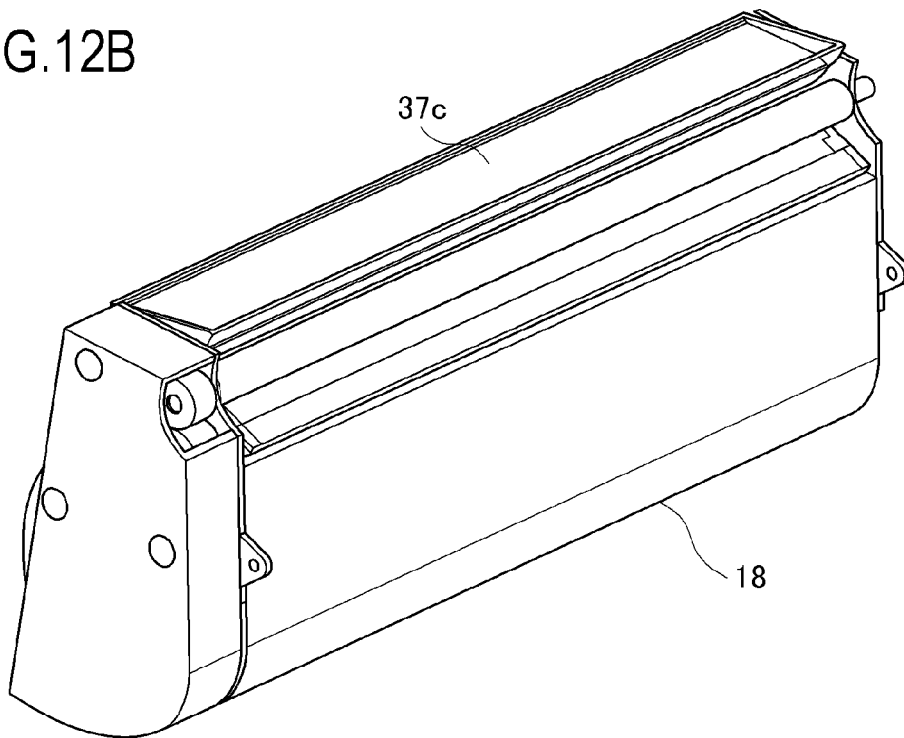


FIG.13





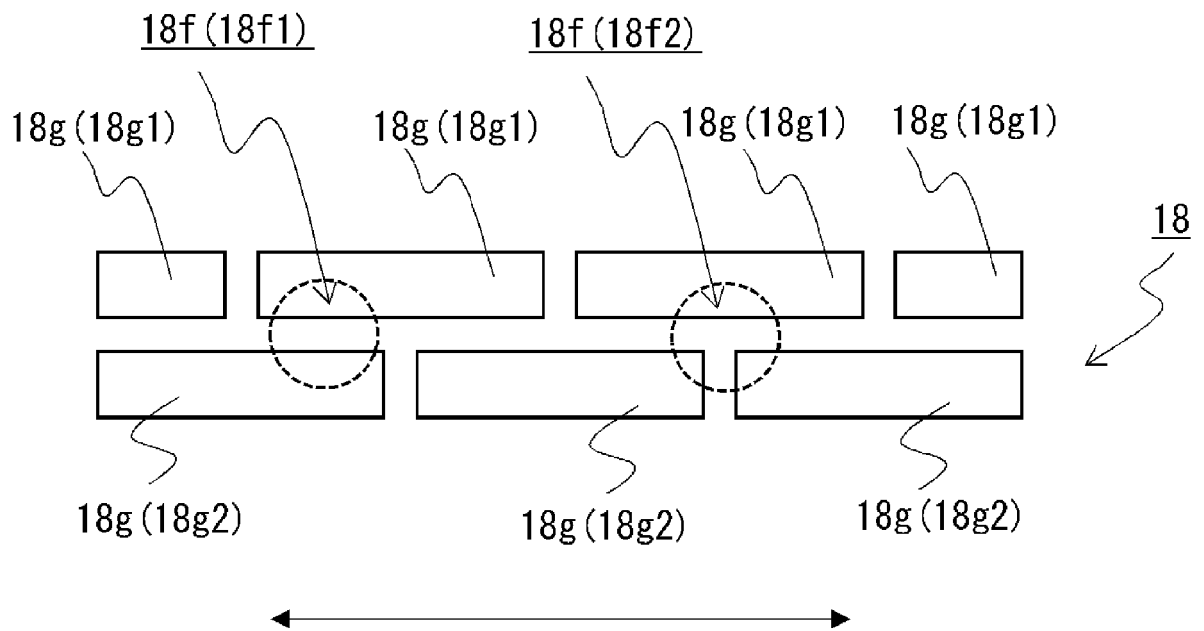

EUROPEAN SEARCH REPORT

Application Number  
EP 19 19 3712

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	JP 2002 278423 A (CANON KK) 27 September 2002 (2002-09-27)	1,15-20	INV. G03G15/08 G03G21/16 G03G21/18
Y	* the whole document * -----	2-14	
X	US 2018/143569 A1 (ISOBE YUTA [JP] ET AL) 24 May 2018 (2018-05-24)	1,15-17, 19,20	
Y	* the whole document * -----	2-14,16, 18-20	
Y	EP 3 316 042 A1 (CANON KK [JP]) 2 May 2018 (2018-05-02) * the whole document * -----	2-14,16, 18-20	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
			G03G
Place of search		Date of completion of the search	Examiner
Munich		24 March 2020	Scarpa, Giuseppe
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone		T : theory or principle underlying the invention	
Y : particularly relevant if combined with another document of the same category		E : earlier patent document, but published on, or after the filing date	
A : technological background		D : document cited in the application	
O : non-written disclosure		L : document cited for other reasons	
P : intermediate document		& : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P04C01)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 19 19 3712

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-03-2020

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2002278423 A	27-09-2002	JP 3363893 B2 JP 2002278423 A	08-01-2003 27-09-2002
US 2018143569 A1	24-05-2018	CN 105549359 A EP 3026498 A1 JP 6584062 B2 JP 2016085372 A KR 20160049485 A PH 12015000357 A1 US 2016124347 A1 US 2017075259 A1 US 2018143569 A1	04-05-2016 01-06-2016 02-10-2019 19-05-2016 09-05-2016 03-05-2017 05-05-2016 16-03-2017 24-05-2018
EP 3316042 A1	02-05-2018	CN 108021000 A EP 3316042 A1 US 2018120731 A1	11-05-2018 02-05-2018 03-05-2018

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- JP 2002328588 A [0003]
- JP 2002251119 A [0003]