



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : G01N 5/02</p>	<p>A1</p>	<p>(11) International Publication Number: WO 97/37208 (43) International Publication Date: 9 October 1997 (09.10.97)</p>
---	------------------	---

(21) International Application Number: PCT/US97/04860
 (22) International Filing Date: 25 March 1997 (25.03.97)
 (30) Priority Data:
 96105022.6 29 March 1996 (29.03.96) EP
 (34) Countries for which the regional or international application was filed: AT et al.
 (71) Applicant (for all designated States except US): THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US).
 (72) Inventor; and
 (75) Inventor/Applicant (for US only): HERRLEIN, Mathais, Kurt [DE/DE]; Apostelstrasse 4, D-60528 Frankfurt (DE).
 (74) Agents: REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US).


(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published
 With international search report.
 Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: METHOD FOR ASSESSING DISPOSABLE ABSORBENT STRUCTURES

(57) Abstract

The invention refers to methods for assessing absorbent structures (10) for their fluid handling ability by using materials (110) having a moisture pick up ability which is very close to the one of human skin. This is achieved by using materials (110) which do not function based on capillary transport for moisture, but which comprise as an essential element swellable but non-soluble materials in a film form. Such materials (110) can be based on proteins, Glycin, Prolin, 4-hydroxyprolin, naturally occurring sugars, glycerin, sorbit and collagen. A particularly preferred material is a film material comprising collagen. To simulate a baby's weight upon the absorbent structure (10), a load (16) may be utilized therewith.

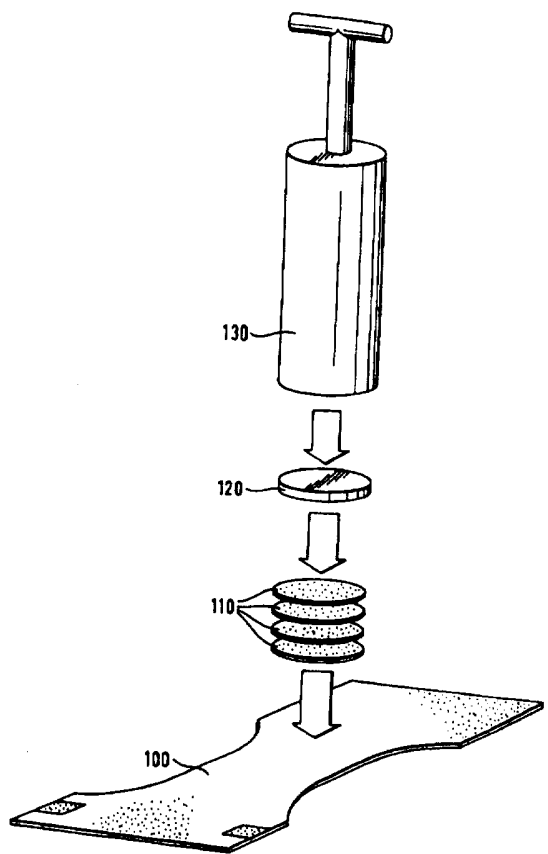

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

5

METHOD FOR ASSESSING DISPOSABLE ABSORBENT STRUCTURES

10 The present invention relates to a method for assessing disposable absorbent structures for their fluid handling ability. More specifically, the present invention relates to materials which are particularly suitable for such an assessment.

15

Background of the Invention

Disposable, absorbent articles such as diapers, incontinence articles, sanitary towels, training pants and the like are well known in the art.

20 Significant effort has already been spent against assessing the performance of such articles both with respect to wetting of outer garments (leakage) and with respect to wetting or lack thereof of the skin of the wearer.

25 To assess the condition of the skin of the wearer, the moisture content of the uppermost skin layer, the stratum corneum, is of critical importance, and many reports refer to the evaluation of such articles under in-vivo conditions.

30 Elsner et al. provides a comprehensive overview of such methods in "Bio-engineering of the skin: Water and the Stratum Corneum", CRC Press, 1994. The most relevant methods are the "Transepidermal Water Loss" (often abbreviated TEWL) measuring the moisture evaporation from the skin; methods to measure the electrical properties like capacitance, impedance, or conductance of the skin, which depend strongly on the moisture content, such as with the CORNEOMETER or NOVA or other instruments. Also, further methods applying
35 conventional chemical analysis tools like IR or NMR spectroscopic or magnetic

resonance imaging are referred, too, however, have so far not found broad application.

5 The in-vivo methods have in common, that they assess directly the condition of the skin of the wearer of an absorbent article either under real in-use loadings or possibly with artificially loaded articles, which are for example worn on the forearm of a test person for a certain period.

10 For all these methods, the comparison of absorbent articles for development purposes is cumbersome. Apart from the fact of needing test persons as such, these persons have individual factors - such as varying reaction to certain room conditions as temperature or relative humidity - all contributing to a large variability of the test results. In order to still get meaningful data, the number of test persons must be increased - again increasing the effort.

15 Hence, significant effort has already been put against evaluating absorbent articles and structures under reproducible and easy to execute laboratory conditions, whereby generally the human skin is replaced by standardised fluid pick-up filter paper. Essentially, these methods are based on the "capillary rewet" principle, whereby a test sample is loaded with a certain amount of test fluid, such as synthetic urine. After a certain time such as to allow for equilibration and preferably under a certain pressure, the pick up filter paper as "skin replacement" is placed on top of the surface of the loaded structure for a certain time, under a certain pressure. The pick-up filter paper is well defined such as by porosity, basis weight, or absorbency. Due to the capillary suction power of its pores, it is sucking up readily available moisture (i.e. "free" moisture not being bound such as through superabsorbent materials or in smaller pores than the pick-up paper) from the surface of the test specimen and the weight increase is a measure for the "rewet" performance of the absorbent article.

30 Optionally, this test procedure can be combined with other fluid handling evaluation protocols, for example a "post-acquisition-rewet-test" indicates, that during the first part of the combine protocol the fluid acquisition behaviour of the test specimen is studied, whereas the rewet assessment is then carried out in the second part of the test.

35

A big number of such tests have been described in the public, such as in WO 93/02 188 (Guidotti et al.); EP-A-0 039 974 (Mullane); EP-A-0 278 601 (Kobayashi); or EP-A-0 539 703 (Hanson).

5

Another approach to assess the performance of such articles has been proposed by Lask et al. in EP-B-0 312 919, whereby the surface moisture e.g. of an absorbent article is correlated to the reflection and scattering of a light beam

10 However, advanced core designs have resulted in "drier and drier" products, and the differentiation between "good" and "better" products has become increasingly difficult, if not impossible with these conventional methods. Still, both in-vivo measurements as well as comments of users of such articles clearly indicate, that there is a need for further discerning various products or designs to further
15 improve the performance of such articles, and in particular to reduce skin hydration.

In addition, recent work indicated, that it not only the capillary fluid transport from the loaded article back to the skin of the wearer is impacting on the condition of
20 the skin, but that other factors such as sweating under occlusive conditions can have very negative impact on the condition of the skin.

Hence it is been an object of the invention to provide a better tool for distinguishing well performing absorbent articles under reproducible laboratory
25 conditions.

It is a further object of the invention to provide such a tool not only for capillary fluid transfer conditions, but also for other moisture transfer mechanisms, such as when sweating under occlusive conditions.
30

Thus the invention provides particularly well suited materials, which - when combined with the appropriate test protocol - allow significantly improved differentiation of absorbent articles.
35

Summary of the Invention

5 The invention relates to a method for assessing absorbent structures using materials having a moisture pick up ability which is very close to the behaviour of human skin. This is achieved by using materials which do not function based on capillary transport for moisture , but which comprise as an essential element swellable but insoluble materials, preferably in film form. Such materials can be based on proteins, Glycin, Prolin, 4-hydroxyprolin, naturally occurring sugars, glycerin, sorbit, collagen. A particularly preferred material is a film material comprising collagen, as known in the medical art for wound coverages or for food packaging. Such materials allow very effective distinction of absorbent articles, in particular when used in a test protocol optimised for both the "pick-up" material as well as for the absorbent structure under evaluation.

The method of the invention provides benefits versus in-vivo experiments in allowing standardised testing condition, thus allowing much speedier. It provides benefits over porous rewet test materials for conventional testing protocols, as it is not using the unrealistic capillary liquid transport from the pores of the absorbent article to the pores of the "rewet pick-up" material, generally a specific type of filter paper.

Brief Description of the Drawing

Fig. 1 shows a simplified test equipment according to a preferred test protocol for assessing skin hydration performance of baby diapers.

Fig. 2 shows a simplified test equipment for assessing the liquid acquisition performance of baby diapers.

Detailed Description

The invention relates to materials suitable for a novel way of assessing the impact of absorbent articles on the hydration condition of human skin. It aims at providing

such materials for reliable laboratory tests without negative effects of in-vivo experiments on one side, and laboratory tests focusing on capillary liquid transfer or free surface moisture on the other side.

5 The key element of the materials according to the current invention is the lack of a porous structure whilst the materials have the ability to pick up moisture by a similar mechanism as human skin. This is achieved by using "hydratable" materials, which on one side have the ability to pick up moisture, which, however, on the other side do maintain their generally film like structure even at equilibrium
10 saturation, and do not disintegrate or wet upon wetting. Therby, the moisture pick up is dominated by hydration mechanisms, i.e. in contrast to the mechanisms of porous and/or fibrous structures, the fluid is transferred to the pick-up materials according tot he epresent invention not by capillary transport through said pores, but rather by directly diffusing into the molecular matrix of the pick up materials,
15 and by hydrogen bonding mechanisms dominating the moisture adsorption in these materials.

This mechanism should also be seen in contrast to the swelling of - for example -
cellulosic fibre structures. Whilst the cellulosic fibres do exhibit a certain swelling,
20 and also exhibit a certain ability to bind liquid through hydrogen bonding within the fibres , the dominating mechanism is the liquid retention in the interstitial voids, i.e. the interfibre pores. In contrast, even if materials according to the presnet invention would be applied in a fibrous form, it is an essential element, that the dominating absorption of fluid is not into the pores of such a structure comprising
25 fibres and fibre interstitials, but into the the fibres itself.

Materials exhibiting the fluidpick up ability are proteins in general, prolin, 4-hydroxyprolin, natural sugars, glycerine, sorbit, but a particularly preferred material is collagen.

30 Collagens are generally natural based materials, which are produced by starting from bovine skin skives. Preferred materials are partly modified insoluble collagen films. Making of such films for use in medical applications such as wound coverings is disclosed in WO 94/04201 assigned to NATURIN GmbH, Germany,

- 6 -

who is also a supplier of such materials. Other applications of collagen containing films is in the food industry for use as edible sausage of ham casings.

5 Preferred execution of these films is "Collagen Food Film" manufactured and sold by NATURIN under the designation "COFFI". Such embossed films have a basis weight of about 28g/m². The materials have a closely monitored moisture content of about 12% by weight. With this moisture, the film material is flexible and easy to handle. Upon further drying, it starts to become brittle. If in contact with moisture -
10 be this in the form of liquid or vapour - the material starts to further soften and swells up to an equilibrium moisture of 150 % of its initial weight.

It has been found, that this material is an excellent replica for simulating moisture pick up behaviour of human skin, if applied in an appropriate test protocol.

15 Obviously, this protocol needs to be adjusted according to the object under evaluation, i.e. the protocol for a baby diaper should be different for a test protocol for an Adult Incontinence product, or a catamenial device.

20 In all these cases, the conditions should be varied such is that the collagen material should be allowed be to increase its own weight to about 50% of the equilibrium moisture content under realistic loading conditions of the respective article. It will be straightforward for the man skilled in the art to adjust any of the test parameter as laid out in the following example.

25 **Test Procedures**

The following exemplifies the procedure to evaluate baby diapers, and more specifically baby diapers of the broadly distributed MAXI/MAXI PLUS size (i.e infants in the weight range from about 8 kg to about 18 kg).

30 General

All tests are carried out at about 22 +/- 2°C and at 35+/- 15% relative humidity.

The synthetic urine used in the test methods is commonly known as Jayco SynUrine and is available from Jayco Pharmaceuticals Company of Camp Hill, Pennsylvania. The formula for the synthetic urine is: 2.0 g/l of KCl; 2.0 g/l of
35 Na₂SO₄; 0.85 g/l of (NH₄)H₂PO₄; 0.15 g/l (NH₄)H₂PO₄; 0.19 g/l of CaCl₂; ad

- 7 -

0.23 g/l of MgCl₂. All of the chemicals are of reagent grade. The pH of the synthetic Urine is in the range of 6.0 to 6.4.

Acquisition Test

5 Referring to Figure 1, an absorbent structure (10) is loaded with a 75 ml gush of synthetic urine at a rate of 15 ml/s using a pump (Model 7520-00, supplied by Cole Parmer Instruments., Chicago, U.S.A.), from a height of 5 cm above the sample surface. The time to absorb the urine is recorded by a timer. The gush is repeated every 5 minutes at precisely 5 minute gush intervals until the article is
10 sufficiently loaded. Current test data are generated by loading four times.

The test sample, which comprises a core and includes a topsheet and a backsheet, is arranged to lie flat on a foam platform 11 within a perspex box (only base 12 of which is shown). A perspex plate 13 having a 5 cm diameter opening
15 substantially in its middle is placed on top of the sample. Synthetic urine is introduced to the sample through a cylinder 14 fitted, and glued into the opening. Electrodes 15 are located on the lowest surface of the plate, in contact with the surface of the absorbent structure 10. The electrodes are connected to the timer. Loads 16 are placed on top of the plate to simulate, for example a baby's weight.
20 A pressure of 50g cm⁻² (0.7psi) is typically utilised in this test.

As test fluid is introduced into the cylinder it typically builds up on top of the absorbent structure thereby completing an electrical circuit between the electrodes. This starts the timer. The timer is stopped when the absorbent
25 structure has absorbed the gush of urine, and the electrical contact between the electrodes is broken.

The acquisition rate is defined as the gush volume absorbed (ml) per unit time (s). The acquisition rate is calculated for each gush introduced into the sample. Of
30 particular interest in view of the current invention are the first and the last of the four gushes.

This test is primarily designed to evaluate products having an absorbent capacity of about 300 ml to 400 ml. If products with significantly different capacities should
35 be evaluated, the settings in particular of the fluid volume per gush should be

- 8 -

adjusted appropriately to about 20% of the theoretical capacity, and the deviations should be recorded.

Skin Hydration Value determination (refer to figure 2)

- 5 Before executing the test, the collagen film as purchased from NATURIN GmbH, Weinheim, Germany, is prepared by being cut into sheets of 90 mm diameter by using a sample cutter device and by equilibrating the film in the controlled environment of the test room (see above) for at least 12 hrs (tweezers are to be used for all handling of the collagen film).
- 10 At least 5 minutes, but not more than 6 minutes after the last gush of the above acquisition test is absorbed, the cover plate and weights are removed, and the test sample (100) is carefully placed flat on a lab bench.
- 4 sheets of the precut and equilibrated collagen material (110) are weighed with at least one milligram accuracy, and then positioned centred onto the loading point of the article, and covered by perspex plate (120) of 90 mm diameter, and about 20mm thickness. A weight (130) of 15 kg is carefully added (also centred). After 15 30 +/- 2 seconds the weight and perspex plate are carefully removed again, and the collagen films are reweighed.
- The Skin Hydration Value is the moisture pick up of the collagen film, expressed in g.
- 20

Comparative capillary rewet test

- A comparative test is executed according the following procedure.
- This test is also carried out 10 minutes (+/- 5 sec) after the acquisition test, but uses 10 sheets of blotting paper of 220 g/m² as supplied by Hollinsworth & Vose, UK under the designation of MEDIUM WHITE W/S, and cut to 20 by 10 cm. This is equilibrated and preweighed, and positioned centred onto the loading point. A circular weight of 4860 g (in total) with a perspex plate of 18 cm by 6 cm is covered with a soft foam of a basis weight of 500 g/m² of 1 cm thickness and a Polyethylene film is carefully positioned onto the filter paper and left on it for 15 30 seconds.
- The value for rewetting is the weight increase of the blotting papers.

- 9 -

Post use evaluation of diapers

Diapers have been give to users for overnight usage on babies. In the morning, the diapers were removed under supervision of an expert grader, who executed NOVAMETER tests according to the NOVAMETER using instructions in the genital region of the babies.

Also, the parents were asked to grade the skin dryness in the genital area on a 4 point scale.

Evaluation of sample diapers

In order to further exemplify the benefits of the current invention, samples of different baby diapers have been submitted various test protocols as outlined in the above.

Sample 1 is a commercially available product, PAMPERS Baby Dry Maxi/MAXI PLUS size as marketed by Procter & Gamble in Europe.

Sample 2 is a commercially available product, HUGGIES FLEXIFIT as marketed by Kimberly-Clark in Europe

Sample 3 is identical to sample 1 except for the following

First, chemically treated stiffened cellulosic material (CS) supplied by Weyerhaeuser Co.,US under the trade designation of "CMC" functioning as an acquisition/distribution layer is doubled in basis weight, by an increase from about 295 g/m² to 590 g/m².

Second, an additional acquisition layer in introduced between the topsheet and said chemically treated stiffened cellulose layer, namely a high-loft chemically bonded nonwoven as supplied by FIBERTECH, North America under the designation type 6852. It is a chemically bonded PET fibre web of a basis weight of 42g/m².

Thirdly, the cellulose material usage in the storage core underneath the chemically treated stiffened cellulosic material is increased from about 20 g to 40 g per pad.

5 Fourth, the amount of superabsorbent material in this storage core is increased from about 10 g to about 33 g per pad. Superabsorbent material was supplied by Stockhausen GmbH, Germany under the trade name FAVOR SXM.

10 The results were as follows:

Table 1

	Sample 1	Sample 2	Sample 3
15			
Collagen testing			
Loading zone rewet [μ g]	152	50	146
20			
Filter paper rewet			
[g]	0.4	0.35	0.43
25			
Overnight wear study			
NOVAMETER testing			
number of babies tested	43	21	20
genital area, [-]	540	366	548
30			
Mothers skin rating [%]			
number of babies tested	21	21	20
dry	61	63	55
slightly damp	29	37	30
damp	10	0	15
wet	0	0	0

35 As can be seen from these test, the at best directional differences in conventional testing between the sample 1 and 3 could be made significant on a statistical

basis by applying the present invention. The significant improvement of the sample 2 in on-baby testing is well reflected in the results of the present invention, but not in the conventional testing method.

- 12 -

WHAT IS CLAIMED IS:

- 5 1. A method for assessing disposable absorbent structures for their fluid handling ability, whereby the performance of the absorbent structure is assessed by the amount of fluid this structure releases to a pick up material after the structure has been loaded with test liquid, characterized in that
- 10 said pick up material contains material swellable and insoluble in water; and in that the fluid transfer into the moisture pick up material is dominated by hydration mechanisms.
- 15 2. A method according to claim 1, wherein said swellable and insoluble pick up material is selected from proteins, Glycin, Prolin, 4-hydroxyprolin, naturally occurring sugars, glycerin, sorbit and collagen.
3. A method according to claim 2, wherein said pick up material is collagen.
- 20 4. A method according to claims 1 - 3, wherein the moisture pick up material is in film form.
- 25 5. A method according to claims 1 - 4, comprising the steps of loading the absorbent article with fluid, positioning said moisture pick up materials onto the absorbent article for at least 20 seconds under a pressure of at least 34.5 g/cm² (0.5 psi) and monitoring the moisture pick up of these materials.

1/2


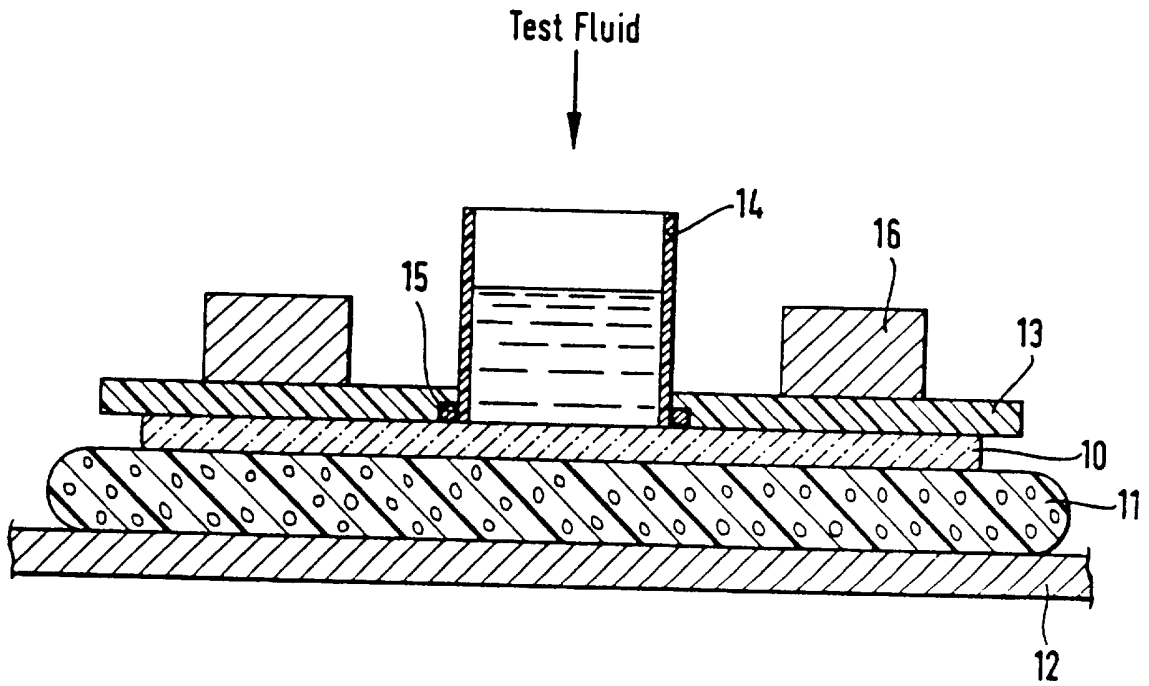


Fig. 1

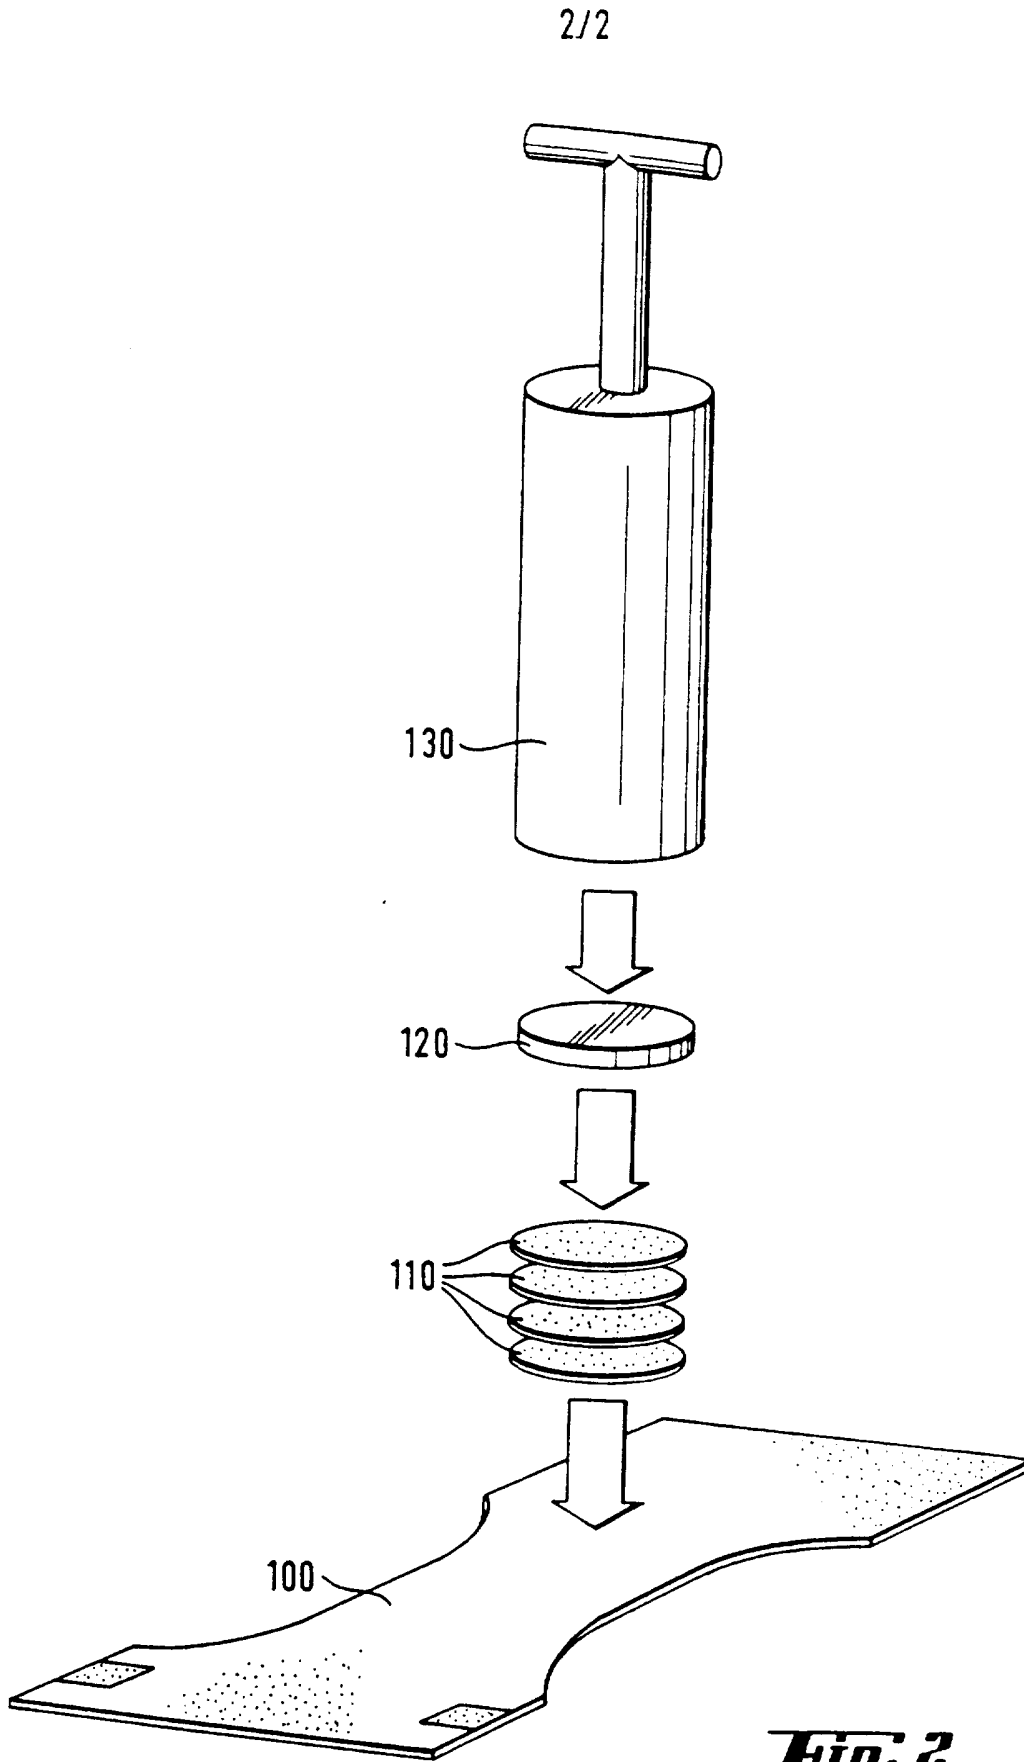

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/04860

A. CLASSIFICATION OF SUBJECT MATTER		
IPC(6) : G01N 5/02 US CL : 73/73, 76 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) U.S. : 73/73, 76		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) APS, search terms: diaper, absorbency, flowback		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 4,798,603 A (MEYER et al.) 17 January 1989, col. 13, line 59 to col. 14, line 17.	1 --- 2,3
Y	US 3,632,361 A (BATTISTA) 4 January 1972, the whole document.	2,3
X --- Y	US 5,147,343 A (KELLENBERGER) 15 September 1992, col. 10, lines 36-63.	1 --- 2,3
X,P ---- Y,P	US 5,509,915 A (HANSON et al.) 23 April 1996, col. 31, lines 1-55.	1 --- 2,3
A	US 3,952,584 A (LICHSTEIN) 27 April 1976.	1-3
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* *A* *E* *L* *O* *P*	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance earlier document published on or after the international filing date document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) document referring to an oral disclosure, use, exhibition or other means document published prior to the international filing date but later than the priority date claimed	*T* *X* *Y* *A* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art document member of the same patent family
Date of the actual completion of the international search 25 JUNE 1997		Date of mailing of the international search report 04 AUG 1997
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer <i>J. Lee Hirschfeld</i> ANDREW HIRSCHFELD Telephone No. (703) 308-1113

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/04860

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4,491,012 A (PETERSON) 1 January 1985, see the whole document.	1-3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/04860

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.: 4 and 5
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

- Remark on Protest The additional search fees were accompanied by the applicant's protest.
 No protest accompanied the payment of additional search fees.