



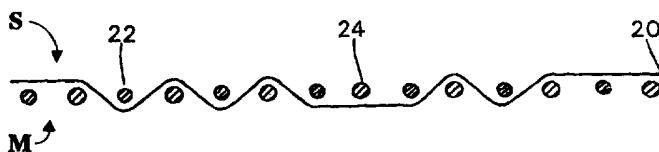

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁶ : D21F 11/00, 1/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 97/38160 (43) International Publication Date: 16 October 1997 (16.10.97)</p>
<p>(21) International Application Number: PCT/US97/03135 (22) International Filing Date: 28 February 1997 (28.02.97) (30) Priority Data: 08/627,410 4 April 1996 (04.04.96) US (71) Applicant: ASTEN, INC. [US/US]; 4399 Corporate Road, P.O. Box 118001, Charleston, SC 29423 (US). (72) Inventors: WRIGHT, Walter, P.; 5263 White Pine Drive, Larsen, WI 54947 (US). GULYA, Thomas; 8400 Charkes Branch Drive, Raleigh, NC 27613 (US). HERRING, Samuel, H.; 645 Keller Park Drive, Appleton, WI 54915 (US). (74) Agents: VOLPE, Anthony, S. et al.; Volpe and Koenig, P.C., 400 One Penn Center, 1617 John F. Kennedy Boulevard, Philadelphia, PA 19103 (US).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>	

(54) Title: A MULTIPLANAR SINGLE LAYER FORMING FABRIC

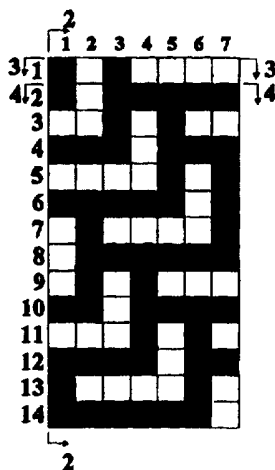

(57) Abstract

A papermaking forming fabric having a single layer of machine direction filaments (20) interwoven with smaller and larger diameter cross direction filaments (22, 24), the larger diameter filaments (24) forming a wear surface on the machine side of the fabric (M).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

A MULTIPLANAR SINGLE LAYER FORMING FABRIC**BACKGROUND OF THE INVENTION****Field of the Invention**

This invention relates generally to papermaking
5 fabrics. More particularly, the present invention relates
to forming fabrics which are used to facilitate the initial
formation of a paper web during the manufacture of paper.
Most particularly, the present invention provides a single
layer forming fabric having a high support surface on the
10 sheet side and a wear resistant surface on the machine side.

Description of Related Art

In the papermaking process, papermaking machines
transform an aqueous slurry of fibers into a continuous
15 paper web which can be processed for a variety of end uses.
Papermakers fabrics are employed throughout the papermaking
process to transport the web of paper as a continuous sheet
through the papermaking equipment. The papermakers fabrics
also act as a drive belt for the equipment.

20 The papermaking process starts in the forming section
of a papermaking machine where the aqueous slurry is
deposited onto a forming fabric. The forming fabric
desirably retains the paper fibers while allowing excess
water to pass through. The wet paper web created by this
25 process is then carried by a press fabric through the press
section where additional water is removed by squeezing the
paper web and fabric between two rolls. The paper web is
then carried through the drying section on a dryer fabric to

remove additional water through forced evaporation. The design of papermakers fabrics used on each section of a papermaking machine vary in accordance with function.

In the forming section of papermaking machines, the
5 fibers are retained and collected on the upper surface of a forming fabric and formed into a paper sheet. The forming fabric must have a fine mesh weave on the paper contact side in order to avoid marking the paper and to support the fiber from the slurry. The fabric must also have good drainage
10 characteristics for initial water removal to facilitate paper formation. However, as previously noted, the forming fabric also serves as a drive belt and is subjected to high tensile loads in the machine direction and compressive or buckling loads in the cross machine direction.

15 The performance of a fourdrinier papermaking machine improves when the sheet forms high on the sheet bearing surface of the forming fabric. Where the sheet forms high on the surface of the forming fabric, the sheet releases better, not being trapped within the web, and thus allows
20 for higher machine speeds and higher paper machine efficiency. Additionally when the sheet forms high on the fabric, wire marking on the paper surface is reduced.

Accordingly, it would be desirable to have a forming fabric which allows the sheet to form high on the fabric
25 thereby reducing marking of the paper product. It would be further desirable to also have a forming fabric with improved wear resistant capabilities.

SUMMARY OF THE INVENTION

A papermaking fabric having a sheet side and a machine side is comprised of a system of MD filaments selectively interwoven with a system of CD filaments comprised of
5 alternating smaller and larger diameter filaments that define at least two subsets of filaments, the MD filaments define sheet side floats at least four CD filaments, the larger diameter CD filaments define machine side floats of at least four MD filaments, and the smaller diameter CD
10 filaments define sheet side floats over at least two MD filaments such that the sheet side has a non-planar sheet supporting surface dominated by the MD filaments and the machine side is dominated by the larger CD filament floats.

It is an object of the present invention to provide a
15 papermaking impression fabric, particularly a forming fabric, having both improved sheet support and pocket spaces.

It is a further object of the present invention to provide a papermaking fabric having increased wear
20 resistance on the machine side of the fabric.

BRIEF DESCRIPTION OF DRAWINGS

Figure 1 is a weave pattern diagram for a first embodiment of a fabric according to the present invention.

25 **Figure 2** is a sectional view along line 2-2 of **Figure 1** of a first embodiment of a fabric according to the present invention depicting the weave pattern of a first MD filament interweaving with the CD filaments of the fabric.

Figure 3 is a sectional view along line 3-3 of **Figure 1** of a first embodiment of a fabric according to the present invention depicting the weave pattern of a smaller diameter CD filament interweaving with the MD filaments of the fabric.

Figure 4 is a sectional view along line 4-4 of **Figure 1** of a first embodiment of a fabric according to the present invention depicting the weave pattern of a larger diameter CD filament interweaving with the MD filaments of the fabric.

Figure 5 is a weave pattern diagram for a second embodiment of a fabric according to the present invention.

Figure 6 is a sectional view along line 6-6 of **Figure 5** of a second embodiment of a fabric according to the present invention depicting the weave pattern of a first MD filament interweaving with the CD filaments of the fabric.

Figure 7 is a sectional view along line 7-7 of **Figure 5** of a second embodiment of a fabric according to the present invention depicting the weave pattern of a smaller diameter CD filament interweaving with the MD filaments of the fabric.

Figure 8 is a sectional view along line 8-8 of **Figure 5** of a second embodiment of a fabric according to the present invention depicting the weave pattern of a larger diameter CD filament interweaving with the MD filaments of the fabric.

Figure 9 is a weave pattern diagram for a third embodiment of a fabric according to the present invention.

Figure 10 is a sectional view along line 10-10 of **Figure 9** of a third embodiment of a fabric according to the present invention depicting the weave pattern of a first MD filament interweaving with the CD filaments of the fabric.

5 **Figure 11** is a sectional view along line 11-11 of **Figure 9** of a third embodiment of a fabric according to the present invention depicting the weave pattern of a smaller diameter CD filament interweaving with the MD filaments of the fabric.

10 **Figure 12** is a sectional view along line 12-12 of **Figure 9** of a third embodiment of a fabric according to the present invention depicting the weave pattern of a larger diameter CD filament interweaving with the MD filaments of the fabric.

15 **Figure 13** is a sectional view in the machine direction of a fourth embodiment of a fabric according to the present invention depicting the weave pattern of a first MD filament interweaving with the CD filaments of the fabric.

20 **Figure 14** is a sectional view in the cross direction of a fourth embodiment of a fabric according to the present invention depicting the weave pattern of a smaller diameter CD filament interweaving with the MD filaments of the fabric.

25 **Figure 15** is a sectional view in the cross direction of a fourth embodiment of a fabric according to the present invention depicting the weave pattern of a larger diameter CD filament interweaving with the MD filaments of the fabric.

Figure 16 is an illustration of a process for forming a paper web.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

5 The invention will be described with reference to drawing figures wherein like numerals represent like elements throughout.

Referring to **Figures 1-4**, a single layer forming fabric is shown with a system of machine direction filaments (MD) 10 20 interwoven with a system of alternating smaller and larger diameter cross direction filaments (CD) 22, 24. The fabric has a sheet side **S** and a machine side **M**.

As shown in **Figure 2**, MD filament 20 weaves in a repeat pattern of under one, over one, under one, over one, under 15 three, over one, under one and over five with respect to both the smaller and larger diameter CD filaments 22, 24. As shown in **Figure 3**, smaller diameter CD filaments 22 weave in a repeat pattern of under one, over one, under one, and over four with respect to the MD filaments 20. As shown in 20 **Figure 4**, larger diameter CD filaments 24 weave in a repeat pattern of over one and under six with respect to the MD filaments 20. The larger diameter CD filaments 24 form long machine side floats.

The smaller diameter CD filaments 22 provide floats on 25 the sheet side **S** of fabric 1. As a result of the weave pattern, smaller CD filaments 22 are urged toward the sheet side and away from machine side wear. On the other hand, the weave is such that the larger diameter CD filaments 24

are urged toward the machine side and form long machine side floats that provide a machine side wear surface. The long machine floats of the larger diameter CD filaments **24** have a pronounced bow or arc which is convex to the plane of the MD filaments **20**. The bow of the larger diameter CD filaments **24** urge the MD filaments **20** and smaller diameter CD filaments **22** away from the wear plane. In the preferred embodiment, this convex relationship is achieved during crimp interchange in the heat setting process. Heat setting of the woven fabrics is preferably performed at a temperature in the range of 320 to 400°F. and at a linear load range of 0.4 to 1.0 grams per deniers. The heat setting increases the ends per inch count of the MD filaments **20**. Since the larger diameter CD filaments **24** have a lesser degree of free shrinkage, heating enhances the bow of the larger diameter CD filaments **24**.

Because the MD filaments **20** are in a relatively higher plane than the smaller diameter CD filaments **22** and the long floats of the larger diameter CD filaments **24** dominate the machine side **M** of the fabric **1**, the sheet side **S** of the fabric is dominated by the MD floats. By alternating the larger diameter CD filaments **24** with the smaller diameter CD filaments **22**, the sheet side of the fabric is non-planar. Although the higher profile MD floats and the knuckles of larger diameter CD filaments **24** cause fiber compression in the paper sheet, not shown, when furnish is placed on the non-planar surface of fabric **1**, the depressions defining the

non-planar portions of the surface will produce areas of uncompressed fibers.

In a second embodiment, shown in **Figures 5-8**, MD filaments **30** weave in a repeat pattern of under one, over one, under one, over one, under three and over seven with respect to both the smaller and larger diameter CD filaments **32, 34**. Smaller diameter CD filaments **32** weave in a repeat pattern of under one, over one, under one, over one, under one and over two with respect to the MD filaments **30**.
10 Larger diameter CD filaments **34** weave in a repeat pattern of over one and under six with respect to the MD filaments **30**. Again, larger diameter CD filaments **34** form long machine side floats.

In a third embodiment, shown in **Figures 9-12**, MD filaments **40** weave in a repeat pattern of under three, over one, under one, over three, under one, over three, under one and over three with respect to smaller and larger diameter CD filaments **42, 44**. Smaller diameter CD filaments **42** weave in a repeat pattern of over one, under one, over one, under one, over three and under one with respect to MD filaments **40**.
20 Larger diameter CD filaments **44** weave in a repeat pattern of over one and under seven with respect to MD filaments **40**. Again, larger diameter CD filaments **44** form long machine side floats.

In a fourth embodiment, shown in **Figures 13-15**, MD filaments **50** weave in a repeat pattern of under three, over one, under one, and over five with respect to smaller and larger diameter CD filaments **52, 54**. Smaller diameter CD
25

filaments 52 weave in a repeat pattern of under one, over one, under one, and over two with respect to MD filaments 50. Larger diameter CD filaments 54 weave in a repeat pattern of over one and under four with respect to MD
5 filaments 50. Again, larger diameter CD filaments 54 form long machine side floats.

The diameter of the larger diameter CD monofilaments is preferably in the range of about 0.1 to 0.8 mm and preferably about 0.4 mm. The diameter of the smaller
10 diameter CD filaments is in a range of about 0.08 and about 0.6 mm, preferably about 0.25mm.

The MD and CD filaments may be polyester, polyamide, vinyl, acrylic, and other materials as known in the art. It is presently preferred that the filaments be made of
15 polyester which has been treated for hydrolysis resistancy. The filaments may differ in composition from each other.

In a preferred embodiment of the present invention, the woven fabric achieves an air permeability of 450 to 650 CFM, most preferably about 550 CFM as tested on a Fraizer air
20 permeability testing and an open area of 5% to 30%, more preferably 10%. Other embodiments can exhibit an air permeability up to 1000 CFM. The fabric may be woven in a flat or an endless configuration.

As an example, one conventional forming process is
25 illustrated in **Figure 16**. In this process, fibers are fed from a headbox (110) to a converging set of forming fabrics (120,130). In this twin wire forming arrangement water is removed from the web by centrifugal forces and by vacuum

means. The wet nascent web is cleanly transferred to forming fabric (130) via uhle box (140). The web can be optionally processed to remove water by vacuum box (150) and steam shroud (160). The web is then carried along forming
5 fabric (130) for further processing.

*

*

*

We claim:

1. A single-layer papermaking fabric having a sheet side and a machine side is comprised of:

a system of MD filaments selectively interwoven with a system of CD filaments comprised of alternating smaller and larger diameter filaments that define at least two subsets of filaments, the MD filaments are in a pattern that defines sheet side floats of at least four CD filaments, the larger diameter CD filaments are in a pattern that defines machine side floats of at least four MD filaments, and the smaller diameter CD filaments are in a pattern that defines sheet side floats over at least two MD filaments such that the sheet side has a non-planar sheet supporting surface dominated by the MD filaments and the machine side running surface is dominated by the larger CD filament floats.

2. The fabric of claim 1 wherein the larger diameter CD floats are convex with respect to the MD filaments.

3. The fabric of claim 1 wherein larger diameter CD monofilament have a diameter which is in the range of about 0.1 to 0.8 mm.

4. The fabric of claim 1 wherein larger diameter CD monofilaments have a diameter of about 0.4 mm.

5. The fabric of claim 1 wherein the smaller diameter CD filaments have a diameter which is in a range of about 0.08 and about 0.6 mm.
6. The fabric of claim 1 wherein the smaller diameter CD filaments have a diameter of about 0.25 mm.
7. The fabric of claim 1 wherein the fabric achieves an air permeability which is in the range of 450 to 650 CFM.
8. The fabric of claim 1 wherein the fabric achieves an air permeability of about 550 CFM.
9. The fabric of claim 1 wherein the fabric has an open area which is in the range of 5% to 30%.
10. The fabric of claim 1 wherein the fabric has an open area of about 10%.
11. The fabric of claim 1 wherein the smaller CD filaments are not dominate in either the supporting or running surface.

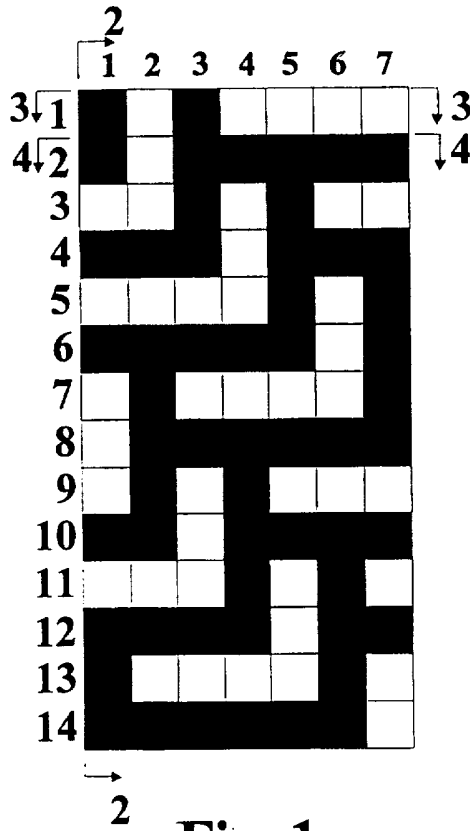


Fig. 1

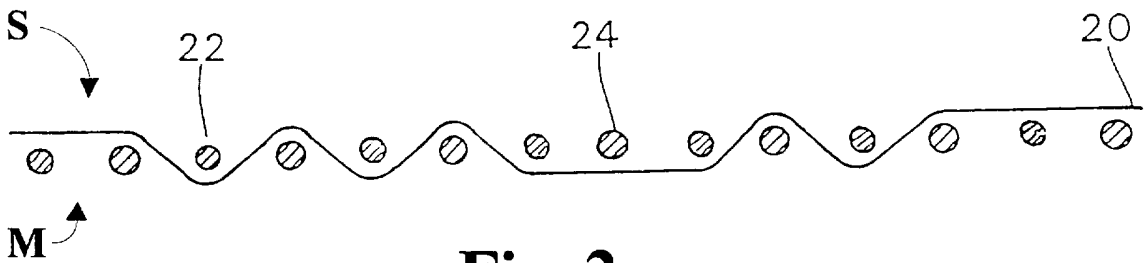


Fig. 2

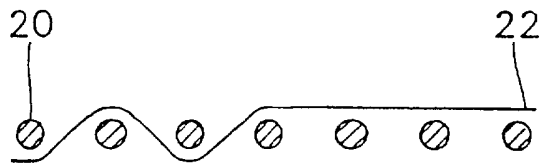


Fig. 3

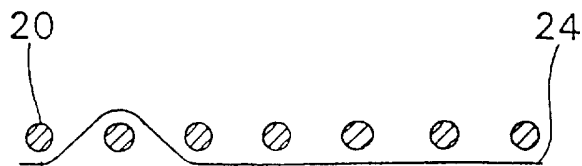


Fig. 4

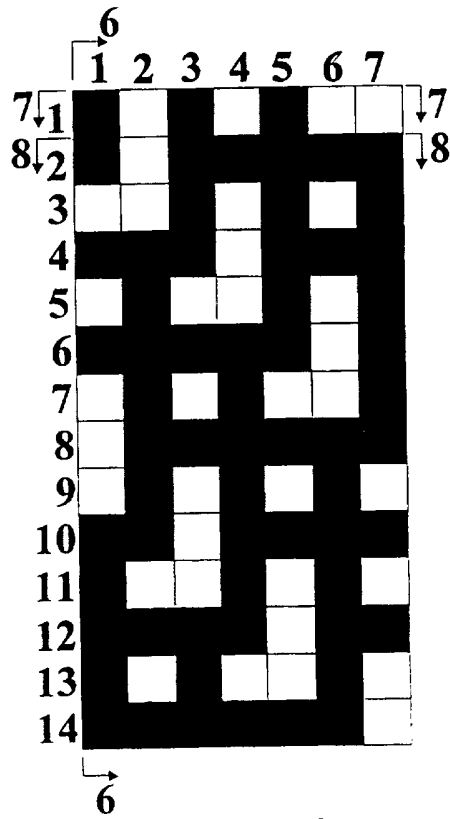


Fig. 5

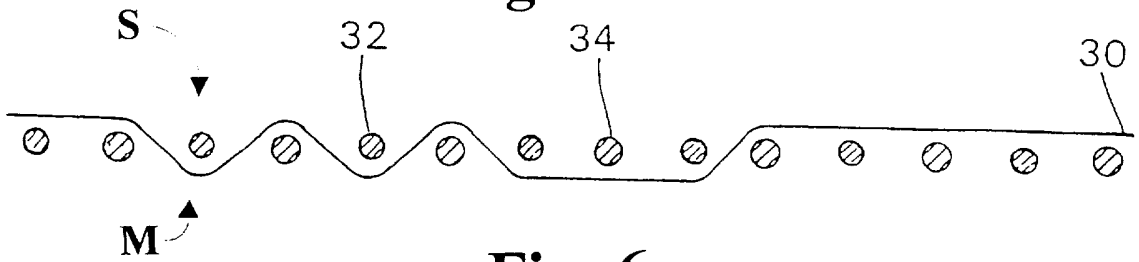


Fig. 6

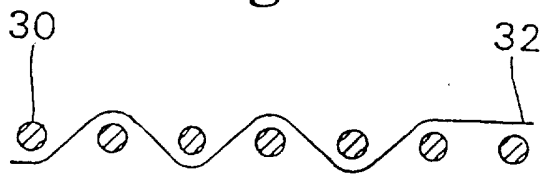


Fig. 7

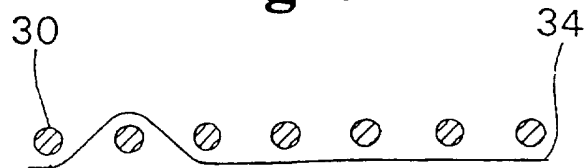


Fig. 8

3/5

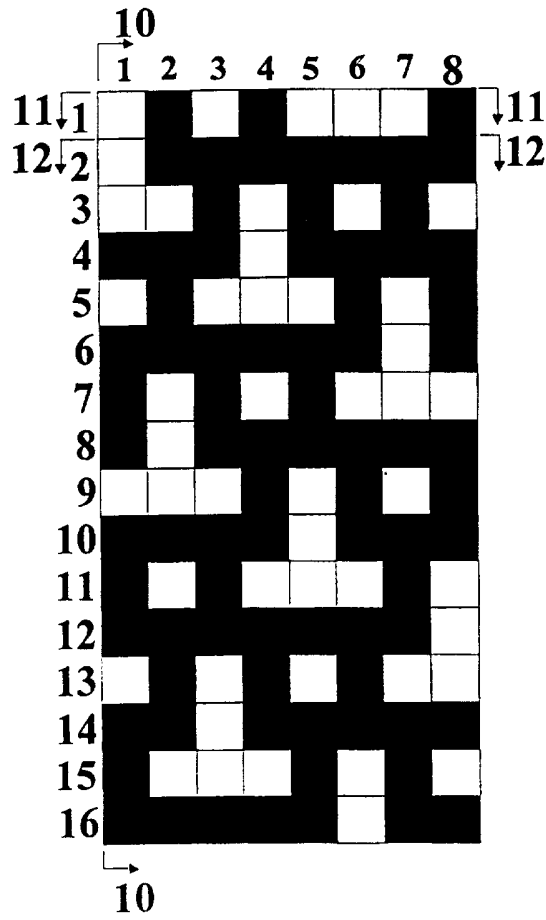


Fig. 9

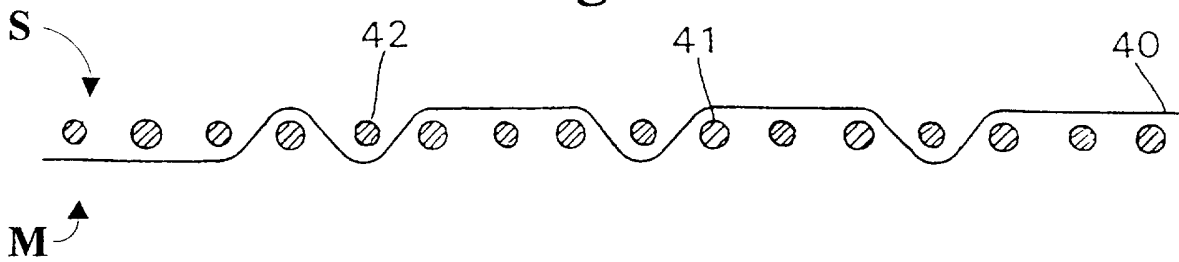


Fig. 10

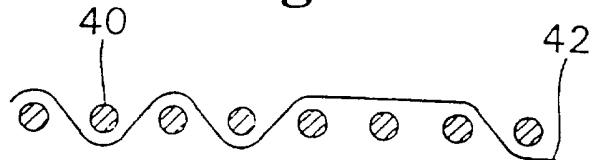


Fig. 11




Fig. 12

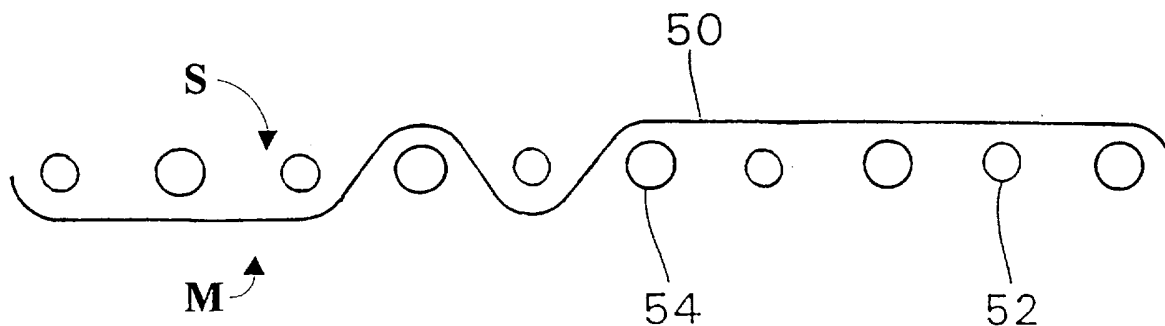


Fig. 13

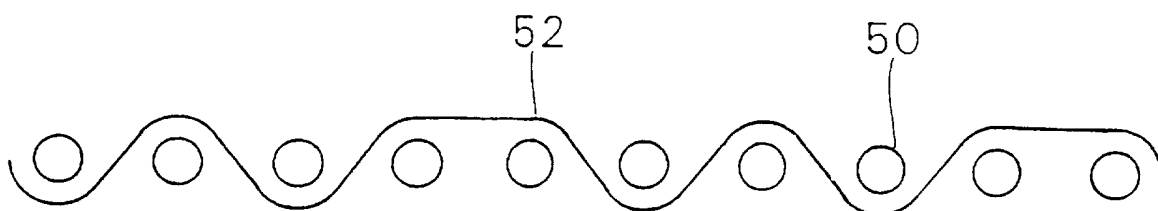


Fig. 14

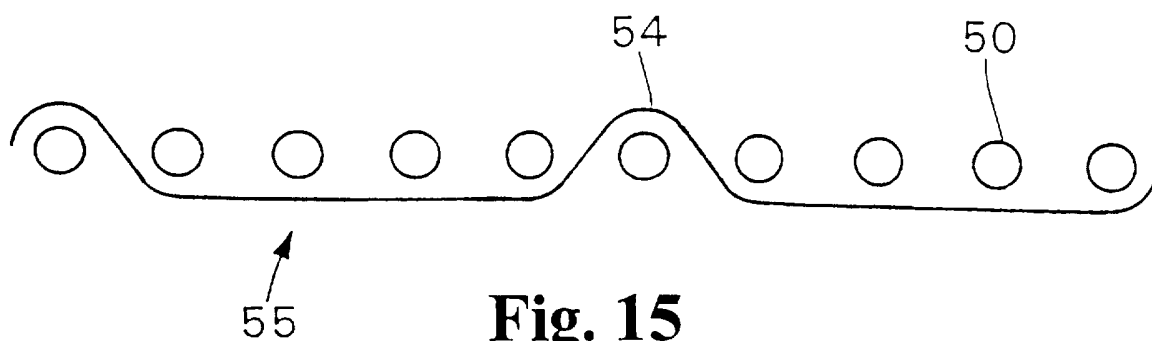


Fig. 15

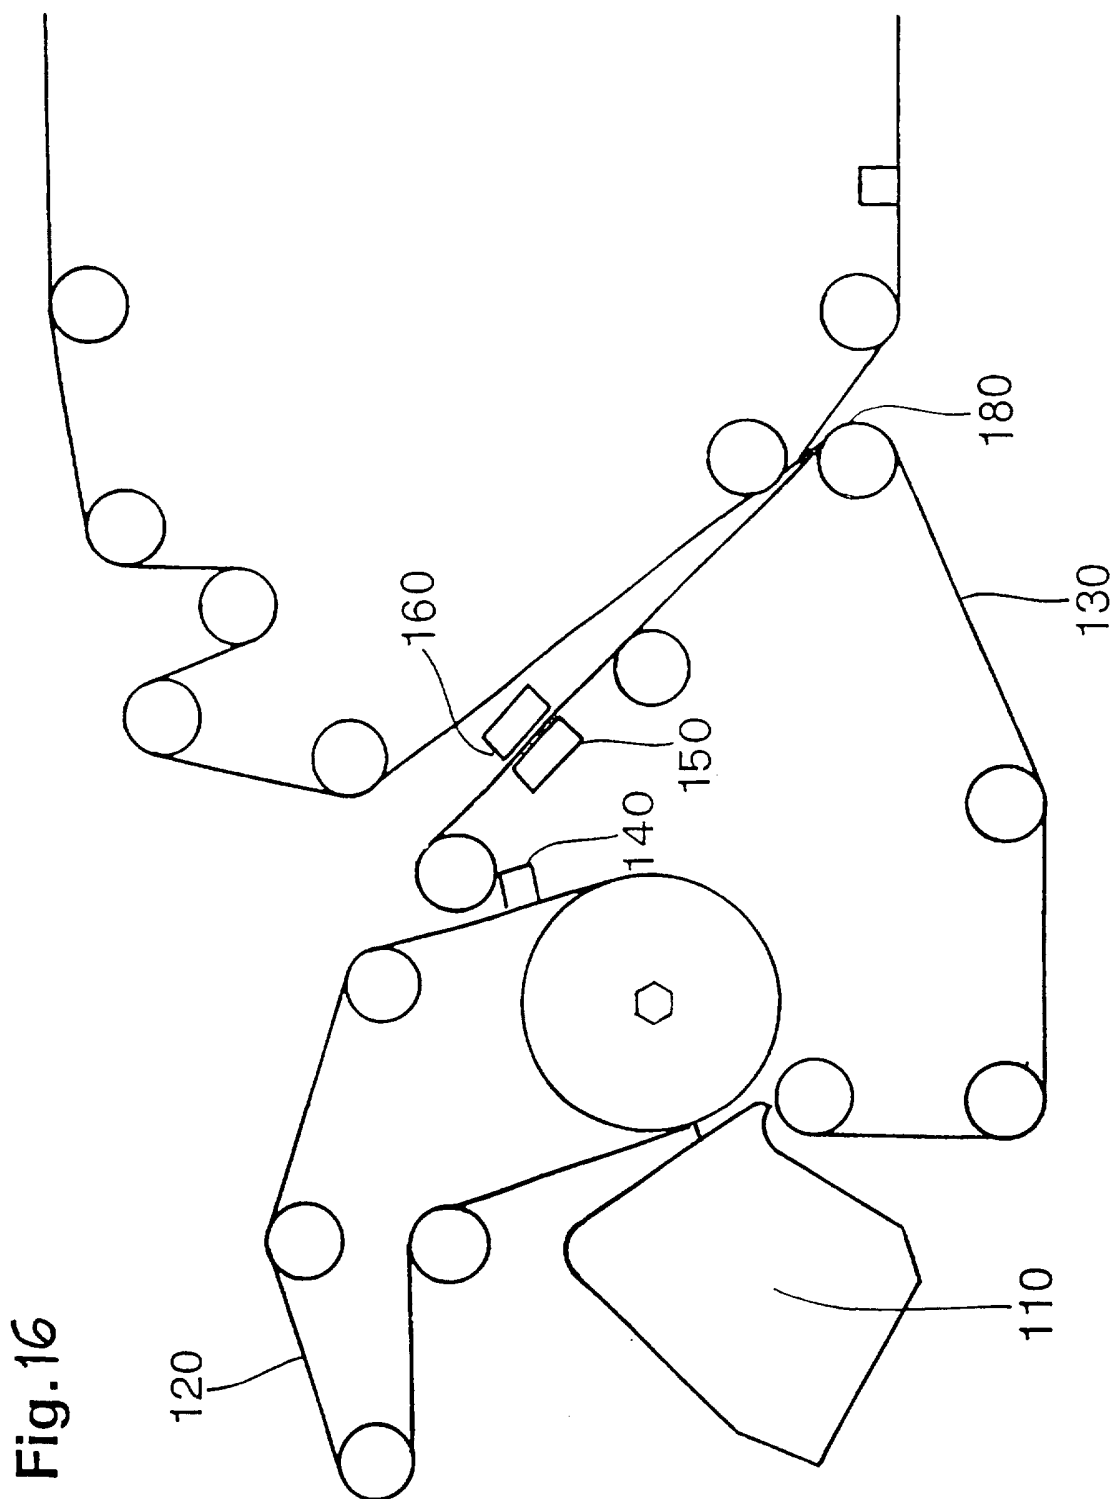


Fig. 16

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/03135

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 6 D21F11/00 D21F1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 D21F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 426 288 A (JAMES RIVER CORP) 8 May 1991 see the whole document ---	1,3,5-8
A	US 4 995 428 A (TATE TAKUO ET AL) 26 February 1991 see abstract; figure 25B ---	1,3,5,11
A	EP 0 449 192 A (NIPPON FILCON KK) 2 October 1991 see abstract; figures 2B,2C ---	1,3,5,11
A	GB 2 192 907 A (PERM VNII TSELLYULOZNO BUMAZHN) 27 January 1988 -----	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

3 June 1997

Date of mailing of the international search report

18. 06. 97

Name and mailing address of the ISA
 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
 Fax (+ 31-70) 340-3016

Authorized officer

Guisan, T

INTERNATIONAL SEARCH REPORT

information on patent family members

Int. Application No

PCT/US 97/03135

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0426288 A	08-05-91	US 5098519 A	24-03-92
		CA 2027794 A	01-05-91
		US 5211815 A	18-05-93

US 4995428 A	26-02-91	JP 2068384 A	07-03-90
		JP 2558154 B	27-11-96
		CA 1307994 A	29-09-92

EP 0449192 A	02-10-91	JP 2558169 B	27-11-96
		JP 3279485 A	10-12-91
		AT 131549 T	15-12-95
		CA 2039101 C	27-06-95
		DE 69115317 D	25-01-96
		DE 69115317 T	18-07-96
		US 5158118 A	27-10-92

GB 2192907 A	27-01-88	CS 8703548 A	12-07-90
		FR 2601976 A	29-01-88
		SE 464141 B	11-03-91
		SE 8702933 A	25-01-88
