

(19)



(11)

EP 1 356 926 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
16.01.2008 Bulletin 2008/03

(51) Int Cl.:
B41C 1/10^(2006.01) B41N 3/03^(2006.01)

(21) Application number: **02100421.3**

(22) Date of filing: **26.04.2002**

(54) **Negative-working thermal lithographic printing plate precursor comprising a smooth aluminum support.**

Negativ-arbeitender thermischer Flachdruckplattenvorläufer, der einen Aluminiumträger mit einer glatten Oberfläche enthält

Précurseur pour plaque lithographique de type négatif, comprenant un support lisse d'aluminium

(84) Designated Contracting States:
DE FR GB NL

(43) Date of publication of application:
29.10.2003 Bulletin 2003/44

(73) Proprietor: **Agfa Graphics N.V.**
2640 Mortsel (BE)

(72) Inventors:

- **Vermeersch, Joan**
c/o AGFA-GEVAERT
2640 Mortsel (BE)
- **Kokkelenberg Dirk**
c/o AGFA-GEVAERT
2640 Mortsel (BE)

- **Watkiss Philip**
AGFA-GEVAERT
2640 Mortsel (BE)
- **Joerg Klaus**
AGFA-GEVAERT
2640 Mortsel (BE)

(74) Representative: **Goedeweck, Rudi et al**
Agfa Graphics N.V.
IP Department 3622
Septestraat 27
2640 Mortsel (BE)

(56) References cited:
EP-A- 0 908 784 EP-A- 0 976 550
EP-A- 1 048 458 EP-A- 1 160 083

EP 1 356 926 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

5 **[0001]** The present invention relates to a negative-working non-ablative, thermal lithographic printing plate precursor which comprises a grained and anodized aluminum support characterized by a low surface roughness, as well as to methods for making a lithographic printing plate and methods of lithographic printing wherein said precursor is used.

BACKGROUND OF THE INVENTION

10 **[0002]** In lithographic printing, a so-called printing master such as a printing plate is mounted on a cylinder of the printing press. The master carries a lithographic image on its surface and a printed copy is obtained by applying ink to said image and then transferring the ink from the master onto a receiver material, which is typically paper. In conventional, so-called "wet" lithographic printing, ink as well as an aqueous fountain solution (also called dampening liquid) are supplied to the lithographic image which consists of oleophilic (or hydrophobic, i.e. ink-accepting, water-repelling) areas as well as hydrophilic (or oleophobic, i.e. water-accepting, ink-repelling) areas. In so-called "driographic" printing, the lithographic image consists of ink-accepting and ink-abhesive (ink-repelling) areas and during driographic printing, only ink is supplied to the master.

20 **[0003]** Printing masters are generally obtained by the so-called computer-to-film (CtF) method wherein various pre-press steps such as typeface selection, scanning, color separation, screening, trapping, layout and imposition are accomplished digitally and each color selection is transferred to graphic arts film using an imagesetter. After processing, the film can be used as a mask for the exposure of an imaging material called plate precursor and after plate processing, a printing plate is obtained which can be used as a master. Since about 1995, the so-called 'computer-to-plate' (CtP) method has gained a lot of interest. This method, also called 'direct-to-plate', bypasses the creation of film because the digital document is transferred directly to a plate precursor by means of a so-called plate-setter.

25 **[0004]** Especially thermal plates, which are sensitive to heat or infrared light, are widely used in CtP methods because of their daylight stability. Such thermal materials may be exposed directly to heat, e.g. by means of a thermal head, but preferably comprise a compound that converts absorbed light into heat and are therefore suitable for exposure by lasers, especially infrared laser diodes. The heat, which is generated on image-wise exposure, triggers a (physico-)chemical process, such as ablation, polymerization, insolubilization by cross-linking of a polymer, decomposition, or particle coagulation of a thermoplastic polymer latex, and after optional processing, a lithographic image is obtained. Many thermal plate materials are based on heat-induced ablation. A problem associated with ablative plates is the generation of debris which is difficult to remove and may disturb the printing process or may contaminate the exposure optics of the plate-setter. As a result, such ablative plates require a processing step for removing the debris from the exposed material.

35 **[0005]** EP-A 770 494 discloses a method wherein an imaging material comprising an image-recording layer of a hydrophilic binder, a compound capable of converting light to heat and hydrophobic thermoplastic polymer particles, is image-wise exposed, thereby inducing coalescence of the polymer particles and converting the exposed areas into an hydrophobic phase which defines the printing areas of the printing master. The press run can be started immediately after exposure without any additional treatment because the layer is developed by interaction with the fountain and ink that are supplied to the cylinder during the press run. During the first ten or twenty revolutions of the press, the non-exposed areas are removed from the support and thereby define the non-printing areas of the plate. So the wet chemical processing of these materials is 'hidden' to the user and accomplished during the start-up of the printing press. Other prior art documents such as EP-A 770 497 and US 6,001,536 describe the (off-press) development of similar materials with water or an aqueous liquid.

40 **[0006]** EP 908 784 discloses a method for making lithographic printing plates including the steps of (i) preparing a precursor comprising a top layer which is unpenetrable for a developer containing SiO₂ and which includes a diazonium salt and at least 20% non-proteinic hydrophilic film-forming polymers, (ii) exposing said precursor with actinic light and followed by (iii) developing said precursor.

50 **[0007]** EP 1 160 083 discloses a printing plate comprising on a hydrophilic support an image-forming layer which contains a hydrophilic resin, an acid precursor and at least one component selected from fine particles containing a compound having a vinyloxy group or fine particles containing a thermosetting resin.

55 **[0008]** Until now, heat-induced polymer particle coalescence is the only heat-triggered non-ablative imaging mechanism that requires no separate processing step with alkaline chemicals and that meets all the requirements for making a high-quality printing plate material (Agfa Thermolite®). Various improvements of such materials are described in e.g. EP-As 773 112; 774 364; 802 457; 816 070; 849 090; 849 091; 881 095; and 931 647. However, none of the prior art materials, which work according to heat-induced polymer particle coalescence, is suitable for making printing plates that provide a high run length during printing. Degradation of the print quality due to image wear limits the run length to a

maximum of typically 25 000 printed copies. Also the limited mechanical robustness (scratch sensitivity) and chemical resistance towards press chemicals such as plate cleaners, blanket cleaners and fountain additives contribute to the mentioned low printing endurance of such plates.

5 SUMMARY OF THE INVENTION

[0009] It is an object of the present invention to provide a non-ablative thermal printing plate precursor which does not require a separate processing step with alkaline chemicals and which provides a high run length and meets the many other requirements of a lithographic printing plate material. This object is realized by applying the heat-sensitive coating onto a smooth aluminum support, as defined in claim 1. The effect that a smooth aluminum support provides a higher run length for a plate working according to heat-induced coalescence of hydrophobic thermoplastic polymer particles is quite surprising : the reason why a smooth surface, characterized by an arithmetical mean center-line roughness Ra, which is less than 0.45 μm , provides a significant reduction of the image wear during printing is not well understood; the skilled person would expect that a rough surface provides a better adherence to the coalesced polymer particles than a smooth surface. Nevertheless, the contrary is observed and materials comprising a smooth support with Ra value as defined herein unexpectedly provide the higher run length.

[0010] The preferred materials of the present invention are capable of providing a lithographic printing master that can be used for a press run of at least 30 000, and more preferably at least 60 000 copies without visible wear of the image. The best embodiments even enable a press run of more than 100 000 copies.

[0011] Specific features for preferred embodiments of the present invention are set out in the dependent claims. Further advantages and embodiments of the present invention will become apparent from the following description.

DETAILED DESCRIPTION OF THE INVENTION

[0012] The support of the plate precursor of the present invention is a grained and anodized aluminum support having a hydrophilic surface that is characterized by a low surface roughness, expressed as arithmetical mean center-line roughness (Ra), sometimes also referred to as CLA (center-line average). Ra as used herein is defined in ISO 4287/1 (= DIN 4762) and references therein. Ra values reported herein have been measured according to ISO 4288 and references therein by a mechanical profile method using a contact stylus with a very thin tip (also optical profile methods are known; such optical methods systematically provide higher values than the ISO method). The apparatus used for measuring Ra was a Talysurf 10 from Taylor Hobson Ltd.

[0013] The Ra value of the hydrophilic surface of the grained and anodized aluminum support used in the material of the present invention is lower than 0.45 μm , preferably lower than 0.4 μm and even more preferably lower than 0.3 μm . A grained and anodized aluminum support having a hydrophilic surface characterized by the mentioned low Ra values is briefly referred to herein as a "smooth support". The lower limit of the Ra value may be 0.05 μm , preferably 0.1 μm .

[0014] Graining and anodizing of aluminum lithographic supports is well known. The grained aluminum support used in the material of the present invention is preferably an electrochemically grained support. The acid used for graining can be e.g. nitric acid. The acid used for graining preferably comprises hydrogen chloride. Also mixtures of e.g. hydrogen chloride and acetic acid can be used.

[0015] The relation between electrochemical graining and anodizing parameters such as electrode voltage, nature and concentration of the acid electrolyte or power consumption on the one hand and the obtained lithographic quality in terms of Ra and anodic weight (g/m^2 of Al_2O_3 formed on the aluminum surface) on the other hand is well known. More details about the relation between various production parameters and Ra or anodic weight can be found in e.g. the article "Management of Change in the Aluminium Printing Industry" by F. R. Mayers, to be published in the ATB Metallurgie Journal. So the skilled person is well aware of the settings of the various parameters which are required for making a smooth surface on a grained aluminum support or for making a given anodic weight during aluminum anodization. According to the present invention, even higher run lengths can be obtained for a given roughness Ra by forming more than 2.5 g/m^2 of aluminum oxide at the hydrophilic surface, a value above 3.0 or even 3.5 g/m^2 being even more preferred.

[0016] The grained and anodized aluminum support may be post-treated to improve the hydrophilic properties of its surface. For example, the aluminum support may be silicated by treating its surface with a sodium silicate solution at elevated temperature, e.g. 95°C. Alternatively, a phosphate treatment may be applied which involves treating the aluminum oxide surface with a phosphate solution that may further contain an inorganic fluoride. Further, the aluminum oxide surface may be rinsed with an organic acid and/or salt thereof, e.g. carboxylic acids, hydroxycarboxylic acids, sulfonic acids or phosphonic acids, or their salts, e.g. succinates, phosphates, phosphonates, sulfates, and sulfonates. A citric acid or citrate solution is preferred. This treatment may be carried out at room temperature or may be carried out at a slightly elevated temperature of about 30 to 50°C. A further post-treatment involves rinsing the aluminum oxide surface with a bicarbonate solution. Still further, the aluminum oxide surface may be treated with polyvinylphosphonic acid, polyvinylmethylphosphonic acid, phosphoric acid esters of polyvinyl alcohol, polyvinylsulfonic acid, polyvinylben-

zenesulfonic acid, sulfuric acid esters of polyvinyl alcohol, and acetals of polyvinyl alcohols formed by reaction with a sulfonated aliphatic aldehyde. It is further evident that one or more of these post-treatments may be carried out alone or in combination. More detailed descriptions of these treatments are given in GB-A- 1 084 070, DE-A- 4 423 140, DE-A- 4 417 907, EP-A- 659 909, EP-A- 537 633, DE-A- 4 001 466, EP-A- 292 801, EP-A- 291 760 and US-P- 4 458 005.

[0017] The coating provided on the support is heat-sensitive, thereby providing a plate precursor which can be handled in normal working lighting conditions (daylight, fluorescent light) for many hours. The coating comprises an image-recording layer which contains hydrophobic thermoplastic polymer particles. Specific examples of suitable hydrophobic polymers are e.g. polyethylene, poly(vinyl chloride), poly(methyl (meth)acrylate), poly(ethyl (meth)acrylate), poly(vinylidene chloride), poly(meth)acrylonitrile, poly(vinyl carbazole), polystyrene or copolymers thereof. According to preferred embodiments, the thermoplastic polymer comprises at least 50 wt.% of polystyrene, and more preferably at least 60 wt.% of polystyrene. In order to obtain sufficient resistivity against mechanical damage and towards press chemicals, such as the hydrocarbons used in plate cleaners, the thermoplastic polymer preferably comprises at least 5 wt.%, more preferably at least 30 wt.% of nitrogen containing monomeric units or of units which correspond to monomers that are characterized by a solubility parameter larger than 20, such as (meth)acrylonitrile or monomeric units comprising sulfonamide and/or phthalimide pendant groups. Other suitable examples of such nitrogen containing monomeric units are disclosed in EP-A-1 219 416. A specific embodiment of the hydrophobic thermoplastic polymer is a homopolymer or a copolymer of (meth)acrylonitrile and/or styrene, e.g. a copolymer consisting of styrene and acrylonitrile units in a weight ratio between 1:1 and 5:1 (styrene:acrylonitrile). A 2:1 or 3:2 ratio provides excellent results.

[0018] The weight average molecular weight of the thermoplastic polymer particles may range from 5,000 to 1,000,000 g/mol. The hydrophobic particles preferably have a number average particle diameter below 200 nm, more preferably between 10 and 100 nm. The amount of hydrophobic thermoplastic polymer particles contained in the image-recording layer is preferably between 20 wt.% and 65 wt.% and more preferably between 25 wt.% and 55 wt.% and most preferably between 30 wt.% and 45 wt.%.

[0019] The hydrophobic thermoplastic polymer particles can be provided as a dispersion in an aqueous coating liquid of the image-recording layer and may be prepared by the methods disclosed in US 3,476,937. Another method especially suitable for preparing an aqueous dispersion of the thermoplastic polymer particles comprises:

- dissolving the hydrophobic thermoplastic polymer in an organic water immiscible solvent,
- dispersing the thus obtained solution in water or in an aqueous medium and
- removing the organic solvent by evaporation.

[0020] The image-recording layer further may comprise a hydrophilic binder, e.g. homopolymers and copolymers of vinyl alcohol, acrylamide, methylol acrylamide, methylol methacrylamide, acrylic acid, methacrylic acid, hydroxyethyl acrylate, hydroxyethyl methacrylate or maleic anhydride/vinylmethylether copolymers. The hydrophilicity of the (co) polymer or (co)polymer mixture used is preferably the same as or higher than the hydrophilicity of polyvinyl acetate hydrolyzed to at least an extent of 60 percent by weight, preferably 80 percent by weight. Binders with carboxylic pendant groups, e.g. poly(meth)acrylic acid, are preferred.

[0021] The image-recording layer may also contain other ingredients such as additional binders, surfactants, colorants, development inhibitors or accelerators, and especially one or more compounds that are capable of converting infrared light into heat. Particularly useful light-to-heat converting compounds are for example infrared dyes, carbon black, metal carbides, borides, nitrides, carbonitrides, bronze-structured oxides, and conductive polymer dispersions such as polypyrrole, polyaniline or polythiophene dispersions. Anionic cyanine dyes are preferred. The colorants are preferably dyes or pigments which provide a visible image after processing.

[0022] The coating may also contain one or more additional layer(s), adjacent to the image-recording layer. Such additional layer can e.g. be an adhesion-improving layer between the image-recording layer and the support; or a light-absorbing layer comprising one or more of the above compounds that are capable of converting infrared light into heat; or a covering layer which is removed during processing.

[0023] The materials of the present invention are suitable for off-press and on-press exposure. The printing plate precursors of the present invention are exposed to heat or to infrared light, e.g. by means of a thermal head, LEDs or an infrared laser. Preferably, a laser emitting near infrared light having a wavelength in the range from about 700 to about 1500 nm is used, e.g. a semiconductor laser diode, a Nd:YAG or a Nd:YLF laser. The required laser power depends on the sensitivity of the image-recording layer, the pixel dwell time of the laser beam, which is determined by the spot diameter (typical value of modern plate-setters at $1/e^2$ of maximum intensity : 10-25 μm), the scan speed and the resolution of the exposure apparatus (i.e. the number of addressable pixels per unit of linear distance, often expressed in dots per inch or dpi; typical value : 1000-4000 dpi). Two types of laser-exposure apparatuses are commonly used : internal (ITD) and external drum (XTD) plate-setters. ITD plate-setters for thermal plates are typically characterized by a very high scan speed up to 500 m/sec and may require a laser power of several Watts. XTD plate-setters for thermal plates having a typical laser power from about 200 mW to about 1 W operate at a lower scan speed, e.g. from 0.1 to 10

m/sec.

[0024] Due to the heat generated during the exposure step, the hydrophobic thermoplastic polymer particles fuse or coagulate so as to form a hydrophobic phase which corresponds to the printing areas of the printing plate. Coagulation may result from heat-induced coalescence, softening or melting of the thermoplastic polymer particles. There is no specific upper limit to the coagulation temperature of the thermoplastic hydrophobic polymer particles, however the temperature should be sufficiently below the decomposition temperature of the polymer particles. Preferably the coagulation temperature is at least 10°C below the temperature at which the decomposition of the polymer particles occurs. The coagulation temperature is preferably higher than 50°C, more preferably above 100°C.

[0025] After exposure, the material is developed. "Developing" and "processing" are used herein as equivalent terms. Development can be carried out by supplying to the coating a liquid comprising a hydrophilic phase, thereby removing the coating from the support at non-exposed areas. Said liquid can be selected from the group consisting of water, an aqueous liquid, gum, fountain and single-fluid ink. According to one embodiment, the material is developed by supplying fountain and/or printing ink, preferably by supplying first fountain and subsequently ink. This method is preferably used in combination with an on-press exposure step. Another development method, also suitable for on-press development, especially in driographic presses, is performed by supplying single-fluid ink. Single-fluid inks which are suitable for use in the method of the present invention have been described in US 4,045,232 and US 4,981,517. A suitable single-fluid ink comprises an ink phase, also called the hydrophobic or oleophilic phase, and a polyol phase as described in WO 00/32705. More information on the development with single-fluid ink can be found in EP-A- 1213 140.

[0026] When exposed in an off-press plate-setter, the material can be processed on-press by supplying ink and/or fountain as mentioned before or off-press, e.g. by supplying water, an aqueous liquid or a gum solution. A gum solution is typically an aqueous liquid which comprises one or more surface protective compounds that are capable of protecting the lithographic image of a printing plate against contamination or damaging. Suitable examples of such compounds are film-forming hydrophilic polymers or surfactants. More information on the development with a gum solution can be found in EP-A-1342568.

[0027] After development, the plate can be dried and baked. The plate can be dried before baking or is dried during the baking process itself. The baking process can proceed at a temperature above the coagulation temperature of the thermoplastic polymer particles, e.g. between 100°C and 230°C for a period of 5 to 40 minutes. For example the exposed and developed plates can be baked at a temperature of 230°C for 5 minutes, at a temperature of 150°C for 10 minutes or at a temperature of 120°C for 30 minutes. A preferred baking temperature is above 60°C. Baking can be done in conventional hot air ovens or by irradiation with lamps emitting in the infrared or ultraviolet spectrum.

EXAMPLES

[0028] In the Examples below, run length is defined as the number of copies printed when the degradation, due to image wear, of a 60% screen of a high quality image (200 lpi) exceeds 5%. Unless indicated otherwise, all the plates described below were on-press processed by the ink and fountain supplied to the plate during the first ten to fifteen revolutions of the press.

Example 1 (comparative) and 2 (invention)

Preparation of the lithographic support 1

[0029] A 0.30 mm thick aluminum foil was degreased by immersing the foil in an aqueous solution containing 40 g/l of sodium hydroxide at 60°C for 8 seconds and rinsed with demineralized water for 2 seconds. The foil was then electrochemically grained during 15 seconds using an alternating current in an aqueous solution containing 12 g/l of hydrochloric acid and 38 g/l of aluminum sulfate (18-hydrate) at a temperature of 33°C and a current density of 130 A/dm². After rinsing with demineralized water for 2 seconds, the aluminum foil was then desmuted by etching with an aqueous solution containing 155 g/l of sulfuric acid at 70°C for 4 seconds and rinsed with demineralized water at 25°C for 2 seconds. The foil was subsequently subjected to anodic oxidation during 13 seconds in an aqueous solution containing 155 g/l of sulfuric acid at a temperature of 45°C and a current density of 22 A/dm², then washed with demineralized water for 2 seconds and post-treated for 10 seconds with a solution containing 4 g/l of polyvinylphosphonic acid at 40°C, rinsed with demineralized water at 20°C during 2 seconds and dried.

[0030] The support thus obtained was characterized by a surface roughness Ra of 0.46 μm and had an anodic weight of 2.9 g/m² of Al₂O₃.

Preparation of the lithographic support 2


[0031] The same procedure as above was followed with the proviso that the current density during graining and

anodizing was 90 A/dm² and 30 A/dm² respectively. The support thus obtained was characterized by a surface roughness Ra of 0.22 μm and had an anodic weight of 4.0 g/m² of Al₂O₃.

Preparation and test of printing plates 1 and 2

[0032] A comparative printing plate precursor 1 and an printing plate precursor 2 according to the invention were produced by preparing a coating composition and coating it onto the above described lithographic supports 1 and 2 respectively.

[0033] Onto the above described lithographic supports an image-recording layer was coated from an aqueous coating solution at a wet thickness of 30 g/m². After drying, the layer consisted of 600 mg/m² of a copolymer of styrene and acrylonitrile (weight ratio 60/40) having an average particle size of 65 nm, stabilized with an anionic wetting agent, 60 mg/m² of infrared absorbing dye I and 120 mg/m² of polyacrylic acid (Glascol D15 from Allied Colloids, molecular weight 2.7x10⁷ g/mole).

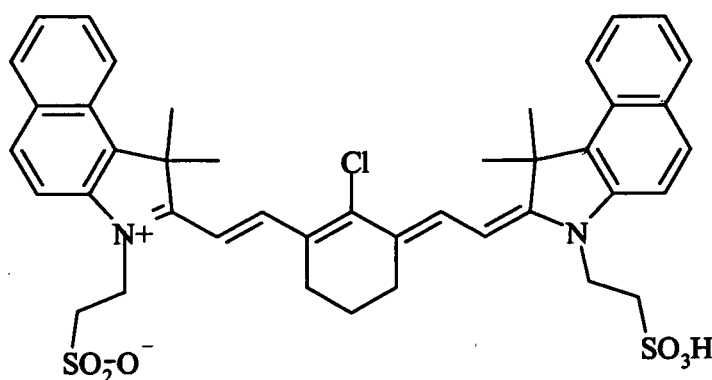

Dye 1

[0034] The plate precursors thus obtained were exposed with a Creo Trendsetter (plate-setter available from Creo, Burnaby, Canada), operating at 330 mJ/cm² and 150 rpm. After imaging, the plates were mounted on a MO printing press (available from Heidelberger Druckmaschinen AG), and a print job was started using K+E800 ink and 4% Combifix XL with 10% isopropanol as a fountain liquid.

[0035] After 25 000 prints, degradation of the image started in the plate obtained from printing plate precursor 1 and after a run length of 30 000 prints, the image wear exceeded the criterion defined above. The plate obtained with printing plate precursor 2 did not show any wear at all, not even after 100 000 impressions when the press run was stopped.

Example 3 (invention) and 4 (comparative)

Preparation of the lithographic support 3

[0036] A continuous web of aluminum having a thickness of 0.30 mm and a width of 500 mm was degreased by immersing the web in an aqueous solution containing 10.4 g/l of sodium hydroxide at 38°C for 35 seconds and then rinsing with demineralized water for 30 seconds. The aluminum web was then electrochemically grained for 30 seconds using an alternating current at a current density of 826 A/m² in a mixed acid aqueous solution containing 9.5 g/l of hydrochloric acid and 21 g/l of acetic acid at a temperature of 29°C. The support thus obtained had an average center-line roughness Ra of 0.24 μm. After rinsing with demineralized water for 30 seconds, the aluminum web was etched to remove smut with an aqueous solution containing 124 g/l of phosphoric acid at 43°C for 35 seconds and then rinsed with demineralized water for 30 seconds. The aluminum web was subsequently subjected to anodic oxidation for 30 seconds in an aqueous solution containing 137 g/l of sulfuric acid at a temperature of 48.5°C, using a DC voltage at a current density of 1173 A/m² to form an anodic oxidation film of 3.4 g/m² of Al₂O₃, then washed with demineralized water for 30 seconds and post-treated for 15 seconds with a solution containing 2.2 g/l of polyvinylphosphonic acid at 52°C, rinsed with demineralized water for 30 seconds and dried.

EP 1 356 926 B1

Preparation of the lithographic support 4

[0037] The same procedure as for support 3 was followed with the proviso that the current density during graining was 2125 A/dm². The support thus obtained was characterized by a surface roughness Ra of 0.53 μm. The anodic weight was the same as for support 3.

Preparation and test of printing plates 3 and 4

[0038] Printing plate precursors 3 and 4 were prepared by coating the same composition as described above for the preparation of printing plate precursor 1 and 2. Also the exposure, on-press processing and printing procedure was the same.

[0039] Plate 4 showed a run length of 30 000 copies while plate 3 did not show any image wear after 50 000 copies, when the run length tests was stopped.

Examples 5-9

Preparation of lithographic supports 5-9

[0040] A continuous web of aluminum having a thickness of 0.30 mm and a width of 500 mm was degreased by immersing the web in an aqueous solution containing 10 g/l of sodium hydroxide at 39°C for 35 seconds and then rinsing with demineralized water for 30 seconds. The aluminum web was then electrochemically grained for 30 seconds using an alternating current at a current density as indicated in Table 1 in a mixed acid aqueous solution containing 8.1 g/l of hydrochloric acid and 21.7 g/l of acetic acid at a temperature of 30°C. After rinsing with demineralized water for 30 seconds, the aluminum web was etched to remove smut with an aqueous solution containing 128 g/l of phosphoric acid at 43°C for 35 seconds and then rinsed with demineralized water for 30 seconds. The aluminum web was subsequently subjected to anodic oxidation for 30 seconds in an aqueous solution containing 154 g/l of sulfuric acid at a temperature of 50°C, using a DC voltage at a current density as indicated in Table 1, then washed with demineralized water for 30 seconds and post-treated for 15 seconds with a solution containing 2.45 g/l of polyvinylphosphonic acid at 53°C, rinsed with demineralized water for 30 seconds and dried.

Preparation and test of printing plates 5-9

[0041] Printing plate precursors 5-9 were prepared by coating the same composition as described above for the preparation of printing plate precursor 1 and 2 onto the supports 5-9 respectively. Also the exposure, on-press processing and printing procedure was the same.

[0042] Table 1 gives the current densities for graining (GR) and anodizing (AN), surface roughness Ra and the anodic weight (AW) of lithographic supports 5-9 and the run length achieved with plates 5-9.

Table 1

Example no.	current GR (A/m ²)	Ra (μm)	current AN (A/m ²)	AW (g/m ²)	Run length
5 (comp.)	2740	0.53	2350	4.8	11 000
6 (inv.)	1300	0.28	2350	4.8	55 000
7 (inv.)	1300	0.28	1750	3.5	50 000
8 (inv.)	1300	0.28	2900	6.3	70 000
9 (inv.)	1000	0.21	2350	4.8	>90 000

[0043] The data for Example 5, 6 and 9 in the above table demonstrate that for a given anodic weight (4.8 g/m²), the run length significantly improves by reducing Ra. For a given Ra value (Examples 6-8 : 0.28 μm), a further improvement is achieved by increasing the anodic weight. Plate 9 still showed no image wear after 90 000 copies when the press run was stopped.

EP 1 356 926 B1

Examples 10-12

Preparation of printing plate precursor 10-11

5 **[0044]** The same lithographic support and coating was used as in Example 1 and 2 respectively with the proviso that the thermoplastic polymer was a homopolymer of styrene having an average particle size of 70 nm.

Preparation and test of printing plates 10-12

10 **[0045]** Plates 10 and 11 were prepared from precursors 10 and 11 respectively by exposure and processing as described in the previous examples with the proviso that the on-press processing and run length test was performed on a GTO printing press (Heidelberger Druckmaschinen), using K+E800 ink and 4% Combifix XL with 10% Isopropanol as a fountain liquid. Plate 12 was prepared from precursor 2 using the same procedure as for plates 10 and 11.

15

Table 2

Example no.	Ra (μm)	Polymer	Run length
10 (comp.)	0.46	styrene homopolymer	21 500
11 (inv.)	0.22	styrene homopolymer	85 000
12 (inv.)	0.22	styrene/acrylo-nitrile copolymer	> 100 000

20

[0046] The above data demonstrate that a further run length improvement is obtained by introducing a nitrogen-containing unit such as acrylonitrile into the hydrophobic thermoplastic polymer.

25

Examples 13-15

Chemical resistance test of printing plates 10-12

30

[0047] Plates 10-12, prepared as described above, were subjected to three chemical resistance tests.

Test 1 :The image-wise exposed plates were mounted on a GTO printing press (Heidelberger Druckmaschinen) and a press run of 500 copies was started using K+E800 ink and 4% Combifix XL with 10% Isopropanol as a fountain liquid. Then a printing area of each plate was treated with two typical press liquids (Meter-X = roller wash liquid from ABC Chemicals Comp. Ltd., UK, based on hydrocarbons; Normakleen = plate cleaner from Agfa, based on a petroleum distillate) using a cotton pad dipped into the corresponding liquid and rubbing over the surface; the damage of the treated areas was evaluated (see Table 3 : 0 = no image attack; X = strong image attack; XX = image completely removed).

35

40

Table 3

Plate no.	Ra (μm)	Polymer	Image attack	
			Meter-X	Normakleen
10 (comp.)	0.46	styrene homopolymer	XX	XX
11 (inv.)	0.22	styrene homopolymer	XX	XX
12 (inv.)	0.22	styrene/acrylo-nitrile copolymer	0	0

45

50

Test 2 :The image-wise exposed plates were mounted on a GTO printing press (Heidelberger Druckmaschinen) and a press run of 500 copies was started using K+E800 ink and 4% Combifix XL with 10% Isopropanol as a fountain liquid. Then a drop of each of the same liquids as used in Test 1 was put onto a printing area of the plates and allowed to dry for 4 minutes. Then, printing was started again for another 200 copies (the rubbing of test 1 is replaced by printing in test 2). After the second press run, the areas treated with the liquid were evaluated (see Table 4 : 0 = no image attack; X = strong image attack; XX = image completely removed).

55

Table 4

Plate no.	Ra (μm)	Polymer	Image attack	
			Meter-X	Normakleen
10 (comp.)	0.46	styrene homopolymer	XX	X
11 (inv.)	0.22	styrene homopolymer	XX	X
12 (inv.)	0.22	styrene/acrylo-nitrile copolymer	0	0

Test 3 :The coating of the image-wise exposed plates was mechanically scratched in a non-exposed area. Then the plates were mounted on a press as described in test 1 and 2 and 1000 copies were printed. The press was stopped and it was evaluated whether the scratch was visible on the last printed copies (inking up in non-image parts due to scratching)

Table 5

Plate no.	Ra (μm)	Polymer	Scratches
10 (comp.)	0.46	styrene homopolymer	severe
11 (inv.)	0.22	styrene homopolymer	small
12 (inv.)	0.22	styrene/acrylo-nitrile copolymer	none

Examples 16 and 17

Preparation of lithographic support 16

[0048] All the steps were identical to Example 2 except for the graining step : the aluminum foil was electrochemically grained during 4 seconds in an aqueous solution containing 12.4 g/l of nitric acid and 67 g/l of aluminum nitrate (9-hydrate) at a temperature of 40°C, using an alternating current at a current density of 36 A/dm². The Ra value of the nitric acid grained support thus obtained was 0.38 μm .

Preparation and test of printing plates 16 and 17.

[0049] Printing plate precursor 16 was prepared by coating the same composition as described in Example 2 on the above support 16. Plates 16 and 17 were prepared by exposing plate precursors 16 and 2 respectively with a Creo Trendsetter (plate-setter available from Creo, Burnaby, Canada), operating at 330 mJ/cm² and 150 rpm.

After imaging the plates 16 and 17 was mounted on a MO printing press (available from Heidelberg Druckmaschinen AG), and printing was started using K+E800 ink and 4% Combifix XL with 10% Isopropanol as a fountain liquid. Similar samples of plates 16 and 17 were mounted on a Speedmaster 74 printing press (SM-74, available from Heidelberg Druckmaschinen AG) and printing was started using K+E700 Novavit Speed ink and 4% Varnfount as a fountain liquid.

Table 6

Plate no.	acid used for graining	printing press	ink built-up on blanket
16 (inv.)	chloric acid	MO	no
17 (inv.)	nitric acid	MO	no
16 (inv.)	chloric acid	SM-74	no
17 (inv.)	nitric acid	SM-74	yes

[0050] None of the plates showed image wear during the press run of 100 000 copies. Plate 17 (nitric acid graining) showed ink built-up on the blanket of the SM-74 during printing while plate 16 (chloric acid graining) was running on the SM-74 without any ink built up on the blanket throughout the whole press run.

Examples 18 and 19

[0051] Plate 18 was prepared as described in Example 2 with the proviso that the exposed plate was off-press processed with a gum solution using RC520 baking gum from Agfa (HWP450 processor, 1 minute immersion time, room temperature).

[0052] Plate 19 was prepared similarly, but after processing the plate was baked during 2 minutes at 270 °C.

[0053] Both plates were evaluated on a MO printing press (Heidelberger Druckmaschinen AG) using K+E800 ink and 4% Combifix XL with 10% Isopropanol as a fountain liquid.

[0054] After 150 000 impressions, degradation of the image started with unbaked plate 18 while the baked plate 19 showed no image wear at all. Even after 300 000 impressions no image wear was observed with plate 19 and the run length test was stopped.

Claims

1. A negative-working lithographic printing plate precursor comprising

- a grained and anodized aluminum support having a hydrophilic surface; '
- a heat-sensitive coating provided on the hydrophilic surface, said coating comprising hydrophobic thermoplastic polymer particles which are capable of forming a hydrophobic phase in said coating by heat-induced coalescence of said polymer particles;

characterized in that the hydrophilic surface has a surface roughness, expressed as arithmetical mean center-line roughness Ra, which is less than 0.45 μm.

2. A plate precursor according to claim 1 wherein the hydrophilic surface has a surface roughness, expressed as arithmetical mean center-line roughness Ra, which is less than 0.4 μm.

3. A plate precursor according to claim 1 wherein the hydrophilic surface has a surface roughness, expressed as arithmetical mean center-line roughness Ra, which is less than 0.3 μm.

4. A plate precursor according to any preceding claim wherein the aluminum support comprises more than 2.5 g/m² of aluminum oxide at the hydrophilic surface.

5. A plate precursor according to any preceding claim wherein the aluminum support comprises more than 3.5 g/m² of aluminum oxide at the hydrophilic surface.

6. A plate precursor according to any preceding claim wherein the hydrophobic thermoplastic polymer is a homopolymer or a copolymer of (meth)acrylonitrile and/or styrene.

7. A plate precursor according to any preceding claim wherein the hydrophobic thermoplastic polymer comprises sulfonamide and/or phthalimide pendant groups.

8. A plate precursor according to any preceding claim wherein the heat-sensitive coating further comprises a hydrophilic polymeric binder comprising carboxylic pendant groups.

9. A plate precursor according to any preceding claim wherein the heat-sensitive coating further comprises an anionic infrared light absorbing cyanine dye.

10. A plate precursor according to any preceding claim wherein the heat-sensitive coating further comprises a visible light absorbing dye or pigment.

11. A plate precursor according to any preceding claim wherein the hydrophilic surface is hydrophilized by treatment with (i) an organic acid and/or a salt thereof or with (ii) a polymer selected from the group consisting of polyvinylphosphonic acid, polyvinylmethylphosphonic acid, phosphoric acid esters of polyvinyl alcohol, polyvinylsulfonic acid, polyvinylbenzenesulfonic acid, sulfuric acid esters of polyvinyl alcohol, and the product of the reaction of polyvinylalcohol with a sulfonated aliphatic aldehyde.

EP 1 356 926 B1

12. A plate precursor according to any preceding claim wherein said hydrophobic phase is capable of accepting ink during a lithographic press run of at least 60 000 printed copies.

5 13. A plate precursor according to any preceding claim wherein said hydrophobic phase is capable of accepting ink during a lithographic press run of at least 100 000 printed copies.

14. A method of making a lithographic printing plate comprising the steps of

- 10
- image-wise exposing a plate precursor according to any of the preceding claims to heat or to infrared light, thereby inducing coalescence of the hydrophobic thermoplastic polymer particles at exposed areas;
 - developing the exposed plate precursor by supplying to the coating a liquid comprising a hydrophilic phase, thereby removing the coating from the support at non-exposed areas, said liquid being selected from the group consisting of water, an aqueous liquid, gum, fountain and single-fluid ink.

15 15. A method according to claim 14 wherein the steps of exposing and developing are performed while the plate precursor is mounted on a cylinder of a lithographic printing press.

16. A method according to claim 14 further comprising the step of subjecting the developed plate precursor to a baking treatment at a temperature above 60°C.

20 17. A method of lithographic printing comprising the steps of

- 25
- making a lithographic printing plate according to the method of claim 14, 15 or 16;
 - printing at least 60 000 copies with the lithographic printing plate thus obtained.

18. A method of lithographic printing comprising the steps of

- 30
- making a lithographic printing plate according to the method of claim 14, 15 or 16;
 - printing at least 100 000 copies with the lithographic printing plate thus obtained.

19. A method of lithographic printing comprising the steps of

- 35
- making a lithographic printing plate according to the method of claim 16;
 - printing at least 300 000 copies with the lithographic printing plate thus obtained.

40 20. Use of a grained and anodized aluminum support having a hydrophilic surface and a surface roughness, expressed as arithmetical mean center-line roughness Ra, which is less than 0.45 μm , in a negative-working lithographic printing plate precursor comprising a heat-sensitive coating provided on the hydrophilic surface, said coating comprising hydrophobic thermoplastic polymer particles which are capable of forming a hydrophobic phase in said coating by heat-induced coalescence of said polymer particles, for increasing the run length of the printing plate that is obtained by exposure and development of said printing plate precursor.

45 Patentansprüche

1. Eine negativarbeitende lithografische Druckplattenvorstufe, enthaltend :

- 50
- einen angerauten und anodisierten Aluminiumträger mit einer hydrophilen Oberfläche und
 - eine auf die hydrophile Oberfläche angebrachte wärmeempfindliche Beschichtung, enthaltend hydrophobe thermoplastische Partikel, die in der Lage sind, über eine thermisch induzierte Koaleszierung der Partikel eine hydrophobe Phase in der Beschichtung zu bilden,

55 **dadurch gekennzeichnet, dass** die hydrophile Oberfläche eine als arithmetischer Mittenrauwert Ra ausgedrückte Oberflächenrauheit von weniger als 0,45 μm aufweist.

2. Druckplattenvorstufe nach Anspruch 1, **dadurch gekennzeichnet, dass** die hydrophile Oberfläche eine als arithmetischer Mittenrauwert Ra ausgedrückte Oberflächenrauheit von weniger als 0,4 μm aufweist.

EP 1 356 926 B1

3. Druckplattenvorstufe nach Anspruch 1, **dadurch gekennzeichnet, dass** die hydrophile Oberfläche eine als arithmetischer Mittenrauwert Ra ausgedrückte Oberflächenrauheit von weniger als 0,3 μm aufweist.
- 5 4. Druckplattenvorstufe nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** die hydrophile Oberfläche des Aluminiumträgers mehr als 2,5 g/m^2 Aluminiumoxid enthält.
5. Druckplattenvorstufe nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** die hydrophile Oberfläche des Aluminiumträgers mehr als 3,5 g/m^2 Aluminiumoxid enthält.
- 10 6. Druckplattenvorstufe nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** das hydrophobe thermoplastische Polymer ein Homopolymer oder Copolymer von (Meth)acrylnitril und/oder Styrol ist.
7. Druckplattenvorstufe nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** das hydrophobe thermoplastische Polymer seitenständige Sulfonamid- und/oder Phthalimidgruppen enthält.
- 15 8. Druckplattenvorstufe nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** die wärmeempfindliche Beschichtung ferner ein hydrophiles polymeres Bindemittel mit seitenständigen Carbonsäuregruppen enthält.
- 20 9. Druckplattenvorstufe nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** die wärmeempfindliche Beschichtung ferner einen anionischen Infrarotlicht absorbierenden Cyaninfarbstoff enthält.
- 25 10. Druckplattenvorstufe nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** die wärmeempfindliche Beschichtung ferner einen sichtbares Licht absorbierenden Farbstoff oder ein sichtbares Licht absorbierendes Pigment enthält.
- 30 11. Druckplattenvorstufe nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** die hydrophile Oberfläche durch Behandlung mit (i) einer organischen Säure und/oder einem Salz einer organischen Säure oder mit (ii) einem Polymer aus der Gruppe bestehend aus Polyvinylphosphonsäure, Polyvinylmethylphosphonsäure, Phosphorsäureestern von Polyvinylalkohol, Polyvinylsulfonsäure, Polyvinylbenzolsulfonsäure, Schwefelsäureestern von Polyvinylalkohol und dem Reaktionsprodukt von Polyvinylalkohol mit einem sulfonierten alifatischen Aldehyd hydrophil gemacht ist.
- 35 12. Druckplattenvorstufe nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** das Farbanziehungsvermögen der hydrophoben Phase während eines lithografischen Druckzyklus eine Auflage von mindestens 60.000 gedruckten Kopien erlaubt.
- 40 13. Druckplattenvorstufe nach einem der vorstehenden Ansprüche, **dadurch gekennzeichnet, dass** das Farbanziehungsvermögen der hydrophoben Phase während eines lithografischen Druckzyklus eine Auflage von mindestens 100.000 gedruckten Kopien erlaubt.
- 45 14. Ein durch die nachstehenden Schritte **gekennzeichnetes** Verfahren zur Herstellung einer lithografischen Druckplatte :
 - bildmäßige Erwärmung oder Infrarotbelichtung einer Druckplattenvorstufe nach einem der vorstehenden Ansprüche, wobei die Koaleszierung der hydrophoben thermoplastischen Polymerteilchen in belichteten Bereichen ausgelöst wird, und
 - Entwicklung der erwärmten oder belichteten Plattenvorstufe durch Auftrag einer hydrophilen Phase enthaltenden Flüssigkeit auf die Beschichtung, wobei die Beschichtung in nicht-belichteten Bereichen vom Träger entfernt wird, wobei als Flüssigkeit Wasser, eine wässrige Flüssigkeit, eine Gummierung, Feuchtwasser oder Single-Fluid-Druckfarbe verwendet wird.
- 50 15. Verfahren nach Anspruch 14, **dadurch gekennzeichnet, dass** die Schritte der Belichtung und der Entwicklung vorgenommen werden, während die Druckplattenvorstufe auf einem Zylinder einer lithografischen Druckmaschine aufgespannt ist.
- 55 16. Verfahren nach Anspruch 14, das ferner den Schritt umfasst, in dem die entwickelte Plattenvorstufe bei einer Temperatur von mehr als 60°C eingebrannt wird.

EP 1 356 926 B1

17. Ein durch die nachstehenden Schritte **gekennzeichnetes** lithografisches Druckverfahren :

- Herstellung einer lithografischen Druckplatte nach dem in Anspruch 14, 15 oder 16 definierten Verfahren und
- Drucken von zumindest 60.000 Kopien mit der so erhaltenen lithografischen Druckplatte.

5

18. Ein durch die nachstehenden Schritte **gekennzeichnetes** lithografisches Druckverfahren :

- Herstellung einer lithografischen Druckplatte nach dem in Anspruch 14, 15 oder 16 definierten Verfahren und
- Drucken von zumindest 100.000 Kopien mit der so erhaltenen lithografischen Druckplatte.

10

19. Ein durch die nachstehenden Schritte **gekennzeichnetes** lithografisches Druckverfahren :

- Herstellung einer lithografischen Druckplatte nach dem in Anspruch 14, 15 oder 16 definierten Verfahren und
- Drucken von zumindest 300.000 Kopien mit der so erhaltenen lithografischen Druckplatte.

15

20. Verwendung eines angerauten und anodisierten Aluminiumträgers mit einer hydrophilen Oberfläche und einer als arithmetischer Mittenrauwert Ra ausgedrückten Oberflächenrauheit von weniger als $45 \mu\text{m}$ in einer negativarbeitenden lithografischen Druckplattenvorstufe mit einer auf die hydrophile Oberfläche angebrachten wärmeempfindlichen Beschichtung, die hydrophobe thermoplastische Polymerteilchen enthält, die in der Lage sind, über eine thermisch induzierte Koaleszierung der Polymerteilchen eine hydrophobe Phase in der Beschichtung zu bilden,
zur Steigerung der mit der durch Belichtung und Entwicklung der Druckplattenvorstufe erhaltenen Druckplatte erreichbaren Auflagenhöhe.

20

25

Revendications

1. Un précurseur de plaque d'impression lithographique à effet négatif, comprenant :

30

- un support aluminium grainé et anodisé ayant une surface hydrophile et
- un revêtement thermosensible appliqué sur la surface hydrophile, contenant des particules d'un polymère thermoplastique hydrophobe capables de former une phase hydrophobe dans le revêtement par le biais d'une coalescence induite par chauffage des particules polymères,

35

caractérisé en ce que la rugosité de surface, exprimée comme rugosité moyenne arithmétique Ra, de la surface hydrophile est inférieure à $0,45 \mu\text{m}$.

2. Précurseur de plaque d'impression selon la revendication 1, **caractérisé en ce que** la rugosité de surface, exprimée comme rugosité moyenne arithmétique Ra, de la surface hydrophile est inférieure à $0,4 \mu\text{m}$.

40

3. Précurseur de plaque d'impression selon la revendication 1, **caractérisé en ce que** la rugosité de surface, exprimée comme rugosité moyenne arithmétique Ra, de la surface hydrophile est inférieure à $0,3 \mu\text{m}$.

4. Précurseur de plaque d'impression selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le rapport d'oxyde d'aluminium sur la surface hydrophile du support aluminium est supérieur à $2,5 \text{ g/m}^2$.

45

5. Précurseur de plaque d'impression selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le rapport d'oxyde d'aluminium sur la surface hydrophile du support aluminium est supérieur à $3,5 \text{ g/m}^2$.

50

6. Précurseur de plaque d'impression selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le polymère hydrophobe thermoplastique est un homopolymère ou copolymère de (méth)acrylonitrile et/ou de styrène.

7. Précurseur de plaque d'impression selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le polymère hydrophobe thermoplastique contient des groupes sulfonamide et/ou des groupes phthalimide latéraux.

55

8. Précurseur de plaque d'impression selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le revêtement thermosensible contient en outre un liant polymère hydrophile possédant des groupes acide carboxy-

lique latéraux.

- 5
9. Précurseur de plaque d'impression selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le revêtement thermosensible contient en outre un colorant de cyanine anionique absorbant les rayons infrarouges.
10. Précurseur de plaque d'impression selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le revêtement thermosensible contient en outre un colorant ou pigment absorbant de la lumière visible.
- 10
11. Précurseur de plaque d'impression selon l'une quelconque des revendications précédentes, **caractérisé en ce que** la surface hydrophile est rendue hydrophile par le biais d'un traitement avec (i) un acide organique et/ou un sel d'un acide organique ou avec (ii) un polymère choisi parmi le groupe composé d'acide polyvinylphosphonique, d'acide polyvinylméthylphosphonique, d'esters de l'acide phosphorique d'alcool polyvinylique, d'acide polyvinylsulfonique, d'acide polyvinylbenzènesulfonique, d'esters de l'acide sulfurique d'alcool polyvinylique et du produit de réaction d'alcool polyvinylique avec un aldéhyde aliphatique sulfoné.
- 15
12. Précurseur de plaque d'impression selon l'une quelconque des revendications précédentes, **caractérisé en ce que** la phase hydrophobe est capable de recevoir de l'encre pendant un cycle d'impression lithographique d'au moins 60.000 copies.
- 20
13. Précurseur de plaque d'impression selon l'une quelconque des revendications précédentes, **caractérisé en ce que** la phase hydrophobe est capable de recevoir de l'encre pendant un cycle d'impression lithographique d'au moins 100.000 copies.
- 25
14. Un procédé pour la confection d'une plaque d'impression lithographique, comprenant les étapes ci-après :
- le chauffage ou l'exposition à des rayons infrarouges, sous forme d'image, d'un précurseur de plaque d'impression selon l'une quelconque des revendications précédentes, provoquant la coalescence des particules d'un polymère hydrophobe thermoplastique dans des zones exposées, et
 - le développement du précurseur de plaque d'impression chauffé ou exposé par l'application d'un liquide contenant une phase hydrophile sur le revêtement, provoquant ainsi l'élimination de zones non exposées du revêtement du support, le liquide utilisé étant de l'eau, un liquide aqueux, une solution de gommage, une solution de mouillage ou une encre « single fluid ».
- 30
15. Procédé selon la revendication 14, **caractérisé en ce que** les étapes de l'exposition et du développement sont effectuées pendant que le précurseur de plaque d'impression est calé sur un cylindre d'impression d'une presse à imprimer lithographique.
- 35
16. Procédé selon la revendication 14, comprenant en outre l'étape dans laquelle le précurseur de plaque d'impression développé est cuit à une température supérieure à 60°C.
- 40
17. Un procédé d'impression lithographique comprenant les étapes ci-après :
- la confection d'une plaque d'impression lithographique selon le procédé défini dans la revendication 14, 15 ou 16 et
 - l'impression d'au moins 60.000 copies en utilisant la plaque d'impression lithographique ainsi obtenue.
- 45
18. Un procédé d'impression lithographique comprenant les étapes ci-après :
- la confection d'une plaque d'impression lithographique selon le procédé défini dans la revendication 14, 15 ou 16 et
 - l'impression d'au moins 100.000 copies en utilisant la plaque d'impression lithographique ainsi obtenue.
- 50
19. Un procédé d'impression lithographique comprenant les étapes ci-après :
- la confection d'une plaque d'impression lithographique selon le procédé défini dans la revendication 14, 15 ou 16 et
 - l'impression d'au moins 300.000 copies en utilisant la plaque d'impression lithographique ainsi obtenue.
- 55

EP 1 356 926 B1

20. Utilisation d'un support aluminium grainé et anodisé ayant une surface hydrophile et présentant une rugosité de surface, exprimée comme rugosité moyenne arithmétique Ra, de moins de 45 μm , dans un précurseur de plaque d'impression lithographique à effet négatif, comprenant un revêtement thermosensible appliqué sur la surface hydrophile, ledit revêtement contenant des particules d'un polymère hydrophobe thermo-
- 5 plastique capables de former une phase hydrophobe dans le revêtement par le biais d'une coalescence induite par chauffage des particules polymères,
- afin d'augmenter le chiffre de tirage pouvant être réalisé en utilisant la plaque d'impression obtenue par l'exposition et le développement du précurseur de plaque d'impression.

5

10

15

20

25

30

35

40

45

50

55

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 770494 A [0005]
- EP 770497 A [0005]
- US 6001536 A [0005]
- EP 908784 A [0006]
- EP 1160083 A [0007]
- EP 773112 A [0008]
- EP 774364 A [0008]
- EP 802457 A [0008]
- EP 816070 A [0008]
- EP 849090 A [0008]
- EP 849091 A [0008]
- EP 881095 A [0008]
- EP 931647 A [0008]
- GB 1084070 A [0016]
- DE 4423140 A [0016]
- DE 4417907 A [0016]
- EP 659909 A [0016]
- EP 537633 A [0016]
- DE 4001466 A [0016]
- EP 292801 A [0016]
- EP 291760 A [0016]
- US 4458005 P [0016]
- EP 1219416 A [0017]
- US 3476937 A [0019]
- US 4045232 A [0025]
- US 4981517 A [0025]
- WO 0032705 A [0025]
- EP 1213140 A [0025]
- EP 1342568 A [0026]