




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁵ : F04B 1/22</p>	<p>A1</p>	<p>(11) International Publication Number: WO 94/10442 (43) International Publication Date: 11 May 1994 (11.05.94)</p>
---	------------------	--

<p>(21) International Application Number: PCT/IT92/00134 (22) International Filing Date: 30 October 1992 (30.10.92) (71)(72) Applicant and Inventor: PECORARI, Felice [IT/IT]; Via della Resistenza, 3, I-41011 Campogalliano (IT). (74) Agent: GASPARINI, Alberto; Ufficio Finderoute, Via Ugo Sbrillanci, 17, I-41012 Carpi (IT). (81) Designated States: AU, BR, CA, CS, FI, HU, JP, KR, NO, PL, RU, UA, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE).</p>	<p>Published <i>With international search report.</i></p>
---	--

(54) Title: VOLUMETRIC FLUID MACHINE EQUIPPED WITH PISTONS WITHOUT CONNECTING RODS

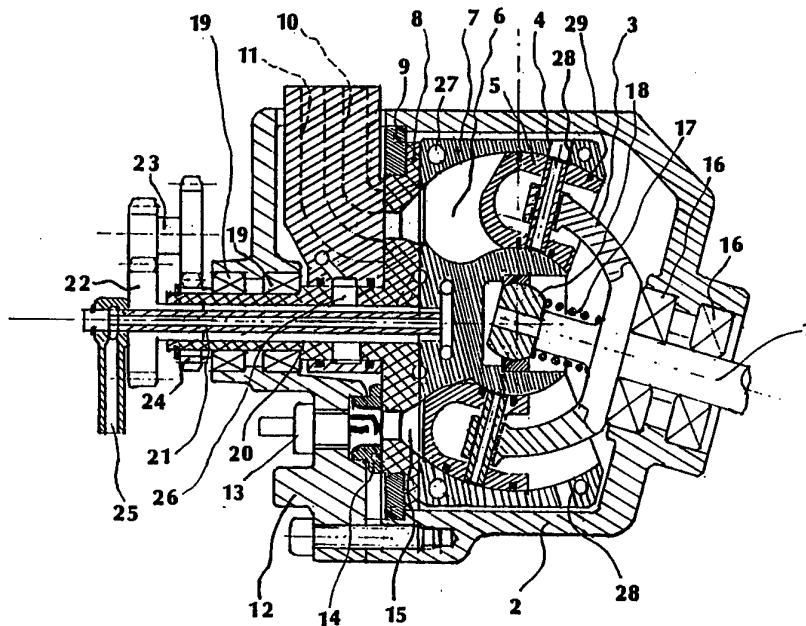

(57) Abstract

The volumetric machine for fluids, endothermic or not, have liners with non-linear or curved development, which are machined, or not, in a rotating liner block (7, 45, 63, 75) on an axis that can be coinciding or passing with the axis of the shaft (1, 37), from the side of its center curvature; the pistons (5, 42, 59, 62) rotate with the liners, but on an inclined axis coinciding with the axis of rotation of the liners or passing through the same center, without the interposition of elements having alternate motion.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

DESCRIPTION OF THE INVENTION

VOLUMETIC FLUID MACHINE EQUIPPED WITH PISTONS WITHOUT CONNECTING RODS

5

The invention relates to a pump, compressor and/or an engine, which can also be endothermic, that while functioning, achieves a displacement by means of pistons connected to the driving shaft without oscillating connecting
10 rods. The displacement can, furthermore, be changed as wished if necessary.

The state of the art comprises in the field of endothermic engines: engines with alternative pistons which
15 are connected to the crankshaft with connecting rods; the volumetric lobe engine (Wankel), with rotor eccentric to the driving shaft, or engines which have axial pistons, i.e. parallel to the driving shaft and driven in the alternating motion with a circular sloped course in order to
20 achieve the axial displacement of the piston and which does not have high performance. In the field of pumps/engines or fluid compressors, both compressible and not, there are various known arrangements of the pistons in line, mounted axially, or with oscillating barrel or with
25 oscillating plate, or mounted be radially.

However, all above mentioned pistons are connected to the driving shaft with connecting rods, which are oscillating on a surface perpendicular to said shaft, or with connecting rods, in the case of axial pistons, which oscillate
30 when running on a conoid surface, because the inclination of course of the big end of the connecting rod has a variation of range, while the small end is driven into the liner by the piston.

The above mentioned mechanisms, except the endothermic lobe engine (Wankel), have large dimensions, and none have
35

SUBSTITUTE SHEET

high efficiency which depends on the conditions of utilization.

In particular:

- 5 - for the rotary lobe engine (Wankel), the sealing parts have short life due to the heavy wear to which these are subject, with loss of compression and, therefore, loss of efficiency. The use of special materials is required which are very expensive and difficult to obtain.
- 10 - The endothermic piston engines, in all their various configurations, have limited speed of rotation, due to the presence of parts with alternating or oscillating motion, pistons, connecting rods, valves and also the crankshaft, which is always of difficult construction; the axial thrust from the piston is transmitted to the connecting
15 rod by the presence of the reaction of the cylinder wall: this reaction causes heavy wearing and therefore high performance lubricating oils are needed for; in four-stroke engines, efficiency is reduced because of the impossibility to design the combustion chamber in the ideal way due
20 to the dimensions and the restricted passage of the valves.
- As regards pumps/engines for compressible fluids, the disadvantages are the same as those caused by the connecting rods in endothermic engines, with low efficiency
25 due to mechanical friction produced by these connecting rods, and high weight, dimensions and costs.
- As regards pumps/engines for incompressible fluids, typically for hydrostatic transmissions, but also for the pumping of other liquids, the various designs, offer distinguishing inconveniences, such as: pumps/engines with
30 radial cylinder or cylinder in line, whilst providing fairly good performance, present high dimensions and construction costs; pumps/engines with axial cylinder, subdivided in the two following categories: cylinders with inclined barrel, as regards the axis of the shaft, or with
35

inclined plate for the guidance of the big end and cylinders which are parallel to the axis of the shaft. Both first present unacceptable limitations of speed of rotation, caused by possible centrifugation of the big ends; 5 the second presents very low efficiency at the starting point and also impossibility of working in an open circuit. The diffusion of both has been limited by the high construction costs.

10 Such state of the art may be subject to large improvements as regards: improving the characteristics of the mechanisms of reciprocating volumetric engines by increasing efficiency in all conditions, reducing weight, dimension and construction costs.

15

From what has been said so far the technical problem would be solved by eliminating in reciprocating volumetric engines the parts with oscillating motion, typically: connecting rods, valves, the parts that are complex, such as 20 the crankshaft and the camshaft, reducing in the same time the dimensions and the weights.

The present invention solves the above-mentioned technical problem by adopting:

25 a volumetric machine for fluids, including mobile pistons inside liners with non-linear development, which are machined, or not, in a rotating liner block on an axis that can be coinciding or passing with the axis of the shaft, from the side of its concavity; the pistons rotate with 30 the liners, but on an inclined axis coinciding with the axis of rotation of the liners or passing through the same center, without the interposition of elements having alternate motion;

adopting, furthermore: the liners are of arched form and 35 with center of curvature on their axis of rotation, that

can be coinciding or passing, in the same center of curvature, as the axis of driving shaft; the pistons rotate in synchronism with the liners, but on an inclined axis coinciding with the axis of rotation of the liners or passing
5 through the same center curvature;

adopting: the variation of the inclination between the axis of rotation of the liner block and of the pistons, in order to obtain the variation of displacement;

adopting: pistons connected in a rigid or oscillating way
10 to their shaft or rotation plate, without the interposition of connecting rods;

adopting: pistons with spherical head, equipped with seal rings which also have spherical faying surface, located in the piston head in such a way as to come into contact with
15 respective liner, wall radially with respect to the axis of that same liner;

adopting: the pistons are arched in the same way as the liners and are equipped with seal rings with spherical faying surface.

20

Adopting in the case of the internal combustion engine: a distribution plate, adjacent to the liner block with at least one communication port to the liners in induction, at least one outlet port and at least one combustion chamber,
25 that rotates or not with respect to the housing;

adopting: on the distribution plate, closed zones in intermediate positions, that coincide with the end position of scavenging fase and thus achieve null volume in four-stroke cycles;

30 adopting: one single auxiliary cooling and lubricating circuit;

adopting: the liner block as the mobile part of the pump for the cooling and lubricating circuit.

35 Adopting, in the case of a volumetric machine for fluids:

either the piston-holder plate or the liner block keyed or rigidly connected to the shaft;

adopting: pistons with head connected rigidly to the shank, which is in turn rigidly connected to the rotating
5 plate that can be inclinable, inclined, or not

adopting: oscillating piston heads with contact surface with the shank and contact surface with head of the connecting bolt, also spherical and concentric;

adopting: the variation of the displacement obtained by
10 varying the inclination between pistons and liners, bearing on the plate whose rear surface is cylindrical surface with axis of rotation that passes through in the same crossing point between the axis of rotation of the liner block and pistons.

15

The advantages achieved by the present invention, for all types of volumetric machines for fluids, can be summarized by the absence of parts in alternating and oscillating motion, such as connecting rods, the traditional
20 pistons and valves: all this leads to a considerable reduction in noise, due to the absence of thrust elements that when oscillating create noise because of the unavoidable presence of clearances between components. The elimination of the radial loading of the pistons on the walls of
25 the cylinder, because the thrust of the fluid is always tangential to the curvature of the liner, which always coincides with the center of the spherical piston, whether fixed or oscillating; consequently there is a considerable reduction in wearing and an increase in efficiency, specially at starting-up in the case of volumetric devices;
30 there are fewer parts to be constructed and there is considerable reduction in swarf machining required; considerable reduction of the axial and radial dimensions of the machines, for the higher powers and efficiencies obtainable.
35 Particular, for the internal combustion engines,

problems regarding centrifugation or elasticity that can increase rotation speed are eliminated; moreover, cooling is facilitated both of the pistons from the internal part of the housing and of the rotating liner block, which can
5 easily operate as a cooling liquid pump; the restintances and the choking of the valves are eliminated; the lubrication and cooling circuits are not separate, as it is possible to utilize the cooling liquid that has lubrication function too.

10 Furthermore, particulary for volumetric machines pumps/engines or compressors, compensation of the axial thrusts on the pistons being facilitates, further reduces friction and so increases efficiency; connecting members between the piston-holder plate and the liner block are
15 not required, which on the other hand are obligatory in barrel pumps or engines; the pistons with fixed spheric head connected to the piston-hoder are suitable for low or medium angles between the shaft and the inclined element (pistons or liner block) and enable high speeds to be ob-
20 tained as there are no components subject to centrigfugation. The pistons with oscillating head enable very large angles to be used and enablbling dimensions to be reduced even with large displacements. The heads, that self-center on the tangent at the line of curvature at any point
25 along the liner ned, therefore, on the thrust of the fluid, do not radially load the liner wall, limiting wearing and increasing efficiency.

Finally, the pumps of the hydraulic circuits can work indifferently in both open circuit and closed circuit at the
30 same speed of rotation, as there are no components of articulated elements (typically connecting rods) that could disconnect and centrifugate; the feeding of the closed circuit is obtainable also directly without the traditional use of the so called charge pumps; in the combination
35 of more pumps for different hydraulic circuits the pairing

of more pumps on one same shaft, is easily achieved and with reduced dimensions; each of these pumps is sized and/or adjusted for the particular requirements of the circuit, avoiding the use of expensive mechanical couples.

5

A few embodiments of the invention are shown in the five drawing tables attached, in which: Figure 1 shows a section of an internal combustion engine, with four pistons and four-stroke cycle, in accordance with the invention; 10 Figure 2 is the side view of distribution plate faced on to the block of rotating liners; Figure 3 is a partial section of an ignition device of a two-stroke engine; Figure 4 and figure 5 are views according to two lateral directions at 90° of the curved piston; Figure 6 is the longitudinal section of a pump/engine or compressor for 15 fluids, with variable displacement in both directions, with rotating and inclinable block of liners. Figure 7 is partial view from the supply side of the plate of inclination and of the distribution of fluid to the block of rotating liners; Figure 8 is the section of a piston with 20 oscillating head; Figure 9 is a longitudinal section of a pump/engine for fluids, the same as Figure 6, but with an inclinable piston holder plate instead of the liner block; Figure 10 and 11 are the same views of Figure 4 and 5 but 25 for a piston not for internal combustion engine; Figure 12 is a side view of a spherical piston; Figure 13 is the longitudinal section of a pump/engine for fluids, the same as Figures 6 and 9, without inversion of motion of fluid; Figure 14 is a longitudinal section of a pump/engine for 30 fluids, the same as the previous Figure with both mechanism having a variable displacement.

The indications are as follows: 1 (Figure 1) is the drive shaft that rotates, on bearings in the housing 2 of the 35 endothermic engine and positioned on each end 3 of the

shaft, each of which is coupled with piston pin 4 to the
corrispondent curved piston 5; this last piston is driven
from the mentioned ends to move inside the liners, which
are machined in the rotating liner block 7; with 8 the
5 distribution plate, rotating on the ring 9; with 10 and 11
the exhaust pipe and induction pipe; with 12 the head,
equipped with ignition plug 13, which is facing the piston
in a position of maximum compression, through an anti-wear
ring 14 and the combustion chamber 15, which is machined
10 in the thickness of the distribution plate; with 17 the
spring for the recovery of clearances for the sealing be-
tween distribution plate 8 and the liner block 7, which
bears on the spherical articulation 18 of centering block
of the shaft; with 19 guide bearings of the tube 20 the
15 distribution plate, comanded through internal coaxial
shaft 21 rotating with the liner block 7 and through re-
duction gearing of speed 22,23 and 24; with 26 refriger-
ating duct of the distribution plate and of the manifold
10 and 11, and with analogous 27 duct in liner block; with
20 28 a radial hole in each liner for the assembly of the
piston pin 4; with 29 the seal rings of the pistons 5,
connected to the respective pin boss 30 through the piston
pins at each end 3; with 31 and 32 (Figure 2) the holes
and the suction ports on the distribution plate and with
25 33 and 34 the holes and the corrispondent exhaust ports;
with 35 (Figure 3) the chamber of combustion in the fixed
distribution plate 36 of a two-stroke engine.

In the second embodiment of the invention, the indica-
30 tions are as follow: with 37 (Figure 6) a drive shaft of
the pumps/engine or volumetric compressor on which the
piston holder plate 39 is splined, by means of a splined
profile 38; the pistons are screwed on to the plate by
means of a thread; with 40 the piston shank has a central
35 hole 41 of compensation of the axial hydraulic thrusts,

it presents a head with a spherical swelling 42 and a seal ring 43 with external spherical swelling; the above mentioned pistons are driven into the liners 44 of the rotating liner block 45, which is driven to the mentioned shaft 5 37 through a ball joint 46; with 47 the end clearances of the compensation springs acting on the mentioned joint and against the plate 39, which slides against the anti-wear lining 48 to which the compensation cavities 49 of the axial hydraulic thrust are facing; with 50 the hole for the 10 passage of the fluid from the liner to the distribution cap 51, equipped with slots 52 and ports 53, on the side of the liner block 45, which is fed through ducts 54 and 55 for the passage of fluid; with 56 a slot on the axis distribution cap 51 for oscillation, which is driven from 15 the parallel surface, which couples with the envelope 58; with 59 the head of the spherical piston, can oscillate on the shank 40 through a spherical headed screw 60 and a correspondent spherical surface 61 between the shank and the piston head 59.

20

In the third embodiment of the invention, without repeating the numbers of the common parts found in following Figures, are as follows; with 62 the curved piston, are mobile in the liners of the block 63, which presents feeding 25 ing holes, facing the cover 65 with feeding lines of the fluid; with 66 a piston holder plate driven from the ball joint 46 and facing a correspondent inclinable cap 67, with a parallel surface 68, against a block inserted 69 inside the envelope 58; with 70 the central axis of a curvature of the liners; with 71 (Figure 10) the seating of 30 the seal ring 43 and with 72 the axis of the piston shank 40.

Lastly, the indications shown are the following: with 35 73 (Figure 13) a plate which is splined on the shaft 37 by

means of splined profile, and supports two series of pistons, which are connected to the plate and which are opposed to one another, there are equipped with axial holes 74 for connection of the correspondent chambers of the liners; with 75 a liner block without feeding lines, rotating like block 45, but diesel cycle, starts the combustion through the special chamber 15 or 35, in the case of two-stroke engines that have the distribution plate fixed to the cylinder head 12; the drive of the coaxial driving shaft 21, together with the wheel work 22,23 and 24, halves the rotation, because of the distribution plate control 8, through sleeve 20.

During the stroke of the pistons 5 inside the liners 6, the slight differences of path, which are also due to the high angles between the the spin axis are compensated by slight oscillations on the gudgeon pins 4 in the hubs 30 besides slight radial slidings of the pistons in the intermediate positions of 45°, 135°, 225° and 315° of rotation. The coolant is sucked from the radiator through the pipe 25 and is conducted right into the liner block 7 through the hollow shaft 21; the holes 27 receive the coolant by means of radial ducts, which are not shown in the drawing, and that are situated between the liners: the coolant is therefore centrifugated by the rotation of the liner block and fills the internal volume of box 2 then hot it flows out of it, into tubes that are not shown in the drawing towards the radiator; the coolant, by means of the cavity wall between the sleeve 20 and the coaxial shaft 21, cools the central part of the distribution plate 8 and with the ducts it also cools the manifolds.

The functioning of the pump/engine or compressor for fluid referred to the second embodiment carried out occurs in the following way: the fluid under pressure, flowing in the ducts 54 and 55 and crossing the slots 52, the parts

53 and the holes 50, enters the liners 44; the action on the surface of the piston head 42 is distributed with relation to the position of the seal ring 43, i.e. exactly axial to the shank 40, without radial components driven from the piston to the liners; the rotation that is impressed to the piston-holder plate 39 is driven to the driving a shaft 37 by splined fitting 38: the cavities 49, which are held at the same pressure of the liners 44 by the hole 41, balance the axial hydraulic thrusts on the mentioned plate and on the pistons; the Belleville washers 47 stop the end clearances between the liner block 45, the cap 51, and the envelope 58: the preloading is considerably superior to the force generated during the suction of the fluid at atmospheric pressure. The variation of displacement and, therefore, a major versatility during use is possible by changing the inclination of the cap 51 by sliding on the cylindrical surface 57. The head of the oscillating piston 59, for the employment of the pistons and of the liners with ample angles between the axis of rotation, results to be always balanced, because the center of oscillation is out of the piston and inside the fluid. On the contrary usual pistons, have the piston pin situated considerably far from the surface in contact with the fluid.

25

The functioning of the pump/engine or compressor for fluids referred to the third type carried out, occurs in the following way: the keying position to the shaft 37 is inverted: i.e., it is the liner block 63 that drives the couple: this disposition generates a radial component for the piston heads 62, rapidly wearing out the liners. The curved piston with head 62, results to be more adapted for disposition with a high angle of inclination between the axis even if it is more difficult to construct. Also for this realization, the variation of the displacement ob-

35

tained with the inclination of the cap, in this case number 67.

Figures 13 and 14 show two realizations for pumps/engines or compressor for fluids, for use in different fields: the first is a pump/engine with a series of pistons of variable displacement and the other series of fixed displacement, in all without inversion of direction of the fluid; the second is equipped with both the series of pistons with variable displacement and the inversion of the flow, as indicated by the arrows next to the feeding lines 54,55 is possible; the caps 51 and/or 76 are to be inclined through external control with well known mechanisms. In both two realizations the piston-holder plate 73 keyed on the driving-shaft 37, balances the axial thrust between the opposing liners 44 and being the axial holes 74 in the pistons, the less work is done by the fluid in passing through.

The functioning as a pump/compressor can comfortably occur for all the angles of the cap (51 and/or 76), while when functioning as an engine, due to the known impossibility of zero setting the displacement, the angle must not be too reduced. Moreover, being the elimination of the fluid motion between the two series of pistons of the double device in figures 13 and 14, which reduce the efficiency, the displacement in the mechanism of figure 13 must not be completely zero setted: the cap 76 must not be placed with opposed inclination to that figure; the displacement in the mechanism of figure 14 must not be varied by controlling the caps 76 and 51 inverted sincronism, therefore the caps 76 and 51 will result parallel when the displacement state is null, while they will result to be inclined as in the drawing or in opposing way due to the flow of fluid in both directions respectively.

If in practice materials, dimensions and operative details should be different from those indicated, but technically equivalent, the patent will still apply.

5 In this way the pump/engine or compressor in Figures 6 or 9 can be obtained at a fixed displacement, or even a pump and an engine can be paired through the cavities 49 or the feeding ports 64, by interposing a fixed distributor to the housing, in order to carry out compact hydrostatic
10 drives: the advantages due to the reduction of dimensions, weight and to run high speed of rotation make this type of embodiment extremely interesting.

Finally, fixing the pistons rigidly to the housing and placing the liner block in oscillation by means of axial
15 or radial cam connected to the driving shaft, a pump/engine or compressor, without moving parts will be obtained with exception for the cam: this is very convenient in the case of pumps or engines for liquids. On the analogy of the displacement variation pumps engines or
20 compressor, it is possible to carry out, with the configuration of pistons 5, 42, 59 or 62, and of the rotating liner block 7 of the present invention, endothermic engines, that can reduce displacement, facilitating the mixing of the gasoline with air, without the complex artific-
25 es that are employed at present for the adjustment of its composition, achieving advantageous efficiencies at low charge.

30

35

CLAIMS

1. Volumetric fluid machine, endothermic or not, equipped with pistons, having reciprocating movement in the liner
5 block without connecting rods, rigidly connected to the driving shaft or not, including mobile pistons inside liners, characterised in that of having liners with non-linear development, which are machined, or not, in a rotating liner block (7, 45, 63, 75) on an axis that can
10 be coinciding or passing with the axis of the shaft (1, 37), from the side of its concavity; the pistons (5, 42, 59, 62) rotate with the liners, but on an inclined axis coinciding with the axis of rotation of the liners or passing through the same center, without the interposi-
15 tion of elements having alternate motion.
2. Volumetric fluid machine, according to claim 1, characterised in that of said liners (6, 44) are of arched form and with center of curvature on their axis of rotation,
20 that can be coinciding or passing, in the same center of curvature, as the axis of driving shaft (1, 37); the pistons rotate in synchronism with the liners, but on an inclined axis coinciding with the axis of rotation of the liners or passing through the same center curvature.
25
3. Volumetric fluid machine, according to one of the previous claims, characterised in that having the variation of the inclination between the axis of rotation of the liner block (7, 45, 63, 75) and of the pistons (5, 42,
30 59, 62), in order to obtain the variation of displacement.
4. Volumetric fluid machine, according to one of the previous claims, characterised in that having pistons
35 connected in a rigid or oscillating way to their shaft

(1, 37) or rotation plate (39, 66, 73), without the interposition of connecting rods.

5. Volumetric fluid machine, according to one of the
5 previous claims, characterised in that having pistons with spherical head (42, 59), equipped with seal rings (29, 43) which also have spherical faying surface, located in the piston head in such a way as to come into contact with respective liner (6, 44), wall radially with
10 respect to the axis of that same liner.
6. Volumetric fluid machine, according to one of the previous claims 1 to 4, characterised in that of the pistons (5, 62) are arched in the same way as the liners
15 (6, 44) and are equipped with seal rings (29, 43) with spherical faying surface.
7. Volumetric fluid machine with internal combustion, according to one of the previous claims, characterised in
20 that having a distribution plate (8), adjacent to the liner block (7) with at least one communication port (31, 32) to the liners in induction, at least one outlet port (33, 34) and at least one combustion chamber (15), that rotates or not with respect to the housing (2).
25
8. Volumetric fluid machine, according to the previous claim, characterised in that distribution plate (8) having closed zones in intermediate positions, that coincide with the end position of scavenging fase and thus achieve
30 null volume in four-stroke cycles.
9. Volumetric fluid machine, according to one of the previous claims 7 and 8, characterised in that having one single auxiliary cooling and lubricating circuit.

10. Volumetric fluid machine, according to one of the previous claims 7 to 9, characterised in that the liner block (7) act as the mobile part of the pump for the cooling and lubricating circuit.

5

11. Volumetric fluid machine, according to the one or more of the previous claim 1 to 6, characterised in that of either the piston-holder plate (39, 66, 73) or the liner block (45, 63, 75) is keyed or rigidly connected to the shaft (37).

12. Volumetric fluid machine, according to one of claims 1 to 6 or 11, characterised in that having pistons with head connected rigidly to the shank (40), which is in turn rigidly connected to the rotating plate (39, 66, 73) that can be inclinable, inclined, or not.

13. Volumetric fluid machine, according to one of previous claims, characterised in that of oscillating piston heads (59) with contact surface (61) with the shank (40) and contact surface with head (60) of the connecting bolt, also spherical and concentric.

14. Volumetric fluid machine, according to claim one of previous claims, characterised in that having variation of the displacement obtained by varying the inclination between pistons and liners, bearing on the plate (51, 67, 76) whose rear surface is cylindrical surface with axis of rotation that passes through in the same crossing point between the axis of rotation of the liner block (45, 63) and pistons.

35

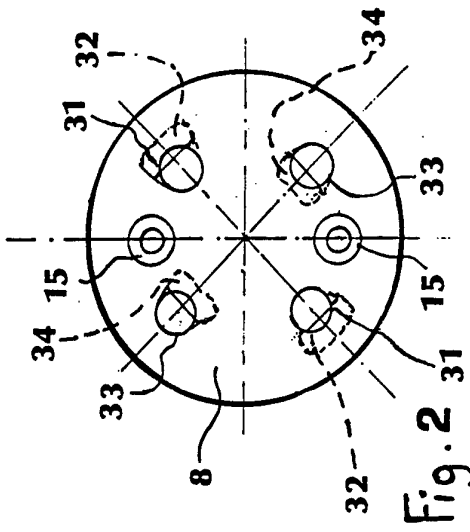


Fig. 2




Fig. 3

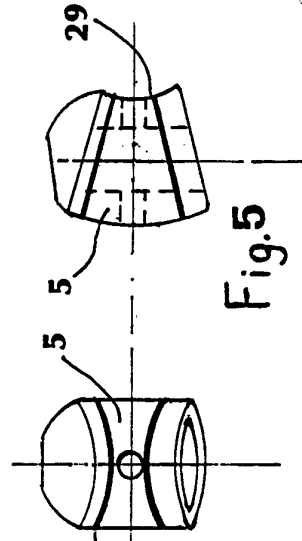


Fig. 4

Fig. 5

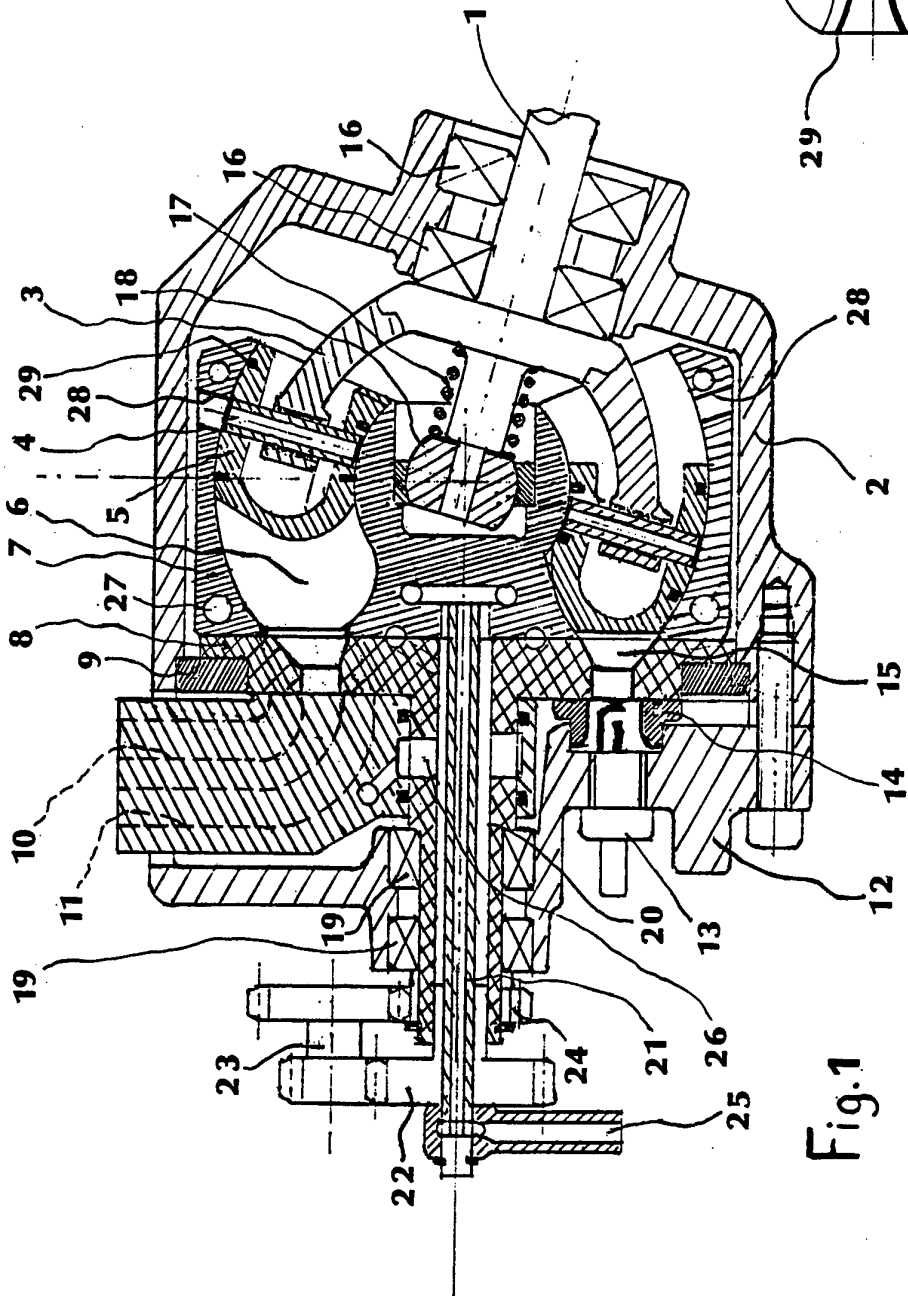
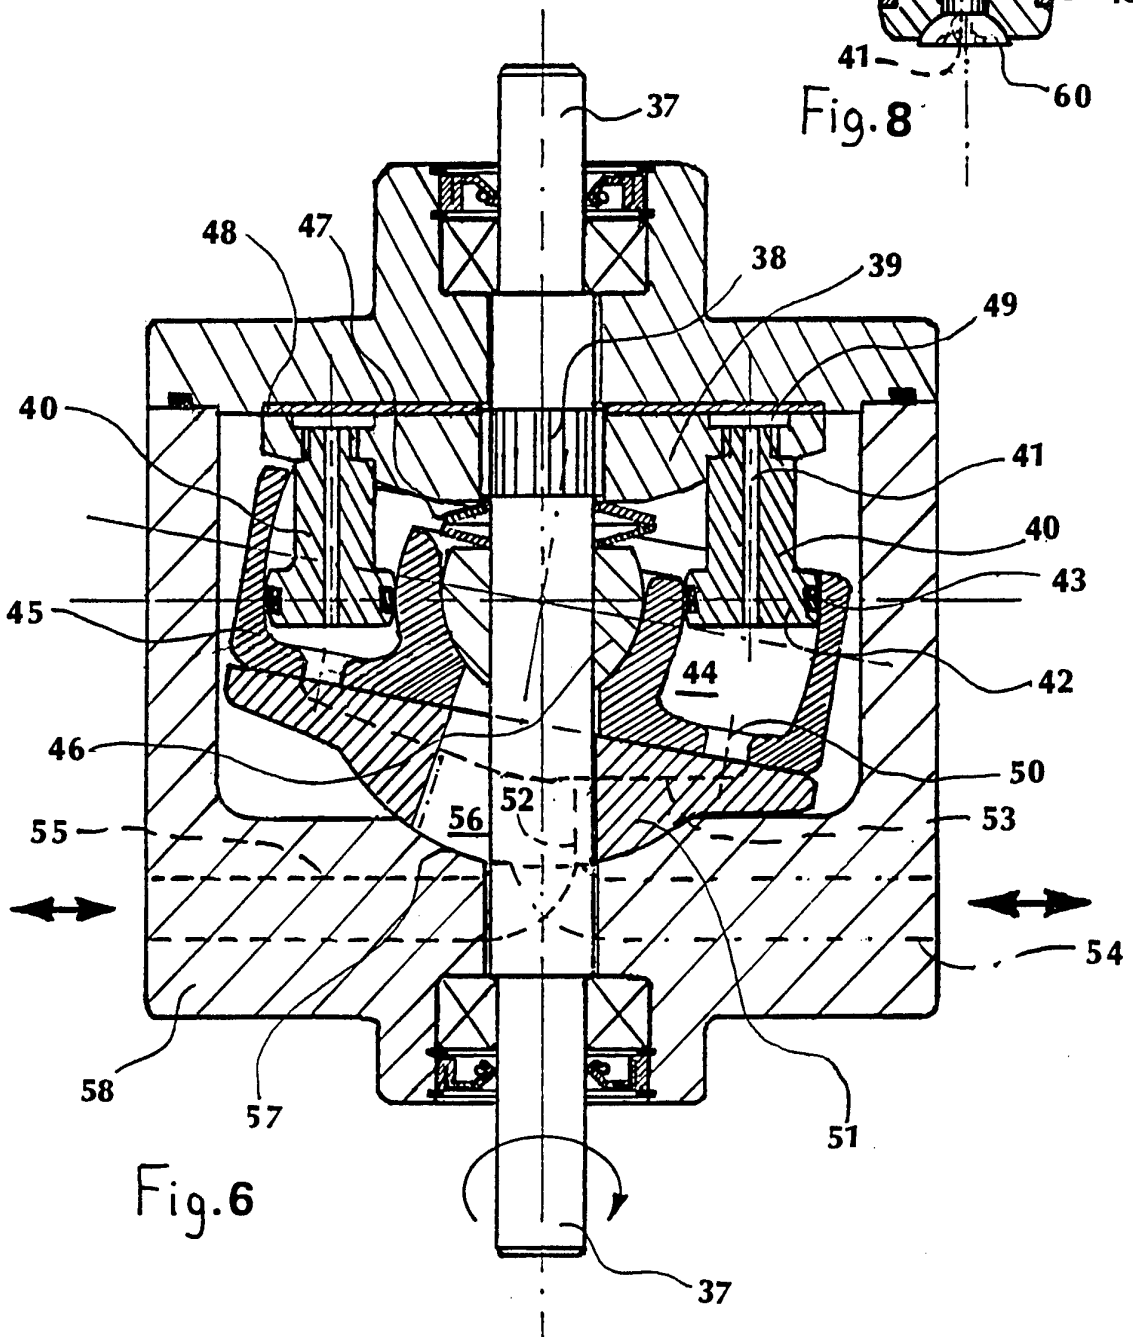
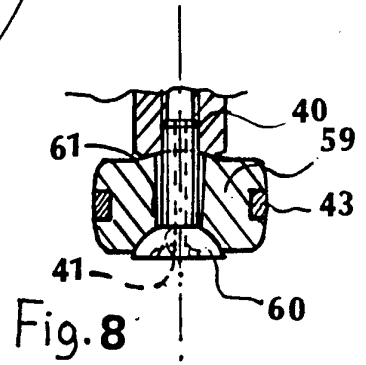
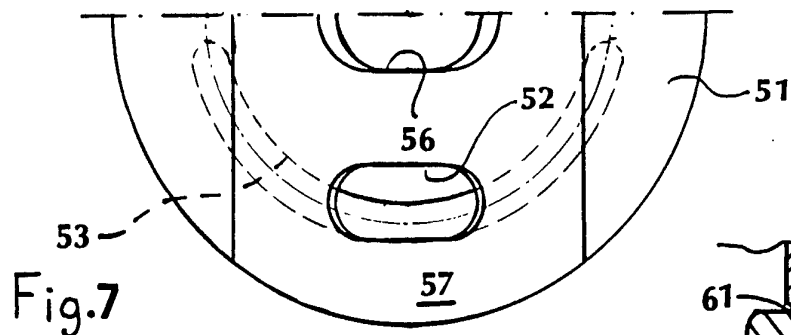
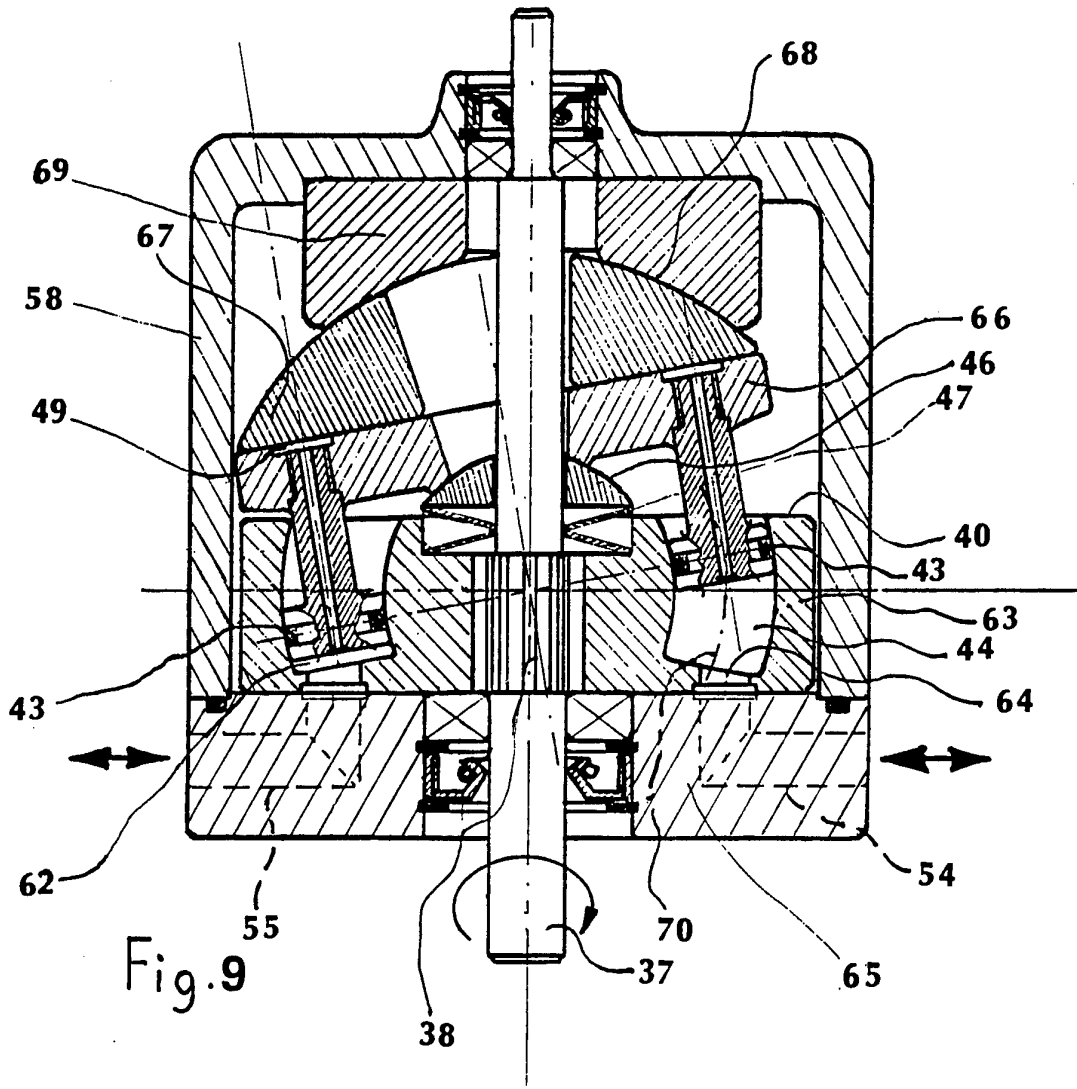
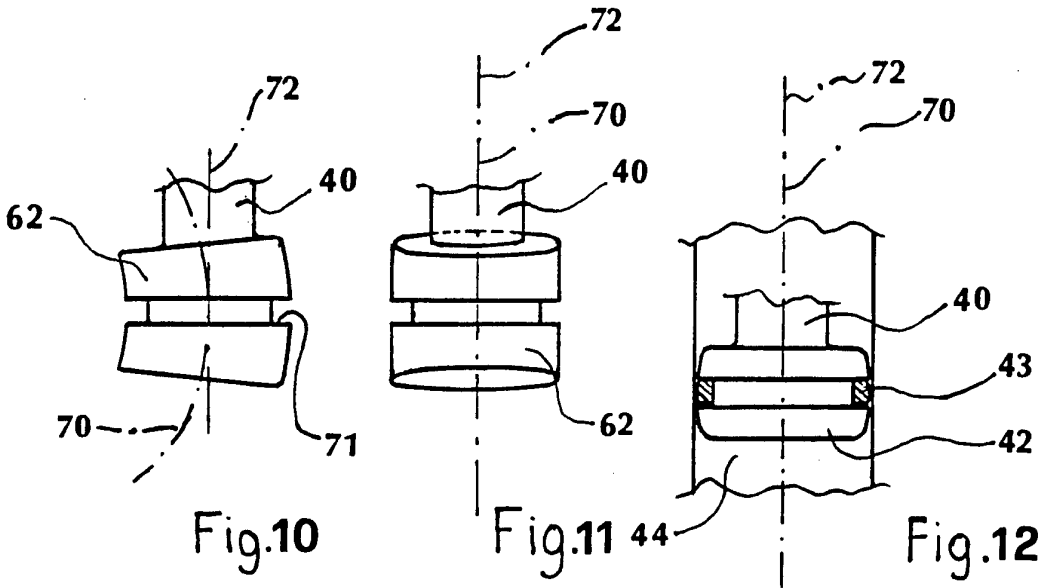


Fig. 1





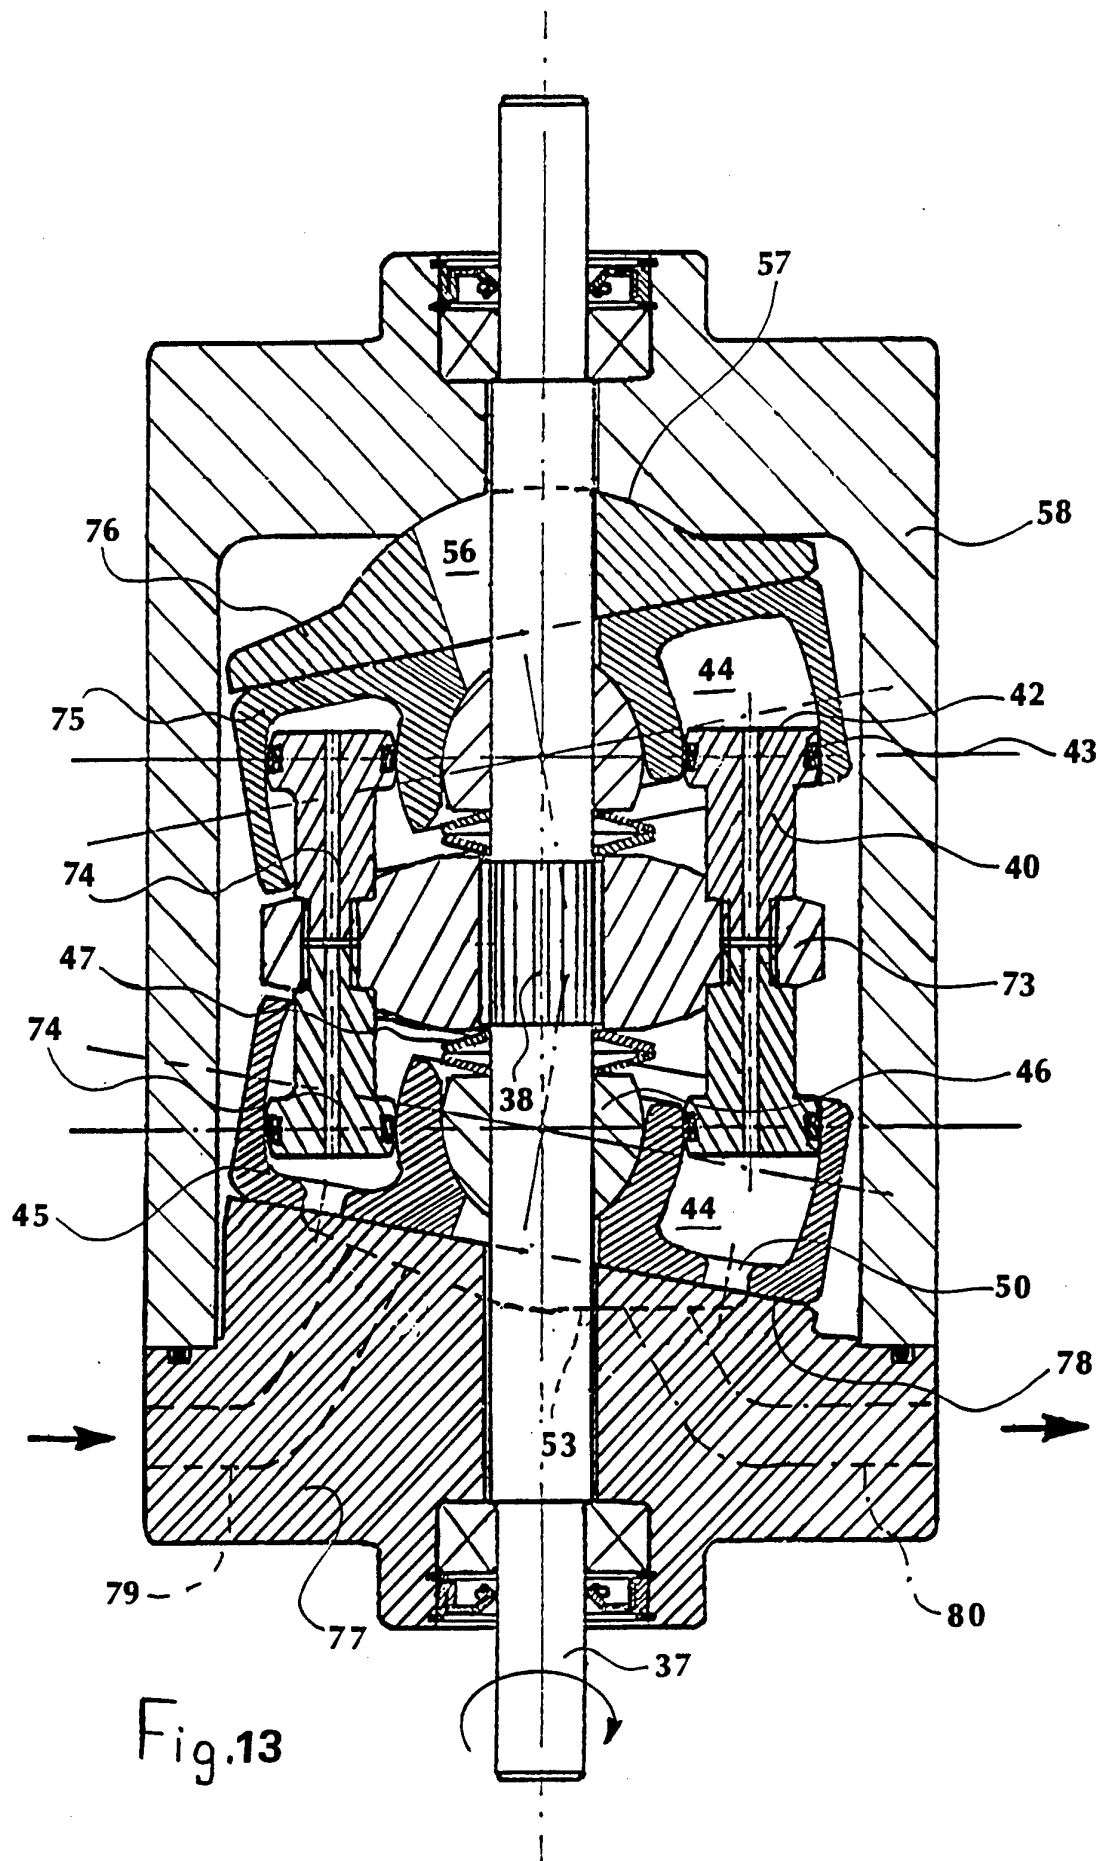


Fig.13

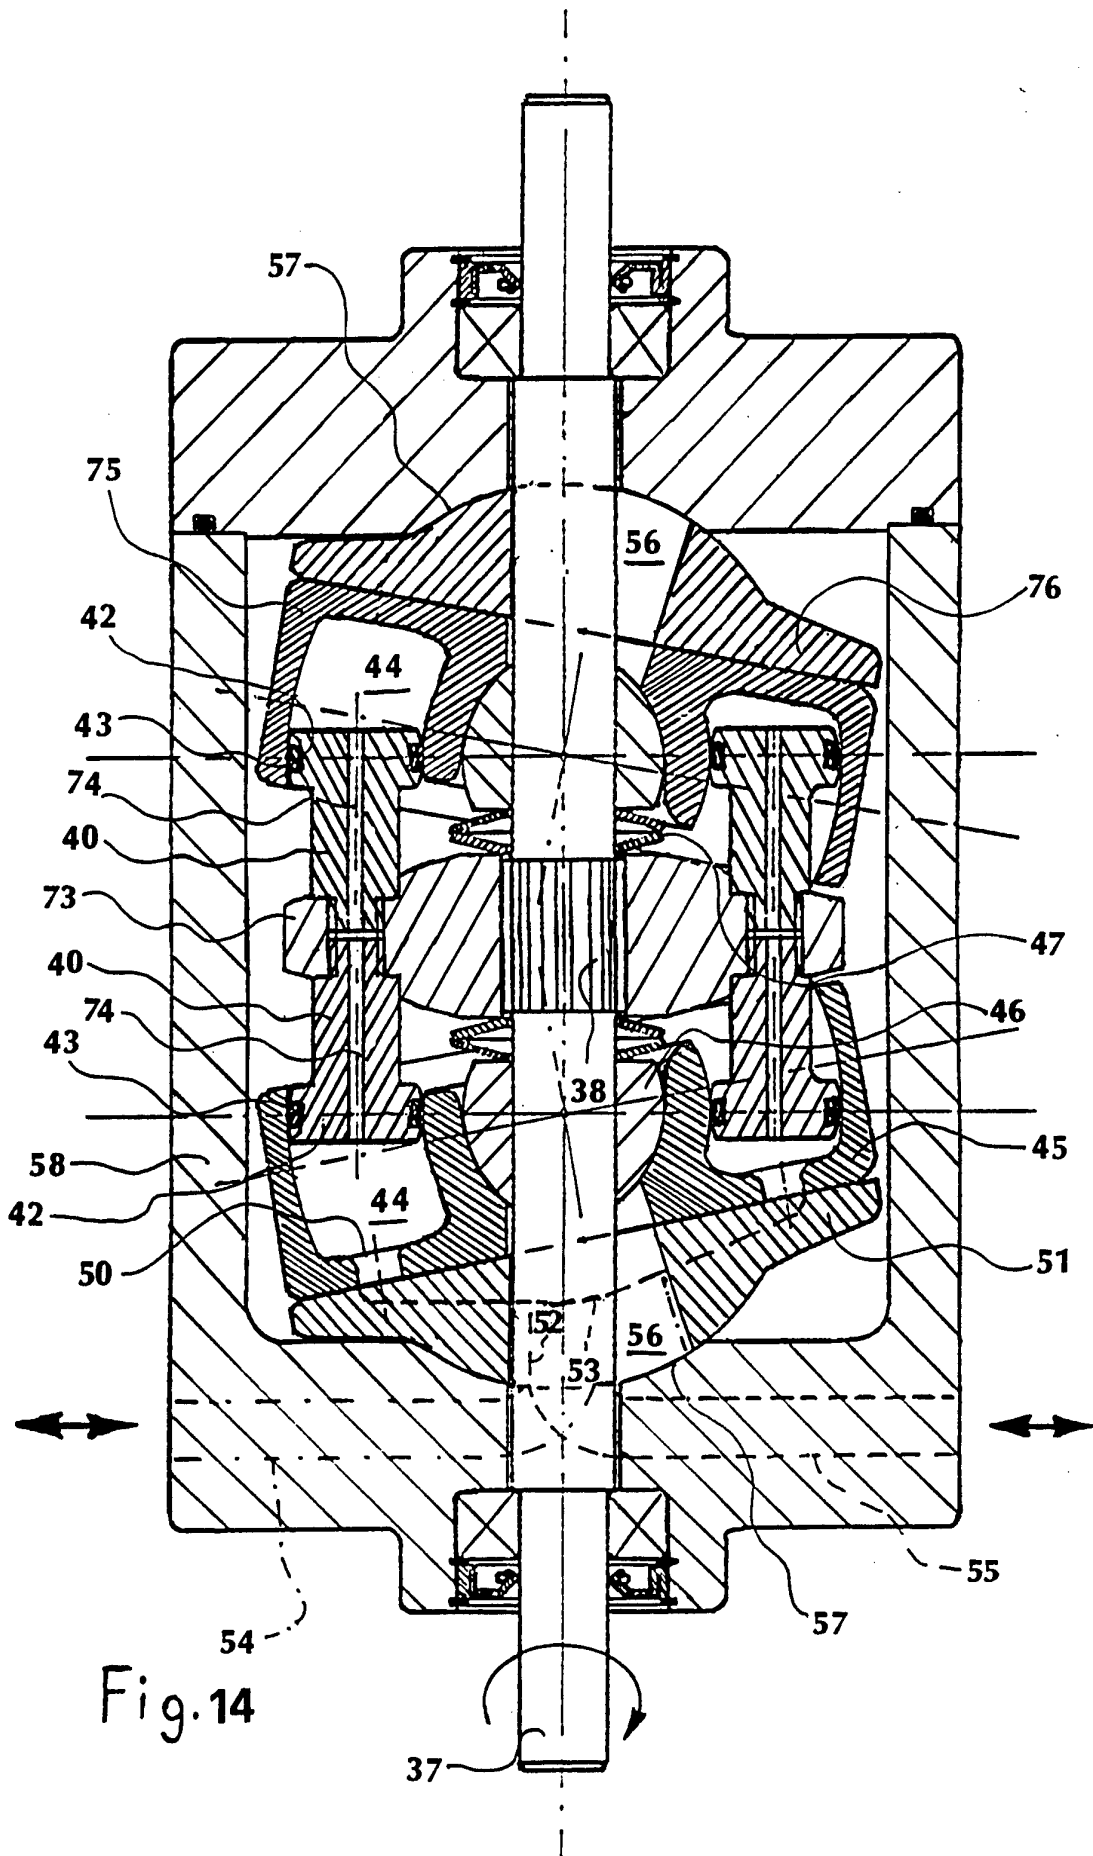


Fig. 14

INTERNATIONAL SEARCH REPORT

PCT/IT 92/00134

International Application No

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC Int.Cl. 5 F04B1/22		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	F04B ; F03C ; F01B ; F01C	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
Y	WO,A,8 600 662 (SEARLE) 30 January 1986	1
A	see abstract; figure 1	3-5, 11-12, 14
Y	US,A,3 910 239 (JAMES) 7 October 1975	1
A	see abstract; figure 1	2,6
A	FR,A,1 408 719 (CHAYVIALLE) 7 February 1964	1,3-4, 11,13-14
A	US3 648 567 (CLARK) 14 March 1972	1,3-5, 11-12, 14
	see ; figures	
		-/--
¹⁰ Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
23 FEBRUARY 1993	04. 03. 93	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	NARMINIO A.	

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category °	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	GB,A,2 027 122 (SEARLE) 13 February 1980 see abstract; figures 1,6 -----	1,7

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.**

IT 9200134
SA 66792

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 23/02/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-8600662	30-01-86	EP-A- 0189452	06-08-86
US-A-3910239	07-10-75	CA-A- 1019247	18-10-77
		DE-A- 2525521	22-04-76
		FR-A, B 2273948	02-01-76
		GB-A- 1460231	31-12-76
		JP-C- 1232202	26-09-84
		JP-A- 51010205	27-01-76
		JP-B- 59008648	25-02-84
FR-A-1408719		None	
US-3-648567		None	
GB-A-2027122	13-02-80	None	