

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2001269615 B2**

(54) Title
Blade of a wind turbine

(51)⁷ International Patent Classification(s)
F03D 001/06

(21) Application No: **2001269615** (22) Date of Filing: **2001.06.28**

(87) WIPO No: **WO02/08600**

(30) Priority Data

(31) Number	(32) Date	(33) Country
1015558	2000.06.28	NL

(43) Publication Date: **2002.02.05**

(43) Publication Journal Date: **2002.05.02**

(44) Accepted Journal Date: **2004.12.02**

(71) Applicant(s)
Stichting Energieonderzoek Centrum

(72) Inventor(s)
Corten, Gustave Paul

(74) Agent / Attorney
Collison & Co, 117 King William Street, Adelaide, SA, 5000

(56) Related Art
GB 2068472
US 4571156
US 4412784
US 3874816
WO 1986/002701

ABSTRACT

Blade of a wind turbine. This blade is provided with a connection part for connection to the shaft or hub of the turbine. The blade also contains a wind-energy-absorbing profile which is optimized for wind flow. The output of the wind turbine is increased according to the invention by providing the connection part with a member that is designed in such a way that the assembly consisting of said member and the connection part can absorb wind energy and will increase the efficiency of the structures.

Blade of a wind turbine

The present invention relates to a blade of a wind turbine, comprising a connection part provided at one end with connection means, for connection to the shaft/hub of a wind turbine, and a wind-energy-absorbing profile which is optimized for the wind flow and extends from the other end of the connection part, the connection part being provided with a member that is designed in such a way that the assembly comprising the member and the connection part can absorb wind energy, which member comprises a rib that projects from the connection part.

Such a blade is generally known

Because the wind-energy-absorbing profile is expensive to produce and is of an elongated design, it is opted to fit a connection part between the wind-energy-absorbing part and the shaft/hub of the wind turbine. On the one hand, the connection part is cheap to produce and, on the other hand, it is designed in such a way that simple connection is possible, large torques being effectively transmitted. Since the torque of the aerodynamic forces increases with decreasing distance from the shaft, and since the surface area passed through by a blade part decreases - and consequently so does the share in the energy output - with decreasing distance from the shaft, the blade cross section in the direction from tip to connection end acquires an optimization which runs from generally aerodynamic to generally structural. In particular, this connection part will comprise a tube. Since the connection part is situated near the centre of rotation of the wind turbine, the loss that occurs through the cross section not being optimized for the wind flow is less than the costs necessary for making a profile that is optimized for the wind flow, such as that fitted on the other side of the connection part. If the connection part is, for example, a tube, the costs of that tube per metre are many times lower than the costs of the wind-energy-absorbing, wing-like profile fixed on it. In addition, it is simple to connect a tube in a particularly sturdy manner to the remaining part of the structures, by means of, for example, a flange. The term connection part in the description and claims should be understood as meaning that part of a blade that is optimized for the structures, and not so much optimized for the absorption of wind energy. Such a part is characterized by a low natural speed, and it absorbs little in the way of wind forces. In general, it can be said that it does not comprise the part from the free end onwards with increasing chord, but it does comprise the part beyond the maximum chord, in other words the part with

decreasing or invariable chord. The connection part can be connected with a separate flange to the aerodynamic wind-energy-absorbing profile.

Such blades are used on a large scale in the prior art.

It is the object of the present invention to increase the output of such a blade without prohibitively increasing its costs, as would be the case if, for example, the connection part were to be replaced by an extension of the wind-energy-absorbing profile, and to do so without the strength decreasing to an inadmissible extent.

This object is achieved with a blade as described above wherein the connection part is provided with a member that is designed in such a way that the assembly comprising the member and the connection part can absorb wind energy.

According to the invention, the existing connection part is retained in principle unchanged, except that it is provided with a member. According to an advantageous embodiment of the invention, said member can be a simple rib which is fitted on the connection part. Such a rib can be of a slightly curved shape, or it can simply be of a design that extends perpendicular to the connection section. Such a member comprises a rib that extends from the connection part, fitted in an area bounded, on the one hand, by the surface of the wind-energy-absorbing profile in its most effective position and bounded, on the other hand, by the surface clamped down by the rotor shaft and the axis of the wind-energy-absorbing profile, comprising the quadrant lying between the sharp rear edge of the aerodynamic profile and the pressure side of the rotor blade. The term most effective position should be understood as meaning the position in which the most wind energy is absorbed by the profile. Such a position must be distinguished from, for example, the feathering position of a wind-energy-absorbing profile. More particularly the member is in a plane parallel to the plane of the wind energy generating profile.

In the case of new structures to be produced, the connection part and the member can be made as a unit from fibre reinforced resin. In the case of known structures, if the connection part comprises a circular tube, a strip of material extending from it can be fitted on it, for example by welding or gluing. According to the invention, the height of such a strip is preferably 0.05 – 0.3 times the (external) diameter or thickness of the connection part. More particularly, the height is approximately 0.1 times the diameter of the connection part.

It has been found that in such a way, particularly in the case of wind turbines with a capacity of more than 50 kW, the output can be increased by 1.5% or more.

The costs of fitting such a rib are many times lower than the additional output because such a simple change always pays. It should be pointed out that it is possible to provide existing blades with such a projecting rib, for example during an overhaul.

5 The rib can be designed in various ways, such as a flat strip, (partially) triangular profile, block profile, sailcloth and the like. Furthermore, the rib may be made flexible or otherwise, since it does not form part of the strength-providing structures of the blade. Forces exerted upon the strip are transmitted to the blade or connection part.

10 Further optimization of the flow properties of the connection part can be achieved by fitting vortex generators, or by means of air jets which have the same effect. The effect can be produced to a lesser extent also by roughness alone.

The invention will be explained below with reference to an preferred embodiment illustrated in the drawing, in which:

15 Fig. 1 shows in perspective and diagrammatically a blade of a wind turbine,
Fig. 2 shows a cross section along the line II-II of Fig. 1,
Fig. 3 shows a variant of the structures according to Fig. 1 and
Fig. 4 shows a second variant.

In Fig. 1 a blade of a wind turbine according to the invention is illustrated by 1. It is composed of a connection part 2. Connection to a hub 3, which forms part of a shaft 4 behind which the actual generator is connected, is possible by means of a flanged connection (not shown). At the other side, connection part 2 is connected to the wind-energy-absorbing profile 5 of the blade 1. In the embodiment shown, the profile is illustrated as a wing profile, and it will be understood that any other shape can be achieved. The axis of the blade is indicated by 7.

25 In the example shown here, the connection part 2 is of a circular design and comprises a simple tube. In the general prior art, this tube was of a smooth design, without any further measure being taken.

30 According to the invention, it is proposed that a member or rib 6 be fitted on the tube 2. It is also proposed that vortex generators 8 be fitted in the position shown. The vortex generators (not drawn to scale) can be punched out of a strip material, the base material being fixed to the connection part 2, for example by means of an adhesive layer. The vortex generators (not drawn to scale) extend perpendicular to the plane of the connection part 2, preferably at an angle of 15° relative to the plane perpendicular to the longitudinal axis 7. The angle can be either positive or negative.

The member or the rib 6 according to the invention is shown in detail in Fig. 2. Its height is drawn slightly out of proportion. As a matter of fact, according to the invention it is preferable for said height to be $h = 0.05 - 0.3$ of the diameter of the cylinder. In particular, said height will be approximately one tenth of the diameter.

5 Further variants of the invention are shown in Figs. 3 and 4. In Fig. 3 a blade of a wind turbine is indicated by 11. It consists of a connection part. Reference numeral 17 indicates the axis of the blade, while the wind-energy-absorbing profile is indicated by 15. The part according to the invention is indicated by 16. As in the case of the previous embodiment and that to be discussed below, said part can be flexible
10 or even controllable.

A further embodiment is shown in Fig. 4 and is indicated in its entirety by 21. The hub is indicated by 23, while 27 indicates the axis of the blade. The wind-absorbing part is indicated by 25, and the connection part by 22. The part according to the invention is indicated by 26.

15 Although the invention has been described above with reference to a preferred embodiment, it should be understood that numerous modifications are possible. For instance, the member 6 can extend over only a limited part of the height of the connection part 2, and the connection part 2 can have a shape that deviates from the circular shape. Such modifications are obvious to persons skilled in the art after
20 reading the above description, and lie within the scope of the appended claims.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

2001269615 15 Nov 2004

1. Blade (1, 11, 21, 31) of a wind turbine, comprising a connection part (2, 12, 22) provided at one end with connection means, for connection to the shaft (4)/hub (3, 13, 23) of a wind turbine, and a wind-energy-absorbing profile (5, 15, 25) which is optimized for the wind flow and extends from the other end of the connection part, the connection part being provided with a member (6, 16, 26, 36) that is designed in such a way that the assembly comprising the member (6, 16, 26, 36) and the connection part can absorb wind energy, which member comprises a rib (6, 16, 26, 36) that projects from the connection part, characterized in that said rib (6, 16, 26, 36) is arranged in a plane that forms an angle, which on the pressure side lies between 45° and 135° to the chordal plane of said wind-energy-absorbing profile.

2. Blade according to Claim 1, in which said angle lies between 45° and 135°.

3. Blade (1, 11, 21, 31) according to Claim 1, in which said rib is fitted in a plane that forms an angle of approximately 90° to the chordal plane of said wind-energy-absorbing profile.

4. Blade according to one of the preceding claims, in which said connection part comprises a substantially circular cross section.

5. Blade according to one of the preceding claims, in which said connection part comprises the transition from a circular to an aerodynamic profile.

6. Blade according to one of the preceding claims, in which the height (h) of the rib (6, 16, 26) lies between 0.05 and 0.3 times the diameter (d) or thickness of the connection part.

7. Blade according to one of the preceding claims, in which said connection part is provided with vortex-producing generators (8).

8. Blade according to one of the preceding claims, designed as a flexible part.

9. Method for producing a blade (1, 11, 21) of a wind turbine, comprising the provision of a blade comprising a connection part (3, 13, 23) provided at one end with connection means for connection to the shaft/hub of a wind turbine, characterized in that after the provision of the connection part a rib is provided on in a plane that forms an angle, which on the pressure side lies between 45° and 135° to the chordal plane of said wind-energy-absorbing profile, it in such a way that the assembly comprising the rib (6, 16, 26) and the connection part can generate wind energy.

Dated this 15th day of November 2004

STICHTING ENERGIEONDERZOEK CENTRUM NEDERLAND
By their Patent Attorneys
COLLISON & CO

Fig 1

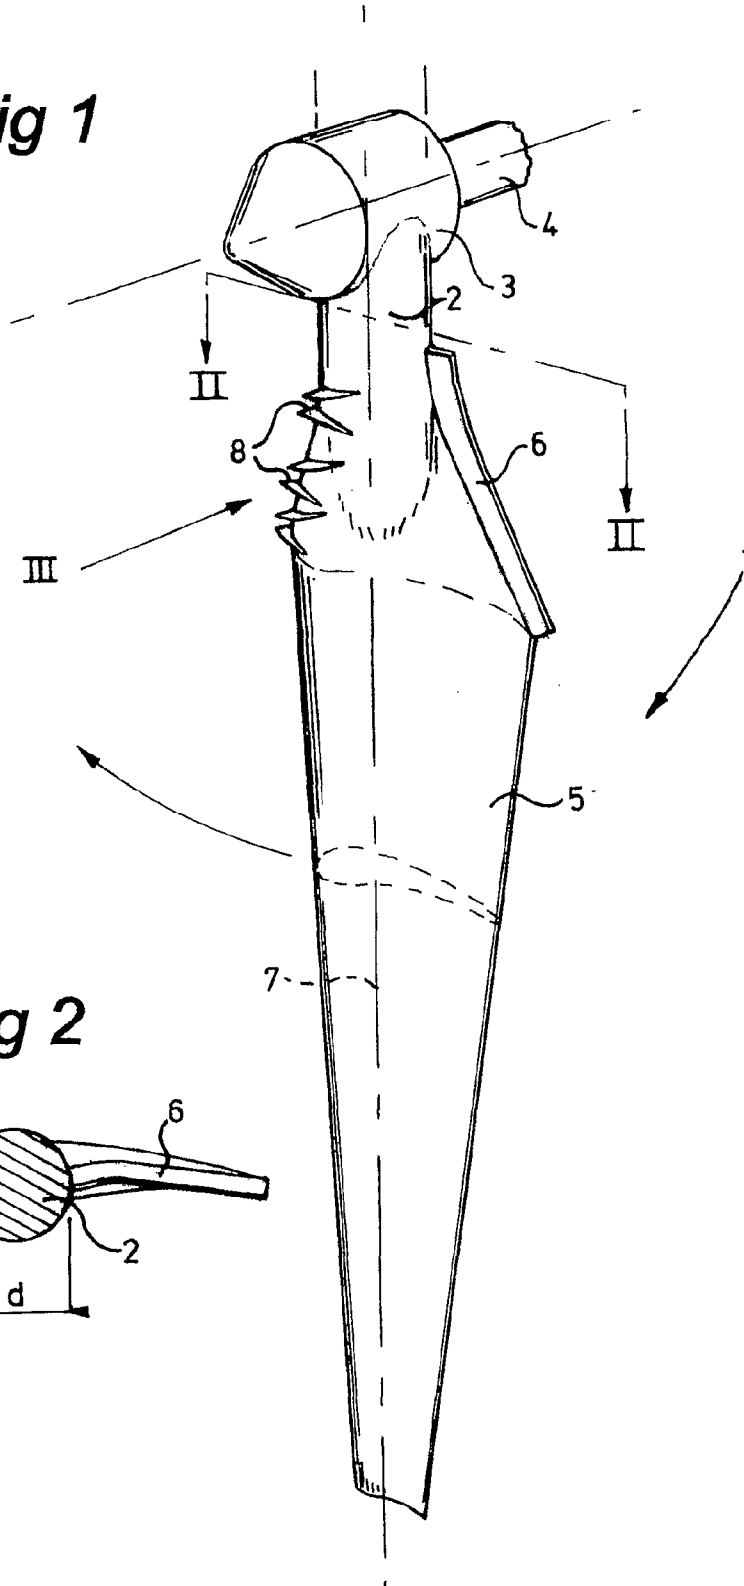


Fig 2

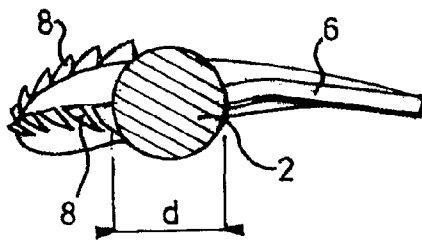


Fig 3

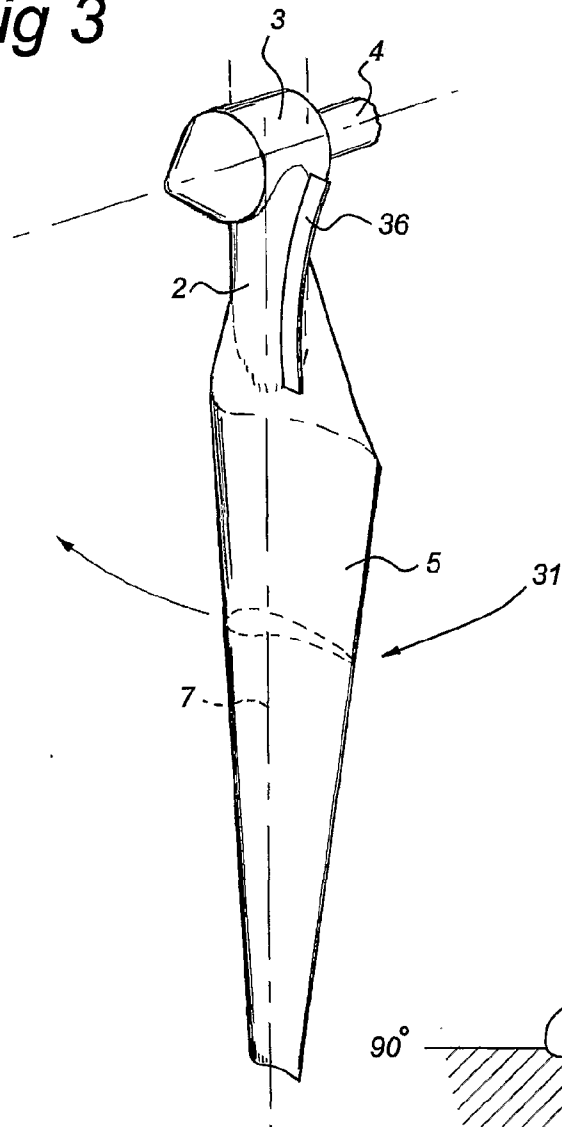


Fig 4

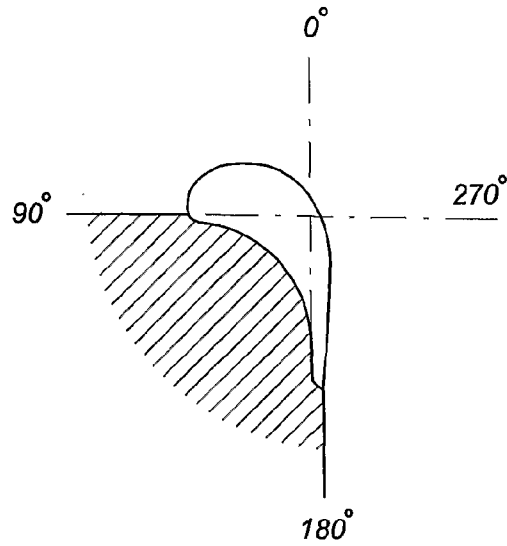


Fig 5

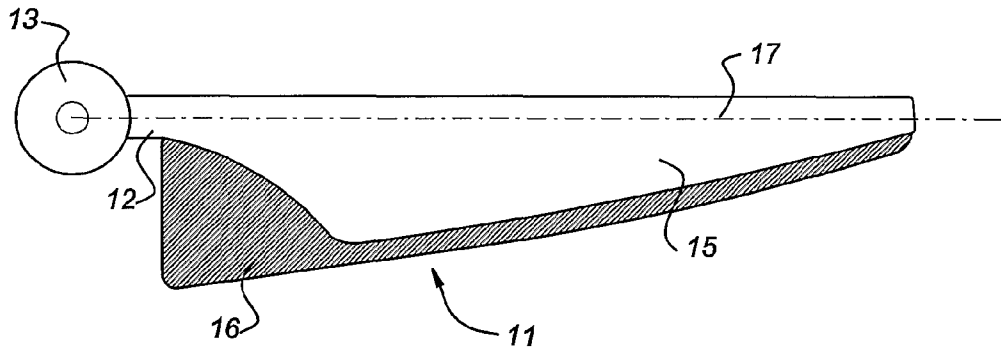


Fig 6

