

(12) PATENT APPLICATION
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 200163601 A1

(54) Title
Stackable cardboard carton with reinforced corners

(51)⁷ International Patent Classification(s)
B65D 005/20 B65D 021/032
B65D 005/28

(21) Application No: **200163601** (22) Application Date: **2001.08.22**

(30) Priority Data

(31) Number (32) Date (33) Country
PQ9581 2000.08.22 AU

(43) Publication Date : **2002.02.28**

(43) Publication Journal Date : **2002.02.28**


(71) Applicant(s)
Visy Board (NZ) Limited

(72) Inventor(s)
Clint Paul Moka

(74) Agent/Attorney
**FREEHILLS CARTER SMITH BEADLE, Level 43, 101 Collins Street, MELBOURNE
VIC 3000**

ABSTRACT

A container (1) is formed of side walls (2a) and end walls (2b) and a bottom wall (10). Support posts (5) are formed at each corner, the support posts being formed of a layer of material integral with the end walls (2b). Additional reinforcing (4) is formed by an additional layer of material integral with the posts (5) and folded back on itself.



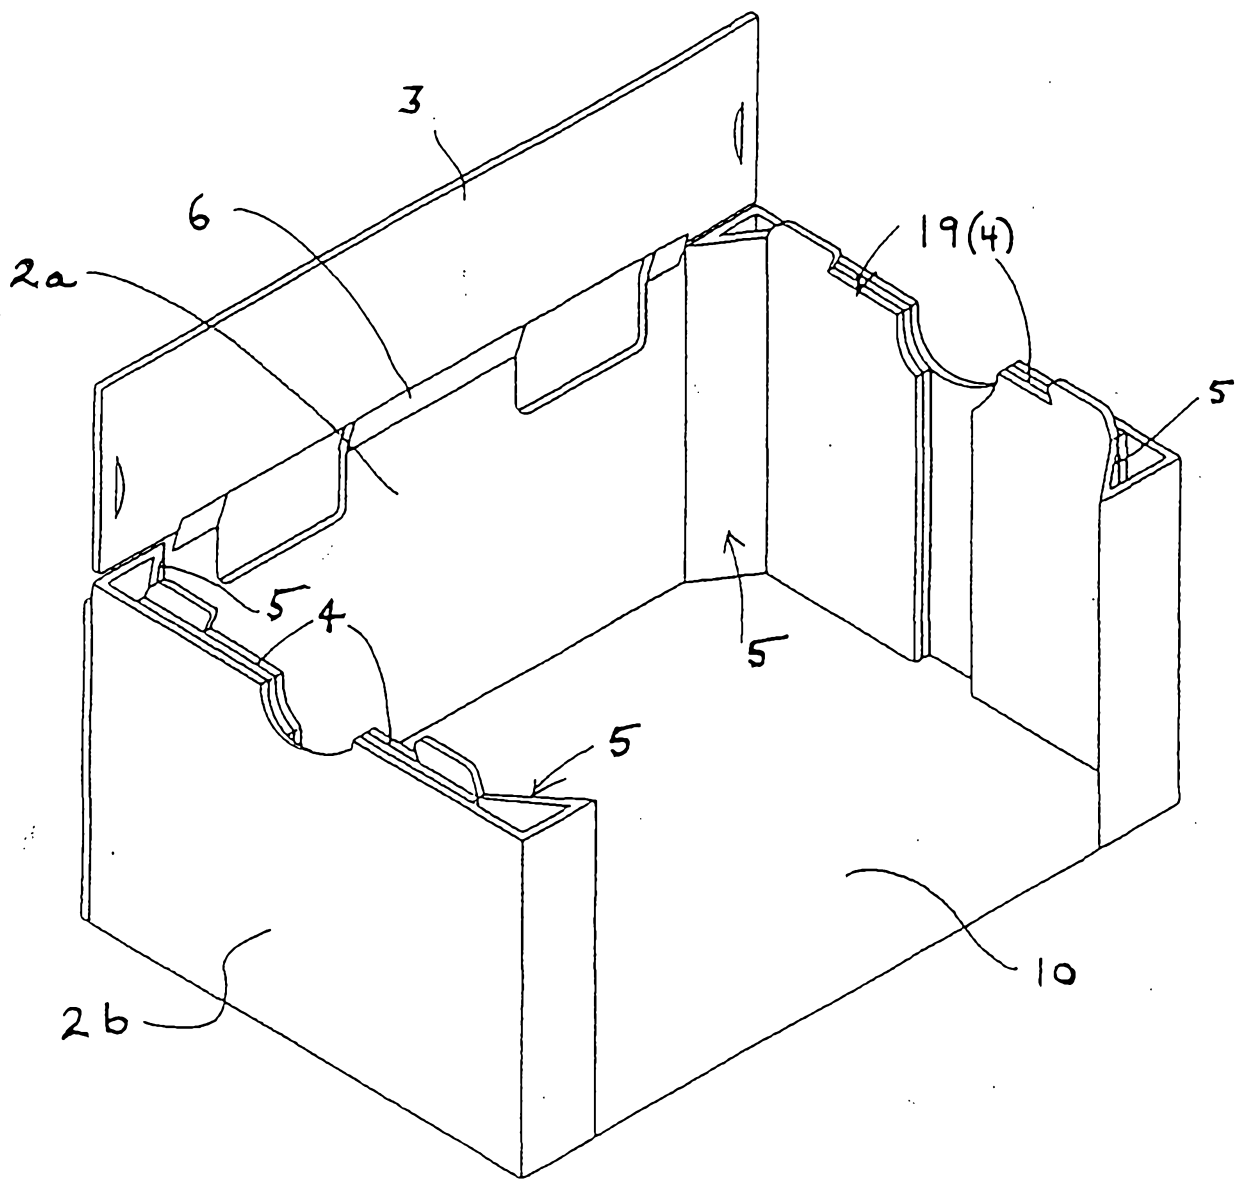


FIGURE 2

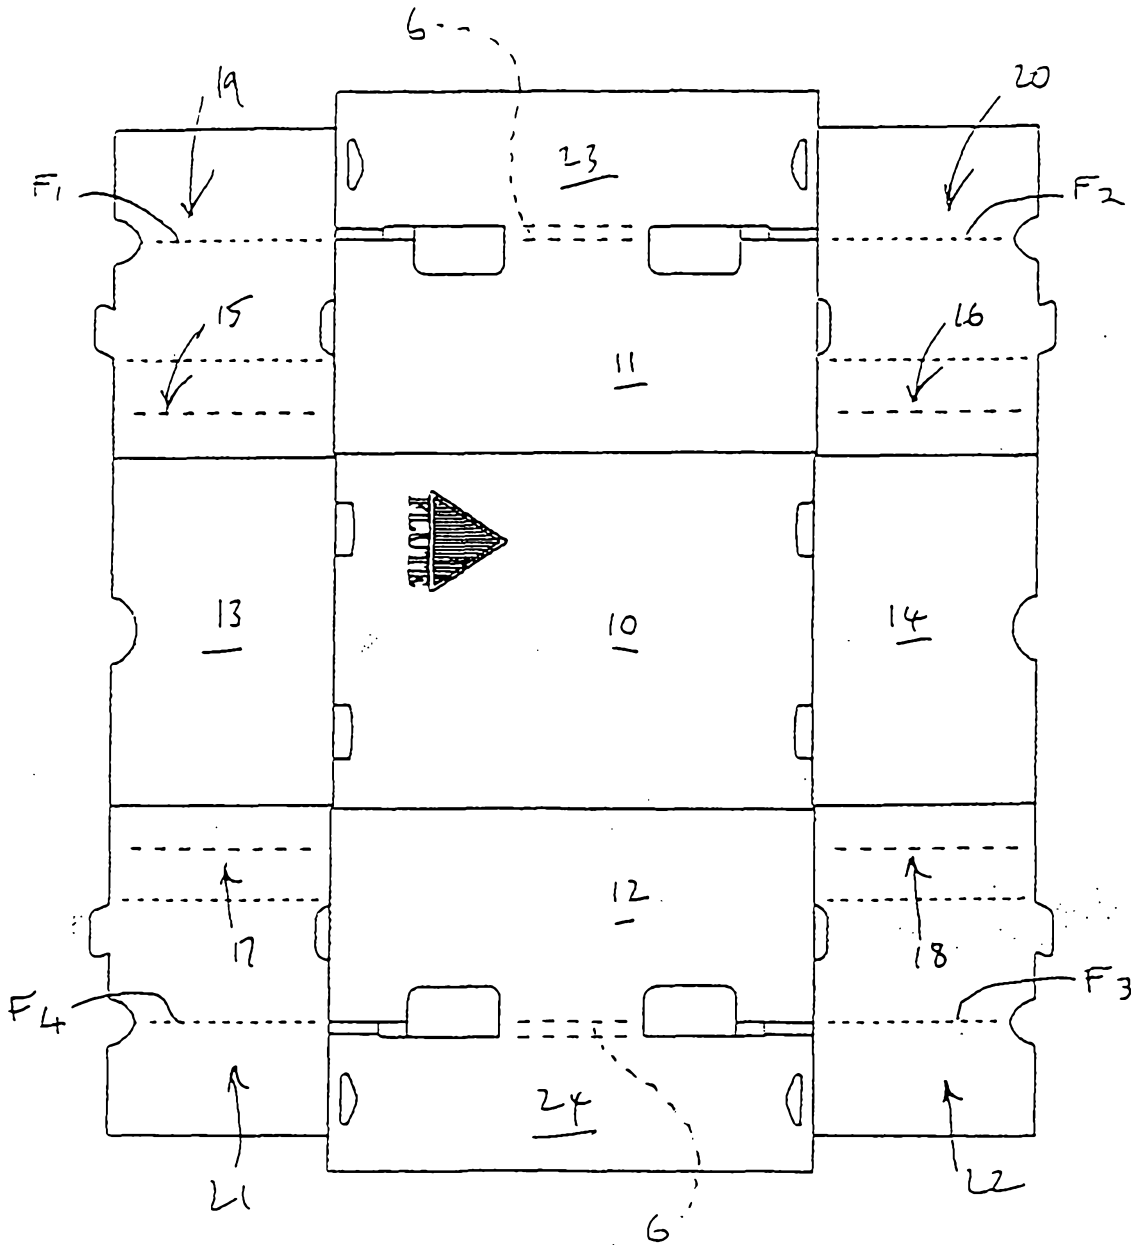


FIGURE 4

AUSTRALIA

Patents Act 1990

**ORIGINAL
COMPLETE SPECIFICATION
STANDARD PATENT**

Invention Title: **Improved container**

The following statement is a full description of this invention, including the best method of performing it known to us:

IMPROVED CONTAINER

Technical Field

This invention relates to improvements to containers. Specifically a container formed in accordance with the present invention may be constructed from
5 corrugated cardboard and may be used to form a substantially box shaped container with sufficient strength to allow numerous loaded containers to be stacked one on top of each other. Reference throughout this specification will also be made to the present invention being used to box, package or contain kiwifruit. However, those skilled in the art should appreciate that that reference throughout this specification
10 should in no way be seen as limiting.

Background Art

Numerous forms of containers are used to package products and articles to be transported. Containers may be used to protect products or articles from damage
15 during transportation, and also allow a large number of individual articles packaged within a container to be handled easily and quickly.

Where large volumes of products or individual articles are to be packaged or transported, it is common for a carton or box formed of corrugated cardboard to be used to contain same. In numerous instances cartons of packaged products will be
20 stacked one on top of each other on a pallet ready for transportation.

When cardboard cartons or boxes are stacked on top of each other, the boxes at the bottom of the stack can come under significant loads from the weight of the boxes above them. This can cause damage to the bottom boxes, causing them to bulge out at the sides and bottom faces, creating an unattractive and unsightly
25 package for the end consumer. Furthermore, as cardboard boxes deform under loads, the articles or products they contain can also be damaged by loads applied to the top of boxes.

This problem in corrugated cardboard boxes or trays has been addressed in the past by the use of reinforcing end posts in each corner of the carton or tray. A
30 well known example of such a carton or tray is marketed under the trade mark

VISOPOST. Another example of this type of cardboard carton or box is disclosed in New Zealand Patent No. 330617. In each of the above examples, additional lengths of cardboard sheeting are provided in the blank from which the box or tray is formed and these lengths are folded up at the corners of the resulting box or tray to create a pillar or post. The resulting post improves the load-bearing characteristics of the box or tray when placed in a stack.

The applicant has found that, while such corner post boxes have improved load bearing characteristics, they are not entirely suited to the packaging of some forms of food produce. For example, kiwifruit are packaged in boxes that need to be stored in high humidity environments for long periods of time. The moisture content in the surrounding air can saturate the cardboard used and therefore degrade the strength of the box and promote bulges forming under loads in the bottom and sides of the box. The applicants believe that, if the corner post boxes or trays outlined above were used in this environment, the high moisture content would cause the stacked boxes or trays to fail by bulging at the sides and bottom of the box.

An improved container that solved or addressed any or all of the above problems would be of advantage. Specifically an improved container constructed from cardboard with a strong structure resistant to compression when stacked in a high humidity environment would be of advantage.

It is an object of the present invention to address the foregoing problems or at least to provide the public with a useful choice.

Further aspects and advantages of the present invention will become apparent from the ensuing description that is given by way of example only.

Disclosure of the Invention

According to one aspect of the present invention there is provided a container formed of sheet material and including a base, opposed side walls, and opposed end walls, at least one corner support formed of at least one layer of said sheet material, and a reinforcing, additional support adjacent the corner support formed of a layer

of material being folded back over itself at least once.

In one form, the corner support includes a corner post structure and the additional support is positioned adjacent the corner post structure, preferably inside a wall of the container, such as an end wall or side wall thereof.

5 Preferably, the container includes a known corner post structure to which a flap which is folded on itself is attached to define a double thickness reinforcing container which is secured to a wall of the container to form a layer of triple thickness.

10 According to another aspect of the present invention there is provided a blank for forming a container which includes at least one portion foldable into an additional support to form a container as defined above.

The foldable portion of the box blank may be folded over itself to provide a double layer of cardboard in the vicinity of a corner support.

15 The container or blank defined above is preferably formed from a corrugated brand material and includes a bottom and at least four side walls, the corrugations provided in said container bottom preferably running in the same direction as the corrugations provided in at least one of said container side walls.

20 In a further preferred embodiment corrugations in the bottom of the box may run substantially in the same direction as corrugations provided in a non-reinforced or single layer side walls of the box.

25 By running the corrugation in the two non-reinforced side walls of the box in the same directions as the corrugations in the bottom of the box, this adds to the overall strength of the bottom of the box. The two non-reinforced side walls act to support or reinforce the bottom of the box, and thereby alleviate or reduce the chances of the bottom of the box failing when placed under heavy load conditions. This will obviate or minimise "bottom bulge" occurring in the resulting box, thereby providing an attractive and strong package for the end user of the products or articles to be packaged.

30 The present invention is adapted to provide a container that can be used to package and/or easily transport any number of different types of articles. Such

containers may be used in a wide range and a number of industries, but reference throughout this specification will be made to the present invention being used to provide a container, carton, box or tray for the packaging and transportation of produce such as kiwifruit. Those skilled in the art should appreciate that reference
 5 to the packaging and transportation of kiwifruit only throughout this specification should in no way be seen as limiting, as the present invention may be used in numerous other applications and industries.

In a preferred embodiment a container formed in accordance with the present invention may be provided with a substantially rectangular shape with a bottom face
 10 and four side walls or two side walls and two end walls. The container may also be provided with a partial or complete lid or closure which may be hinged to the side walls along a fold or score line.

In a preferred embodiment a box formed in accordance with the present invention may be constructed from corrugated cardboard.

15

Brief Description of the Drawings

Further aspects of the present invention will become apparent from the following description that is given by way of example only and with reference to the accompanying drawings in which:

20 Figure 1 illustrates a perspective view of a container as configured in accordance with one embodiment of the present invention;

Figure 2 is a top open perspective view of the container in Figure 1 partly cut away to show the reinforcing structure;

25 Figure 3 is an open topped perspective view of the same container of Figures 1 and 2, and

Figure 4 illustrates a blank from which the container of Figures 1 and 3 may be formed.

Best Modes for Carrying out the Invention

30 Figures 1, 2, 3 and 4 show a container configured in accordance with a

preferred embodiment. The container in question is shown in a perspective view in Figure 1, a top view in Figure 2 and a side view in Figure 3. Figure 4 shows a blank for forming the container of Figures 1 to 3.

In the embodiment shown the container is configured as a box 1 which is formed to include side walls 2a, end walls 2b, top surface flaps 3 and a bottom 10.

Each corner of the box 1 includes a corner support post 5 (Figs. 2 and 3) which is adapted to reinforce the corners and side walls of the box. The two end walls 2b are substantially reinforced when compared with the two side walls 2a by additional layers of cardboard from the blank used to form the box. In this embodiment portions of the blank are folded over themselves at least twice in the formation of a corner support. These double layers of reinforcing 4 are provided only at the end walls 2b of the resulting box and integral with the posts. This significantly reinforces the end walls 2b while leaving the side walls 2a to be formed from a single layer of cardboard only. The formation of the reinforcing double layers 4 as an integral part of the corner support posts 5 ensures integrity of the posts along their length obviating any tendency to splay outwardly on application of vertical forces.

In the embodiment shown, both top surface flaps 3 are connected to the side walls 2a through a strip of material 6. This strip 6 is preferably formed through weakening the material of the cardboard blank through score lines, perforations, cuts or small apertures. By connecting a top flap 3 to a side wall 2a in this manner, the forces developed from loads placed on the top flap 3 are not transmitted directly through to a side wall 2a. These loads will, therefore, be directed onto the reinforced end walls 2b and corner posts 5 and be supported by same. The strips of material 6 connecting a top flap 3 to a side wall 2a will allow the top flap 3 to flex downwards under load, thereby reducing the chances of a load on the top of the box being transferred into a side wall 2a.

Referring now to Figure 4, the blank includes a box base 10, side walls 11 and 12, end walls 13 and 14, and corner posts 15, 16, 17 and 18, to which are attached additional reinforcing flaps 19, 20, 21 and 22, which are folded along fold

lines F1 to F4, and then glued together, before the corner posts are assembled, to define in the erected box or tray the additional reinforcing layers 4 described above. These layers 4 are glued in the folded and glued condition to the inside face of the end walls 13-14 (numeral 2b in Figures 1 to 3) to provide with the end walls a triple layer of material to reinforce the load carrying capacity of the corner posts 5 in the box or tray.

The blank also has top flaps or lids 23 and 24 (numeral 3 in Figs 1 to 3) which extend from the side walls 11 and 12 and are bent along parallel fold lines as illustrated.

The blank of Figure 4 is designed to be machine erected by a known corner post machine modified to fold and glue the flaps 19 to 22 before the blank is erected in the known manner to form the reinforced corner post box or tray embodying the invention.

The dimensional relationship of the blank of Figure 4 are illustrative of one particular embodiment only and may be varied to provide boxes or trays of different dimensions.

The use of a corner support in combination with the provision of reinforced layers on two of the end walls of the container substantially reinforce, these sections of the resulting box. Furthermore, by connecting the top surfaces or lids of the container to the appropriate reinforced side walls through a strip of material ensures that substantially all the load placed on the top of the box will be transferred onto the reinforced end walls and corner posts.

As the non reinforced side walls 2a need not support any load placed on them directly from above they may in turn be configured to support or reinforce the bottom 10 of the container 1 through having the corrugations of the corrugated material of which the blank is made run substantially in the same direction as the corrugations provided on the bottom of the box which is preferably in the direction of end to end.

The claims defining the invention are as follows:

1. A container formed of sheet material and including a base, opposed side walls, and opposed end walls, at least one corner support formed of at least one layer of said sheet material, and a reinforcing, additional support adjacent the corner support formed of a layer of material being folded back over itself at least once.
2. A container according to claim 1 wherein the corner support comprises a corner post structure.
3. A container according to claim 1 or claim 2 wherein the corner support is inside an end or side wall of the container.
4. A container according to any one of claims 1 to 3 wherein a corner support is formed at each corner of a rectangular, box-shaped container, each support being formed of a material layer integral with the layer forming a side wall or an end wall.
5. A container according to claim 4 wherein the reinforcing support is formed of the layer of the associated corner support.
6. A container according to any one of claims 1 to 5 wherein the material folded back over itself is adhered to itself by adhesive.
7. A container according to any one of the preceding claims wherein the reinforcing support is adhered to an adjacent side or end wall by adhesive.
8. A container according to any one of the preceding claims wherein the reinforcing additional support is engaged with an end wall.
9. A container according to any one of the preceding claims wherein a lid panel

is formed integral with at least one side wall, the lid panel being connected to the side wall by one or more strips of material which separate the lid from the respective side wall.

5 10. A container according to claim 9 wherein a lid panel is formed integral with each side wall, each lid panel being connected by one or more strips of material.

11. A container according to claim 9 or claim 10 wherein the strip or strips are defined by lines of weaknesses formed by scoring, perforations, cuts or apertures.

10

12. A container according to any one of the preceding claims wherein the sheet material from which the container is formed is corrugated cardboard or fluted plastics material, with the corrugations extending in the direction of end to end.

15 13. A container blank for forming a container from sheet material including integral panels defining a bottom, side and end walls, and additional panels integral with the end wall panels and extending from opposite edges thereof, the additional panels each defining a corner support and a reinforcing support which is formed by folding the sheet material back on itself.

20 14. A container blank according to claim 13 further including lid panels connected to the side panels through one or more strips of material.

25 15. A container blank according to claim 13 or claim 14 formed of corrugated cardboard or fluted plastics material with the corrugations or flutes extending in the direction from one end panel to the other.

16. A container substantially as hereinbefore described with reference to the accompanying drawings.

17. A container blank substantially as hereinbefore described with reference to the accompanying drawings.

5

DATED this 22nd day of August 2001

FREEHILLS CARTER SMITH BEADLE

Patent Attorneys for the Applicant

VISY (NZ) LIMITED



200103001

1/4

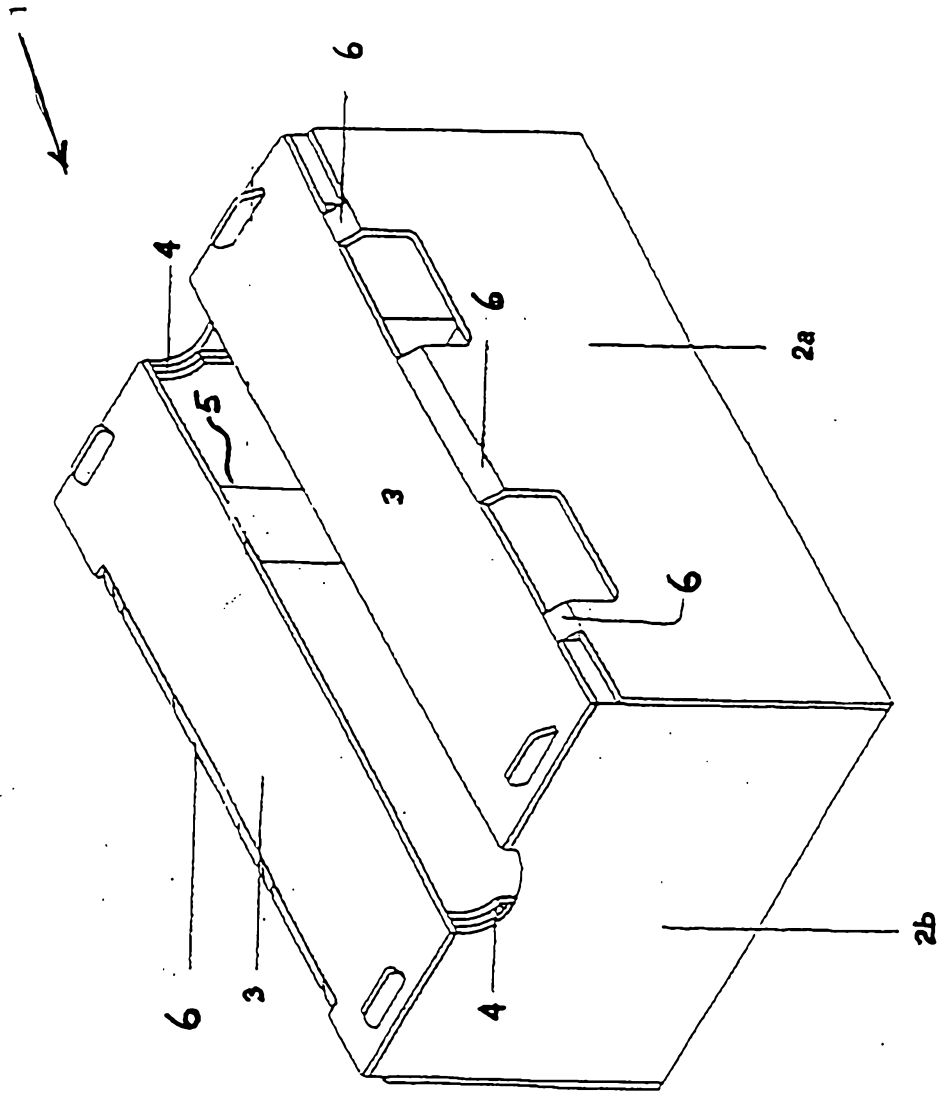


FIGURE 1

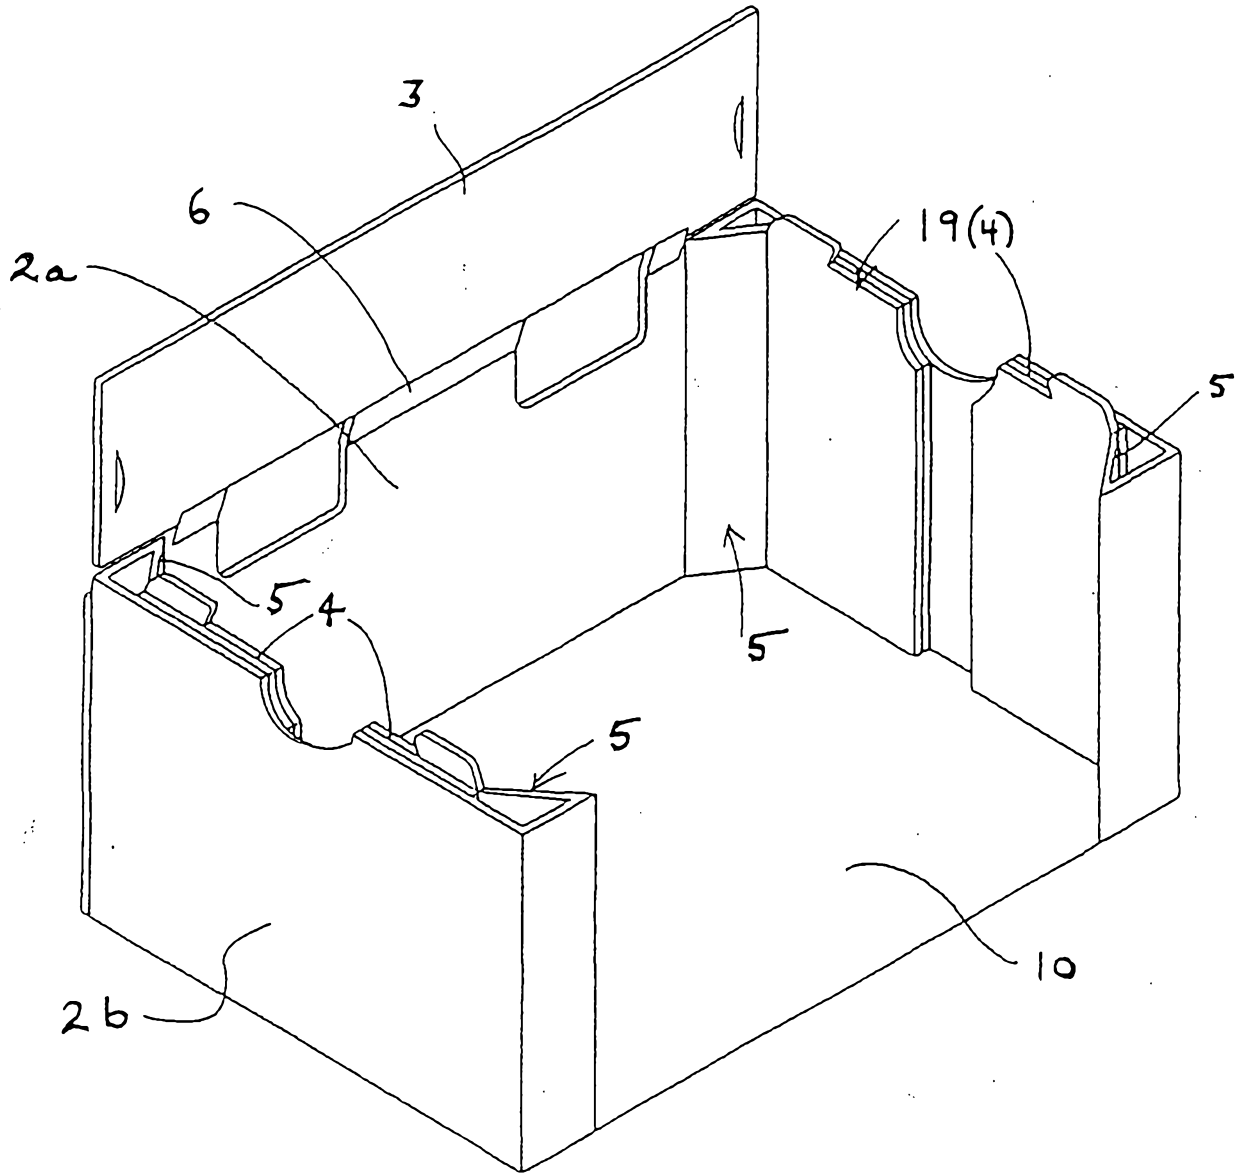


FIGURE 2

3/4

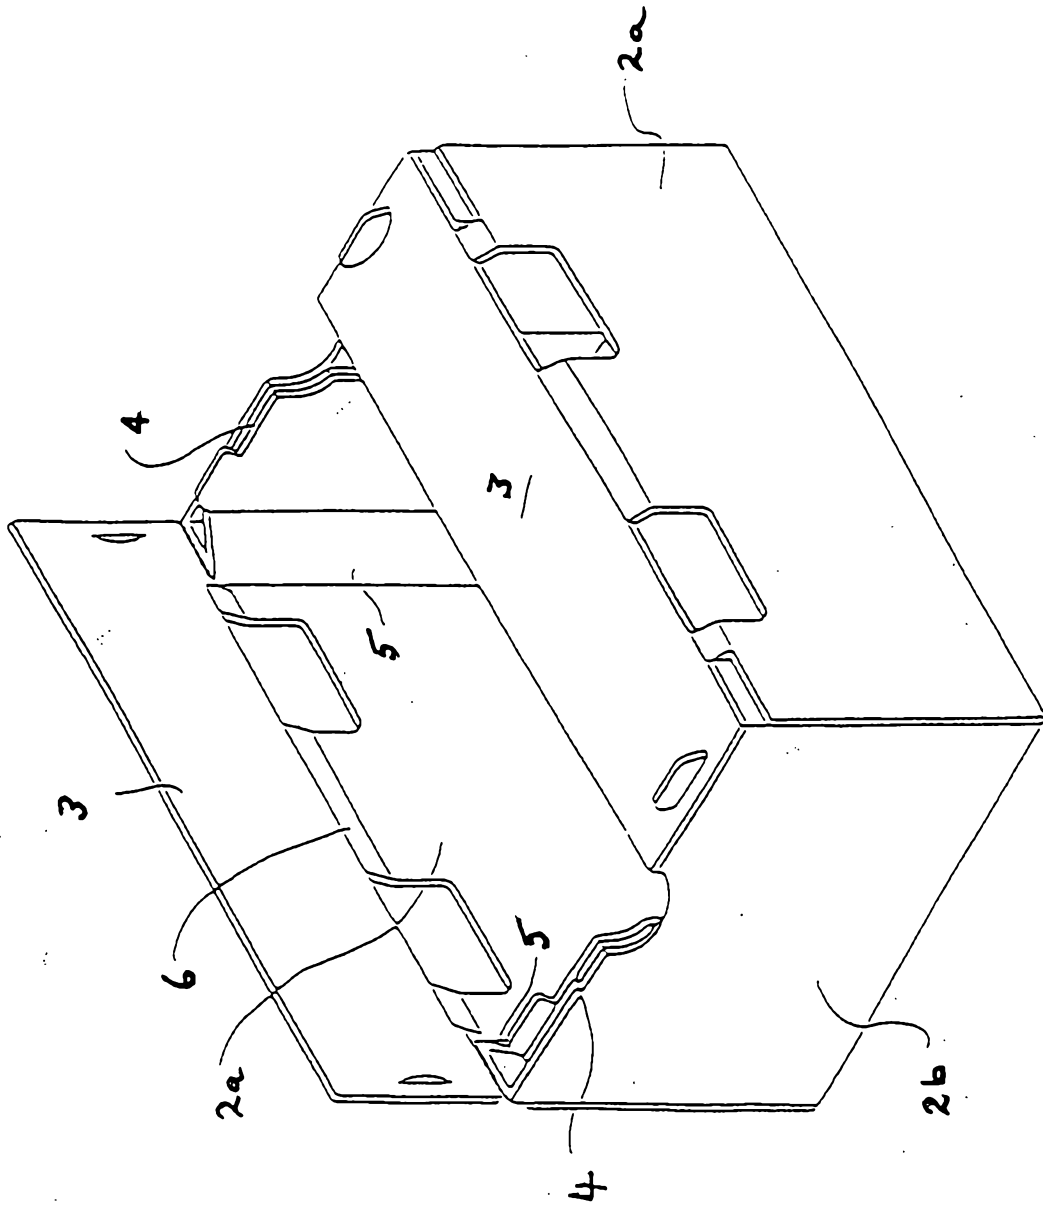


FIGURE 3

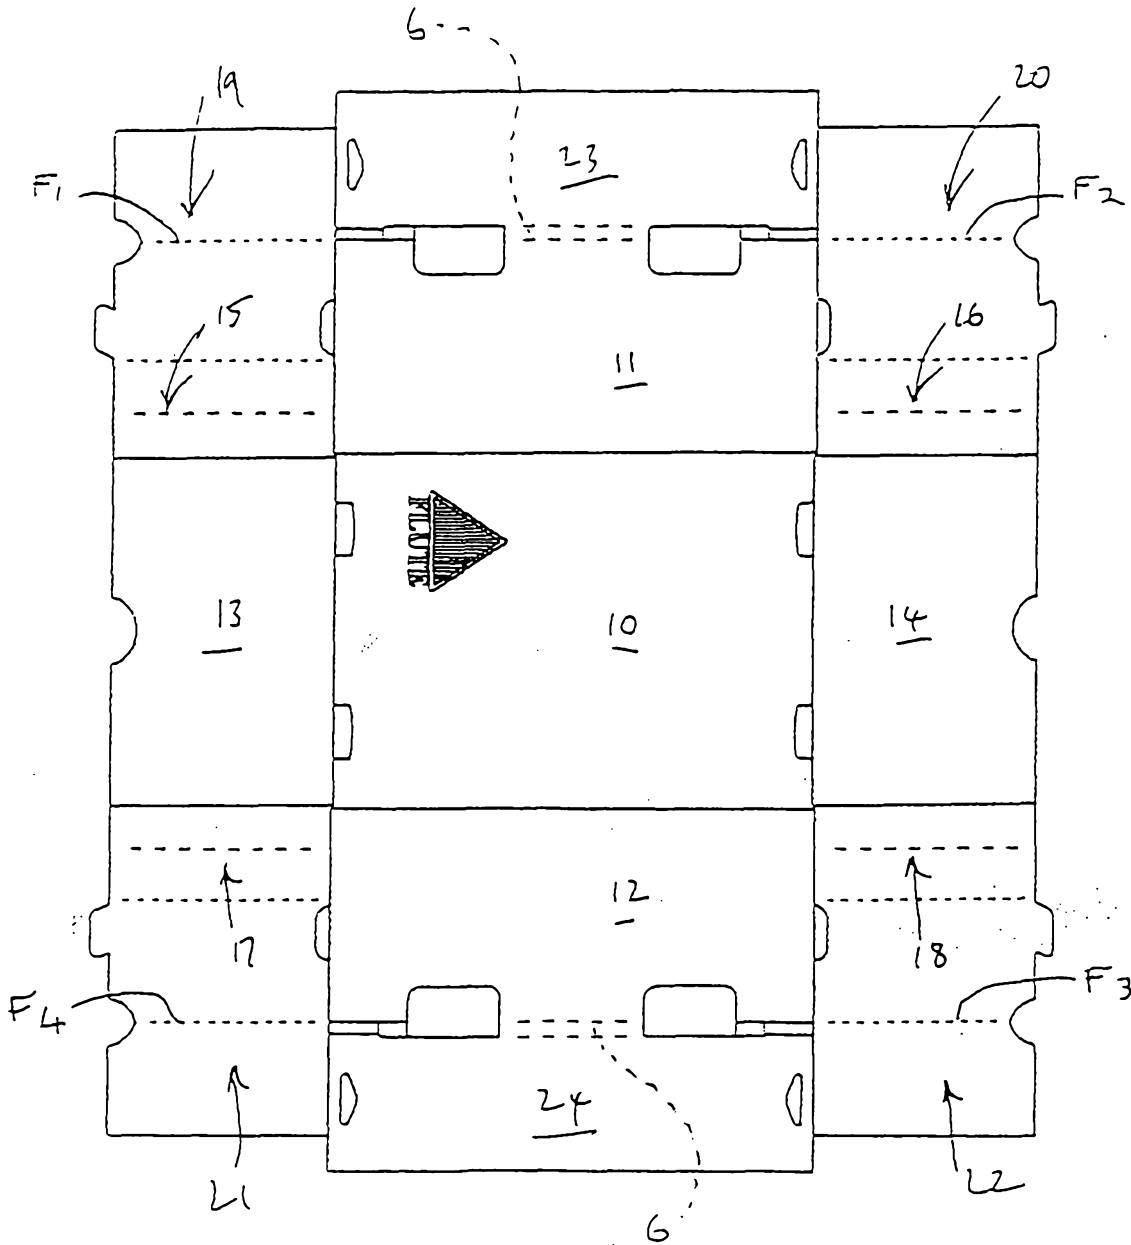


FIGURE 4