



(51) International Patent Classification:

H04W 56/00 (2009.01) H04W 24/02 (2009.01)
H04W 52/02 (2009.01) H04W 52/00 (2009.01)
H04J 3/06 (2006.01) G06F 1/14 (2006.01)

(21) International Application Number:

PCT/IB2013/059917

(22) International Filing Date:

5 November 2013 (05.11.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/722,628 5 November 2012 (05.11.2012) US
14/070,758 4 November 2013 (04.11.2013) US

(71) Applicant: TELEFONAKTIEBOLAGET L M ERICSSON (PUBL) [SE/SE]; 164 83, S-164 83 Stockholm (SE).

(72) Inventors: SIOMINA, Iana; Mäster Simons Väg 20, D41, SE-170 66 Solna (SE). KAZMI, Muhammad; Svartviksslingan 110, SE-167 39 Bromma (SE).

(74) Agents: CASON, Todd et al.; 6300 Legacy, MS EVR 1-C-11, Plano, Texas 75024 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available):

AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available):

ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: SYSTEMS AND METHODS FOR MAINTAINING TIME STAMPING ACCURACY TO MEET A NON-LINEAR TIME DRIFT CONSTRAINT


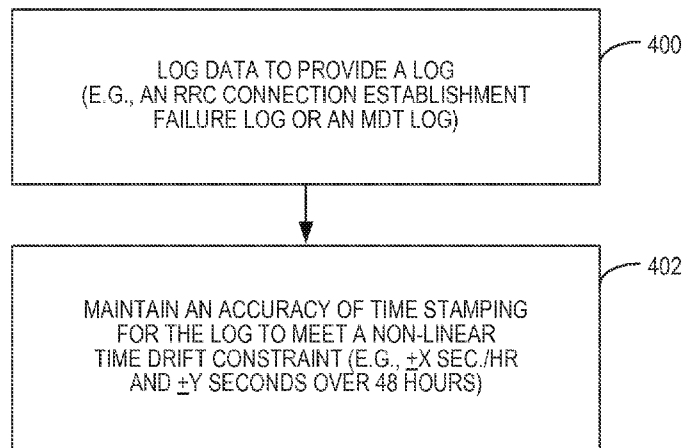


FIG. 8

(57) Abstract: Systems and methods for maintaining time stamping accuracy are disclosed. In one embodiment, a wireless device (14) in a cellular communications network (10) logs data to provide a log. The wireless device (14) maintains an accuracy of time stamping for the log to meet, or satisfy, a non-linear time drift constraint. In one embodiment, the log is one or more of a Radio Resource Control (RRC) connection establishment failure log, a radio link failure log, a random access failure log, a paging channel failure log, a broadcast channel failure log, data related to failure of one or more specific channels, and a radio measurement. In another embodiment, the log is a Minimization of Drive Tests (MDT) log.



WO 2014/068546 A1

- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

SYSTEMS AND METHODS FOR MAINTAINING TIME STAMPING ACCURACY TO MEET A NON-LINEAR TIME DRIFT CONSTRAINT

Related Applications

5 This application claims the benefit of provisional patent application serial number 61/722,628, filed November 5, 2012, the disclosure of which is hereby incorporated herein by reference in its entirety.

Field of the Disclosure

10 The present disclosure relates to logging and reporting data in a wireless communications network and, more specifically, to maintaining time stamping accuracy for logging and reporting of data in a wireless communications network.

Background

15 Non-real time measurements and background services are becoming more and more common in cellular communications networks. More and more information is being exchanged between the cellular communications network and wireless devices in the cellular communications network for various purposes, e.g., file sharing, measurements reporting for Minimization of Drive Tests (MDT), etc. Deploying radio
20 nodes that provide a specific service or a restricted set of services becomes more justified in such wireless network architectures. Third Generation Partnership Project (3GPP) standards, however, provide limited possibilities for using such specialized service nodes, and in particular provide limited possibilities for specialized service nodes facilitating non-real time information collection throughout the cellular
25 communications network. To enable full functionality, such specialized service nodes would have to, at a minimum, announce their presence and availability and, in one way or another, indicate the service(s) being provided by the specialized service node.

 One example application of collecting non-real time measurements is MDT and enhanced MDT, which is being standardized for Universal Mobile Telecommunications
30 System (UMTS) and Long Term Evolution (LTE). MDT is used as a means to compensate or partially replace costly drive tests an operator will otherwise have to perform by configuring a selection of User Equipment devices (UEs) in active or idle mode to do certain types of measurements, as specified in 3GPP Technical Report (TR)

36.805 (“Evolved Universal Terrestrial Radio Access (E-UTRA); Study on minimization of drive-tests in next generation networks”) and 3GPP TR 37.320 (“Radio measurement collection for Minimization of Drive Tests (MDT)”). The selection can be made based on International Mobile Subscriber Identity (IMSI), International
5 Mobile Equipment Identity (IMEI), area, device capabilities, and any combinations thereof.

So far, the following use cases for MDT have been identified:

- Coverage optimization,
- Mobility optimization,
- 10 • Capacity optimization,
- Parameterization for common channels, and
- Quality of Service (QoS) verification.

Two modes of MDT exist, immediate MDT and logged MDT. Immediate MDT is the MDT functionality involving measurement performance by a UE in a high Radio
15 Resource Control (RRC) activity state (e.g., RRC CONNECTED state in LTE, CELL_DCH state in Universal Terrestrial Radio Access (UTRA) Frequency Division Duplexing (FDD) and UTRA Time Division Duplexing (TDD), etc.) and reporting of the measurements to a network node (e.g., an Evolved Node B (eNB), a Radio Network Controller (RNC), a Node B (NB), a Base Station Controller (BSC), a Base Station
20 (BS), a relay, etc.) available at the time of the occurrence of a reporting condition. Logged MDT is the MDT functionality involving measurement performance by a UE when operating in a low RRC activity state (e.g., RRC_IDLE in LTE and idle mode, CELL_PCH, URA_PCH or CELL_FACH states in UTRA FDD or UTRA TDD, etc.). The logging in a low activity state is carried out by the UE at points when configured
25 conditions are satisfied. The measurement log is stored for reporting of measurements to a network node (e.g., eNB, Radio Network Controller (RNC) Node B (NB), BSC, BS, relay, etc.) at a later point in time.

One possible requirement for MDT in particular implementations is that the measurements in measurement logs and the reported measurements for immediate
30 MDT are linked to available location information and/or other information or measurements that can be used to derive location information (e.g., Reference Signal Received Power (RSRP) measurements may be selected for this purpose in some

implementations). The measurements in the measurement logs are also linked to a time stamp that is available in the UE.

In various implementations, the following measurements logs (or suitable alternatives) may be utilized:

- 5 • Periodical downlink pilot measurements,
- Serving cell becomes worse than threshold,
- Transmit power headroom becomes less than threshold,
- Random access failure,
- Paging channel failure,
- 10 • Broadcast channel failure, and
- Radio link failure report.

In addition to the information which may be specific for the type of the log, all of the measurement logs listed above include at least the following:

- 15 • Location information when available (e.g., the location at which the concerned trigger and/or measurement took place),
- Time information (e.g., the time at which the concerned trigger and/or measurement took place),
- Cell identification (at least the serving cell is always included), and
- 20 • Radio environment measurement (e.g., cell measurements that are available at the trigger for the logged measurement and/or average cell measurements during a certain period before/after the trigger for the logged measurement, where the cell measurements include RSRP and Reference Signal Received Quality (RSRQ) measurements).

25 Signaling of MDT measurements and logs, including the associated location information, is via RRC signaling. For logged MDT, the configuration, measurement collection, and reporting of the concerned measurements will always be done in cells of the same Radio Access Technology (RAT) type. There is only one RAT-specific logged measurement configuration for logged MDT in the UE, and it is left up to the cellular communications network to retrieve any relevant data before providing a new
30 configuration (e.g. for another RAT) since the previous log may be cleared.

When a logging area is configured, logged MDT measurements are performed as long as the UE is within this logging area. When the UE is not in the logging area or

a Registered Public Land Mobile Network (PLMN) (RPLMN) of the UE is not part of an MDT PLMN list, logging is suspended, i.e. the logged measurement configuration and the log are kept (until a logging duration timer expires), but measurement results are not logged and the logging duration timer continues. In case a new PLMN that
5 does not belong to the MDT PLMN list provides a logged measurement configuration, any previous logged measurement configuration and the corresponding log are cleared and overwritten without being retrieved by the cellular communications network.

Logged MDT measurements are configured with an MDT Measurement Configuration procedure, which is illustrated in Figure 1. As shown, the cellular
10 communications network, specifically the Radio Access Network (RAN) (i.e., the Universal Terrestrial Radio Access Network (UTRAN) or Evolved Universal Terrestrial Radio Access Network (E-UTRAN)), initiates the procedure to a UE in RRC Connected state by sending a LoggedMeasurementConfiguration message to the UE (step 100). The LoggedMeasurementConfiguration message is sent in the
15 Downlink (DL) Dedicated Control Channel (DCCH) Message class, which is a set of RRC messages that may be sent from the E-UTRAN to the UE or from the E-UTRAN to the relay node on the DL DCCH logical channel. The LoggedMeasurementConfiguration message is used to transfer configuration parameters for logged MDT. A release operation for logged measurement
20 configuration in the UE is realized only by replacing the logged measurement configuration with a new configuration (i.e., when the logged measurement configuration is overwritten) or by clearing the logged measurement configuration when a duration timer has expired or an expiration condition is met. The format of the LoggedMeasurementConfiguration message is illustrated in Figure 2.

25 At the UE, upon receiving the LoggedMeasurementConfiguration message, the UE starts a timer T330 with the timer value set to a LoggingDuration specified in the LoggedMeasurementConfiguration message. Upon expiry of the timer T330 or when memory reserved for the logged measurement information becomes full (which triggers T330 expiry), the UE is allowed to discard VarLogMeasConfig. VarLogMeasConfig is
30 defined in 3GPP Technical Specification (TS) 36.331 as the UE variable that includes the configuration of the logging of measurements to be performed by the UE while in RRC_IDLE, covering intra-frequency, inter-frequency, and inter-RAT mobility related

measurements. The variable VarLogMeasConfig is signaled to the UE by the network node in an RRC message. Forty-eight (48) hours after expiry of the timer T330, the UE is also allowed to discard the stored logged measurements and VarLogMeasReport. VarLogMeasReport is also defined in 3GPP TS 36.331 as the UE variable that includes
5 the logged measurements information. The UE variable VarLogMeasReport is also signaled to the UE by the network node in an RRC message.

Within the LoggedMeasurementConfiguration message, LoggingDuration defines an amount of time that measurements are to be logged after the UE receives the LoggedMeasurementConfiguration message. LoggingDuration is one of the predefined
10 values in the range of 10 minutes to 120 minutes. LoggingInterval is an interval of measurement logging and is one of the predefined values in the range of 1.28 seconds to 2.56 seconds. The Trace Collection Entity (TCE) Identifier (ID), tce-Id, denotes a particular TCE. The UE returns the tce-Id to the cellular communications network together with the logged data. The cellular communications network has a configured
15 mapping of an Internet Protocol (IP) address of the TCE (to which corresponding trace records are transferred) and the TCE ID. The mapping needs to be unique within the PLMN.

If areaConfiguration is configured, the UE will log measurements as long as the UE is within the configured logging area. The scope of the logging area may consist of
20 one of a list of 32 global cell identities. If this list is configured, the UE will only log measurements when camping in any of these cells. Alternatively, the logging area may consist of a list of eight Tracking Areas (TAs), eight Local Areas (LAs), or eight Registered Areas (RAs). If this list is configured, the UE will only log measurements when camping in any cell belonging to the preconfigured TA/LA/RAs. If no logging
25 area is configured, the logged measurement configuration is valid in the entire MDT PLMN of the UE, i.e. the UE will log measurements throughout the MDT PLMN.

Figure 3 illustrates an example of logged MDT reporting as described in 3GPP TS 32.421, "Telecommunication management; Subscriber and equipment trace; Trace concepts and requirements," V11.4.0, September 2012 and 3GPP TS 32.422,
30 "Telecommunication management; Subscriber and equipment trace; Trace control and configuration management," V11.5.0, September 2012, both of which are incorporated herein by reference herein their entireties. In case of logged MDT, the UE collects the

measurements while it is in IDLE mode. As illustrated, MDT is configured as discussed above (step 200). The UE enters the IDLE mode (step 202). While in the IDLE mode, the UE performs MDT measurement logging (step 204). Sometime after measurement logging is complete (i.e., after the logging duration has expired), the UE
5 enters the RRC CONNECTED mode (step 206), and the UE indicates MDT log availability in an RRCConnectionSetupComplete message sent to the RNC/eNB (step 208). The UE will not indicate MDT log availability in another RAT or in another RPLMN.

When the RNC/eNB receives the indication of the MDT log availability, the
10 RNC/eNB can request the MDT log (if the UE is still in the same RAT type where the MDT configuration was done) by sending a UEInformationRequest message to the UE (step 210). The MDT log is then sent to the RNC/eNB in a UEInformationResponse message (step 212). The reporting may occur in different cells than which the logged measurement configuration is signaled. At the reception of the
15 UEInformationResponse message, the RNC/eNB saves the received MDT log to a trace record (step 214) and sends the trace record to the corresponding TCE (step 216).

The reported MDT log consists of measurement results for the serving cell of the UE (the measurement quantity), available UE measurements performed in IDLE mode for intra-frequency/inter-frequency/inter-RAT, time stamps, and location
20 information. The number of neighboring cells to be logged is limited by a fixed upper limit per frequency for each category (e.g., six for intra-frequency neighboring cells, three for inter-frequency neighboring cells, etc.). The measurement reports for neighboring cells (which are part of the same MDT log/report as the measurements for the serving cell but contained in different Information Elements (IEs)) consist of:
25 Physical Cell Identity (PCI) of the logged cell, carrier frequency, RSRP and RSRQ for E-UTRA, Received Signal Code Power (RSCP) and Energy per Chip (E_c) / Noise Spectral Density (N_o) for UTRA, Primary Common Control Physical Channel (P-CCPCH) RSCP for UTRA 1.28 TDD, Received Signal Level (Rxlev) for Global System for Mobile Communications Edge Radio Access Network (GERAN), and Pilot
30 Pseudo noise (Pn) Phase and Pilot Strength for Code Division Multiple Access (CDMA) 2000.

In case of immediate MDT, as illustrated in Figure 4, the MDT is first configured as discussed above (step 300). For immediate MDT, the UE is in RRC CONNECTED mode. The UE periodically logs MDT measurements and reports the logged MDT measurements to the RNC/eNB via RRC signaling (as part of existing
5 RRC measurements) where the logged MDT measurements are stored to a trace record (steps 302 through 312). The immediate MDT measurement reports are periodic (with intervals in the range of 120 milliseconds (ms) to 1 hour) or event-triggered. The trace records are sent to the TCE via an Element Manager (EM), where the EM can reside in the RNC/eNB (steps 314 and 316).

10 In addition to MDT logs, the UE logs failed RRC connection establishments for LTE and UMTS, i.e. a log is created when the RRC connection establishment procedure fails. For LTE, the trigger for creating a log related to a failed RRC connection establishment is when timer T300 expires. For UMTS, the trigger for creating a log related to a failed RRC connection establishment is when V300 is greater
15 than N300. Unlike logged MDT and immediate MDT, the UE logs failed RRC connection establishments without the need for prior configuration by the cellular communications network.

For an RRC connection establishment failure log, the UE stores the selected PLMN on the RRC connection establishment failure. The UE may report the RRC
20 connection establishment failure log only if that PLMN is the same as the RPLMN. The RRC connection establishment failure log includes:

- Time stamp, which is the elapsed time between logging and reporting the log,
- The global cell identity of the serving cell when the RRC connection establishment fails, i.e. the cell which the UE attempted to access,
25
- The latest available radio measurements for any frequency or RAT,
- The latest detailed location information, if available,
- For LTE:
 - Number of random access preambles transmitted,
 - 30 ○ Indication whether the maximum transmission power was used, and
 - Contention detected,
- For UMTS FDD:

- Number of RRC Connection Request attempts (e.g., T300 expiry after receiving an Acknowledgement (ACK) and an Acquisition Indicator Channel (AICH)),
- Indication of probable contention, e.g. mismatch of UE identity in RRC CONNECTION SETUP message, and
- For UMTS TDD:
 - Number of RRC connection request attempts,
 - Indication of probable contention, e.g. mismatch of UE identity in RRC CONNECTION SETUP message,
 - Whether the Fast Physical Access Channel (FPACH) is received or whether the maximum number Mmax of synchronization attempts is reached, and
 - Failure indication of the Enhanced Dedicated Channel Random Access Uplink Control Channel (E-RUCCH) transmission. The failure indication is only applied if common Enhanced Dedicated Channel (E-DCH) is supported by the UE and the cellular communications network.

With regard to RRC connection establishment failure logging in LTE, the content of the report is illustrated in Figure 5. The information for the RRC connection establishment failure log is logged at expiry of timer T300, which is initiated when the UE sends an RRCConnectionRequest. The timer T300 is stopped when the UE receives an RRCConnectionSetup or RRCConnectionReject message, when there is cell re-selection, or upon abortion of connection establishment by upper layers. The timer T300 is defined in 3GPP TS 36.331 as follows:

Timer	Start	Stop	At expiry
T300	Transmission of <i>RRCConnectionRequest</i>	Reception of <i>RRCConnectionSetup</i> or <i>RRCConnectionReject</i> message, cell re-selection, and upon abortion of connection establishment by upper layers	Perform the actions as specified in 5.3.3.6

The availability of the RRC connection establishment failure report (the `connEstFailInfoAvailable` indication) may be indicated upon reception by the UE of the following messages:

- `RRCCConnectionSetup`,
- 5 • `RRCCConnectionReconfiguration` including the `mobilityControlInfo` (handover), and
- `RRCCConnectionReestablishment`.

The time stamping for the RRC connection establishment failure report is upon receiving a `UEInformationRequest` message when the report is available. The
10 `UEInformationRequest` message may be sent to the UE when the availability of the report (by the indicator `connEstFailInfoAvailable`) has been indicated by the UE. The UE then includes the available report in a `UEInformationResponse` message. Specifically, upon receiving the `UEInformationRequest` message, the UE will:

- If `connEstFail-ReportReq` is set to true and the UE has connection
15 establishment failure information in `VarConnEstFail-Report` and if the RPLMN is equal to `plmn-Identity` stored in `VarConnEstFail-Report`:
 - Set `timeSinceFailure` in `VarConnEstFail-Report` to the time that elapsed since the last connection establishment failure; and
 - Set the `connEstFail-Report` in the `UEInformationResponse` message
20 to the value of `connEstFail-Report` in `VarConnEstFail-Report`.

In UTRA, the logging of an RRC connection establishment failure depends on timer V300. Namely, when V300 is greater than N300, the UE performs the following actions for logging of a failed RRC connection establishment (as specified in 3GPP TS 25.311, section 8.1.3.11):

- If the RRC connection establishment fails, the UE shall perform logging
25 of information for later retrieval. The UE shall store connection establishment failure information in the variable `LOGGED_CONNECTION_ESTABLISHMENT_FAILURE` by setting its respective fields to corresponding values.

30 From the above, it becomes evident that there is a substantial difference between time stamping for RRC connection establishment failure log reporting and time stamping for MDT measurement logs in RRC IDLE mode. This difference is

schematically illustrated in Figure 6. As shown, the major difference is that the time stamp for the RRC connection establishment failure log may occur after up to 48 hours after a reference time (failure logged), while the maximum time for maximum time for the logged MDT measurements to be logged and time-stamped is two hours with respect to a reference time (MDT configuration received).

Current MDT logging and reporting mechanisms as well as current RRC connection establishment failure logging and reporting mechanisms have a number of problems. As such, there is a need for systems and methods for enhanced MDT logging and/or reporting as well as enhanced RRC connection establishment failure logging and/or reporting.

Summary

Systems and methods for maintaining time stamping accuracy are disclosed. In one embodiment, a wireless device in a cellular communications network logs data to provide a log. The wireless device maintains an accuracy of time stamping for the log to meet, or satisfy, a non-linear time drift constraint. In one embodiment, the log is one or more of a Radio Resource Control (RRC) connection establishment failure log, a radio link failure log, a random access failure log, a paging channel failure log, a broadcast channel failure log, data related to failure of one or more specific channels, and a radio measurement. In another embodiment, the log is a Minimization of Drive Tests (MDT) log.

In one embodiment, the non-linear time drift constraint includes a linear time drift constraint and a total maximum time drift over a defined amount of time, wherein the total maximum time drift over the defined amount of time is less than an amount of time drift in the time stamping that would result from the linear time drift constraint over the defined amount of time. In this manner, the total maximum time drift is more restrictive than the linear time drift constraint such that the combination of the total maximum time drift and the linear time drift constraint provide the non-linear time drift constraint.

In one embodiment, the non-linear time drift constraint is a constraint that a time drift of the time stamping for the log is not larger than $\pm X$ seconds per hour and $\pm Y$ seconds over a defined amount of time. In one embodiment, the defined amount of

time is 48 hours. In another embodiment, X is 0.72 and the defined amount of time is 48 hours. In yet another embodiment, X is 0.72, the defined amount of time is 48 hours, and Y is less than 34.56 (i.e., less than 0.72×48).

5 In one embodiment, the wireless device maintains the accuracy of the time stamping for the log by switching between two or more clocks having different accuracies such that the non-linear time drift constraint is met.

In another embodiment, the wireless device maintains the accuracy of the time stamping for the log by adaptively adjusting one or more clocks utilized for the time stamping for the log based on a reference time to meet the non-linear time drift
10 constraint.

In another embodiment, the wireless device maintains the accuracy of the time stamping for the log by adaptively synchronizing one or more clocks utilized for the time stamping for the log to a reference time to meet the non-linear time drift constraint.

15 In yet another embodiment, the wireless device maintains the accuracy of the time stamping for the log by adaptively controlling an activity state of the wireless device to meet the non-linear time drift constraint.

In one embodiment, the time stamping for the log is one or more of: a relative time stamp for a logged measurement as a time from a moment an MDT configuration
20 was received at the wireless device until the logged measurement was logged, a relative time stamp as a time elapsed between a moment the logged data is logged and a moment the logged data is reported, a relative time stamp as a time elapsed between a moment the logged data is logged and a moment the logged data is included in a report to be reported, and a relative time stamp for an RRC connection establishment failure
25 as a time elapsed from a last RRC connection establishment failure to a time when the log is included in a report.

Those skilled in the art will appreciate the scope of the present disclosure and realize additional aspects thereof after reading the following detailed description of the preferred embodiments in association with the accompanying drawing figures.

Brief Description of the Drawing Figures

The accompanying drawing figures incorporated in and forming a part of this specification illustrate several aspects of the disclosure, and together with the description serve to explain the principles of the disclosure.

5 Figure 1 illustrates a conventional Minimization of Drive Tests (MDT) configuration procedure;

 Figure 2 illustrates the format of a conventional LoggedMeasurementConfiguration message used for MDT configuration;

 Figure 3 illustrates an example of logged MDT reporting as described in 3rd 10 Generation Partnership Project (3GPP) standards;

 Figure 4 illustrates an example of immediate MDT reporting;

 Figure 5 illustrates the content of a Radio Resource Control (RRC) connection establishment failure log as defined in 3GPP standards;

 Figure 6 schematically illustrates the difference between time stamping for an 15 MDT measurement log and time stamping for an RRC connection establishment failure log;

 Figure 7 illustrates a cellular communications network according to one embodiment of the present disclosure;

 Figure 8 illustrates a process performed by a logging node according to one 20 embodiment of the present disclosure;

 Figure 9 illustrates a process by which a logging node maintains an accuracy of time stamping to meet a non-linear time drift constraint by switching between two or more clocks having different accuracies according to one embodiment of the present disclosure;

 Figure 10 illustrates a process by which a logging node maintains one or more 25 constraints by switching between two or more clocks having different accuracies according to one embodiment of the present disclosure;

 Figure 11 is a block diagram of one example of a logging node that switches 30 between two or more clocks according to the process of either Figure 9 or Figure 10 according to one embodiment of the present disclosure;

 Figure 12 illustrates a process by which a logging node maintains an accuracy of time stamping to meet a non-linear time drift constraint by adaptively adjusting a

clock used for time stamping based on a higher accuracy reference clock or synchronizing the clock used for time stamping to the higher accuracy reference clock according to one embodiment of the present disclosure;

Figure 13 is a block diagram of one example of a logging node that performs
5 the process of Figure 12 according to another embodiment of the present disclosure;

Figure 14 illustrates a process by which a logging node maintains an accuracy of time stamping to meet a non-linear time drift constraint by adaptively controlling an activity level of the logging node according to one embodiment of the present disclosure; and

10 Figure 15 is a block diagram of one example of a logging node that performs the process of Figure 14 according to another embodiment of the present disclosure.

Detailed Description

The embodiments set forth below represent the necessary information to enable
15 those skilled in the art to practice the embodiments and illustrate the best mode of practicing the embodiments. Upon reading the following description in light of the accompanying drawing figures, those skilled in the art will understand the concepts of the disclosure and will recognize applications of these concepts not particularly addressed herein. It should be understood that these concepts and applications fall
20 within the scope of the disclosure and the accompanying claims.

The present disclosure relates to maintaining time stamping accuracy for reporting and logging in a wireless communications network. In particular, embodiments are disclosed herein for maintaining time stamping accuracy for reporting and/or logging in a cellular communications network. In some of the embodiments
25 described herein, the cellular communications network is a Long Term Evolution (LTE) cellular communications network. However, the concepts disclosed herein are not limited to LTE and may be used in any suitable cellular communications network or, more generally, any suitable wireless communications network. For instance, the embodiments described herein may apply to any Radio Access Network (RAN) or
30 single or multiple Radio Access Technology (RAT). Other than LTE, some other RAT examples are LTE Time Division Duplexing (TDD), LTE-Advanced, Universal Mobile Telecommunications System (UMTS), High Speed Packet Access (HSPA), Global

System for Mobile Communications (GSM), Code Division Multiple Access (CDMA) 2000, WiMAX, and WiFi. The embodiments described herein also apply to single-carrier, multi-carrier, multi-RAT, and Carrier Aggregation (CA) networks.

While the concepts disclosed herein are not limited by any particular problem to
5 be solved, before discussing embodiments of the present disclosure, a brief discussion of some examples of problems related to current Minimization of Drive Tests (MDT) logging and reporting and Radio Resource Control (RRC) connection establishment failure logging and reporting are described. While embodiments of the systems and methods disclosed herein may be used to address or overcome these problems, the
10 present disclosure is not limited thereto. Embodiments disclosed herein may be used to address additional or alternative problems.

For some MDT logs, a time stamp at reporting is made and an accuracy requirement may be defined for the time stamp. MDT logs may be stored for up to 48 hours according to 3rd Generation Partnership Project (3GPP) specifications or even
15 longer in practice. During such a long storage time of an MDT log, there may be a large time drift which may degrade the accuracy of the time stamp at the time of reporting. This time drift represents an accumulated error in the clock or clocks used by the User Equipment device (UE) with respect to some absolute time or a reference time used by a network node that will be interpreting the UE's measurements. After a
20 long storage time (e.g., 48 hours), this time drift will make the time stamp at reporting very inaccurate, and the reported information in the MDT log may be difficult to use in a correct way in the cellular communications network, which will in turn reduce the benefits of the MDT feature.

Currently, the accuracy requirement for a relative time stamp for logged MDT
25 is ± 2 seconds per hour (s/hr). However, the relative time stamp for a logged measurement is defined as the time from the moment the MDT configuration was received at the UE until the measurement was logged, and the duration of the logging can be up to a maximum of two hours. Thus, the maximum error due to time drift at the end of two hours is ± 4 seconds. The situation is different for an RRC connection
30 establishment failure log, where the relative time stamp is defined as the elapsed time between logging and reporting the log, i.e., up to 48 hours. Therefore, reusing the same accuracy requirement for RRC connection establishment failure log time stamping as

that used for logged MDT would lead to an error of up to 96 seconds, which is not acceptable from the cellular communications network point of view. On the other hand, not all UEs may be capable of having a better accuracy, which may be more costly and may require a separate clock for RRC connection failure log reporting.

5 Systems and methods are disclosed herein that can be used to address the issues discussed above by maintaining time stamping accuracy according to a non-linear accuracy constraint. While these systems and methods may be used in any suitable type of wireless network, in the embodiments described herein, the systems and methods are used in a cellular communications network and, in particular, a UMTS or
10 LTE/LTE-Advanced cellular communications network.

 In this regard, Figure 7 illustrates a cellular communications network 10 according to one embodiment of the present disclosure. The cellular communications network 10 is preferably a UMTS or LTE/LTE-Advanced cellular communications network. As illustrated, the cellular communications network 10 includes a RAN (e.g.,
15 a Universal Terrestrial Radio Access Network (UTRAN) or Evolved UTRAN (E-UTRAN)) that includes a number of base stations 12 that provide wireless access to a number of wireless devices 14, which may also be referred to herein as UEs. The base stations 12 are connected, directly or indirectly (e.g., through a Radio Network Controller (RNC)), to a core network 16. Note that the cellular communications
20 network 10 may include numerous types of nodes that are not illustrated in Figure 7 such as, for example, relays, mobile relays, Location Management Units (LMUs), Self-Optimized Network (SON) nodes, low-power or small-cell base stations (e.g., femto base stations, pico base stations, and/or home base stations), or the like.

 Before continuing, a number of definitions are beneficial. As used herein, a
25 “radio node” is characterized by its ability to transmit and/or receive radio signals and it comprises at least a transmitting or receiving antenna. A radio node may be a wireless device (i.e., a UE) or a radio network node.

 The terms wireless device and UE are used interchangeably in this disclosure. As used herein, a “wireless device,” or UE, is any device equipped with a radio
30 interface and capable of at least transmitting or receiving a radio signal from another radio node. A wireless device may also be capable of receiving and demodulating a signal. Note that even some radio network nodes, e.g., a femto Base Station (BS)

(which is also known as a home BS) or LMU, may also be equipped with a UE-like interface. Some examples of a wireless device that are to be understood in a general sense are a Personal Digital Assistant (PDA), a laptop, a mobile phone, a tablet device, a sensor, a fixed relay, a mobile relay, or any radio network node equipped with a UE-like interface (e.g., a small Radio BS (RBS), an Evolved Node B (eNB), a femto BS, or an LMU). Additionally, the wireless devices described herein may represent Machine Type Communication (MTC) / Machine-to-Machine (M2M) communication devices or other devices that only have limited communication capabilities. For example, the described wireless devices may represent devices, such as a wireless meter or sensor, that are capable of transmitting data but that lack or have limited ability to receive wireless transmissions. Similarly, the described wireless devices may represent devices, such as an electronic billboard, that are capable of receiving data but that lack or have limited ability to transmit wireless transmissions.

As used herein, a “radio network node” is a radio node comprised in a radio communications network. A radio network node may be capable of receiving radio signals or transmitting radio signals in one or more frequencies, and may operate in single-RAT, multi-RAT or multi-standard mode (e.g., Multi-Standard Radio (MSR)). A radio network node, including a base station (e.g., an eNB), a pico eNB or a Home eNB (HeNB), a radio access point, a Remote Radio Head (RRH), a Remote Radio Unit (RRU), a relay, a mobile relay, a transmitting-only/receiving-only radio network node, or an RNC, may or may not create its own cell. Some examples of radio network nodes not creating their own cells are beacon devices transmitting configured radio signals or measuring nodes receiving and performing measurements on certain signals (e.g., location measurement units and LMUs). A radio network node may also share a cell or the used cell Identifier (ID) with another radio node which creates its own cell. Further, a radio network node may operate in a cell sector or may be associated with a radio network node creating its own cell. More than one cell or cell sectors (commonly named in the described embodiments by a generalized term “cell” which may be understood as a cell or its logical or geographical part) may be associated with one radio network node. Further, one or more serving cells (in downlink and/or uplink) may be configured for a wireless device, e.g., in a CA system where a wireless device may have one Primary Cell (PCell) and one or more Secondary Cells (SCells). A cell

may also be a virtual cell (e.g., characterized by a cell ID but does not provide a full cell-like service) associated with a transmit node. A radio network node (e.g., an eNB, an RNC, a radio access point, etc.) may be a node controlling a wireless device.

A network node may be any radio network node or core network node. Some
5 non-limiting examples of a network node are an eNB (also a radio network node), an RNC, a positioning node, a Mobility Management Entity (MME), a Public Safety Answering Point (PSAP), a SON node, an MDT node (also interchangeably used with “Trace Collection Entity (TCE)” at least in some embodiments), a coordinating node, a gateway node (e.g., a Packet Data Network Gateway (P-GW), a Serving Gateway (S-
10 GW), an LMU gateway, or a femto gateway), and an Operation and Management (O&M) node.

The term “coordinating node” used herein is a network and/or node, which coordinates radio resources with one or more radio nodes. Some examples of the coordinating node are a network monitoring and configuration node, an Operational
15 Support System (OSS) node, an O&M node, an MDT node, a SON node, a positioning node, an MME node, a gateway node such as a P-GW or a S-GW network node, a femto gateway node, an LMU gateway connecting multiple LMUs, a macro node coordinating smaller radio nodes associated with the macro node, an eNB coordinating resources with other eNBs, etc.

20 The signaling described herein is either via direct links or logical links (e.g., via higher layer protocols and/or via one or more network and/or radio nodes). For example, signaling from a coordinating node to a UE may also pass another network node, e.g., a radio network node. The term “subframe” used in the embodiments described herein (typically related to LTE) is an example resource in the time domain,
25 and in general it may be any predefined time instance or time period.

Figure 8 is a flow chart that illustrates a process performed by a logging node according to one embodiment of the present disclosure. The logging node is generally any node that performs logging of data such as, for example, one of the wireless devices 14, a relay, a mobile relay, or the like. As illustrated, the logging node logs
30 data to provide a log (step 400). The logged data is preferably logged measurements for MDT purposes such that the log is an MDT log or logged data for an RRC connection establishment failure such that the log is an RRC connection establishment

failure log. However, the log may additionally or alternatively include a radio link failure log, a random access failure log, a paging channel failure log, a broadcast channel failure log, data related to failure of specific channels, and/or a radio measurement(s).

5 The logging node performs one or more actions to maintain an accuracy of time stamping for the log to meet a non-linear time drift constraint (step 402). In one embodiment, the non-linear time drift constraint is a constraint that the time drift of the time stamping be less than or equal to $\pm X$ s/hr and $\pm Y$ seconds over a defined number of hours (e.g., 48 hours). The value of X and Y are such that the accuracy constraint of
10 $\pm Y$ seconds over the defined number of hours is more restrictive than the accuracy constraint $\pm X$ s/hr. Thus, the non-linear time drift constraint is referred to herein as being “non-linear” in that the accuracy constraint of the time drift is non-linear over time. In other words, the non-linear time drift constraint can be said to be a combination of a linear time drift constraint (i.e., $\pm X$ s/hr) and a total time drift
15 constraint over a defined amount of time (e.g., $\pm Y$ seconds over the defined amount of time) that is more restrictive than the linear time drift constraint.

In one particular embodiment, the non-linear time drift constraint is a constraint that the time drift of the time stamping be less than or equal to ± 0.72 s/hr and $\pm Y$ seconds over 48 hours. Further, in one embodiment, the log is either an MDT log or an
20 RRC connection establishment failure log, and the non-linear time drift constraint is a constraint that the time drift of the time stamping be less than or equal to ± 0.72 s/hr and $\pm Y$ seconds over 48 hours. Still further, in another embodiment, $Y=1.73$. In another embodiment, $Y=10$. Thus, using an RRC connection establishment failure report as an example, normally, the RRC connection establishment failure report can be
25 reported any time up to 48 hours after the occurrence of the RRC connection establishment failure (as specified in the 3GPP standards). Using the normal time drift constraint of ± 2 s/hr, the time drift of the time stamping of the RRC connection establishment failure log at the time of reporting can be up to ± 96 seconds. In contrast, in the process of Figure 8, the accuracy of time stamping is maintained to meet the non-
30 linear time drift constraint such that, at the end of the maximum 48 hour period for reporting, the time stamping has an accuracy of at least $\pm Y$ seconds, wherein in one embodiment $Y=1.73$ and in another embodiment $Y=10$.

Figures 9 through 14 provide various embodiments of methods and systems for maintaining the accuracy of time stamping to meet the non-linear time drift constraint. More specifically, Figure 9 illustrates a process by which a logging node maintains an accuracy of time stamping to meet a non-linear time drift constraint by switching
5 between two or more clocks having different accuracies according to one embodiment of the present disclosure. As illustrated, the logging node logs data to provide a log (step 500). The logged data is preferably logged measurements for MDT purposes such that the log is an MDT log or logged data for an RRC connection establishment failure such that the log is an RRC connection establishment failure log. However, the logged
10 data may additionally or alternatively include data logged for other purposes (e.g., data logged for a radio link failure log, data logged for a random access failure log, data logged for a paging channel failure log, data logged for a broadcast channel failure log, data related to failure of specific channels, and/or a radio measurement(s)).

The logging node switches between two or more clocks having different
15 accuracies to meet a non-linear time drift constraint (step 502). The details of the non-linear time drift constraint are given above and, as such, are not repeated. In one embodiment, the logging node may have a first clock having a first accuracy and a second clock having a second accuracy, where the accuracy of the first clock is less, or worse, than the accuracy of the second clock. The logging node may then switch
20 between the first and second clocks such that the non-linear time drift constraint is met. In one embodiment, the logging node initially uses the first lower accuracy clock and then switches to the second higher accuracy clock after a predefined amount of time has elapsed since, e.g., MDT configuration or detection of an RRC connection establishment failure. In a similar manner, the logging node may switch to the second
25 higher accuracy clock if the time stamping accuracy falls below a predefined or configured threshold. The time periods or schedule for switching between the two or more clocks may be pre-configured statically in the logging node or may be adapted to environmental and operational conditions (e.g., to the current resource utilization level, activity state, current or predicted time stamping accuracy, etc.). The clock switching
30 may also be controlled by a schedule controlling the two or more clocks.

As an example, if the non-linear time drift constraint is ± 0.72 s/hr and ± 10 seconds over 48 hours and if the first clock has an accuracy or time drift of ± 0.72 s/hr

(200 parts per million (ppm) accuracy) and the second clock has an accuracy or time drift of ± 0.015 s/hr (10 ppm), the logging node could use the first clock (lower accuracy clock) for the first 13.16 hours (for a time drift of ± 9.4752 seconds) and then use the second clock (high accuracy clock) for the remaining 34.84 hours (for an additional time drift of ± 0.5226 seconds). This would give a total time drift of ± 10 seconds for the time stamping over the maximum period of 48 hours. In another example, the logging node could switch between the first and second clocks according to some determined or predefined/configured schedule to meet the non-linear time drift constraint. For example, the logging node may switch between the first and second clocks according to any schedule where the first clock (accuracy of ± 0.72 s/hr) operates 27.42% of the time over the 48 hour period and the second clock (accuracy of ± 0.015 s/hr) operates 72.58% of the time over the 48 hour period.

In another embodiment, the logging node may monitor the accuracy of the time stamping over time and adaptively or dynamically switch between the two or more clocks based on the monitored accuracy. For example, the logging node may initially use a first lower accuracy clock for time stamping. However, when the accuracy of the time stamping is worse than a predefined threshold, the logging node may switch to a second higher accuracy clock until the accuracy of the clock is better than a predefined threshold or in an acceptable range. The threshold(s) (and, if applicable, the acceptable range) are predefined such that the time stamping accuracy satisfies the non-linear time drift constraint. In a similar manner, a predicted accuracy of the time stamping may be used to switch between two or more clocks in order to meet the non-linear time drift constraint.

Note that the logging node may also switch between the clocks to intentionally degrade the accuracy of the time stamping in order to, e.g., save resources, but not below a threshold. The logging node may then use a higher accuracy clock(s) to catch up with the non-linear time drift constraint by the end of the time period.

Note that while the process of Figure 9 is used to meet the non-linear time drift constraint, the logging node may additionally or alternatively switch between two or more clocks having different accuracies (and thus resource requirements) in order to meet one or more constraints in addition to or as an alternative to a non-linear time drift constraint. In this regard, Figure 10 illustrates a process by which the logging node

switches between two or more clocks to meet, or satisfy, one or more constraints according to one embodiment of the present disclosure. As illustrated, the logging node logs data to provide a log (step 600). The logged data is preferably logged measurements for MDT purposes such that the log is an MDT log or logged data for an RRC connection establishment failure such that the log is an RRC connection establishment failure log. However, the logged data may additionally or alternatively include data logged for other purposes (e.g., data logged for a radio link failure log, data logged for a random access failure log, data logged for a paging channel failure log, data logged for a broadcast channel failure log, data related to failure of specific channels, and/or a radio measurement(s)).

The logging node switches between two or more clocks having different accuracies to meet one or more constraints (step 602). The one or more constraints may include a non-linear time drift constraint. In addition or alternatively, the one or more constraints may include one or more additional constraints such as, for example, one or more resource constraints (e.g., one or more constraints on power consumed by the logging node and/or processing resources consumed by the logging node for logging and reporting of data). More specifically, higher accuracy clocks require higher power and/or processing resources than lower accuracy clocks. As such, the logging node may adaptively switch between the two or more clocks in order to maintain a desired level of accuracy for, e.g., time stamping while also reducing or minimizing the power and/or processing resources utilized for logging and reporting. Thus, the logging node may initially use the lower or lowest accuracy clock for time stamping and then switch to a higher accuracy clock(s) only as needed to satisfy, e.g., a time stamping accuracy constraint.

Figure 11 is a block diagram of one example of a logging node 18 that switches between two or more clocks according to the process of either Figure 9 or Figure 10 according to one embodiment of the present disclosure. As illustrated, the logging node 18 includes a radio subsystem 20, a processing subsystem 22, and a clock subsystem 24. The radio subsystem 20 generally includes analog and, in some embodiments, digital components for wirelessly sending and receiving messages to and from other nodes (e.g., radio network nodes and/or the wireless devices 14). The processing subsystem 22 is implemented in hardware or in a combination of hardware

and software. In particular embodiments, the processing subsystem 22 may comprise, for example, one or several general-purpose or special-purpose microprocessors or other microcontrollers programmed with suitable software and/or firmware to carry out some or all of the functionality of the logging node 18 described herein. In addition or
5 alternatively, the processing subsystem 22 may comprise various digital hardware blocks (e.g., Application Specific Integrated Circuits (ASICs), one or more off-the-shelf digital and analog hardware components, or a combination thereof) configured to carry out some or all of the functionality of the logging node 18 described herein. Additionally, in particular embodiments, the above-described functionality of the
10 logging node 18 may be implemented, in whole or in part, by the processing subsystem 22 executing software or other instructions stored on a non-transitory computer-readable medium, such as Random Access Memory (RAM), Read Only Memory (ROM), a magnetic storage device, an optical storage device, or any other suitable type of data storage component.

15 The clock subsystem 24 includes a number of clocks 26-1 through 26-N (where $N > 1$) each having a different accuracy. The processing subsystem 22 controls the clock subsystem 24 to switch between the clocks 26-1 through 26-N as described above in order to satisfy one or more constraints (e.g., a non-linear time drift constraint) related to logging and reporting of data to the cellular communications network (e.g., logging
20 and reporting of MDT measurements and/or logging and reporting an RRC connection establishment failure).

Figure 12 illustrates a process by which a logging node maintains an accuracy of time stamping to meet a non-linear time drift constraint by adaptively adjusting a clock used for time stamping based on a higher accuracy reference clock or
25 synchronizing the clock used for time stamping to the higher accuracy reference clock according to one embodiment of the present disclosure. As illustrated, the logging node logs data to provide a log (step 700). The logged data is preferably logged measurements for MDT purposes such that the log is an MDT log or logged data for an RRC connection establishment failure such that the log is an RRC connection
30 establishment failure log. However, the logged data may additionally or alternatively include data logged for other purposes (e.g., data logged for a radio link failure log, data logged for a random access failure log, data logged for a paging channel failure

log, data logged for a broadcast channel failure log, data related to failure of specific channels, and/or a radio measurement(s)).

The logging node adaptively adjusts a clock used for time stamping based on a higher accuracy reference clock or synchronizes the clock used for time stamping to the
5 higher accuracy reference clock to meet a non-linear time drift constraint (step 702). The details of the non-linear time drift constraint are given above and, as such, are not repeated. The reference clock may be provided by any internal or external source. For example, the reference clock may be provided by an external source, e.g., BS timing, Global Navigation Satellite System (GNSS) timing, or the like or by timing of an in-
10 device external wireless system such as Wireless Local Area Network (WLAN), Bluetooth, or the like.

For example, the logging node may adjust the clock used for time stamping based on the reference clock or synchronize the clock used for time stamping with the reference clock if the logging time exceeds a predefined threshold and/or an accuracy
15 of time stamping becomes worse than a predefined threshold. In one embodiment, the logging time is a duration of time over which data is logged starting from reception of the MDT configuration (e.g., the relative time stamp for a logged MDT measurement is defined as the time from the moment the MDT configuration was received at the logging node until the measurement was logged). In another embodiment, the logging
20 time is a duration of time from a last logging of logged data to a current time, a predicted or future time, a reporting time for the log, or the time when the log is included in the report (e.g., the relative time stamp for RRC connection establishment failure log reporting is defined as the time elapsed from the last RRC connection establishment failure to the time when the log is included in the report). Thereafter, the
25 logging node may continue to periodically or otherwise adjust/synchronize the clock used for time stamping to meet the non-linear time drift constraint. As another example, the logging node may adjust/synchronize the clock used for time stamping periodically or according to a predefined or a dynamically configured schedule such that the non-linear time drift constraint is satisfied. In addition to the non-linear time
30 drift constraint, the logging node may perform adjustments/synchronization of the clock used for time stamping based on one or more additional constraints (e.g., one or more resource constraints).

Figure 13 is a block diagram of one example of the logging node 18 that performs the process of Figure 12 according to another embodiment of the present disclosure. In this embodiment, the logging node 18 includes the radio subsystem 20 and the processing subsystem 22, as described above. In addition, the logging node 18 includes a clock subsystem 28 that provides a clock used for time stamping for logging and reporting of logged data (e.g., logged MDT measurements and/or logged RRC connection establishment failure data). In this embodiment, the logging node 18 also includes a high accuracy clock source 30. The high accuracy clock source 30 may be, for example, a component associated with an in-device external wireless system such as WLAN, Bluetooth, or the like that is capable of providing a high accuracy reference clock. As discussed above, the logging node 18, and in this particular embodiment the processing subsystem 22, adjusts the clock provided by the clock subsystem 28 based on the reference clock or synchronizes the clock provided by the clock subsystem 28 to the reference clock to satisfy one or more constraints (e.g., the non-linear time drift constraint for time stamping).

Figure 14 illustrates a process by which a logging node (e.g., a wireless device 14) maintains an accuracy of time stamping to meet a non-linear time drift constraint by adaptively controlling an activity level of the logging node according to one embodiment of the present disclosure. For example, there may be three activity levels each having an associated accuracy level for the clock used for time stamping. Specifically, in this example, the three activity levels have the following accuracy levels (e.g., predefined and associated with states):

- Level 1 in state 1 (e.g., 200 ppm which corresponds to a time drift of 0.72 s/hr, when out of coverage),
- Level 2 in state 2 (e.g., 10 ppm which corresponds to a time drift of 0.036 s/hr, when in RRC_IDLE), and
- Level 3 in state 3 (e.g., 1 ppm which corresponds to 0.0036 s/hr, when in RRC_CONNECTED).

As illustrated, the logging node logs data to provide a log (step 800). The logged data is preferably logged measurements for MDT purposes such that the log is an MDT log or logged data for an RRC connection establishment failure such that the log is an RRC connection establishment failure log. The logging node adaptively

controls the activity state of the logging node to meet a non-linear time drift constraint (step 802). The non-linear time drift constraint may be as defined above. Note that this embodiment (as well as the other embodiments described above) may also be used to meet linear time drift constraints. In one embodiment, the activity state of the logging node is adaptively controlled to ensure that the non-linear time drift constraint (or other minimum condition(s)) is met. For example, the logging node may be not allowed to go to IDLE state or may choose to not go to IDLE state if the accuracy of time stamping is too loose and may not meet the constraint(s) since the clock time drift is higher with RRC_IDLE than with RRC_CONNECTED stated. The logging node or the network node may trigger state changes using any suitable technique.

As an example, the logging node (or alternatively a network node) may know that a certain accuracy can be obtained by controlling the activity level of the logging node in a certain manner. As one specific example, it may be known that the logging node can meet a certain accuracy level provided that the logging node spends at least X hours or Y% of time in a certain activity state. As another example, it may be known that 10 ppm accuracy can be met provided that the logging node spends 80% of time corresponding to the relative time stamp in RRC_IDLE and >10% of time in RRC_CONNECTED.

Figure 15 is a block diagram of one example of the logging node 18 that performs the process of Figure 14 according to another embodiment of the present disclosure. In this embodiment, the logging node 18 includes the radio subsystem 20 and the processing subsystem 22, as described above. In addition, the logging node 18 includes a clock subsystem 32 that provides a clock used for time stamping for logging and reporting of logged data (e.g., logged MDT measurements and/or logged RRC connection establishment failure data). The accuracy of the clock provided by the clock subsystem 32 depends on the activity state of the logging node 18. As such, using the process of Figure 14, the activity level of the logging node 18 is controlled by the logging node 18 or a network node in order to meet the desired constraint(s) on the accuracy of the time stamping.

The embodiments above, separately or in combination with each other, may be implemented to meet one or more predefined constraints. Some examples of the constraint(s) are: time stamping accuracy (e.g., relative time stamp accuracy) for

logged measurements in RRC_IDLE (e.g., logged MDT measurements) and time stamping accuracy (e.g., relative time stamp accuracy) for RRC connection establishment failure log reporting. The time stamping accuracy for logged measurements in RRC_IDLE may require a different time stamp accuracy than RRC connection establishment failure logging. Also, one constraint may have different accuracy levels depending on time period, e.g., as below.

Relative Time Stamp Accuracy: The relative time stamp for a logged MDT measurement is defined as the time from the moment the MDT configuration was received at the logging node until the measurement was logged. While not essential, for more information, the interested reader is directed to 3GPP TS 36.331: "Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC) protocol specification," V.11.1.0, September 2012 ("3GPP Technical Specification (TS) 36.331"), which is incorporated by reference herein in its entirety. As specified in 3GPP TS 36.331, the accuracy of the relative time stamping for MDT measurements is such that the time drift of the time stamping is not more than ± 2 s/hr.

Relative Time Stamp Accuracy for RRC Connection Establishment Failure Log Reporting: As specified in 3GPP TS 36.331, relative time stamping for RRC connection establishment failure log reporting is defined as the time elapsed from the last RRC connection establishment failure to the time when the log is included in the report. The logging node shall report the RRC connection establishment failure log, while meeting the following accuracy requirement: the accuracy of the relative time stamping for RRC connection establishment failure log reporting is such that the time drift of the time stamping shall not be larger than ± 0.72 s/hr and ± 10 seconds over 48 hours. Note: 0.72 s/hr corresponds to 200 ppm, and 10 seconds over 48 hours corresponds to approximately 57.87 ppm over 48 hours (i.e., approximately 0.208 s/hr, which is less than 2 s/hr for the lower accuracy requirement). An accuracy of 10 ppm corresponds to 1.73 seconds over 48 hours (i.e., the total time drift is only 10 ppm over 48 hours giving 0.015 s/hr in average, which is less than 2 seconds for a short timer which can only be up to 2 hours).

Using the embodiments described above, in one example, the logging node may implement two different clocks and switch between the clocks to control the accuracy to meet the tightest accuracy requirement (57.87 ppm in one embodiment and 10 ppm

	• ID	Identifier
	• IE	Information Element
	• IMEI	International Mobile Equipment Identity
	• IMSI	International Mobile Subscriber Identity
5	• IP	Internet Protocol
	• LA	Local Area
	• LTE	Long Term Evolution
	• LMU	Location Measurement Unit
	• M2M	Machine-to-Machine
10	• MDT	Minimization of Drive Tests
	• MME	Mobility Management Entity
	• ms	Millisecond
	• MSR	Multi-Standard Radio
	• MTC	Machine Type Communication
15	• NB	Node B
	• No	Noise Spectral Density
	• O&M	Operation and Management
	• OSS	Operational Support System
	• P-CCPCH	Primary Common Control Physical Channel
20	• PCell	Primary Cell
	• PCI	Physical Cell Identity
	• PDA	Personal Digital Assistant
	• P-GW	Packet Data Network Gateway
	• PLMN	Public Land Mobile Network
25	• Pn	Pseudo noise
	• ppm	Parts Per Million
	• PSAP	Public Safety Answering Point
	• QoS	Quality of Service
	• RA	Registered Area
30	• RAM	Random Access Memory
	• RAN	Radio Access Network

- RAT Radio Access Technology
- RBS Radio Base Station
- RNC Radio Network Controller
- ROM Read Only Memory
- 5 • RPLMN Registered Public Land Mobile Network
- RRC Radio Resource Control
- RRH Remote Radio Head
- RRU Remote Radio Unit
- RSCP Received Signal Code Power
- 10 • RSRP Reference Signal Received Power
- RSRQ Reference Signal Received Quality
- Rxlev Received Signal Level
- SCell Secondary Cell
- S-GW Serving Gateway
- 15 • s/hr Seconds per Hour
- SON Self-Optimized Network
- TA Tracking Area
- TCE Trace Collection Entity
- TDD Time Division Duplexing
- 20 • TR Technical Report
- TS Technical Specification
- UE User Equipment
- UMTS Universal Mobile Telecommunications System
- UTRA Universal Terrestrial Radio Access
- 25 • UTRAN Universal Terrestrial Radio Access Network
- WLAN Wireless Local Area Network

Those skilled in the art will recognize improvements and modifications to the preferred embodiments of the present disclosure. All such improvements and modifications are considered within the scope of the concepts disclosed herein and the

30 claims that follow.

Claims

What is claimed is:

1. A method of operation of a wireless device (14) in a cellular communications
5 network (10), comprising:
logging data to provide a log; and
maintaining an accuracy of time stamping for the log to meet a non-linear time drift constraint.
- 10 2. The method of claim 1 wherein the log is one or more of a Radio Resource Control, RRC, connection establishment failure log, a radio link failure log, a random access failure log, a paging channel failure log, a broadcast channel failure log, data related to failure of specific channels, and a radio measurement.
- 15 3. The method of claim 1 wherein the log is a Minimization of Drive Test, MDT, log.
4. The method of claim 1 wherein the log is a Minimization of Drive Test, MDT, log including a reported time since failure for a radio link failure.
- 20 5. The method of claim 1 wherein the log is a Minimization of Drive Test, MDT, log including a reported time since a corresponding failure.
6. The method of claim 1 wherein the non-linear time drift constraint comprises a
25 linear time drift constraint and a total maximum time drift over a defined amount of time, wherein the total maximum time drift over the defined amount of time is less than an amount of time drift in the time stamping that would result from the linear time drift constraint over the defined amount of time.
- 30 7. The method of claim 1 wherein the non-linear time drift constraint is a constraint that a time drift of the time stamping for the log is not larger than $\pm X$ seconds per hour and $\pm Y$ seconds over a defined amount of time.

8. The method of claim 1 wherein the non-linear time drift constraint is a constraint that a time drift of the time stamping for the log is not larger than $\pm X$ seconds per hour and $\pm Y$ seconds over 48 hours.
- 5
9. The method of claim 8 wherein X is 0.72.
10. The method of claim 8 wherein Y is 1.73.
- 10 11. The method of claim 8 wherein the log is a Radio Resource Control, RRC, connection establishment failure log.
12. The method of claim 8 wherein the log is a Minimization of Drive Test, MDT, log including a reported time since failure for a corresponding failure.
- 15
13. The method of claim 1 wherein maintaining the accuracy of the time stamping for the log to meet the non-linear time drift constraint comprises switching between two or more clocks (26) having different accuracies such that the non-linear time drift constraint is met.
- 20
14. The method of claim 1 wherein maintaining the accuracy of the time stamping for the log to meet the non-linear time drift constraint comprises:
- providing the time stamping for the log with a first clock (26) having a first accuracy; and
- 25 switching to a second clock (26) having a second accuracy that is greater than the first accuracy when a logging time exceeds a threshold.
15. The method of claim 14 wherein the log is a Minimization of Drive Time, MDT, log, and the logging time is a duration of time over which data is logged starting
- 30 from reception of an MDT configuration for the MDT log.

16. The method of claim 14 wherein the logging time is a duration of time elapsed from a last logging of logged data to one of a group consisting of: a current time, a predicted future time, a reporting time for the log, and the time when the log is included in the report.

5

17. The method of claim 1 wherein maintaining the accuracy of the time stamping for the log to meet the non-linear time drift constraint comprises switching from a first clock (26) having a first accuracy to a second clock (26) having a second accuracy that is greater than the first accuracy when the accuracy of the time stamping for the log becomes worse than a first threshold.

10

18. The method of claim 17 wherein maintaining the accuracy of the time stamping for the log to meet the non-linear time drift constraint further comprises:

switching back to the first clock (26) when the accuracy of the time stamping

15 for the log improves to a second threshold that is greater than the first threshold.

19. The method of claim 1 wherein maintaining the accuracy of the time stamping for the log to meet the non-linear time drift constraint comprises adaptively adjusting a clock (26) utilized to provide the time stamping for the log based on a reference time to meet the non-linear time drift constraint.

20

20. The method of claim 19 wherein adaptively adjusting the clock (26) utilized to provide the time stamping for the log based on the reference time comprises adjusting the clock (26) based on the reference time when a logging time exceeds a threshold.

25

21. The method of claim 20 wherein the log is a Minimization of Drive Time, MDT, log, and the logging time is a duration of time over which data is logged starting from reception of an MDT configuration for the MDT log.

30

22. The method of claim 20 wherein the logging time is a duration of time elapsed from a last logging of logged data to one of a group consisting of: a current time, a

predicted future time, a reporting time for the log, and the time when the log is included in the report.

23. The method of claim 19 wherein adaptively adjusting the clock (26) utilized to
5 provide the time stamping for the log based on the reference time comprises adjusting the clock (26) based on the reference time when an accuracy of the clock (26) falls below a threshold.

24. The method of claim 1 wherein maintaining the accuracy of the time stamping
10 for the log to meet the non-linear time drift constraint comprises adaptively synchronizing a clock (26) utilized to provide the time stamping for the log to a reference time to meet the non-linear time drift constraint.

25. The method of claim 24 wherein adaptively synchronizing the clock (26)
15 utilized to provide the time stamping for the log to the reference time comprises synchronizing the clock (26) to the reference time when a logging time exceeds a threshold.

26. The method of claim 24 wherein adaptively synchronizing the clock (26)
20 utilized to provide the time stamping for the log to the reference time comprises synchronizing the clock (26) to the reference time when an accuracy of the clock (26) falls below a threshold.

27. The method of claim 1 wherein the time stamping for the log is based on a clock
25 (26) having an accuracy that is a function of an activity state of the wireless device (14), and maintaining the accuracy of the time stamping for the log to meet the non-linear time drift constraint comprises adaptively controlling an activity state of the wireless device (14) to meet the non-linear time drift constant.

30 28. The method of claim 1 wherein the time stamping for the log is one or more of:

- a relative time stamp for a logged measurement as a time from a moment a Minimization of Drive Time, MDT, configuration was received at the wireless device (14) until the logged measurement was logged;
 - a relative time stamp as a time elapsed between a moment logged data is logged and a moment the logged data is reported;
 - a relative time stamp as a time elapsed between a moment logged data is logged and a moment the logged data is included in a report to be reported; and
 - a relative time stamp for a Radio Resource Control, RRC, connection establishment failure as a time elapsed from a last RRC connection establishment failure to a time when the log is included in a report.
29. The method of claim 1 wherein at least a portion of the log is reported to a network node (18).
30. A wireless device (14) configured to operate in a cellular communications network (10), comprising:
a radio subsystem (20); and
a processing subsystem (22) associated with the radio subsystem (20) and configured to:
log data to provide a log; and
maintain an accuracy of time stamping for the log to meet a non-linear time drift constraint.
31. The wireless device (14) of claim 30 wherein the non-linear time drift constraint is a constraint that a time drift of the time stamping for the log is not larger than $\pm X$ seconds per hour and $\pm Y$ seconds over 48 hours.
32. The wireless device (14) of claim 31 wherein X is 0.72.
33. The wireless device (14) of claim 32 wherein Y is 1.73.

34. The wireless device (14) of claim 31 wherein the log is one or more of a Radio Resource Control, RRC, connection establishment failure log, a radio link failure log, a random access failure log, a paging channel failure log, a broadcast channel failure log, data related to failure of specific channels, and a radio measurement.

5

35. The wireless device (14) of claim 31 wherein the log is a Minimization of Drive Test, MDT, log.

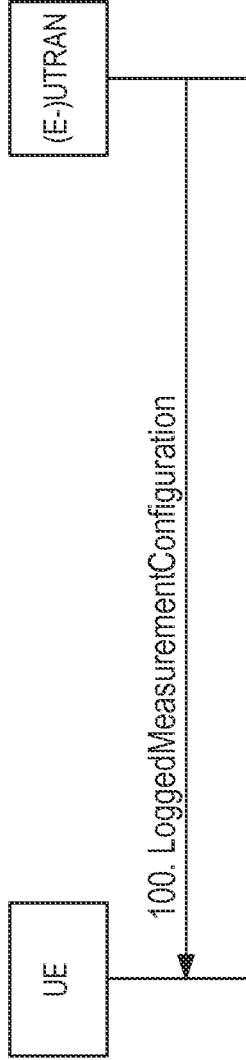


FIG. 1

```

LoggedMeasurementConfiguration-r10-IEs ::= SEQUENCE {
  traceReference-r10          TraceReference-r10,
  traceRecordingSessionRef-r10 OCTET STRING (SIZE (2)),
  tce-Id-r10                 OCTET STRING (SIZE (1)),
  absoluteTimeInfo-r10      AbsoluteTimeInfo-r10,
  areaConfiguration-r10     AreaConfiguration-r10 OPTIONAL, --Need OR
  loggingDuration-r10       LoggingDuration-r10,
  loggingInterval-r10       LoggingInterval-r10,
  nonCriticalExtension       LoggedMeasurementConfiguration-v11x0-IEs OPTIONAL
}

```

```

LoggedMeasurementConfiguration-v11x0-IEs ::= SEQUENCE {
  lateNonCriticalExtension OCTET STRING OPTIONAL, --Need OP
  plmn-IdentityList-r11    PLMN-IdentityList3-r11 OPTIONAL, --Need OP
  areaConfiguration-v11x0 AreaConfiguration-v11x0 OPTIONAL, --Need OR
  nonCriticalExtension     SEQUENCE {} OPTIONAL, --Need OP
}

```

FIG. 2

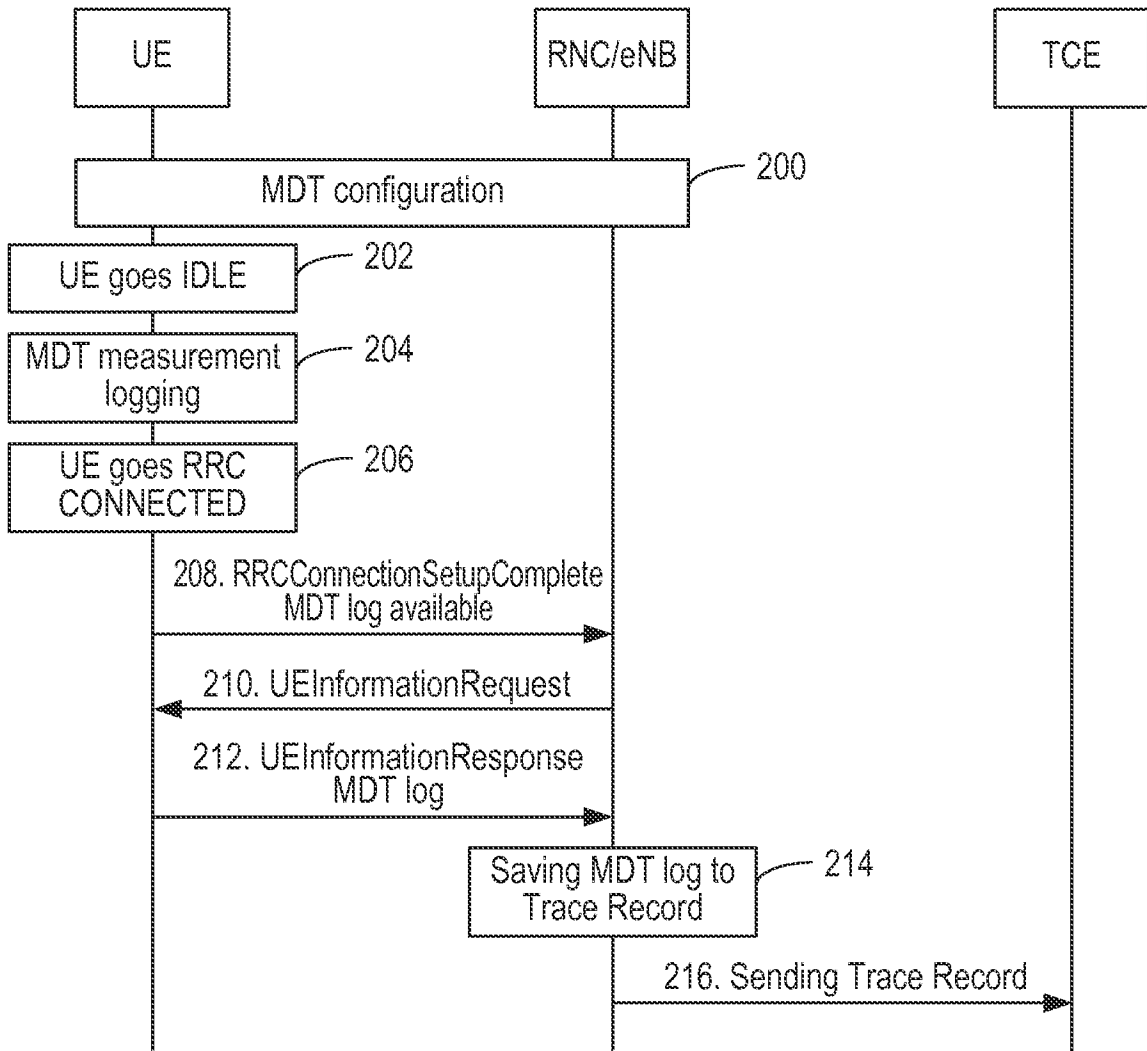


FIG. 3


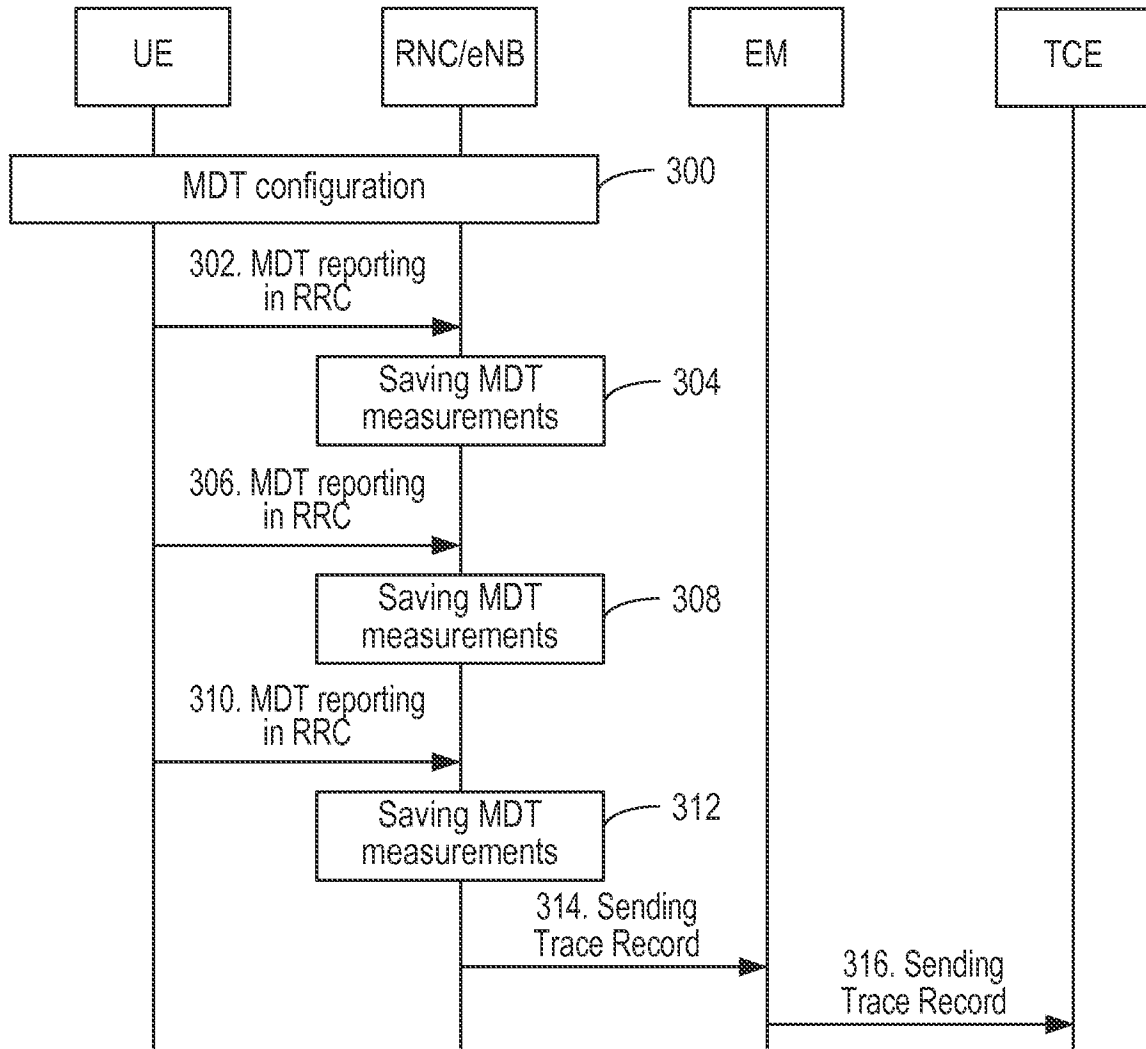


FIG. 4

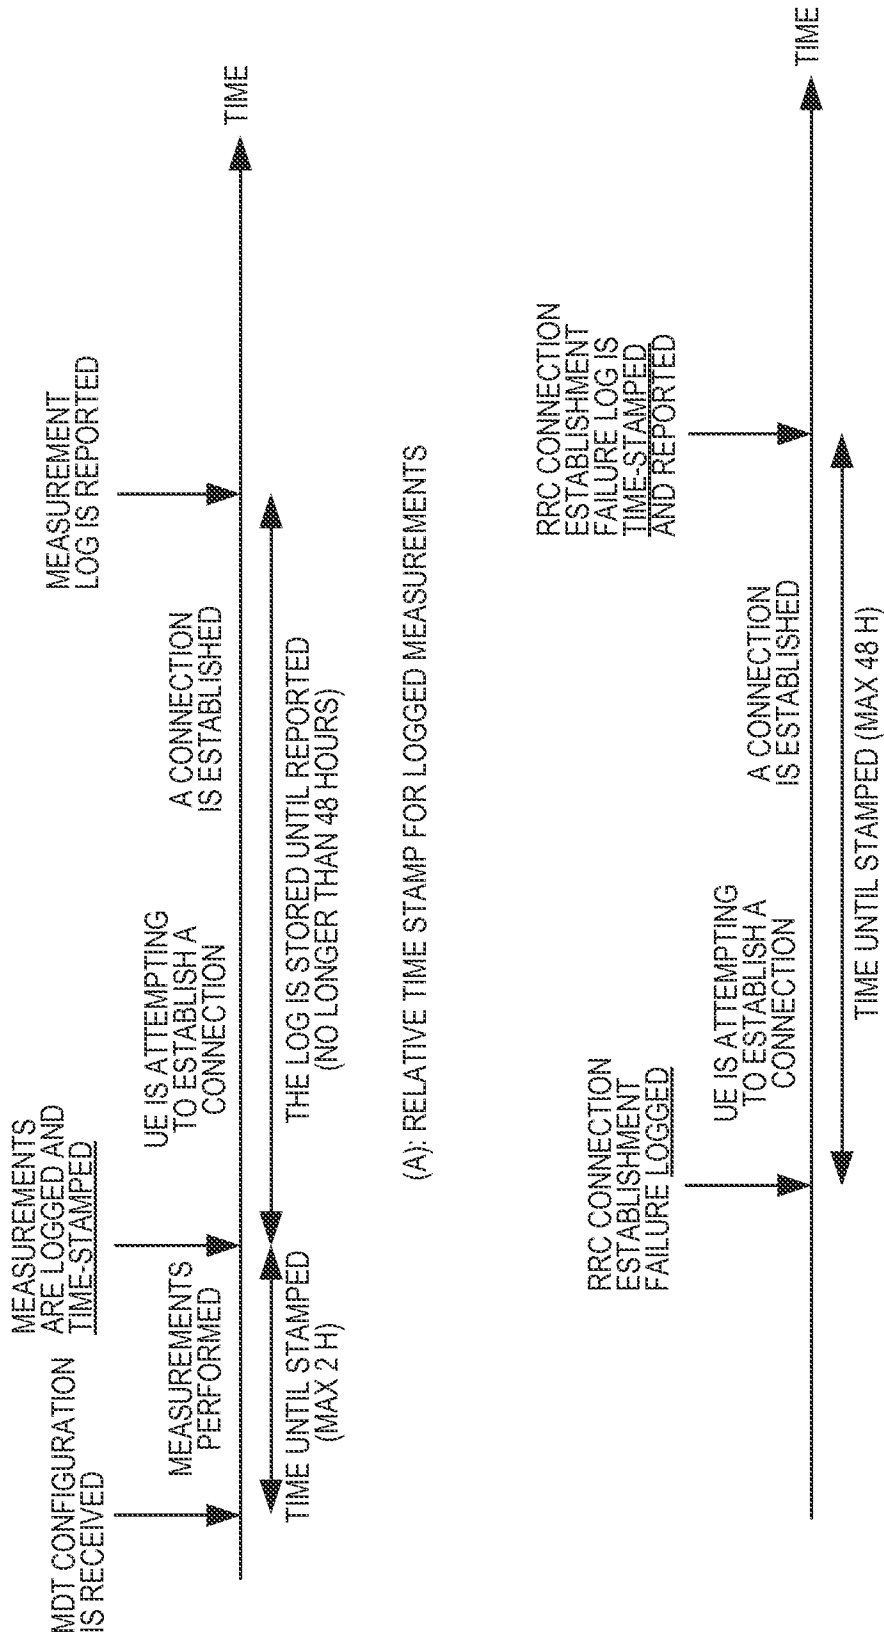

(A): RELATIVE TIME STAMP FOR LOGGED MEASUREMENTS

(B): RELATIVE TIME STAMP FOR RRC CONNECTION ESTABLISHMENT FAILURE LOG REPORTING

FIG. 6

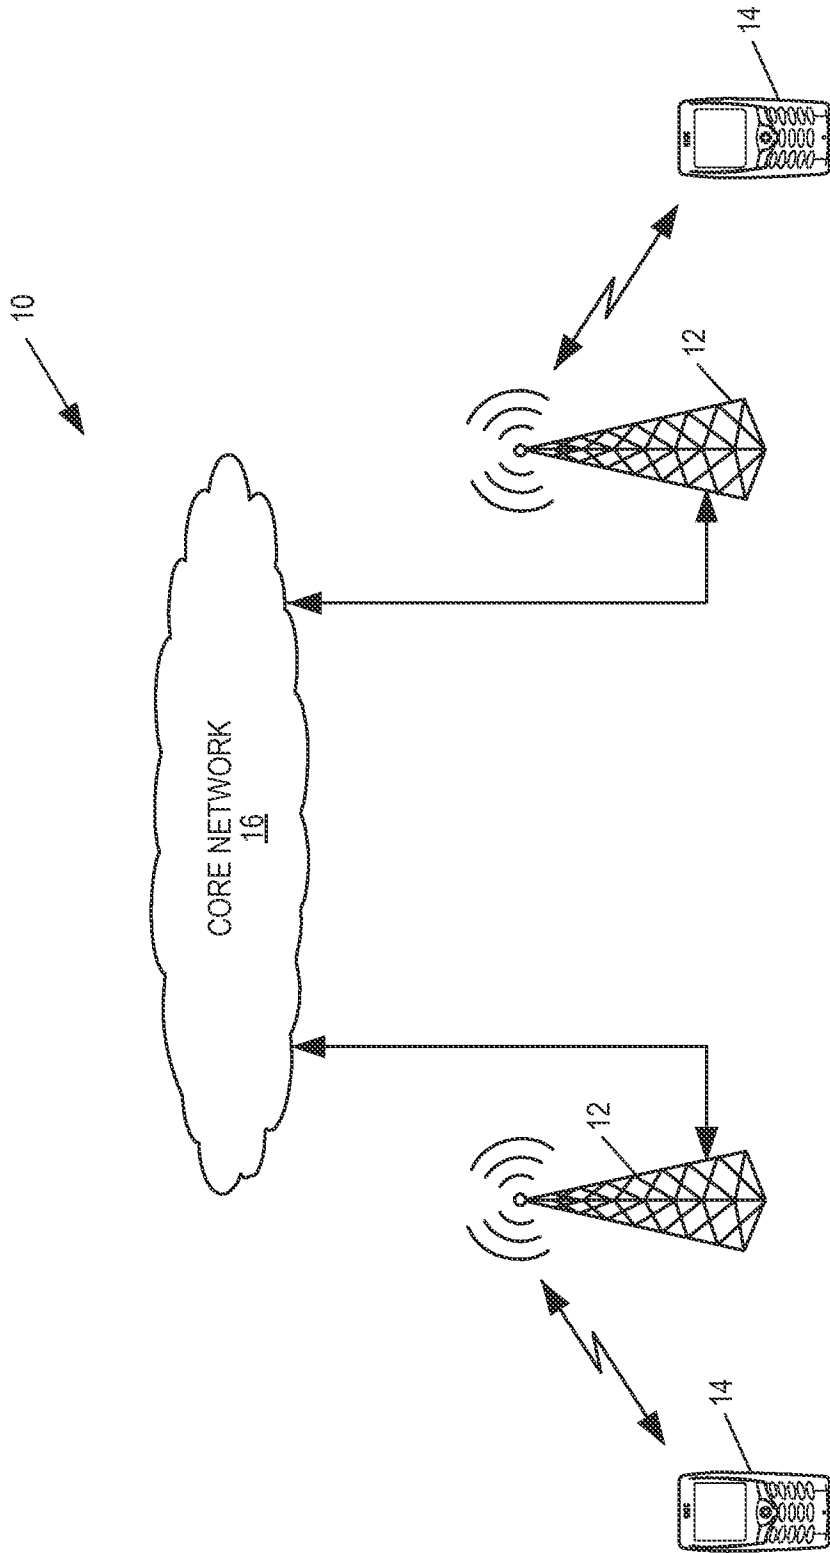
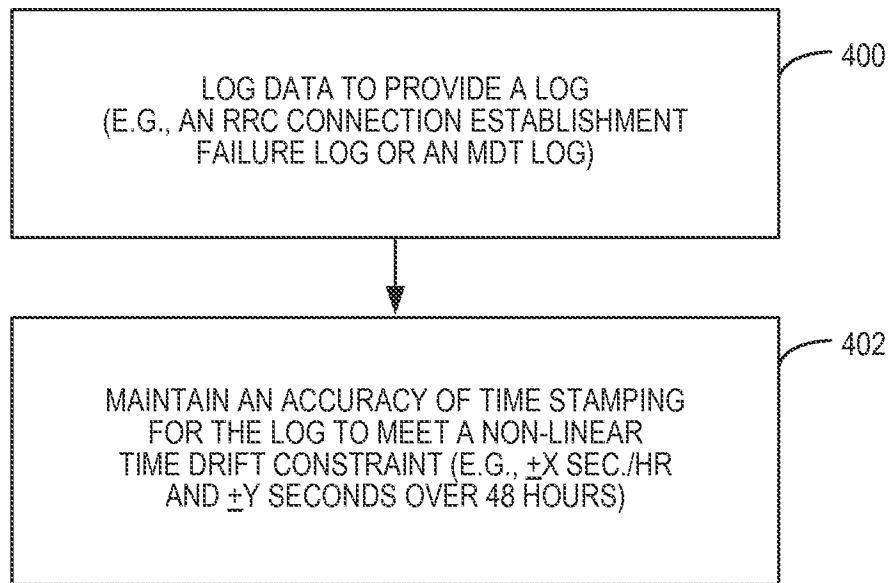
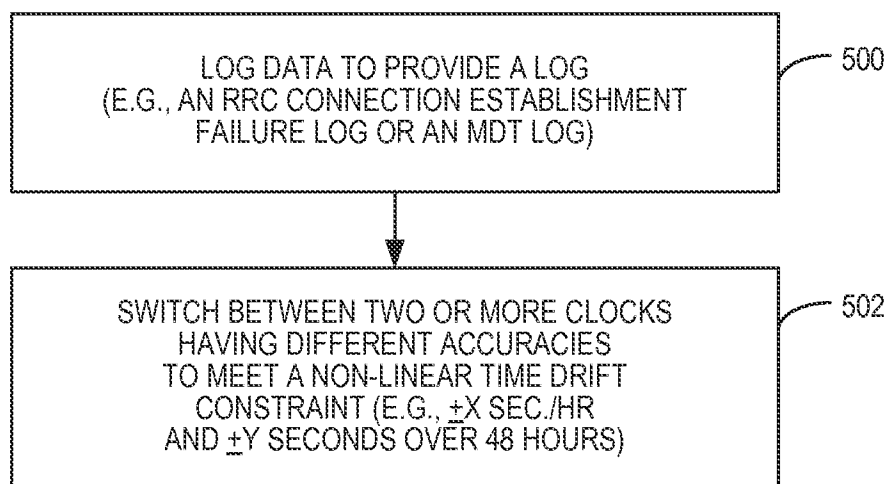


FIG. 7

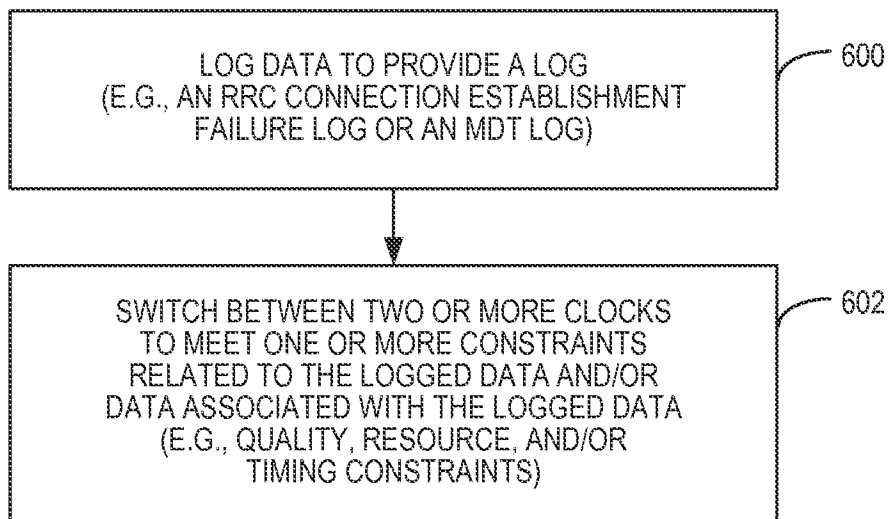
7/14

**FIG. 8**

8/14

**FIG. 9**

9/14

**FIG. 10**

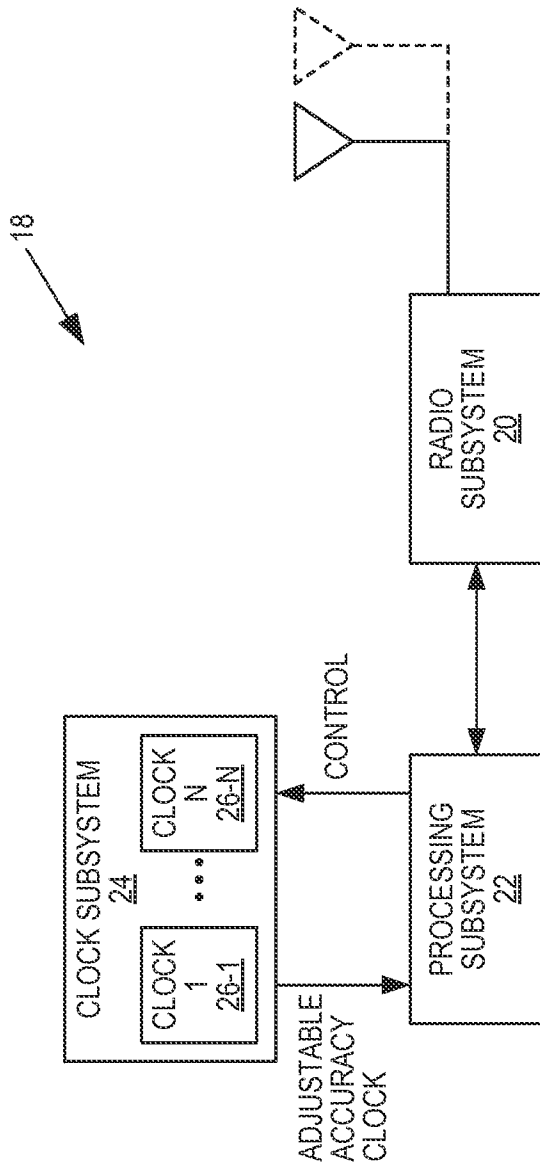
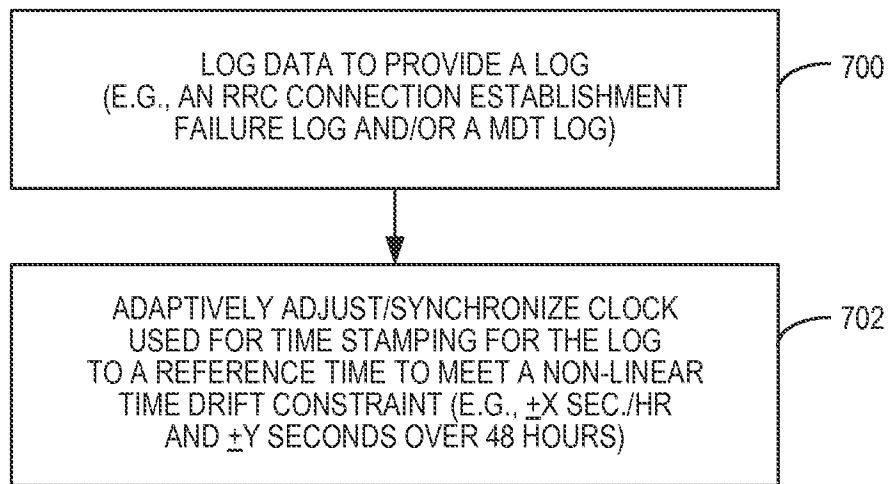


FIG. 11

11/14

**FIG. 12**

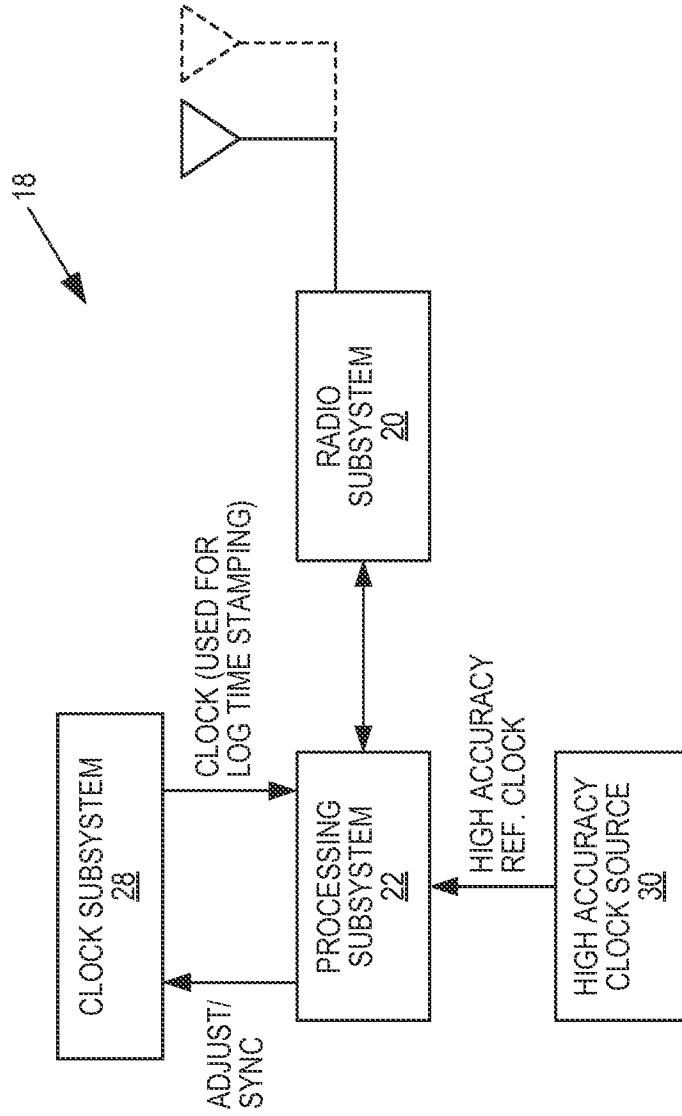
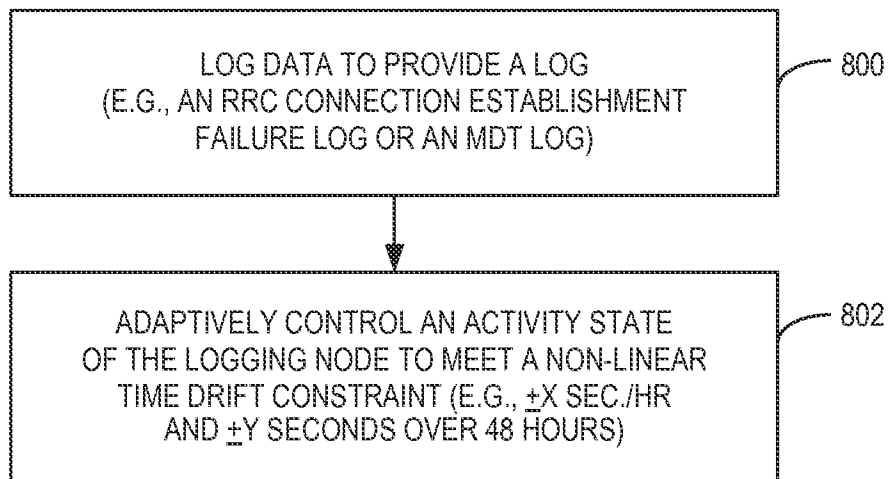


FIG. 13

13/14

**FIG. 14**

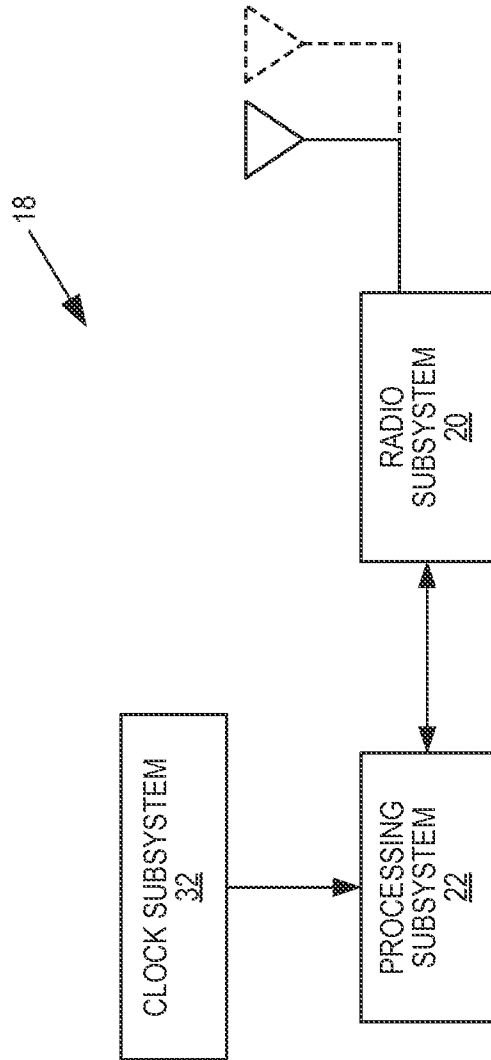


FIG. 15

INTERNATIONAL SEARCH REPORT

International application No PCT/IB2013/059917

A. CLASSIFICATION OF SUBJECT MATTER INV. H04W56/00 H04W52/02 H04J3/06 ADD. H04W24/02 H04W52/00 G06F1/14				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) H04W G06F H04J G01D H03L G04G H04B				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	HUAWEI ET AL: "Further discussion on relative time stamp accuracy for MDT", 3GPP DRAFT; R4-112059, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. RAN WG4, no. Shanghai, China; 20110411, 6 April 2011 (2011-04-06), XP050502037, [retrieved on 2011-04-06]	1-12, 28-35		
Y	the whole document	13-27		
Y	CA 2 669 041 A1 (RESEARCH IN MOTION LTD [CA]) 16 December 2010 (2010-12-16) page 9, line 5 - page 10, line 11 page 14, line 25 - page 16, line 26 page 17, line 6 - line 21 ----- -/--	13-27		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.				
* Special categories of cited documents : <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family </td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family			
Date of the actual completion of the international search	Date of mailing of the international search report			
18 February 2014	25/02/2014			
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Pieper, Thomas			

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2013/059917

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>DANIELLE GRIFFITH ET AL: "A 65nm CMOS DCXO system for generating 38.4MHz and a real time clock from a single crystal in 0.09mm²", RADIO FREQUENCY INTEGRATED CIRCUITS SYMPOSIUM (RFIC), 2010 IEEE, IEEE, PISCATAWAY, NJ, USA, 23 May 2010 (2010-05-23), pages 321-324, XP031684164, ISBN: 978-1-4244-6240-7 abstract page 321, left-hand column, paragraph 1 - page 322, left-hand column, paragraph 1 page 323, paragraph III -----</p>	1-30
A	<p>Thomas Schmid ET AL: "Exploiting Manufacturing Variations for Compensating Environment-induced Clock Drift in Time Synchronization * Wildlife Reserve in Riverside County", SIGMETRICS 2008, 2 June 2008 (2008-06-02), pages 1-12, XP055102602, Annapolis, Maryland, US Retrieved from the Internet: URL:http://wiesel.ece.utah.edu/media/documents/pdf/2010/01/23/schmid2008sigmetrics.pdf [retrieved on 2014-02-17] page 2, left-hand column, last paragraph - page 3, right-hand column, paragraph 3; figures 2-4 page 5, right-hand column, last paragraph - page 6, left-hand column, paragraph 3 page 11, left-hand column - right-hand column, paragraph 2; figures 20,21 -----</p>	1,30
A	<p>MIYAYAMA T ET AL: "A new digitally temperature compensated crystal oscillator for a mobile telephone system", 19880601; 19880601 - 19880603, 1 June 1988 (1988-06-01), pages 327-333, XP010076428, abstract; figures 3-5 -----</p>	1,30
A	<p>WO 2012/060765 A1 (ERICSSON TELEFON AB L M [SE]; PERSSON HAAKAN [SE]; WIEMANN HENNING [DE]) 10 May 2012 (2012-05-10) page 1, line 1 - page 6, line 32 page 17, line 18 - line 37 ----- -/--</p>	1-30

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2013/059917

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>3GPP: "3rd Generation Partnership Project; Technical Specification Group TSG RAN Universal Terrestrial Radio Access (UTRA) and Evolved Universal Terrestrial Radio Access (E-UTRA); Radio measurement collection for Minimization of Drive Tests (MDT); Overall description; Stage 2 (Release 10)", 3GPP TS 37.320 V1.0.0, vol. 37.320, no. v1.0.0 1 August 2010 (2010-08-01), pages 1-14, XP002666116, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/tsg_ran/WG2_RL2/TSGR2_71/Docs/R2-105238.zip [retrieved on 2011-12-20] the whole document</p>	1-30
X	<p align="center">-----</p> <p>US 6 600 919 B1 (KAWASE YOSHIYUKI [JP]) 29 July 2003 (2003-07-29) column 6, line 61 - column 7, line 8; figure 2</p> <p align="center">-----</p>	1,30

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/IB2013/059917

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
CA 2669041	A1	16-12-2010	NONE

WO 2012060765	A1	10-05-2012	NONE

US 6600919	B1	29-07-2003	JP 3351396 B2 25-11-2002
			JP 2001036966 A 09-02-2001
			KR 20010021110 A 15-03-2001
			US 6600919 B1 29-07-2003
