



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>7</sup> : <b>B01J 19/00, G01N 33/543</b></p>	<p><b>A2</b></p>	<p>(11) International Publication Number: <b>WO 00/23182</b></p> <p>(43) International Publication Date: 27 April 2000 (27.04.00)</p>
<p>(21) International Application Number: PCT/US99/23880</p> <p>(22) International Filing Date: 14 October 1999 (14.10.99)</p> <p>(30) Priority Data: 09/174,606 19 October 1998 (19.10.98) US</p> <p>(71) Applicant: MOTOROLA, INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).</p> <p>(72) Inventors: FOLEY, Barbara; 14842 South Foxtail Lane, Phoenix, AZ 85048 (US). BRIONES, Natalia; 1345 West Pampa Avenue, Mesa, AZ 85202 (US).</p> <p>(74) Agents: INGRASSIA, Vincent, B. et al.; Motorola, Inc., Intellectual Property Dept., P.O. Box 10219, Scottsdale, AZ 85271-0219 (US).</p>		<p>(81) Designated States: JP, KP, SG, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p><b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i></p>
<p>(54) Title: METHOD OF BONDING BIO-MOLECULES TO A TEST SITE</p>		
<p>(57) Abstract</p> <p>A method of bonding bio-molecules to a test site (32, 42, 62) including providing a substrate (16, 45, 46, 65) having a test site defined on a surface thereof, providing a solution (22, 55, 70) containing a plurality of probe molecules (30, 40, 60) and bonding material (54, 72), directing light (33, 50, 69) from a light source (35, 52, 67) onto the test site so as to cause the bonding material to bond the probe molecules to the test site.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakistan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD OF BONDING BIO-MOLECULES  
TO A TEST SITE

5 Field of the Invention

This invention relates to fabrication of bio-molecule analyzers.

More particularly, the present invention relates to  
10 methods of bonding, i.e. fixing or attaching physically  
but not necessarily chemically, bio-molecules to test  
sites.

15 Background of the Invention

Identification of molecular structure has become very  
important in many industries. In particular, biological  
molecules such as nucleic acids and proteins are analyzed  
20 to form the basis of clinical diagnostic assays. The  
procedures utilized often involve large numbers of  
repetitive steps which consume large amounts of time.  
With the advent of large projects such as the human genome  
project, faster and less complex techniques are required.

25 Simpler and quicker analysis of molecules has been  
provided by the development of devices often referred to  
as bio chips, which are arrays of test sites formed on a  
substrate. Each of the plurality of test sites includes

probes therein to bond with target molecules from samples applied to the device. The binding of a molecule to a probe is noted, thereby identifying the molecule.

While increasing the speed and efficiency of  
5 analyzing samples, the arrays of test sites must still immobilize specific bio-molecules on a solid surface to act as probes. Conventional bonding of probe molecules to the test sites includes polymerization of monomers attached to the probe molecule. While effective, the bond  
10 can be tenuous. Thus a new and novel method of bonding is desired, which provides robust and uniform deposition of the bio-molecule probes.

It would be highly advantageous, therefore, to remedy the foregoing and other deficiencies inherent in the prior  
15 art.

Accordingly, it is an object of the present invention to provide a new and improved bonding method.

Another object of the present invention is to provide a method of bonding probe molecules to test sites which is  
20 robust and uniform.

#### Summary of the Invention

25 Briefly, to achieve the desired objects of the instant invention, in accordance with a preferred embodiment thereof, provided is a method of bonding bio-molecules to a test site including providing a substrate

having a test site defined on a surface thereof, providing  
a solution containing a plurality of probe molecules and  
bonding material, directing light from a light source onto  
the test site so as to cause the bonding material to bond  
5 the probe molecules to the test site.

In a specific method of bonding, the bonding material  
includes a binder which cross-links under the influence of  
the light, capturing and retaining the bio-molecules.

A further specific method of bonding includes  
10 providing a test site having a metal base, directing the  
light onto the metal base so as to heat the metal base,  
and providing a bonding material, bonded to the bio-  
molecules, which melts in response to the heat of the  
metal base and adheres to the test site.

15

#### Brief Description of the Drawings

The foregoing and further and more specific objects  
20 and advantages of the instant invention will become  
readily apparent to those skilled in the art from the  
following detailed description of preferred embodiments  
thereof taken in conjunction with the drawings in which:

FIG. 1 is a sectional view of a bio-molecule analyzer  
25 according to the present invention;

FIG. 2 is a sectional view illustrating another  
embodiment of a bio-molecule analyzer according to the  
present invention;

FIG. 3 is a greatly enlarged sectional view illustrating a method of bonding bio-molecules to a test site according to the present invention; and

FIGS. 4 is a greatly enlarged sectional view illustrating another method of bonding bio-molecules to a test site according to the present invention.

#### Detailed Description of the Preferred Embodiments

10

Turning now to the drawings in which like reference characters indicate corresponding elements throughout the several views, attention is first directed to FIG. 1 which illustrates a bio-molecule analyzer generally designated 10. Bio-molecule analyzer 10 includes a substrate 12 preferably fabricated of silicon, glass, plastic, etc., a thin conductive layer 14 formed on substrate 12, and a photoconductive layer 16 formed on thin conductive layer 14. Thin conductive layer 14 can be any conductive material such as gold, platinum etc., and can be indium tin oxide (ITO) or other optically transparent conductors for reasons which will become apparent from the subsequent description. Photoconductive layer 16 is a material such as amorphous silicon, CdS, CdSe, various photoconductive polymers, etc. which becomes conductive when subjected to light.

25

Still referring to FIG. 1, a lead 18 is coupled to conductive layer 14 and a lead 20 is coupled to a solution

22 positioned in electrical contact with a surface 24 of photoconductive layer 16 opposite to conductive layer 14. While not specifically shown, it will be understood that solution 22 is in electrical contact only with surface 24 and not with conductive layer 14. A potential is applied across leads 18 and 20 and thus between solution 22 and conductive layer 14.

Still referring to FIG. 1, a beam or beams of light 33 are directed through a portion 34 of photoconductive layer 16 defining a test site 30 (preferably one test site for each beam). In this embodiment, test sites 30 are formed into an array, with each test site 30 being an area of surface 24 substantially coextensive with a corresponding portion 34. The beam or beams of light 33 complete an electrical circuit between conductive layer 14 and solution 22 through portion 34 of photoconductive layer 16. This is accomplished by beam of light 33 temporarily converting portion 34 of photoconductive layer 16 to a conducting medium.

Solution 22 contains ionic probe molecule to be bound to test sites 30. By completing the circuit, the ionic probe molecules in solution 22 are attracted to and concentrate proximate surface 24 at a selected one or ones of test sites 30. It will be understood that any method of controllably illuminating a selected portion 34 of photoconductive layer 16 can be used, such as a masked light source, the use of a laser or diode array 35 or similar device instead of or in combination with a mask

which permits passage of light in only the desired locations. Array 35 can be a one dimensional or two dimensional array of light sources which are individually addressable, i.e. one or more light sources can be  
5 activated as desired.

The array of test sites 30 (micro-locations) defined on surface 24 have groups of probes 32 coupled thereto. Each test site 30 contains a plurality of probes 32 which are capable of binding to specific molecular structures.  
10 The molecular structure can comprise, for example, bio-molecules such as polynucleotides, protein, DNA, RNA, enzymes, antibodies, antigens, etc. In the case of DNA or RNA testing, probes 32 can comprise, for example, oligonucleotides. All probes 32 at a given test site 30  
15 are identical. Probes in respective test sites differ in sequence for simultaneous detection of a plurality of different target molecules within a single array. Each test site 30 is individually addressable by array 35 to provide the ability to attract ionic probe molecules from  
20 solution 22 to selected test site(s) 30 in order to fabricate an array of test sites each for detecting different molecules or sequences.

In the previous description, light 33 is directed at photoconductive layer 16 through solution 22. With  
25 reference to FIG. 2, the same elements are illustrated, but light 33 is directed through substrate 12 and thin conductive layer 14. In this case, substrate 12 must be formed of a material transparent to light 33 such as



glass, plastic, etc., and thin conductive layer 14 must be a transparent conductor such as indium tin oxide (ITO), various thin metals or other optically transparent materials. It will be understood that when the term  
5 transparent is used throughout the text, it refers to a material's ability to transmit light being used to transform photoconductive layer 16.

A specific process of fabricating a bio-molecule analyzer (e.g. analyzer 10) includes providing a first  
10 solution, containing a plurality of first probe molecules, in electrical contact with the plurality of test sites 30. An electrical potential is applied between the first solution and the layer of electrically conductive material 14 by means of leads 18 and 20. A beam of light 33 is  
15 directed through a first portion 34 of the photoconductive layer 16 to complete an electrical circuit between the layer of electrically conductive material 14 and the first solution through the first portion 34 of the  
photoconductive layer 16 and a first test site 30 of the  
20 array of test sites. Completing the electrical circuit causes first probe molecules in the first solution to be attracted to a first test site 30.

After being attracted to first test site 30, a method of bonding bio-molecules according to the present  
25 invention is employed. The first solution contains bonding material along with the first probe molecules. Beam of light 33 from the light source is contemporaneously directed onto the first test site so as

to cause the bonding material to bond the first probe molecules to the first test site by entrapment of the probes in the bonding material which will be cross-linked by the presence of the light.

5           The circuit is then broken by deactivating the light source and the first solution is removed leaving a test site with a plurality of identical probes bound thereto.

          The fabrication process continues by providing a second solution, containing a plurality of second probe  
10 molecules, in electrical contact with the plurality of test sites 30. An electrical potential is applied between the second solution and the layer of electrically  
conductive material 14 by means of leads 18 and 20. A beam of light 33 is directed through a second portion 34  
15 of the photoconductive layer 16 to complete an electrical circuit between the layer of electrically conductive material 14 and the second solution through the second portion 34 of the photoconductive layer 16 and a second test site 30 of the array of test sites. Completing the  
20 electrical circuit causes second probe molecules in the second solution to be attracted to a second test site 30 where they are bound as described above and as described in greater detail below.

          This process is repeated as many times as needed to  
25 produce a bio-molecule analyzer having a desired number or array of different test sites each with different probe molecules. In this fashion, an analyzer having a one or two dimensional array of test sites can be easily

fashioned with a reduction in labor intensity greater accuracy, quicker processing and the ability to build very small test sites.

Turning now to FIG. 3, illustrated is a specific method of bonding probe molecules 40 to a test site 42 according to the present invention. The method includes providing a substrate 45 having test site 42 defined on a surface thereof. In this specific embodiment, test site 42 is defined by a depression 46 formed in the surface of substrate 45 and includes a metal base 47 formed therein. Metal base 47 can be formed in any convention manner such as depositing by small melting metal tip. A beam of light 50 from a light source 52 is directed onto metal base 47 so as to heat metal base 47. A solution 53 includes bonding material 54 coupled to bio-molecules 40. Bonding material 54 melts in response to the heat of metal base 47 and adheres to test site 42 in depression 46 and to metal base 47. Any material which can be bonded to the probe molecules and which will melt at the temperatures generated can be employed. An example of a bonding material is polystyrene which has been chemically modified, as will be understood by those skilled in the art, to perform the bonding or entrapment features. It should be understood that while metal base 47 is shown as being conical in shape, other shapes (e.g. single shapes or plurality of shapes which can include cones, blobs, droplets, pads, etc.) are anticipated, with the conical

shape providing the largest surface area and providing the most efficient shape for heat conduction.

Referring now to FIG. 4 illustrated is another method of bonding probe molecules 60 to a test site 62 according to the present invention. The method includes providing a substrate 65 having test site 62 defined on a surface thereof. In this specific embodiment, test site 62 is defined by a light source 67 as illustrated by broken lines 68. A beam of light 69 from light source 67 is directed onto test site 62. A solution 70 includes bonding material 72 which crosslinks under the influence of beam of light 69, capturing and retaining probe molecules 60. In this specific embodiment, the bonding material is polyacrylamide. However, one skilled in the art will understand that other bonding materials may be employed which cross-link in the presence of light.

While a specific analyzing system utilizing electrical circuitry is disclosed above, it will be understood that this method can be used to fabricate any bio analyzer in which probe molecules are bonded, i.e. fixed or attached, to a test site.

Thus provided is a method of bonding, fixing, or attaching probe molecules to test sites which is robust and uniformly distributes probe molecules.

Various modifications and changes to the embodiments herein chosen for purposes of illustration will readily occur to those skilled in the art. Other modifications and variations may be made by those skilled in the art

without departing from the scope of the invention as defined by the following claims.

Having fully described and disclosed the present invention and preferred embodiments thereof in such clear  
5 and concise terms as to enable those skilled in the art to understand and practice same, the invention claimed is:

1. A method of bonding bio-molecules to a test site comprising the steps of:

providing a substrate having a test site defined on a surface thereof;

5 providing a solution containing a plurality of probe molecules and bonding material;

providing a light source; and

directing light from the light source onto the test site so as to cause the bonding material to bond the probe  
10 molecules to the test site.

2. A method as claimed in claim 1 wherein the bonding material includes a binder which cross-links under the influence of the light, capturing and retaining the  
15 bio-molecules.

3. A method as claimed in claim 2 wherein the binder includes polyacrylamide.

20 4. A method as claimed in claim 1 wherein the step of providing the substrate includes providing a test site having a metal base, and the step of directing the light from the light source onto the test site includes directing the light onto the metal base so as to heat the  
25 metal base.

5. A method as claimed in claim 4 wherein the step of providing the solution including bonding material includes a bonding material, bonded to the bio-molecules, which melts in response to the heat of the metal base and adheres to the test site.

6. A method as claimed in claim 5 wherein the metal base is conical.

7. A method as claimed in claim 5 wherein the bonding material includes chemically modified polystyrene.

8. A method of bonding bio-molecules to a plurality of test sites comprising the steps of:

providing a substrate having a plurality of test sites defined on a surface thereof;

providing a first solution containing a plurality of first probe molecules and bonding material;

providing a light source; and

directing light from the light source onto a first test site of the plurality of test sites so as to cause the bonding material to bond the first probe molecules to the first test site;

providing a second solution containing a plurality of second probe molecules and bonding material; and


directing light from the light source onto a second test site of the plurality of test sites so as to cause

the bonding material to bond the second probe molecules to the second test site.


9. A method as claimed in claim 8 wherein the  
5 bonding material includes a binder which cross-links under the influence of the light, capturing and retaining the bio-molecules.

10. A method as claimed in claim 8 wherein the step  
10 of providing the substrate includes providing a test site having a metal base, the step of directing the light from the light source onto the test site includes directing the light onto the metal base so as to heat the metal base, and the step of providing the solution including bonding  
15 material includes a bonding material, bonded to the bio-molecules, which melts in response to the heat of the metal base and adheres to the test site.




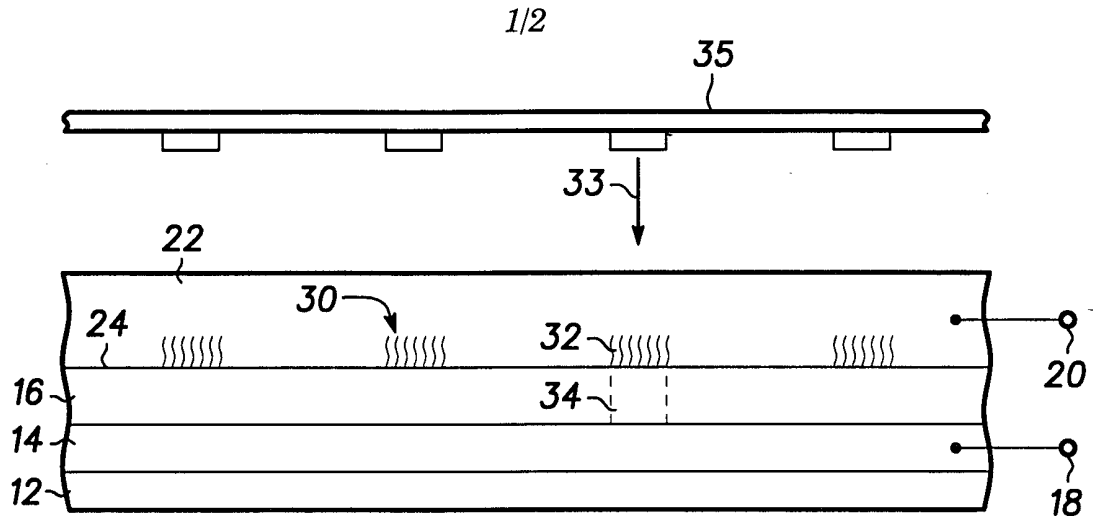


10 **FIG. 1**

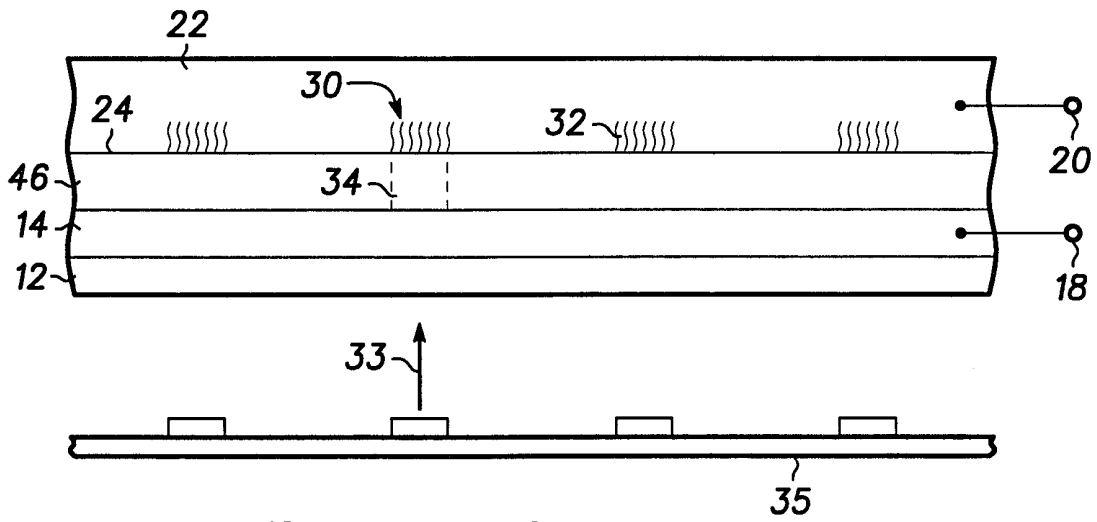

10 **FIG. 2**

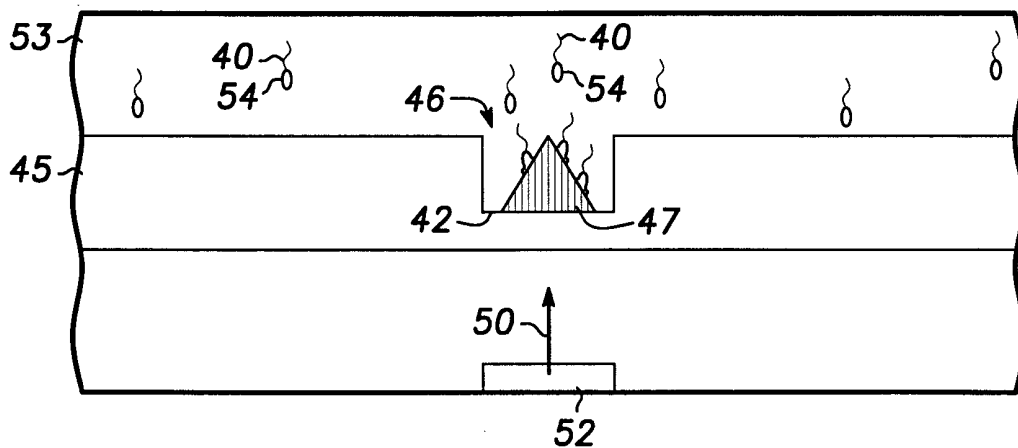

**FIG. 3**

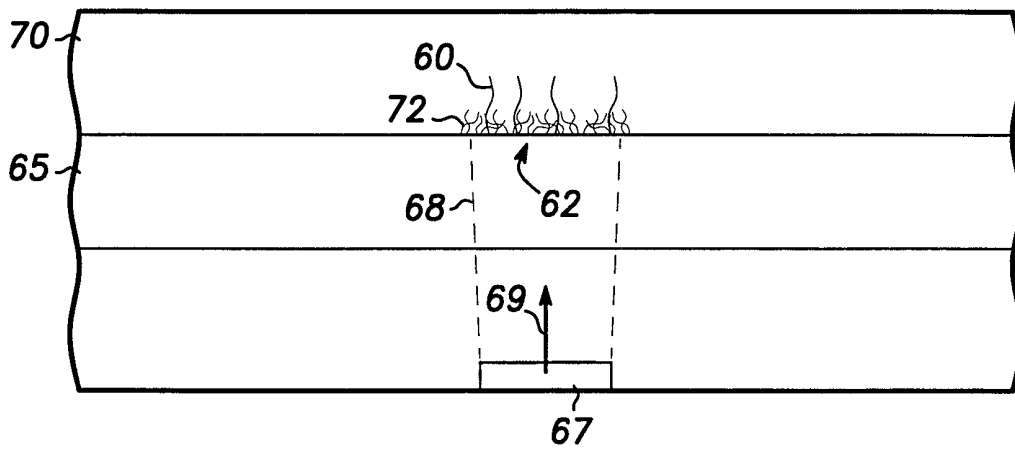

**FIG. 4**