



- (51) International Patent Classification:
B01J 8/18 (2006.01) *C07C 2/08* (2006.01)
C07C 11/00 (2006.01)
- (21) International Application Number:
PCT/US2009/042456
- (22) International Filing Date:
1 May 2009 (01.05.2009)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
12/145,576 25 June 2008 (25.06.2008) US
- (71) Applicant (for all designated States except US): UOP LLC [US/US]; 25 East Algonquin Road, P. O. Box 5017, Des Plaines, IL 60017-5017 (US).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): STEWART, Douglas, G. [US/US]; UOP LLC, 25 East Algonquin Road, P. O. Box 5017, Des Plaines, IL 60017-5017 (US). RILEY, Mark, G. [US/US]; UOP LLC, 25 East Algonquin Road, P. O. Box 5017, Des Plaines, IL 60017-5017 (US). BERNARD, Peter, M. [US/US]; UOP LLC, 25 East Algonquin Road, P. O. Box 5017, Des Plaines, IL 60017-5017 (US).
- (74) Common Representative: UOP LLC; 25 East Algonquin Road, P.O. Box 5017, Des Plaines, Illinois 60017 - 5017 (US).

[Continued on next page]

(54) Title: IMPROVED REACTOR DESIGN FOR SMALLER BATCH TRANSFERS OF CATALYST

10

(57) Abstract: A moving bed of catalyst loses activity as it moves through the reactor. Creating multiple passes for the process fluid moving across a catalyst bed, increases the utilization of the catalyst and creates a pseudo-counter current flow of catalyst and process fluid. The flow improves the temperature profile of the bed and allows higher temperature fluid contacting the less active catalyst.

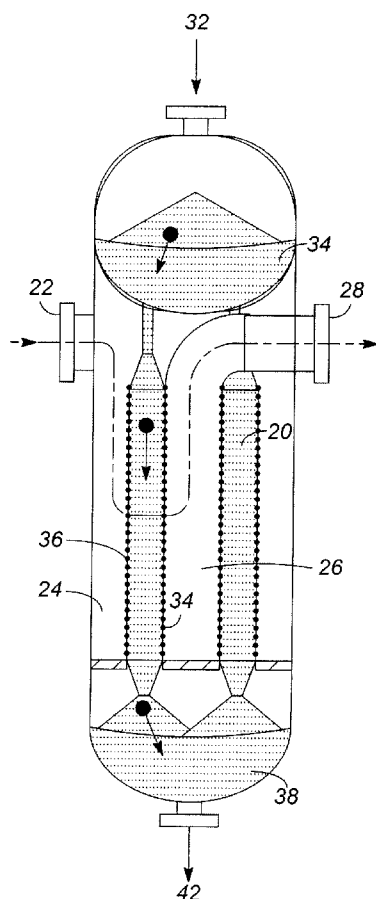


FIG. 1



WO 2010/008652 A1



(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

IMPROVED REACTOR DESIGN FOR SMALLER BATCH
TRANSFERS OF CATALYST

FIELD OF THE INVENTION

[0001] This invention relates to a radial flow reactor for use in a hydrocarbon conversion
5 process. The process involves a catalyst moving down through the reactor, where the catalyst
becomes deactivated over time, and the fluid reactants move across the reactor bed.

BACKGROUND OF THE INVENTION

[0002] A process for the conversion of paraffins to olefins involves passing a normal
paraffin stream over a highly selective catalyst, where the normal paraffin is dehydrogenated to
10 the corresponding mono-olefin. The dehydrogenation reaction is achieved under mild operating
conditions, thereby minimizing the loss of feedstock.

[0003] The typical process involves the use of a radial flow reactor where a paraffin
feedstock is contacted with a dehydrogenation catalyst under reaction conditions. The typical
process involves dehydrogenating linear paraffins in the C7 to C11 range to produce olefins
15 used as plasticizers, for dehydrogenating paraffins in the C10 to C14 range to produce linear
olefins for the production of linear alkyl benzenes (LABs), and for dehydrogenating paraffins in
the C12 to C17 range to produce detergent alcohols or olefin sulfonates.

[0004] The process is affected by reactor design, and processing costs can increase
substantially if the catalyst is underutilized, the reactor is required to be shut down to reload
20 catalyst, or operating conditions need to be significantly changed as the catalyst deactivates.

SUMMARY OF THE INVENTION

[0005] In a radial flow reactor, the catalyst moves downward through an annular region,
while the fluid reactants move across the catalyst bed. As the catalyst moves downward and
processes more of the feedstream, it becomes less active. The reduction in activity requires the
25 increase in temperature of the operating conditions to maintain the desired level of conversion.
The present invention redesigns the reactor to take advantage of the lower activity catalyst as the
catalyst flows through the reactor. The invention comprises a radial flow reactor having a

flow reactor having a substantially cylindrical housing. Disposed within the housing is a centerpipe with a process fluid inlet and a process fluid outlet, and where the centerpipe is perforated to allow for the passage of fluid through the centerpipe wall, but prevents the passage of solid catalyst. The reactor further includes an annular perforated screen disposed between the centerpipe and the housing, thereby forming a region for holding the flowing catalyst through the reactor between the centerpipe and the annular perforated screen, and an annular space between the annular screen and the housing wall. The centerpipe includes a restriction within the pipe to prevent the flow of process fluid directly from the inlet to the outlet. The process fluid is thereby directed across the catalyst bed from the centerpipe to the annular space, and redirected to flow back across the catalyst bed.

[0006] In another embodiment, the invention comprises a plurality of restrictions within the centerpipe, and a plurality of seals between the annular screen and the reactor housing to increase the number of times the process fluid traverses the catalyst bed.

[0007] Other objects, advantages and applications of the present invention will become apparent to those skilled in the art from the following detailed description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Figure 1 is a standard radial flow reactor design;

[0009] Figure 2 is a diagram of one embodiment of the invention, with a single valve;

[0010] Figure 3 is a diagram of a second embodiment with a cone fill for reducing the void space in the centerpipe, and a bypass;

[0011] Figure 4 is a third embodiment of the invention with multiple valves in the centerpipe and multiple passes through the catalyst bed; and

[0012] Figure 5 is a fourth embodiment with a flow bypass.

DETAILED DESCRIPTION OF THE INVENTION

[0013] The use of radial flow reactors is common in the hydrocarbon processing industry. One example is the conversion of paraffins to olefins, where a paraffin rich gas is passed over a catalyst to dehydrogenate the paraffins to generate a product stream comprising olefins. The dehydrogenation reaction is achieved under mild operating conditions to minimize loss of the

of the feedstock to byproducts. The paraffins to olefins conversion is important for the production of linear alkylbenzenes, where linear paraffins in the C7 to C26 range to produce linear alpha olefins.

[0014] In some processes, as the catalyst deactivates, the operating temperature is raised to off-set the reduction in catalyst activity, until the selectivity is too poor to continue the process. This is often done 30-40 times during a cycle, and then the catalyst is replaced in the reactor. Before the process of replacing catalyst begins, the reactor operating temperature is lowered to accept the cooler catalyst, and the feed flow is reduced to insure that catalyst is not pinned to the catalyst screen. That is, at sufficiently high flow rates of the reactor fluid, the catalyst can be held against the catalyst screen and not flow through the reactor, and therefore to insure its movement, the fluid flow is reduced. This process requires a significant amount of time and results in lost productivity.

[0015] A radial flow reactor 10, as shown in Figure 1 and as used in a paraffins to olefins conversion reactor, comprises an annular reactor bed 20 for holding catalyst, an inlet port 22 for admitting a fluid, where the fluid flows around an annular space 24, across the reactor bed 20, and into a centerpipe 26. The product then flows out the centerpipe 26 to a product outlet port 28. Fresh catalyst enters through a catalyst inlet port 32, into a reduction zone 34, where the catalyst is prepared with hot hydrogen before entry to the reactor bed 20. Catalyst enters the reactor bed 20, where it is confined between two annular screens 34, 36, flows through the reactor bed 20 and is collected in a collection zone 38. The spent catalyst is withdrawn from the collection zone 38 through a catalyst outlet port 42 and directed to a regeneration unit.

[0016] The present invention allows for the catalyst to be added in smaller increments, and to increase the catalyst utilization. The invention forces multiple passes of the fluid through the annular reactor bed 20. In a first embodiment, as shown in Figure 2, the radial flow reactor comprises a substantially cylindrical housing 12 having a central axis, and having a catalyst inlet port 32 at the top of the reactor 10 and a catalyst outlet port 42 at the bottom of the reactor 10. The reactor 10 includes a centerpipe 26, which can comprise a perforated tube, a tubular structure with catalyst screens 34, or any other structure that permits the flow of fluid across the centerpipe wall 34 which is also a catalyst screen, while preventing the flow of catalyst into the centerpipe 26. The reactor 10 further includes an annular perforated screen 36 disposed between the centerpipe wall 34 and the housing 12, and a restriction 50 disposed within the

a restriction 50 disposed within the centerpipe 26. The fluid inlet 52 is now in fluid communication with one end of the centerpipe 26. The restriction 50 forces the fluid across the reactor bed 20, and the fluid returns through the reactor bed 20 at a position further up the reactor bed 20 and returns to the centerpipe 26. The reactor 10 further includes seals 54
5 between the annular screen 36 and the reactor housing 12.

[0017] In one embodiment, the restriction 50 is a valve that can be opened to allow free passage of the fluid, or closed to force the fluid through the reactor bed 20. With a valve, the restriction 50 can allow some by-pass flow that does not go through the catalyst bed 20. This is useful for reducing the flow rate when there is catalyst pinning, or there is a need to control or
10 reduce the amount of reaction taking place. The reactor 10 further can optionally include a quench fluid line 56. The quench fluid line 56 is in fluid communication with the centerpipe outlet 28, through a quench fluid inlet port 58. The quench fluid can be used during any by-pass operation to facilitate maintaining a stable operation of the reactor 10. The quench fluid, usually gaseous hydrogen, would cool the outlet stream when there is insufficient endothermic
15 reaction taking place in the reactor bed 20, or when there is a significant bypass of the fluid from going across the reactor bed 20. An alternate quench fluid is a liquid paraffin, entering through the quench inlet port 58 at a temperature of less than 100°C.

[0018] In a second embodiment, as shown in Figure 3, the restriction 50 is a seal. A seal provides a simpler structure for the reactor 10, and removes a need for providing ports through
20 the reactor for the mechanical components required to open and close the valve. In this embodiment, an optional volume fill section 60 in the centerpipe 26. The volume fill section 60 reduces the residence time of the fluid in the centerpipe 26, which can reduce the chance of side reactions, such as thermal cracking taking place. Preferably, the volume fill section 60 is a conic shaped section, and provides additional control over directing flow through the reactor
25 bed 20 and directing the product stream out of the centerpipe 26. The second embodiment further includes an optional by-pass conduit 62. The by-pass conduit 62 allows for control of flow through the reactor 10, and can reduce the flow when there is pinning of catalyst, or for other reasons where it is necessary to reduce the flow to the reactor 10. The by-pass conduit 62 provides fluid communication between the inlet pipe 64 to the centerpipe 26 and the outlet pipe
30 66 from the centerpipe 26. The by-pass conduit 62 includes a valve 68 for opening and closing the by-pass conduit 62.

[0019] In a third embodiment, as shown in Figure 4, the reactor 10 comprises a plurality of restrictions 50 within the centerpipe 26. In Figure 4 two restrictions 50 are shown for illustration, but more restrictions 50 can be added. The number of restrictions 50 is subject to the size of the reactor 10, the length of the centerpipe 26, and other design considerations, such as limits on operating conditions and mechanical limitations. The reactor 10 includes seals 54 at the top and bottom of the reactor bed 20 between the annular perforated screen 36 and the reactor housing 12. The reactor 10 includes additional seals 54 positioned between successive restrictions 50. This provides for a plurality of passes in the reactor bed 20 by the process fluid. When the restrictions 50 are valves, the valves provide control to by-pass the reactor bed 20 when there is catalyst pinning or the need to reduce the rate of reaction.

[0020] A fourth embodiment, as shown in Figure 5, comprises a reactor 10 with a plurality of restrictions 50 within the centerpipe 26, wherein the restrictions 50 are seals that do not open or close, as described above in the second embodiment. The centerpipe 26, optionally includes volume fill sections 60 for reducing residence time of the fluid within the centerpipe. This embodiment further includes an optional by-pass conduit 62. The by-pass conduit 62 allows for control of flow through the reactor 10. The by-pass conduit 62 provides fluid communication between the inlet pipe 64 to the centerpipe 26 and the outlet pipe 66 from the centerpipe 26. The by-pass conduit 62 includes only one valve 68 for opening and closing the by-pass conduit 62, instead of multiple valves as in the third embodiment.

[0021] By providing two or more passes of the fluid across the reactor bed 20, and with the flow of fluid crossing the catalyst having the longest reactor residence time first, and the newest catalyst last, lower activity catalyst contacts higher temperature gas and improves the process. The catalyst is added in a semi-continuous process in small batches that has cooler catalyst added to the top of the reactor bed 20 where the reactor is coolest, and the catalyst withdrawn from the catalyst bed is the hottest and has lost the most activity.

[0022] The reactor 10 with multiple passes provides a pseudo counter-current radial flow reactor. The process fluid enters the reactor centerpipe 26, and successively contacts higher activity catalyst as the process fluid passes back and forth across the reactor bed 20, before exiting the reactor 10 as a product stream. The pseudo counter-current radial flow reactor also provides a favorable temperature profile, by allowing hotter gas to enter the reactor and contact lower activity catalyst. As the process fluid proceeds through the reactor and reacts, the

the temperature drops and the process fluid contacts successively the higher activity catalyst, and reduces the incremental batch feed of catalyst.

[0023] While the invention has been described with what are presently considered the preferred embodiments, it is to be understood that the invention is not limited to the disclosed
5 embodiments, but it is intended to cover various modifications and equivalent arrangements included within the scope of the appended claims.

CLAIMS:

1. A radial flow reactor comprising:
 - a substantially cylindrical housing having a central axis, and having a catalyst inlet port at the top of the reactor and a catalyst outlet port at the bottom of the reactor;
 - 5 a centerpipe having an inlet and an outlet, and with the centerpipe axis substantially aligned with the housing central axis, and the centerpipe has a perforated wall for allowing the passage of fluid through the centerpipe wall;
 - an annular perforated screen disposed between the centerpipe and the housing; and
 - a restriction disposed within the centerpipe for blocking flow through the centerpipe.
- 10 2. The radial flow reactor of claim 1 wherein the restriction in the centerpipe is a valve, allowing for opening and closing flow through the centerpipe.
3. The radial flow reactor of claim 1 further comprising seals between the annular perforated
- 15 screen and the housing.
4. The radial flow reactor of claim 1 further comprises a bypass conduit providing fluid communication between the reactor feed inlet and the reactor product outlet.
- 20 5. The radial flow reactor of claim 1 further comprising a quench fluid inlet port.
6. The radial flow reactor of claim 6 wherein the quench fluid is hydrogen.
7. The radial flow reactor of claim 6 wherein quench fluid is a liquid paraffin at a temperature
- 25 less than 100°C.
8. The radial flow reactor of claim 1 further comprising multiple restrictions in the centerpipe.
- 30 9. The radial flow reactor of claim 8 further comprising multiple seals between the annular perforated screen and the housing.
10. The radial flow reactor of claim 1 further comprising a volume fill section for filling volume in the centerpipe.

1/5

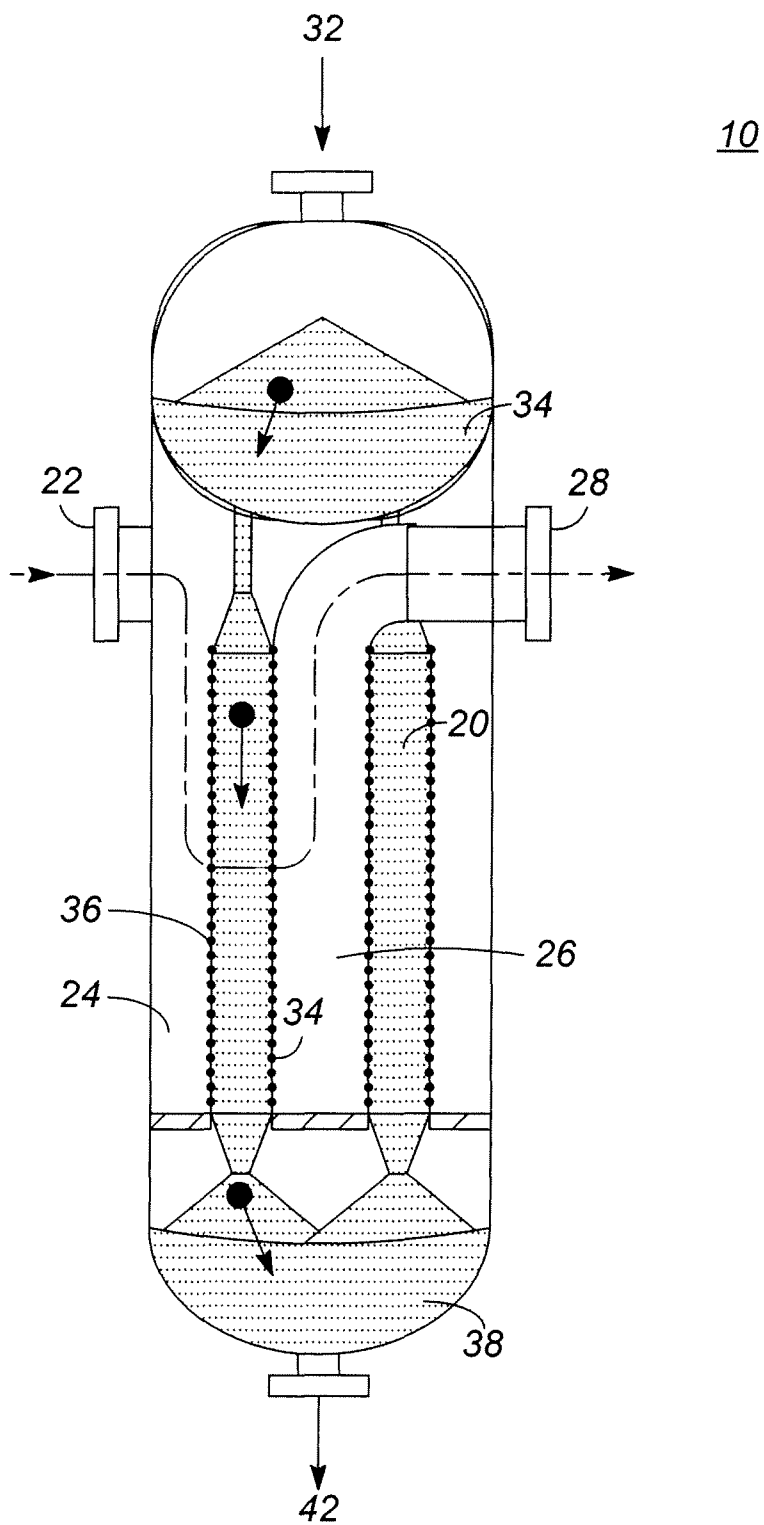


FIG. 1

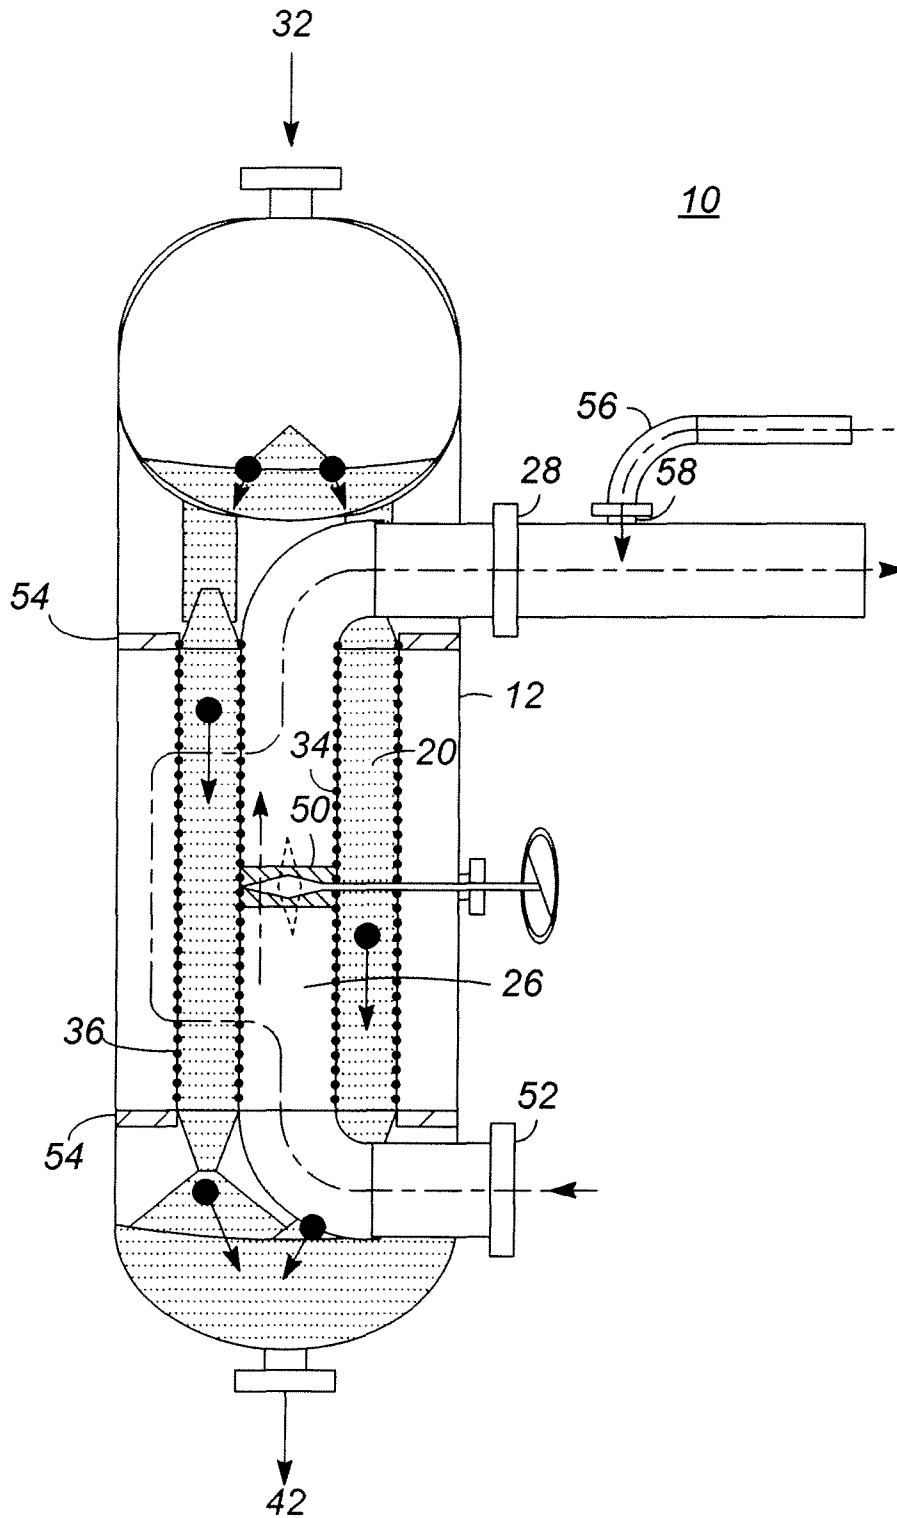


FIG. 2

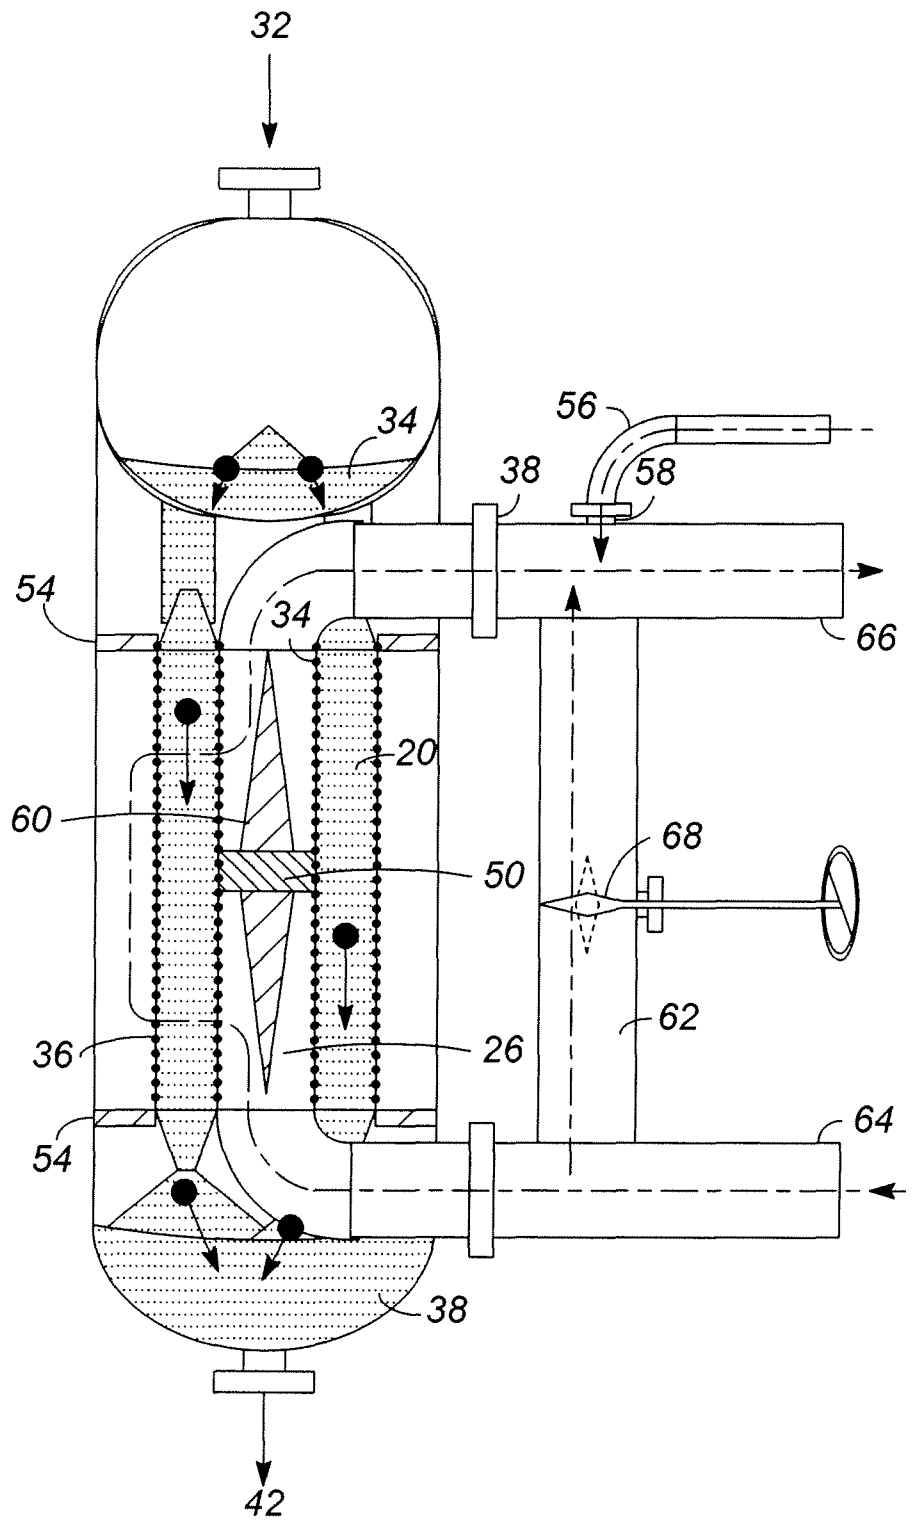


FIG. 3

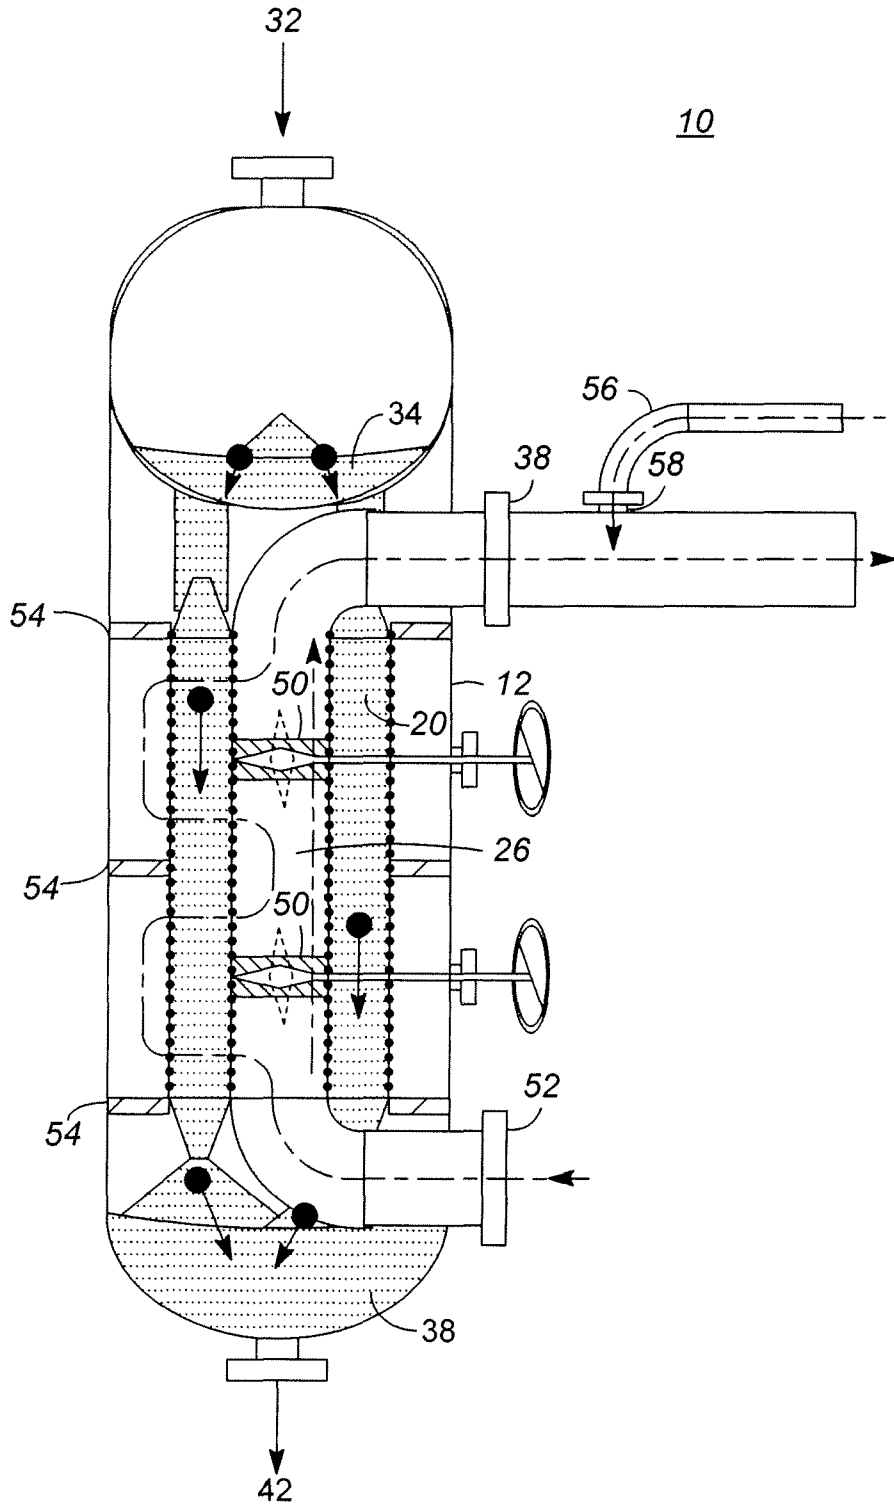


FIG. 4

5/5

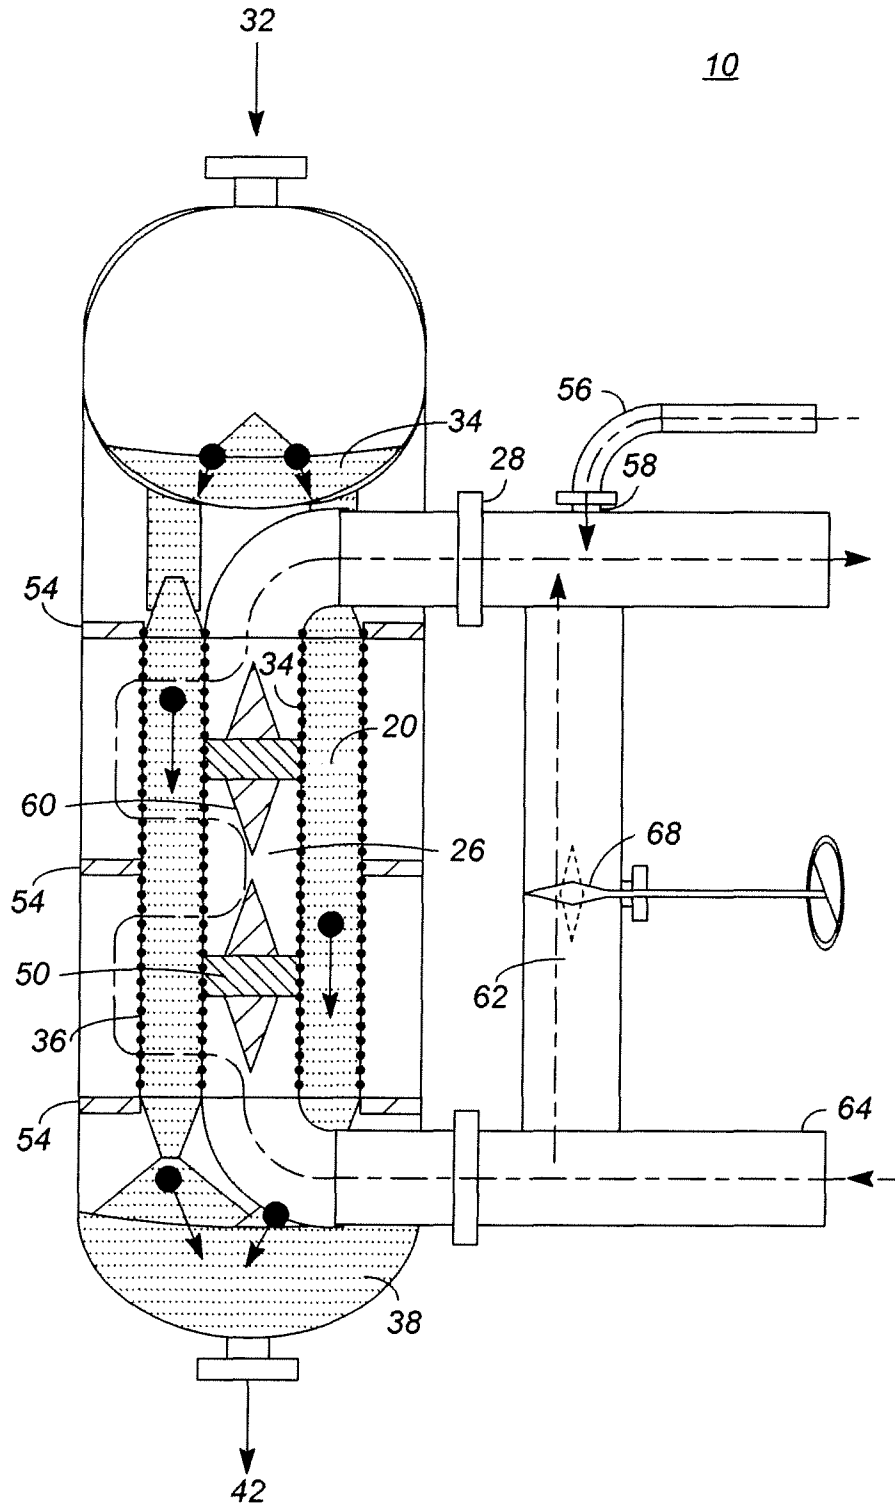


FIG. 5

A. CLASSIFICATION OF SUBJECT MATTER*B01J 8/18(2006.01)i, C07C 11/00(2006.01)i, C07C 2/08(2006.01)i*

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC B01J 8/18

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPAS (KIPO internal) Keyword : flow, tubular, reactor, catalyst, crossflow and similar terms

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|---|-----------------------|
| A | US 07070742 B2 (Eric Lenglet et al.) 04 July 2006 See the whole document | 1 - 10 |
| A | WO 2006-075130 A1 (GTL Microsystems AG) 20 July 2006 See the whole document | 1 - 10 |
| A | US 2007-0003460 A1 (Yukihiro Matsumoto et al.) 04 January 2007 See the whole document | 1 - 10 |
| A | US 05820655 A (Christian Friedrich Gotzmann et al.) 13 October 1998 See the whole document | 1 - 10 |

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 OCTOBER 2009 (29.10.2009)

Date of mailing of the international search report

30 OCTOBER 2009 (30.10.2009)

Name and mailing address of the ISA/KR


Korean Intellectual Property Office
Government Complex-Daejeon, 139 Seonsa-ro, Seo-
gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

PARK Hamyong

Telephone No. 82-42-481-8409



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2009/042456

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|--|------------------|-------------------------|------------------|
| US 07070742 B2 | 04.07.2006 | CA 2430247 A1 | 06.06.2002 |
| | | EP 1341601 A1 | 10.09.2003 |
| | | FR 2817171 A1 | 31.05.2002 |
| | | FR 2817171 B1 | 05.09.2003 |
| | | JP 2004-514552 A | 20.05.2004 |
| | | PA 03004586 A | 05.05.2004 |
| | | US 2004-0071593 A1 | 15.04.2004 |
| | | WO 2002-043852 A1 | 06.06.2002 |
| | | WO 2006-075130 A1 | 20.07.2006 |
| US 2007-0003460 A1 | 04.01.2007 | CA 2592939 A1 | 20.07.2006 |
| | | CN 101128260 A | 20.02.2008 |
| | | EP 1858637 A1 | 28.11.2007 |
| | | GB 0500838 D0 | 23.02.2005 |
| | | JP 2008-526501 A | 24.07.2008 |
| | | KR 10-2007-0100737 A | 11.10.2007 |
| | | NO 20073625 A | 12.10.2007 |
| | | US 2008-0226517 A1 | 18.09.2008 |
| | | BR 0202414 A | 29.04.2003 |
| | | CN 1289178 C | 13.12.2006 |
| | | CN 1394671 A | 05.02.2003 |
| | | CN 1853767 A | 01.11.2006 |
| | | EP 1270065 A1 | 02.01.2003 |
| JP 04-092090 B2 | 07.03.2008 | | |
| JP 2003-001094 A | 07.01.2003 | | |
| KR 20030004074 A | 14.01.2003 | | |
| KR 10-0623638 B1 | 18.09.2006 | | |
| SG 102053 A1 | 27.02.2004 | | |
| US 07534339 B2 | 19.05.2009 | | |
| US 2003-0006026 A1 | 09.01.2003 | | |
| ZA 200204622 A | 13.02.2003 | | |
| US 05820655 A | 13.10.1998 | AU 1998-63655 B2 | 28.04.1998 |
| | | AU 735841 B2 | 19.07.2001 |
| | | CA 2236194 C | 26.06.2001 |
| | | CN 1205240 A | 20.01.1999 |
| | | CN 1104930 C | 09.04.2003 |
| | | CN 1205240 C0 | 20.01.1999 |
| | | EP 0875285 A1 | 04.11.1998 |
| | | EP 0875285 B1 | 30.03.2005 |
| | | JP 3453303 B2 | 06.10.2003 |
| | | JP 03-453303 B2 | 18.07.2003 |
| | | JP 10-314573 A | 02.12.1998 |
| | | KR 10-0343881 B1 | 22.08.2002 |