




(86) Date de dépôt PCT/PCT Filing Date: 2013/12/17
 (87) Date publication PCT/PCT Publication Date: 2014/06/26
 (45) Date de délivrance/Issue Date: 2020/11/24
 (85) Entrée phase nationale/National Entry: 2015/06/17
 (86) N° demande PCT/PCT Application No.: DE 2013/000812
 (87) N° publication PCT/PCT Publication No.: 2014/094720
 (30) Priorité/Priority: 2012/12/21 (DE10 2012 025 106.8)

(51) Cl.Int./Int.Cl. *H01R 13/639* (2006.01),
H01R 13/627 (2006.01)
 (72) Inventeur/Inventor:
LAPPOHN, JURGEN, DE
 (73) Propriétaire/Owner:
ERNI PRODUCTION GMBH & CO. KG, DE
 (74) Agent: ROBIC

(54) Titre : CONNECTEUR A FICHES ELECTRIQUE
 (54) Title: ELECTRICAL PLUG-IN CONNECTOR

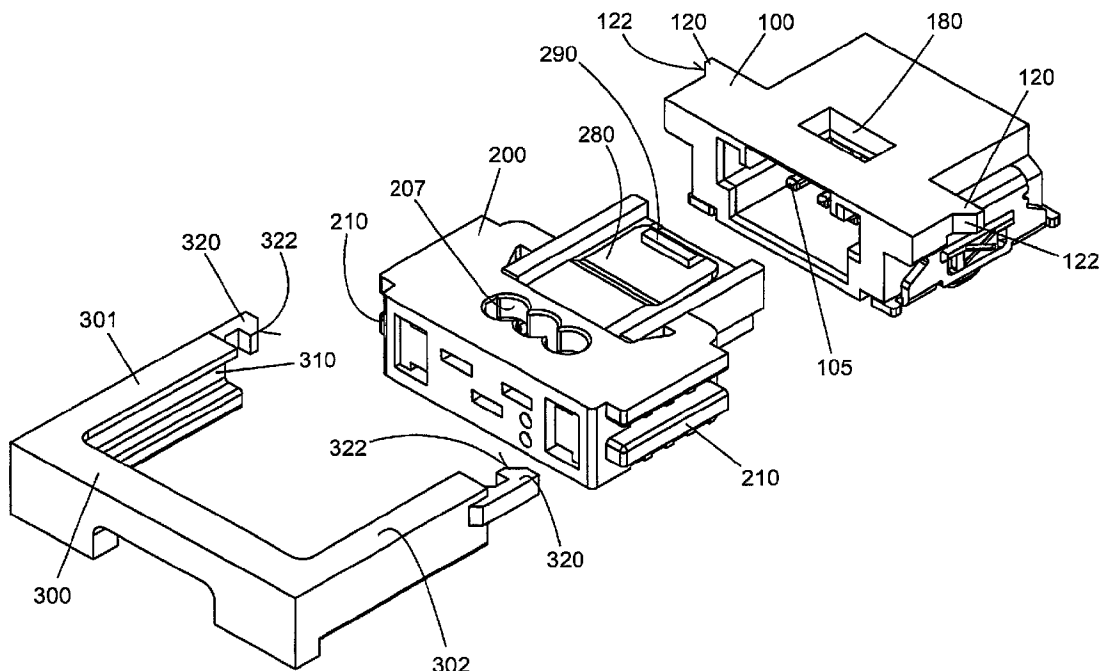

(57) **Abrégé/Abstract:**

An electrical plug-in connector having a first housing part (100) and having a second housing part (200), blade contact elements (105) being arranged in the first or second housing part (100, 200) and spring contact elements being arranged in the second or first housing part which are adapted to the blade contacts and can be inserted therein, characterized by a locking clip (300) which, when it engages around the first or second housing part in a manner substantially parallel to the plug-in direction when the two housing parts (100, 200) are plugged into each other, can be locked in/to the second or first housing part (100, 200).

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
 PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG
 (19) Weltorganisation für geistiges

Eigentum

Internationales Büro

(43) Internationales
 Veröffentlichungsdatum
 26. Juni 2014 (26.06.2014)



(10) Internationale Veröffentlichungsnummer
WO 2014/094720 A1

(51) Internationale Patentklassifikation:

H01R 13/627 (2006.01) H01R 4/24 (2006.01)

H01R 13/639 (2006.01)

(21) Internationales Aktenzeichen: PCT/DE2013/000812

(22) Internationales Anmeldedatum:

17. Dezember 2013 (17.12.2013)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:

10 2012 025 106.8

21. Dezember 2012 (21.12.2012) DE

(71) Anmelder: ERNI PRODUCTION GMBH & CO. KG
 [DE/DE]; Seestrasse 9, 73099 Adelberg (DE).

(72) Erfinder: LAPPÖHN, Jürgen; Im Enter 3, 73108
 Gammelshausen (DE).

(74) Anwalt: JAKELSKI, Joachim; Jakelski & Althoff,
 Mollenbachstrasse 37, 71229 Leonberg (DE).

(81) Bestimmungsstaaten (soweit nicht anders angegeben, für
 jede verfügbare nationale Schutzrechtsart): AE, AG, AL,

AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW,
 BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DK, DM,
 DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
 HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
 KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
 MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
 OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
 SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
 TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
 ZW.

(84) Bestimmungsstaaten (soweit nicht anders angegeben, für
 jede verfügbare regionale Schutzrechtsart): ARIPO (BW,
 GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ,
 TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ,
 RU, TJ, TM), europäisches (AL, AT, BE, BG, CH, CY,
 CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT,
 LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,
 SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
 GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Veröffentlicht:

— mit internationalem Recherchenbericht (Artikel 21 Absatz
 3)

[Fortsetzung auf der nächsten Seite]

(54) Title: ELECTRICAL PLUG-IN CONNECTOR

(54) Bezeichnung : ELEKTRISCHER STECKVERBINDER

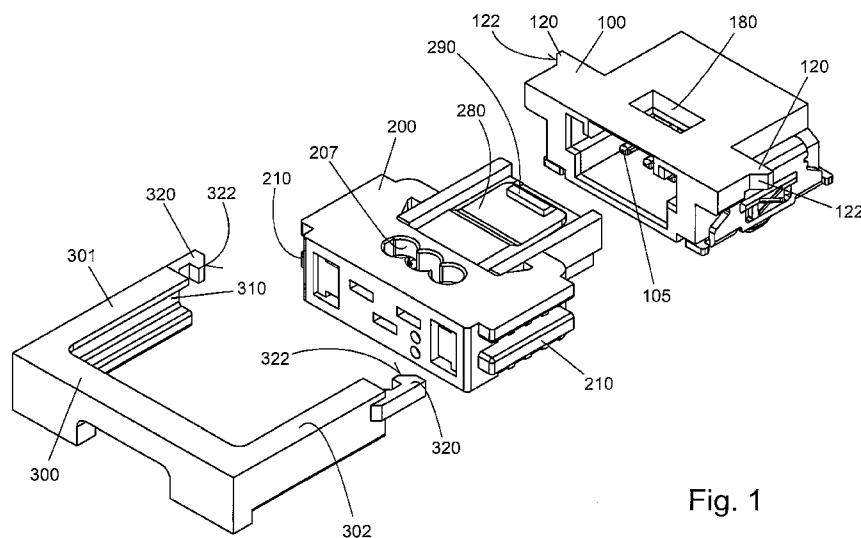


Fig. 1

(57) Abstract: An electrical plug-in connector having a first housing part (100) and having a second housing part (200), blade contact elements (105) being arranged in the first or second housing part (100, 200) and spring contact elements being arranged in the second or first housing part which are adapted to the blade contacts and can be inserted therein, characterized by a locking clip (300) which, when it engages around the first or second housing part in a manner substantially parallel to the plug-in direction when the two housing parts (100, 200) are plugged into each other, can be locked in/to the second or first housing part (100, 200).

(57) Zusammenfassung:

[Fortsetzung auf der nächsten Seite]

WO 2014/094720 A1 

-
- vor Ablauf der für Änderungen der Ansprüche geltenden Frist; Veröffentlichung wird wiederholt, falls Änderungen eingehen (Regel 48 Absatz 2 Buchstabe h)

Ein elektrischer Steckverbinder mit einem ersten Gehäuseteil (100) und mit einem zweiten Gehäuseteil (200), wobei in dem ersten oder zweiten Gehäuseteil (100, 200) Messerkontaktelemente (105) und in dem zweiten bzw. ersten Gehäuseteil an die Messerkontakte angepasste und in diese steckbare Federkontaktelemente angeordnet sind, ist gekennzeichnet durch einen Verriegelungsbügel (300), der während er den ersten oder zweiten Gehäuseteil im ineinandergesteckten Zustand der beiden Gehäuseteile (100, 200) im Wesentlichen parallel zur Steckrichtung umgreift in/an dem zweiten bzw. ersten Gehäuseteil (200, 100) verriegelbar ist.

ELECTRICAL PLUG-IN CONNECTORField

The invention relates to an electrical plug-in connector having a first housing part and a second housing part, wherein
5 blade contact elements are arranged in the first or second housing part and spring contact elements which are adapted to the blade contact elements and are able to be inserted into them are arranged in the second or first housing part.

Prior art

- 10 Such plug-in connectors are widespread in the prior art. Thus, for example, an electrical plug-in connector of the type conforming to its genre arises from DE 10 2004 054 203 A1, in which an insulation displacement plug-in contact strip is provided.
- 15 DE 10 2008 019 016 A1 discloses an electrical plug-in connector that has locking clips for locking two housing parts. Two locking clips are provided which are mounted for rotation on bearing pins arranged on a housing part of the plug-in connector. This rotatable mounting of both locking
20 clips requires complex, time-consuming production; moreover, the bearing pins and, in particular, the locking protrusions that serve for the locking are easily exposed to damage. In addition, two locking clips must be actuated and arrested in order to ensure a secure locking of both housing parts of the
25 plug-in connector.

A similar secondary locking agent on a plug-in connector housing arises from DE 10 2010 032 013 A1. In this case as well, both locking clips must be mounted for rotation on a housing part. Two locking clips are also provided here.

5 Summary

According to a broad aspect, there is provide an electrical plug-in connector comprising a first housing part and having a second housing part; wherein first contact elements are arranged in the first housing part and second contact elements
10 that are able to be plugged into the first contact elements are arranged in the second housing part; wherein a locking clip is able to be locked on the first housing part while it partially encloses the second housing part when both housing parts are plugged into each other; wherein guide elements
15 running substantially parallel to the plugging direction are arranged in the second housing part for guiding clip arms of the locking clip; wherein latch elements are provided in the first housing part for locking with counterpart latch elements arranged on the clip arms; wherein the locking clip is U-
20 shaped; wherein the clip arms are two U-shaped legs that are bent fundamentally orthogonally from a base; wherein the guide elements arranged on the second housing part are protrusions; wherein the U-shaped legs have grooves on their respective inner side; and wherein the grooves face towards the
25 protrusions on the second housing part, with which grooves the protrusions engage in a sliding manner.

The electrical plug-in connector according to the invention, in contrast, has the advantage that the locking clip does not

have to be fastened to a housing, but rather can be handled as a separate component. This is therefore advantageous because, for example, if the locking clip is damaged, an exchange of the locking clip with an undamaged locking clip is easily possible. Furthermore, the locking clip according to the invention is designed to be substantially more massive and stable than the locking clips known from the prior art. It is particularly advantageous that the locking clip according to the invention is, in particular, able to be a secondary locking clip which provides additional security for a plug-in connection that is already locked, such that this is able to be used in particularly critical environments (for example environments that are subject to heavy vibrations and so forth). A tongue having a latching hook, arranged on the second housing part, for example, and an opening arranged in the first housing part, with which opening the latching hook engages, are provided as the primary locking agent. A locking clip is provided according to the invention which is able to be locked in/on the second or first housing part while it encloses the first or second housing part substantially parallel to the plugging direction, when both housing parts are plugged into each other. A particularly stable connection of the two plug-in connector parts that are plugged into each other is hereby implemented.

By the measures described herein, advantageous developments and improvements of the plug-in connector are possible.

One advantageous embodiment thus provides that guide elements for guiding the clip arms of the locking clip, which run substantially parallel to the plugging direction, are arranged

in the first or second housing part. In this way, a precise guiding of the locking clip on the one housing part is implemented and, at the same time, a fastening of the clip arms of the locking clip to the housing part is also enabled.

5 Moreover, provision is advantageously made for latch elements for locking with the counterpart latch elements arranged on the clip arms to be provided in the second or first housing part. The counterpart latch elements arranged on the clip arms lock with the latch elements, wherein a precise guiding, and
10 therefore also a precise locking of the latch elements to one another is ensured by the guide elements.

Purely as a matter of principle, the locking clips may be designed in a different manner. One particularly advantageous embodiment provides that the locking clips are designed in a U
15 shape with two U-shaped legs that are bent fundamentally orthogonally from a base. Such a U-shaped design is used particularly advantageously in the case of mostly cuboidal plug-in connector housing parts.

Provision is highly advantageously made for the U-shaped legs
20 to have grooves as guide elements on their respective inner side facing the first or second housing part, with which grooves protrusions that are adapted to them and are arranged on the outer sides running parallel to the plugging direction engage in a sliding manner. The guide elements are therefore
25 implemented by grooves and by protrusions engaging therewith. This enables, on the one hand, a precise guiding of the locking clip, but on the other hand enables an optimal

fastening of the locking clip to the housing part having the protrusions.

Provision is particularly advantageously made for the U-shaped legs to have latching hooks as counterpart elements on their ends, said latching hooks interacting with snap-in noses arranged on the first or second housing part. The interaction of the grooves, together with the protrusions and the latching hooks, with the snap-in noses arranged on the housing part enables precise guiding of the U-shaped legs and thus also a precise latching of the latching hooks into the snap-in noses. In order to simplify this latching, provision is advantageously made for the latching hooks and the snap-in noses to have sliding surfaces on their sides facing one another that are adapted to one another and that run obliquely.

The locking clips can, purely as a matter of principle, consist of highly different materials. They are particularly advantageously designed as a plastic part which is not only easy to produce, but is also particularly light and at the same time has insulating properties.

Brief description of the drawings

One exemplary embodiment of the invention is depicted in the drawings and illustrated in greater detail in the description below.

25

Shown are:

Figure 1 an isometric depiction of a plug-in connector according to the invention before both housing parts are plugged into each other and of the locking clip;

Figure 2 an isometric depiction of the plug-in connector depicted in Figure 1 after both housing parts of the plug-in connector are plugged into each other and before the fastening of the locking clip; and

Figure 3 the plug-in connector according to the invention depicted in Figure 1 and Figure 2 when both housing parts are plugged into each other and when the locking clip is plugged in.

15 Detailed description of embodiments

Examples, variants and preferred embodiments of the invention are described hereinbelow. An electrical plug-in connector, depicted in Figures 1 to 3 in different plugging states, has a first housing part 100 in which first plug contact elements, for example blade contact elements 105, are arranged. Adapted to this first housing part 100 is a second housing part 200, which is able to be plugged into the first housing part 100 in a manner that is known in itself, and in which corresponding counterpart contact

elements, i.e. spring contacts (not visible here) are arranged.

A locking clip 300 is moreover provided, which has a substantially U-shaped configuration with U-shaped legs 301, 302. The inner side of the U-shaped legs 301, 302 has U-shaped grooves 310 which are adapted to corresponding protrusions 210 that are designed here to be cuboidal, said protrusions being fitted onto the outer sides of the second housing part 200 of the plug-in connector, in such a way that the cuboidal protrusions 210 are able to be slid into the grooves 310 of the locking clip 300. Latching hooks 320 are formed on the respective ends of the U-shaped limbs 301, 302, the front sides of which hooks, so their sides facing both housing parts 100, 200, having a respective slope 322. These obliquely running surfaces 322 are adapted to corresponding obliquely running surfaces 122 of snap-in noses 120 which are arranged on the first housing part 100.

Figure 1 shows the unplugged state of both housing parts 100, 200, whereas Figure 2 shows the plugged state of both housing parts 100, 200. Figure 1 and Figure 2 each show the unlocked state, whereas Figure 3 shows the plugged and locked state of both housing parts 100, 200. As can be gleaned from Figures 1 and 2, the housing part 200 has an elastic tongue 280 having a snap-in nose 290 that engages with an opening 180 provided in the housing part 100. Tongue 280, snap-in nose 290 and opening 180 thus already act as a primary locking agent, which ensures a locking of both housing parts 200 and 100 to each other. This locking is additionally ensured by the locking clip 300 that acts in this case as a secondary locking agent. After

both housing parts 100, 200 have been plugged into each other, the locking clip 300 is slid above the second part 200, wherein the protrusions 210 engage with the grooves 310 and slide into the grooves 310. Then the latching hooks 320 lock
5 on or with the snap-in noses 120 of the first housing part 100. The locking takes place while the second housing part 200 is secured by the locking clip 300. In this instance, the extensively arranged protrusions 210, which practically completely fill the grooves 310 in the locked state, prove to
10 be highly advantageous. They enable not only a precise guiding of both U-shaped legs 301, 302 and thus also a precise guiding of the latching hooks 320 in the direction of the snap-in noses 120. They also enable a secure holding of the second housing part 200, in particular if pressure is exerted
15 perpendicularly to the plugging direction, which is possible purely in principle, since the eduction of the electrical conductors takes place perpendicularly to the drawing plane by a ribbon cable or even individual wires, for example, being inserted into the opening 207, said cable or wires being
20 contacted by means of insulation displacement contact in the second housing part 200, for example in the manner described in DE 10 2004 054 203 A1. The housing part 100 is, however, arranged on a circuit board, for example, and the contact elements are contacted on the circuit board by corresponding
25 conducting paths. Purely as a matter of principle, the housing part 100 could, however, be designed in such a way that the electrical conductors are guided away perpendicularly from the drawing plane, such as in the case of the housing part 200, or even in parallel to the drawing plane, so parallel to the
30 plugging direction.

The locking clip 300 is preferably a plastic part which has a certain level of elasticity, is light and is moreover also electrically insulating. The advantage of the described design of the locking clip 300 can be seen in that it is designed as a separate part. This enables not only simple handling, but it can also be exchanged easily if damaged and can be replaced by an undamaged locking clip 300. It furthermore extensively encloses the housing part 200, which ensures a secure locking, even secondary locking, of the second housing part 200 to the first housing part 100. Not only is a precise and firmly orientated guiding of the locking clip on the second housing part 200 and the latch elements on the first housing part 100 possible by the grooves formed in the inner sides of its legs 301, 302, which interact with corresponding protrusions 210 on the second housing part 200, but a particularly stable locking is also hereby achieved.

CLAIMS

1. An electrical plug-in connector comprising a first housing part and having a second housing part;

5 wherein first contact elements are arranged in the first housing part and second contact elements that are able to be plugged into the first contact elements are arranged in the second housing part;

10 wherein a locking clip is able to be locked on the first housing part while it partially encloses the second housing part when both housing parts are plugged into each other;

 wherein guide elements running substantially parallel to the plugging direction are arranged in the second housing part for guiding clip arms of the locking clip;

15 wherein latch elements are provided in the first housing part for locking with counterpart latch elements arranged on the clip arms;

 wherein the locking clip is U-shaped;

20 wherein the clip arms are two U-shaped legs that are bent fundamentally orthogonally from a base;

 wherein the guide elements arranged on the second housing part are protrusions;

 wherein the U-shaped legs have grooves on their respective inner side; and

25 wherein the grooves face towards the protrusions on the second housing part, with which grooves the protrusions engage in a sliding manner.

30 2. The electrical plug-in connector according to claim 1, wherein the U-shaped legs have latching hooks as counterpart latch elements on their ends, which interact with latch elements formed as a snap-in nose on the first housing part.

3. The electrical plug-in connector according to claim 2, wherein each of the latching hooks has a respective latching hook longitudinal axis and a latching hook sliding surface running
5 obliquely to the latching hook longitudinal axis and each of the snap-in noses has a respective snap-in nose longitudinal axis and a snap-in nose sliding surface running obliquely to the snap-in nose longitudinal axis.
- 10 4. The electrical plug-in connector according to any one of claims 1 to 3, wherein the locking clip comprises plastic.
5. The electrical plug-in connector according to any one of claims 1 to 4, wherein both housing parts have primary locking
15 agents and the locking clip acts as a secondary locking agent.
6. The electrical plug-in connector according to claim 5, wherein the primary locking agent is formed by a tongue arranged on the second housing part having a latching hook that engages
20 with an opening arranged in the first housing part.
7. The electrical plug-in connector according to any one of claims 1 to 6, wherein the grooves are open in the plugging direction.

1/3

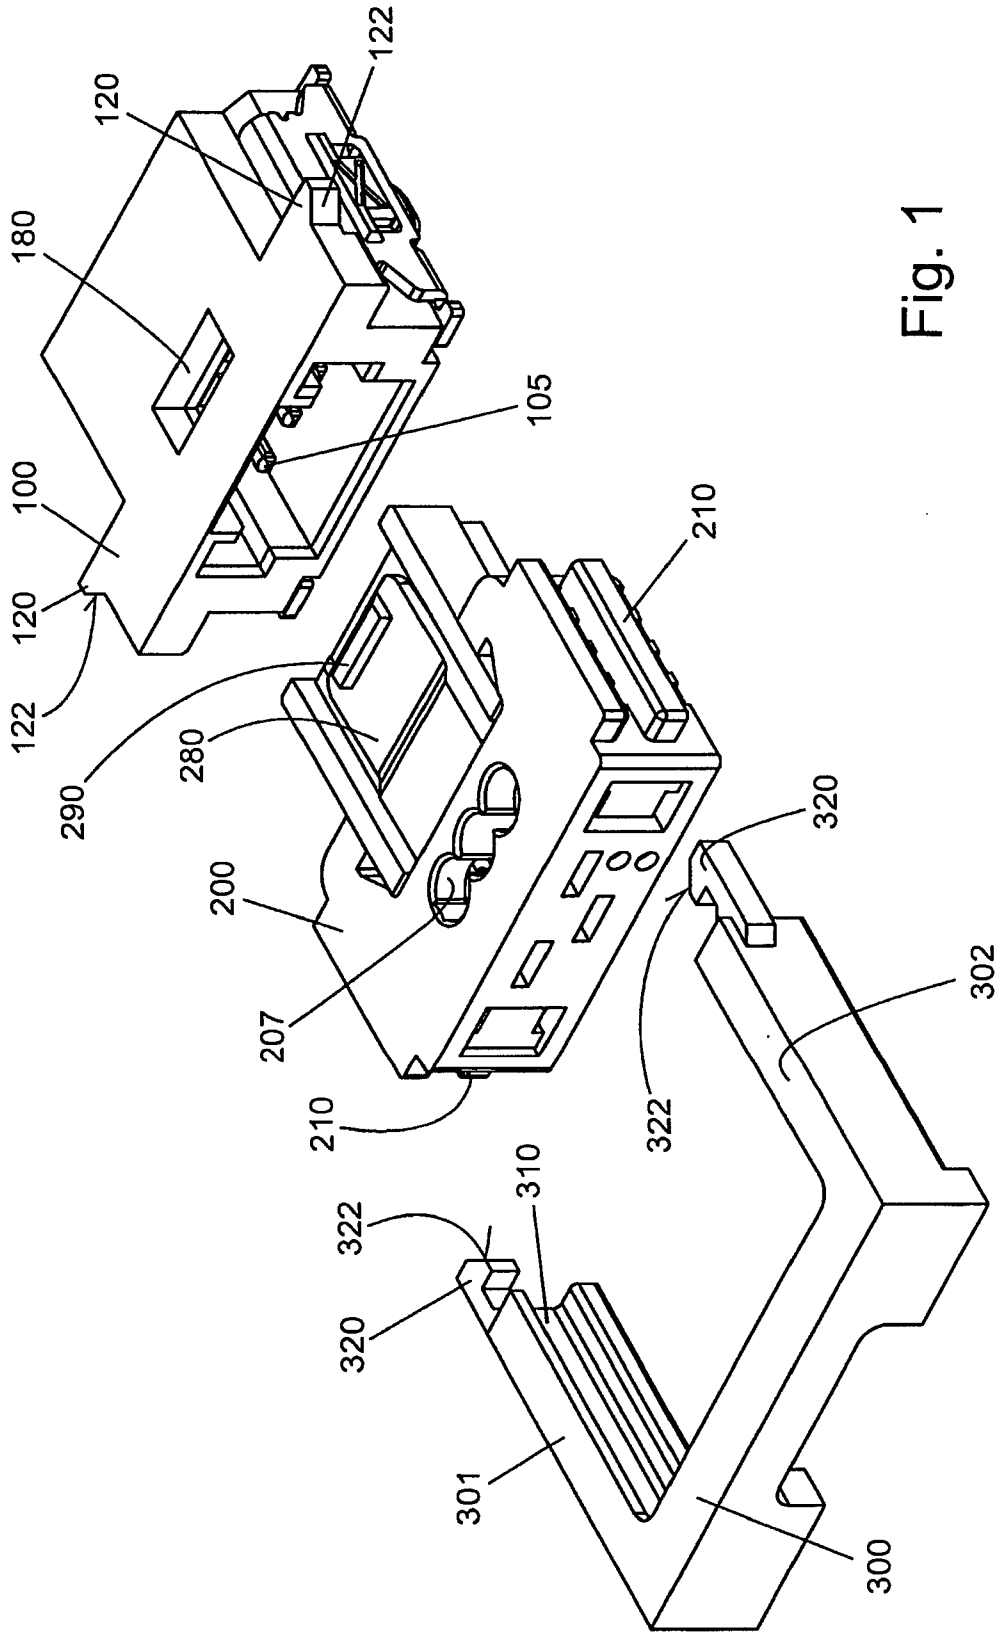


Fig. 1

2/3

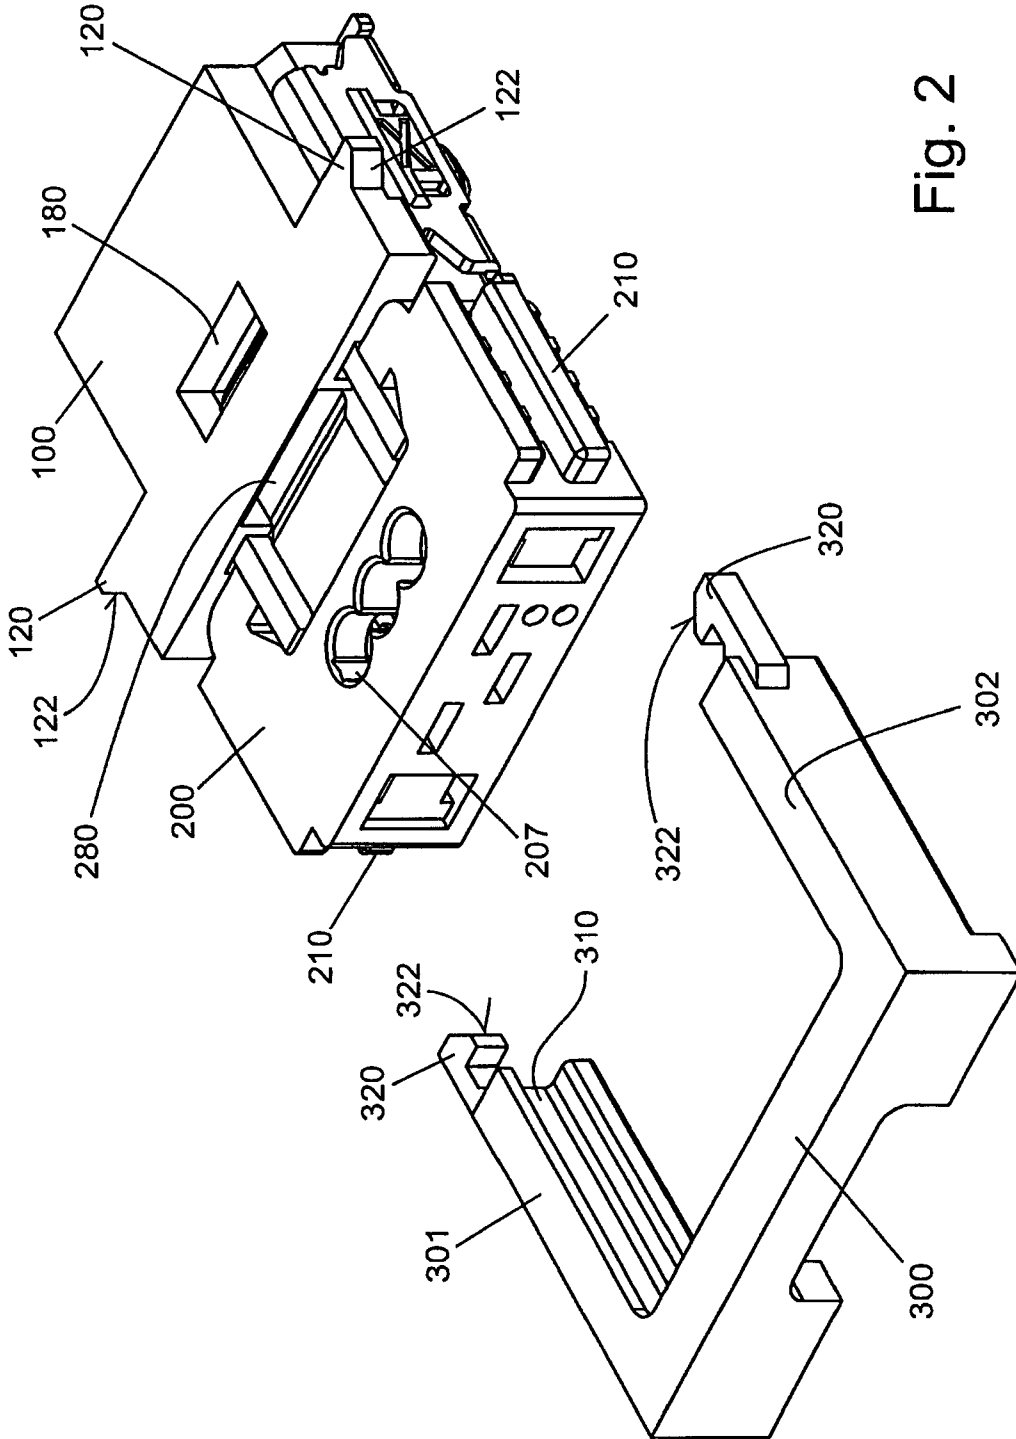


Fig. 2

3/3

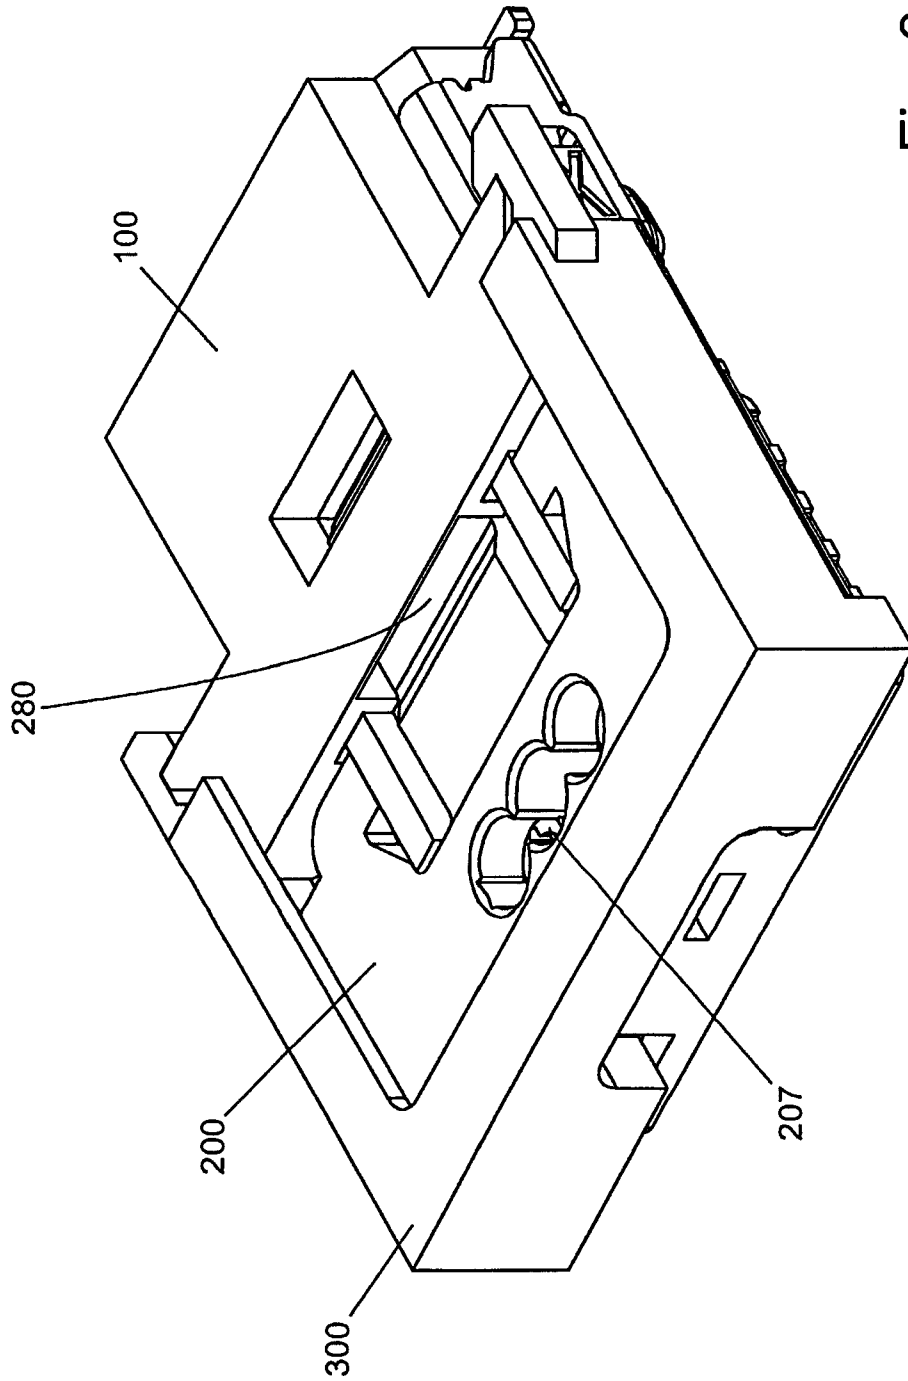


Fig. 3

