

(12) **UK Patent Application** (19) **GB** (11) **2480181** (13) **A**

(43) Date of Reproduction by UK Office **09.11.2011**


(21) Application No: **1113820.3**  
(22) Date of Filing: **02.02.2010**  
(30) Priority Data:  
(31) **12364372** (32) **02.02.2009** (33) **US**  
(86) International Application Data:  
**PCT/US2010/022917 En 02.02.2010**  
(87) International Publication Data:  
**WO2010/088681 En 05.08.2010**

(51) INT CL:  
**E21B 47/10** (2006.01)  
(56) Documents Cited by ISA:  
**US 6125934 A1 US 20080316049 A1**  
**US 20070144737 A1 US 20030056952 A1**  
(58) Field of Search by ISA:  
INT CL **E21B, G01V**  
Other: **eKOMPASS (KIPO internal)**

(71) Applicant(s):  
**IntelliServ International Holding, Ltd**  
**(Incorporated in the Cayman Islands)**  
**PO Box 309, GT MCCS, Uglund House,**  
**South Church Street, George Town, Grand Cayman,**  
**Cayman Islands**  
(72) Inventor(s):  
**Lee Dolman**  
**Louise Bailey**  
**Ashley Bernard Johnson**  
**Alistair Oag**  
(74) Agent and/or Address for Service:  
**Marks & Clerk LLP**  
**27 Imperial Square, CHELTENHAM, GL50 1RQ,**  
**United Kingdom**

(54) Title of the Invention: **System and method of monitoring flow in a wellbore**  
Abstract Title: **System and method of monitoring flow in a wellbore**

(57) A system and method for releasing a marker within a wellbore is provided. The system and method includes a sensor that detects movement or a position of the marker within the wellbore. The marker may be released in drilling fluid, for example, and may travel from the surface to the drill bit and return to the surface with cuttings. As an example, the markers are used to determine the flow of cuttings within the wellbore.

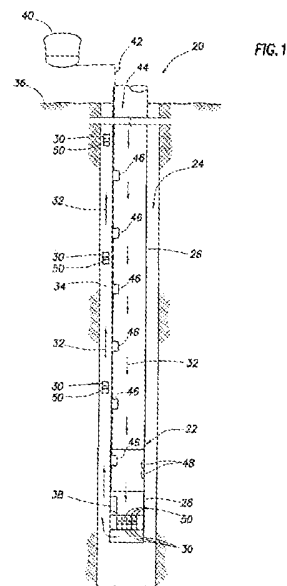

**GB 2480181 A**