

(12) UK Patent Application (19) GB (11) 2 131 190 A

- (21) Application No 8328221
(22) Date of filing 21 Oct 1983
(30) Priority data
(31) 438194
536923
(32) 1 Nov 1982
28 Sep 1983
(33) United States of America
(US)
(43) Application published
13 Jun 1984
(51) INT CL³
G03C 1/52
G03F 7/20
(52) Domestic classification
G2C 1F 1G2 1GX C2 C4A
C4C2B2 C4C5B
G2X B13
(56) Documents cited
GB 1294105
GB 1205781
GB 1204917
GB 1186772
(58) Field of search
G2C
G2X
(71) Applicant
General Electric
Company,
(USA-New York),
1 River Road,
Schenectady 12305,
State of New York,
United States of America.
(72) Inventors
Bruce Frederick Griffing,
Paul Richard West.
(74) Agent and/or Address for
Service
Michael Burnside &
Partners,
2 Serjeant's Inn,
Fleet Street,
London,
EC4Y 1HL.

(54) A method of enhancing the contrast of images and materials therefor

(57) The sharpness of an image produced in a layer of photoresist by imagewise exposure of said layer from a light source emitting light of a predetermined wavelength is improved by providing a contrast-enhancing layer comprising a photobleachable compound between the light source and the photoresist layer. The photobleachable compound is sensitive to light having the predetermined wavelength, and has a ratio of extinction coefficient to molecular weight greater than 10 liters per gram-cm when in the unbleached state, and a ratio of extinction coefficient for the unbleached state to extinction coefficient for the bleached state greater than 10. Aryl nitron compounds are specified for this purpose; specific nitrones are claimed per se.

The resulting photoresist images are suitable for the production of integrated circuits.

ERRATUM

SPECIFICATION NO 2131190A

Page 9, line 19, *after* phenylnitron. *insert*

12. A method as claimed in Claim 1 and substantially as hereinbefore described.

THE PATENT OFFICE
31 August 1984

Bas 258622/6

SEE ERRATA SLIP ATTACHED

Certain of The Chemical and mathematical formula(e) appearing in the printed specification were submitted after the date of filing, the formula(e) originally submitted being incapable of being satisfactorily reproduced. This print takes account of replacement documents later filed to enable the application to comply with the formal requirements of the Patents Rules 1983.

GR 2 131 190 A

(12) UK Patent Application (19) GB (11) 2 131 190 A

- (21) Application No **8328221**
(22) Date of filing **21 Oct 1983**
(30) Priority data
(31) **438194**
536923
(32) **1 Nov 1982**
28 Sep 1983
(33) **United States of America**
(US)
(43) Application published
13 Jun 1984
(51) INT CL³
G03C 1/52
G03F 7/20
(52) Domestic classification
G2C 1F 1G2 1GX C2 C4A
C4C2B2 C4C5B
G2X B13
(56) Documents cited
GB 1294105
GB 1205781
GB 1204917
GB 1186772
(58) Field of search
G2C
G2X
(71) Applicant
General Electric
Company,
(USA-New York),
1 River Road,
Schenectady 12305,
State of New York,
United States of America.
(72) Inventors
Bruce Frederick Griffing,
Paul Richard West.
(74) Agent and/or Address for
Service
Michael Burnside &
Partners,
2 Serjeant's Inn,
Fleet Street,
London,
EC4Y 1HL.

(54) **A method of enhancing the contrast of images and materials therefor**

(57) The sharpness of an image produced in a layer of photoresist by imagewise exposure of said layer from a light source emitting light of a predetermined wavelength is improved by providing a contrast-enhancing layer comprising a photobleachable compound between the light source and the photoresist layer. The photobleachable compound is sensitive to light having the predetermined wavelength, and has a ratio of extinction coefficient to molecular weight greater than 10 liters per gram-cm when in the unbleached state, and a ratio of extinction coefficient for the unbleached state to extinction coefficient for the bleached state greater than 10. Aryl nitron compounds are specified for this purpose; specific nitrones are claimed per se.

The resulting photoresist images are suitable for the production of integrated circuits.

SEE ERRATA SLIP ATTACHED

Certain of The Chemical and mathematical formula(e) appearing in the printed specification were submitted after the date of filing, the formula(e) originally submitted being incapable of being satisfactorily reproduced.
This print takes account of replacement documents later filed to enable the application to comply with the formal requirements

GB 2 131 190 A

FIG. 1

RELATIVE TRANSMISSION
 $\frac{I}{I_0}$

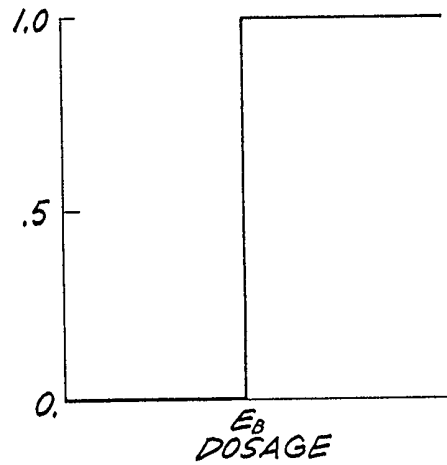


FIG. 2A

RELATIVE TRANSMISSION
 $\frac{I}{I_0}$

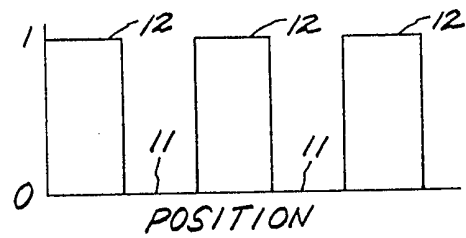


FIG. 2B

AERIAL IMAGE INTENSITY

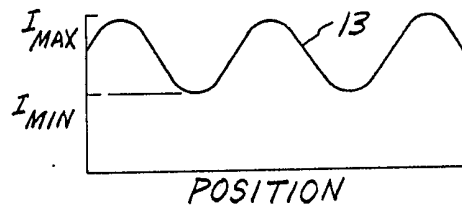


FIG. 2C




FIG. 2D

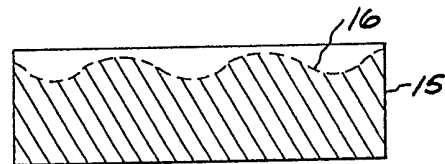


FIG. 2E



FIG. 2F

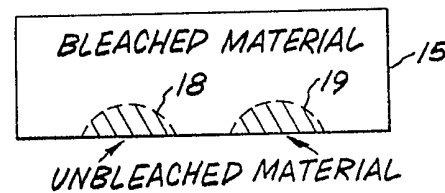


FIG. 3

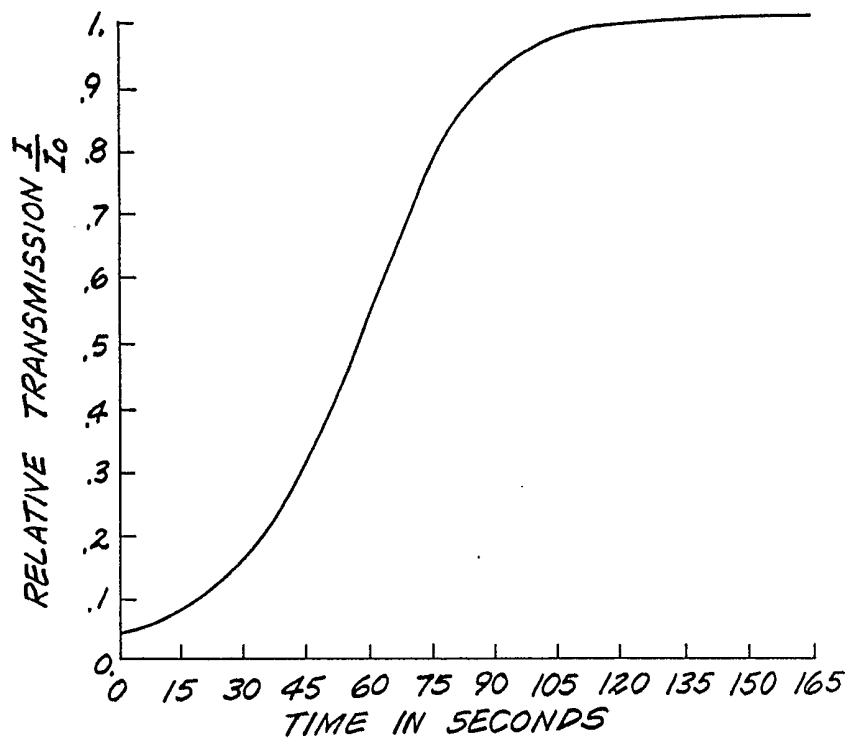


FIG. 4

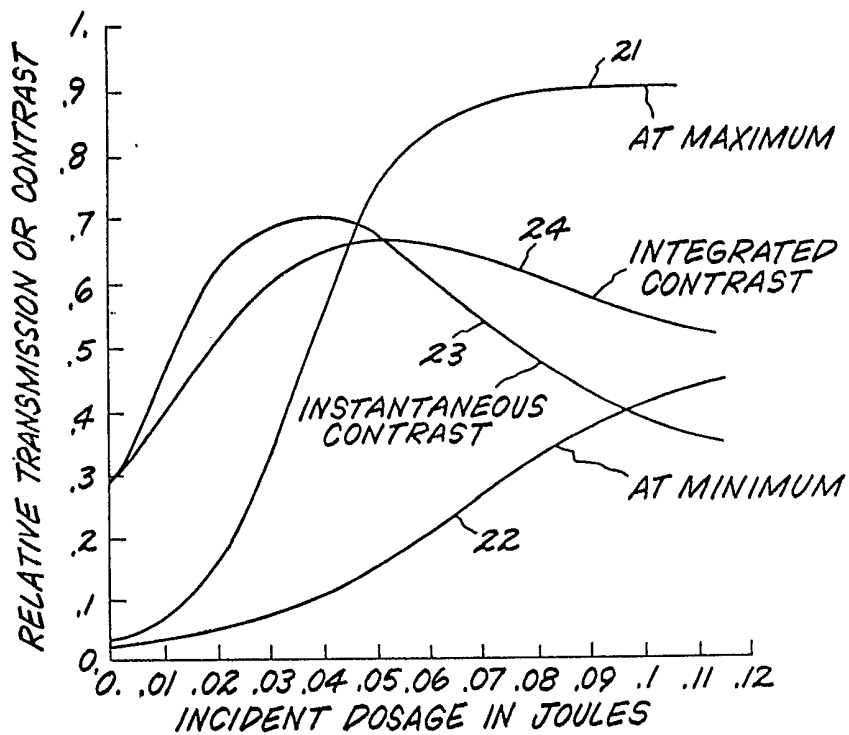


FIG. 5

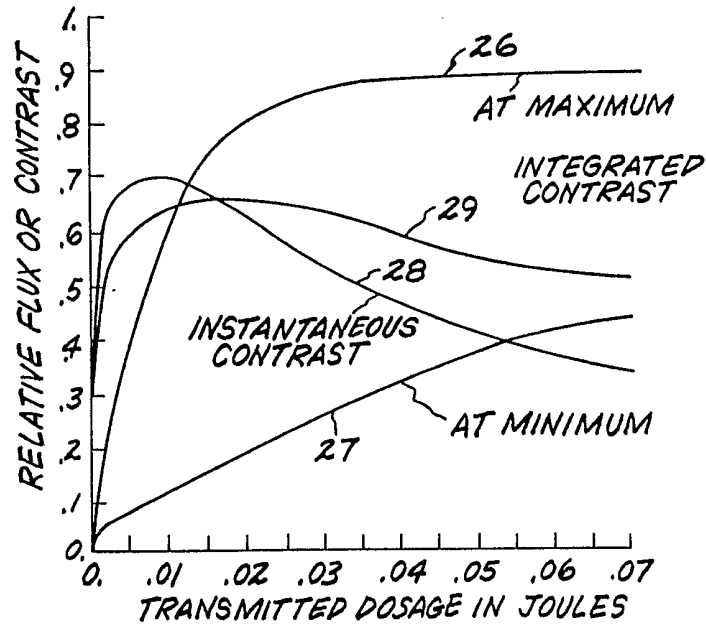


FIG. 6A




FIG. 6B

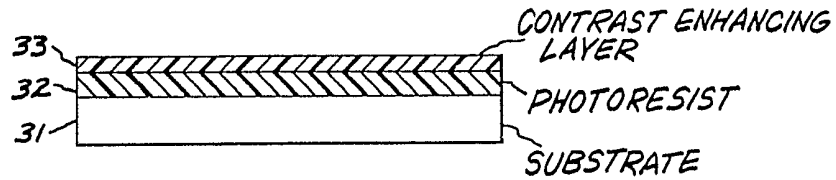


FIG. 6C

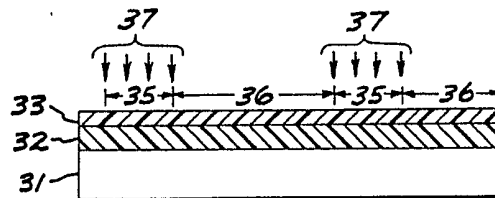


FIG. 6D





FIG. 6E



SPECIFICATION

A method of enhancing the contrast of images and materials therefor

- 5 The present invention is directed to a method of enhancing the contrast of images of objects such as masks for photolithography in the manufacture of integrated circuits and materials therefor. 5
- Lithography in the production of integrated circuits is predominantly carried out by optical means. In the drive to reduce circuit dimensions, improve performance and increase yield, optical systems have provided the required resolution with each successive generation of circuit technology. The image resolution of projection lithographic systems has recently begun to approach the physical limits imposed by practical constraints on numerical aperture and wavelength. While further improvements in lithographic technology are anticipated, dramatic improvements in inherent lens resolution are not. In order to continue the reduction of minimum feature size achievable by optical techniques, it is necessary to alter some other aspect of the lithographic process for further improvements. One area in which further improvements are possible is in the photoresist process. Each photoresist is characterized by some degree of incident contrast necessary to produce patterns usable for subsequent processing. This minimum required contrast of illumination is referred to as the contrast threshold of the resist. Depending on substrate properties, the required pattern thickness and resist edge profiles, conventionally used positive photoresist has a contrast threshold between 85% and 90% contrast. Currently, most production is done at 90% incident contrast or more. If the contrast threshold of the resist is reduced, the resolution obtainable with a given optical system is improved due to the fact that image contrast is a decreasing function of the spatial frequencies present in the image. 10
- The present invention is directed to provide a photoresist process in which the contrast of an aerial image utilized in the process is enhanced prior to incidence on the photoresist. 15
- 25 An object of the present invention is to lower the minimum contrast required to produce usable images in a photoresist. 25
- Another object of the present invention is to provide new photobleachable compounds and materials. In carrying out the invention in an illustrative embodiment thereof, a layer of photoresist of a first thickness and having a predetermined contrast threshold is provided. An object or mask is provided having opaque and transparent areas. An image having a contrast less than the predetermined contrast threshold of the photoresist is formed of the object on the layer of photoresist by projecting light of a predetermined wavelength through the object. A layer of photobleachable material including a photobleachable compound is provided between the object and the layer of photoresist and adjacent a surface of the layer of photoresist. The photobleachable compound is sensitive to the aforementioned wavelength of light and has an extinction coefficient to molecular weight ratio in liters per gram-centimeter in the unbleached state greater than about 10. The ratio of the extinction coefficient for the unbleached state of the photobleachable material is also greater than about 10. Light of the aforementioned wavelength and of a predetermined intensity is projected through the object onto the layer of photobleachable material for a time to obtain a reduction in optical density of the layer of photobleachable material in direct proportion to the dosage of light of the aforementioned wavelength incident thereof, whereby the integrated contrast of the image transmitted by the layer of photobleachable material increases with dosage transmitted thereby, reaches a maximum value and thereafter decreases. Parameters of the layer of photobleachable material are selected such that the maximum value of integrated contrast is greater than the predetermined threshold contrast of the layer of photoresist. The sensitivity of the layer of photoresist and the thickness thereof are selected such that the layer of photoresist is fully exposed by a dosage in a predetermined range transmitted by the layer of photobleachable material and provides an integrated contrast in the transmitted image above the predetermined contrast threshold of the photoresist. Light of the aforementioned predetermined wavelength is projected through the object for a time to provide the dosage in aforementioned predetermined range transmitted through the photobleachable layer. The layer of photobleachable material is removed and the layer of photoresist is developed whereby a pattern representing an enhancement in contrast of the image of reduced contrast of the object is formed in the layer of photoresist. 30
- 35
- 40
- 45
- 50
- Another aspect of the present invention is directed to a spin castable mixture capable of forming a photobleachable layer having an absorption maximum in the range of 300 to 450 nanometers comprising by weight 55
- 55 (A) 100 parts of organic solvent,
 (B) 1 to 30 parts, preferably 5 to 15 parts, of an inert organic polymer binder,
 (C) 1 to 30 parts, preferably 5 to 15 parts, of an aryl nitrene.
- The novel features which are believed to be characteristic of the present invention are set forth with particularity in the appended claims. The invention itself, both as to its organization and method of operation, together with further objects and advantages thereof may best be understood by reference to the following description taken in connection with the accompanying drawings wherein: 60
- Figure 1* is a graph showing the relative transmission of an idealized bleachable layer as a function of dosage applied to an entrance surface thereof.
- Figures 2A-2F* show diagrams useful in explaining the dynamics of the bleaching process used in the present invention. 65

Figure 3 is a graph of the relative transmission of a particular contrast enhancing layer as a function of time in response to the application of an incident dosage of a particular value.

Figure 4 shows a set of graphs showing relative transmission and contrast of an image having 30% contrast for the case of maximum and minimum transmission and the instantaneous contrast and integrated contrast produced thereby as a function of incident dosage.

Figure 5 shows graphs of relative transmission and contrast as a function of transmitted dosage for the graphs of Figure 4.

Figures 6A-6E show cross sections of structures representing successive steps in one method for carrying out the present invention.

A large fraction of optical lithography is done currently by projection techniques in which an aerial image of a mask is used to expose the photoresist. For an aerial image of low contrast, even those parts of the image that correspond to the dark regions of the mask have significant intensities. As the contrast is reduced, discrimination of the darker area from the lighter area becomes increasingly difficult. In accordance with the present invention a method is provided which enhances the contrast of the image incident on the photoresist and thereby improves this discrimination. The contrast enhancement is based on the use of photobleachable materials which are initially relatively opaque, but following some dose of radiation, become relatively transparent. The optical transmission of an idealized bleachable layer is shown in Figure 1. When the aerial image of a mask is incident on such a layer, the regions of the bleachable layer that are exposed to the highest intensities bleach through first, while those parts of the layer that receive the lowest intensities bleach through at a later time.

The dynamics of this bleaching process are depicted in Figures 2A-2F. Figure 2A shows the relative transmission of an object such as a mask consisting of opaque regions producing zero transmission 11 separated by open or transparent regions producing 100% transmission 12. I_0 is incident intensity of radiation. I is transmitted intensity of radiation. E_b is the dosage of radiation required to cause bleaching of the layer. Figure 2B shows a graph 12 of the relative intensity as a function of position of an aerial image of the mask when placed in optical projection apparatus for producing an aerial image used, for example, for exposure of a layer of photoresist. It is assumed that the wavelength of light used and the dimensions of the regions of the mask are such as to produce the contrast shown. I_{max} is the maximum intensity of the image and I_{min} is the minimum intensity of the image. Figure 2C shows the cross-section of a layer 15 of an idealized photobleachable material. Figure 2D shows the bleaching of the layer 15 as delineated by the dotted line 16 at the end of a first period of time. Figure 2E shows the bleaching of the layer 15 as delineated by dotted line 17 at a later period of time. Figure 2F shows the bleaching of the layer 15 as delineated by dotted lines 18 and 19 at the time the exposure is terminated and bleaching stopped. If the exposure is stopped at a time corresponding to Figure 2F, the transmission of the bleachable layer corresponds to that of the original mask. When such a material is coated on top of a conventional photoresist layer, the resulting composite can have lower contrast threshold than the contrast threshold of resist layer alone. This will be true if the photoresist is sensitive enough to be exposed in a time short compared to the bleaching time. The bleachable layer essentially forms an in situ contact mask for the photoresist layer. The net effect of this in situ mask is to increase the contrast which is incident on the photoresist over the contrast of the aerial image.

The application of contrast enhancing techniques to submicron optical lithography raises several physical and chemical constraints on the contrast enhancing layer itself. The contrast enhancing layer must be simultaneously thin and optically dense. The thickness requirement arises because of the narrow depth of focus of high resolution optical systems. This limits the thickness to a range of less than about 1 micron. Because the contrast enhancing layer must be optically dense, it is necessary that the photochemical constituent of the layer be strongly absorbing. Since the optical transmission following bleaching is determined by the absorption of photoproducts, the photoproducts must have a much smaller extinction coefficient than the parent molecule. Extinction coefficient is defined by the equation

$$\epsilon = \frac{A}{bc} \quad (1)$$

where A is absorbance,

b is path length (cm.), and
c is concentration (mole per liter).

Absorbance is defined by equation

$$A = \log_{10} \frac{I_0}{I} \quad (2)$$

where I_0 is intensity of incident radiation, and

I is intensity transmitted radiation.

The extinction coefficient ϵ of a material is obtained by determining the parameters A , b and c in equation (1). The parameter A is obtained from equation (2). Initially, a known amount of a material by volume is dissolved in a known amount of a solvent by volume to obtain the concentration c of the material in the solution. This solution is put into a cell of known dimensions and placed in the light path of a spectrophotometer and radiation of known intensity I_0 is directed onto the cell. The intensity of the radiation transmitted from the cell is measured. The solvent alone is also put into another cell of the same known dimensions and placed in the light path of the spectrophotometer and radiation of known intensity I_0 is directed onto the cell. The intensity of the radiation transmitted from the cell is measured. The intensity measurements of solvent alone is used to correct the transmitted intensity I for cell and solvent absorption. Thus using these values of incident intensity I_0 and transmitted intensity I in equation (2), absorbance A is obtained. Dimension b is obtained from the cell of known dimensions. Thus, the extinction coefficient for the material is obtained by substitution of values b , c and A in equation (1). The measurement of the extinction coefficients of materials is also described on pages 644-652 in "Fundamentals of Analytic Chemistry", 2nd Edition (1969) by Douglas A. Skoog and Donald M. West, published by Hold, Rinehart and Winston, Inc. of New York, New York. Continuing, in order to minimize the necessary increase in exposure time, the quantum yield of the bleaching reaction must be as high as possible. Also, since photoresists are conventionally applied by spin coating techniques, it would be convenient if the contrast enhancing layer could also be applied by similar methods. The solvent in which the bleachable material is dissolved must be compatible with photoresist layers. Further, it is required that it be possible to spin coat contrast enhancing layers of good optical quality. Finally, the wavelength range over which these bleachable materials operate must be the same as the wavelength range over which the optical projection system operates. Most direct-step-on-the-wafer systems operate at 405 nm (nanometers) or 436 nm. In this case, the 405 nm wavelength was chosen for use on an Optimetrix 10:1 DSW system available from Optimetrix Co. of Mountain View, California. The search for appropriate bleaching materials was made with regard to these constraints. Particularly, the search for appropriate bleaching materials was made with regard to absorption maxima in the wavelength range of 300 to 450 nanometers.

A model of the bleaching process was developed and utilized in the evaluation of bleachable materials suitable for use in the contrast enhancing layer. The parameters of the model are set forth in the following table:

TABLE 1


Quantity	Explanation
ϵ_A	Extinction coefficient of unbleached molecules
ϵ_B	Extinction coefficient of bleached molecules
Φ	Quantum yield of the bleaching reaction
N_0	Initial density of unbleached molecules
F_0	Flux density of photons incident on contrast enhancing layer
t_0	Thickness of contrast enhancing layer
n_f	Index of refraction of bleached layer
n_s	Index of refraction of glass substrate on which the contrast enhancing layer is situated

Based on the analysis above and the model of the bleaching process three criteria for material parameters were developed and are set forth in Table 2.

5		TABLE 2		5
		Quantity	Value	
10	(1)	$\epsilon/\text{Molecular Weight}$	≥ 100 liters/grams-cm	10
	(2)	Φ	≥ 0.2	
15	(3)	$\frac{\epsilon_{\text{unbleached}}}{\epsilon_{\text{bleached}}}$	≥ 30	15

The first criterion is based on the need for an optically dense film, and is essentially related to the packing density of absorbing centers in the contrast enhancing layer. The second criterion is based on the need for as abrupt a transition from the unbleached to the bleached state as is possible. Acceptability of a given quantum yield is to some extent related to the first criterion, because improvements in the first can compensate for deficiencies in the second criterion. The third criterion is based on the need for the contrast enhancing layer to be transparent following the bleaching process. These criteria were used in the initial search for appropriate bleachable materials.


Selection of suitable bleachable compound was determined by evaluation in the model of the bleaching process and by test of the compound in a layer thereof to determine the relative transmission as a function of time or dosage of radiation with radiation intensity being held constant. A number of different bleachable compounds, the bleaching properties of which were based on different bleaching mechanisms were evaluated. The bleachable compounds dependent on photoisomerization were found to be particularly suitable. Of these compounds, aryl nitrones represented by formula 1, were found particularly suitable.




In formula 1 Z is a monovalent group selected from $(R^3)_a-Q-R^4$ - or R^5 - and Z' is a monovalent group selected from $-R^6(X)_b$, R, R^1 , R^2 and R^3 are monovalent radicals selected from the class of hydrogen, $C_{(1-8)}$ alkyl, $C_{(1-8)}$ substituted alkyl, $C_{(6-13)}$ aryl hydrocarbon and $C_{(6-13)}$ substituted aryl hydrocarbons. Q is a monovalent, divalent or trivalent atom selected from the group F, C, Br, I, O, S, N, where a can have values of 0, 1 or 2. R^4 is a $C_{(6-13)}$ aryl hydrocarbon or a $C_{(6-13)}$ substituted aryl hydrocarbon. R^5 is selectable from the group of substituted or unsubstituted $C_{(6-20)}$ aromatic heterocyclic compounds incorporating one or more atoms from the group O, N or S. R^6 is selected from the group of $C_{(6-20)}$ aromatic hydrocarbons and X is selected from the group of halo, cyano, alkyl carbonyl, $C_{(1-8)}$ alkyl, $C_{(1-8)}$ substituted alkyl, $C_{(6-13)}$ aryl hydrocarbon, $C_{(6-13)}$ substituted aryl hydrocarbons, or alkoxy carbonyl in any combination for values of b of 0, 1, 2 or 3. n can have values of 0, 1, 2, 3 or 4. The above compounds can be prepared using procedures such as those described in "Methoden der Organischen Chemie" (Houben-Weyl), Vol. 10, part 4 (1968), pgs. 315-416, or those described in Chemical Reviews (1964), Nitrones, by Jan Hamer and Anthony Macaluso, pgs. 476-483.

Various aryl ring systems with a variety of substituents may be constructed to suit the particular needs of the optical system employed in the photoimaging process. The aryl nitrones exhibit extinction coefficients of 2 to 5×10^4 liter mole $^{-1}$ cm $^{-1}$ and bleach with quantum yields in the range of 0.1 to 0.5.

For the direct-step-on-the-wafer systems capable of imaging at 405 nm, the nitrones of the general structure 2 were found to be particularly useful.

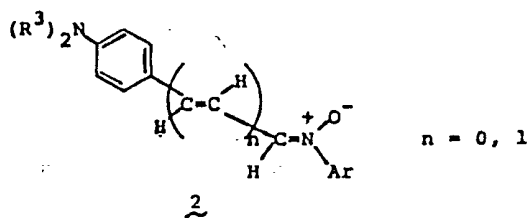

Included among this subclass of *p*-dialkylaminoaryl nitrones are heterocyclic compounds such as 3.



3

- 10 Suitable binders for use in providing a spin castable mixture for formation of a photobleachable layer 10
 incorporating the aryl nitrones of formula (1) are: vinyl acetate polymers (homopolymers and copolymers)
 and their partially saponified products (e.g., polyvinylacetate), copolymers of styrene or its derivatives,
 polymers and copolymers of acrylate or methacrylate esters, acetal resins, acrylonitrile/butadiene
 copolymers, ethyl cellulose and other hydrocarbon-soluble cellulose ethers, cellulose propionate and other
 15 hydrocarbon-soluble cellulose esters, poly(chloroprene), poly(ethyleneoxide), poly(vinylpyrrolidone). 15
 Suitable solvents for use in providing a spin castable mixture for formation of a photobleachable layer
 incorporating the aryl nitronium of formula (1) are: aromatic hydrocarbons (e.g. toluene xylenes, ethyl
 benzene, chlorobenzene) with or without aliphatic hydrocarbons (e.g. cyclohexane), halogenated aliphatic
 compounds (e.g. trichloroethylene, methyl chloroform, alcohols (e.g. propanol, butanol))
 20 The diaryl nitronium 2 where R = CH₂CH₂ and n = 0 was found to be particularly suitable. This nitronium, 20
 referred to as α -(4-diethylaminophenyl)-N-phenylnitronium, was found to absorb strongly at 405 nm and
 bleaches to near transparency with high efficiency at the same wavelength by undergoing unimolecular
 cyclization to an oxaziridine. The nitronium is very soluble in solvents of moderately low polarity (e.g., toluene,
 ethylbenzene) and forms good films at high loading densities with a variety of polymers such as polystyrene,
 25 poly(hydroxyethylmethacrylate), poly- α -methylstyrene, poly(methyl methacrylate), polyvinylpyrrolidone, 25
 vinylpyridine/styrene copolymers and allyl alcohol/styrene copolymers. The material α -(4-
 diethylaminophenyl)-N-phenylnitronium has an extinction coefficient to weight ratio of 130 liters/gram-cm at
 405 nm. The material was formed into a contrast enhancing layer as follows: A solution of α -(4-
 diethylaminophenyl)-N-phenylnitronium (5% by weight of solution) and a binder, styrene/allyl alcohol
 30 copolymer (5% by weight of solution) are dissolved in toluene. A glass substrate is spin coated to a thickness 30
 of 250 nm. The relative transmission of the sample was tested at 405 nm and was found to have the relative
 transmission versus time characteristic at 405 nm, shown in Figure 3.

The model of the bleaching process was used to calculate the improvements in contrast as a function of
 exposure time for the contrast enhancing layer of Figure 3. This is accomplished by calculating the bleaching
 35 for two representative points in a given pattern. In this example, two incident intensities that correspond to 35
 the maxima and minima of line and space grating pattern are chosen. The contrast C that these two levels of
 intensity correspond to can be calculated from the definition of contrast:

$$40 \quad C = \frac{I_{\max} - I_{\min}}{I_{\max} + I_{\min}} \quad (3) \quad 40$$

- 45 Using the model of the bleaching process, the transmitted intensity as a function of incident dose for both 45
 the maxima and minima are determined. From these quantities, both the instantaneous and the integrated
 contrast can be calculated as a function of incident dosage. Figure 4 shows graphs of such determination and
 calculations for a 30% contrast pattern incident on the layer of the sample described above. Graph 21 shows
 the relative transmission at a relative maximum as a function of incident dosage in joules. Graph 22 shows
 50 the relative transmission at a minimum as a function of incident dosage. Graph 23 shows the instantaneous 50
 contrast obtained from graphs 21 and 22 using equation 3, as a function of incident dosage. Graph 24 shows
 the integrated contrast obtained from equation 3 using integrated values of I_{\max} and I_{\min} instead of
 instantaneous values. Since bleaching is a dynamic process, the contrast which results from the transmitted
 radiation is also a function of dosage. A more useful graphical representation is shown in Figure 5 wherein
 55 the corresponding graphs are plotted as a function of transmitted dosage. This representation allows the 55
 degree of contrast enhancement to be estimated as a function of the sensitivity of photoresist to be used in
 connection with the contrast enhancing layer. Graph 26 shows relative transmission at a relative maximum
 as a function of transmitted dosage. Graph 27 shows relative transmission at a relative minimum as a
 function of transmitted dosage. Graph 28 shows the instantaneous contrast obtained from graphs 26 and 27
 60 using equation 3, as a function of transmitted dosage. Graph 29 shows the integrated contrast obtained from 60
 equation 3 using integrated values of I_{\max} and I_{\min} , as a function of transmitted dosage.

The process used for utilizing the contrast enhancing layer will now be described and thereafter the results
 obtained thereby will be compared with the results obtained under the same conditions but without the use
 of a contrast enhancing layer. Reference is now made to Figures 6A-6E which illustrate the various steps of
 65 the process for providing a pattern of photoresist on a suitable substrate. Figure 6A shows a substrate 31 on 65

which is provided a layer 32 of a suitable photoresist such as Shipley 1400 series of positive photoresists available from the Shipley Company of Newton, Mass. Such positive resists consist of a novolac resin or poly(vinylphenol), diazonaphthoquinone esters, and solvents (e.g. cellosolve acetate, xylenes). The liquid photoresist is deposited on the surface of the substrate which is then spun to provide a layer of desired thickness. After baking of the photoresist layer to remove solvent, a contrast enhancing layer 33 is provided on the surface of the photoresist. The contrasting enhancing layer 33 is constituted of a solution of a styrene/allyl alcohol copolymer binder (5% by weight of solution) and α -(4-diethylaminophenyl)-N-phenylnitrone (5% by weight of solution) in the solvent toluene. The solution is deposited on the surface of the photoresist 32, spun and thereafter baked to remove solvent to provide the layer 33 of desired thickness, as shown in Figure 6B. The resultant structure is then exposed to a pattern of radiation consisting of illuminated regions 35 underlying the arrows 37 indicating radiation and nonilluminated regions 36 for a time to produce a contrast enhanced image in the range of dosages to which the photoresist layer is sensitive and which fully expose the layer of photoresist, as shown in Figure 6C. Thereafter, the contrast enhancing layer 33 is removed by using a suitable stripping solvent, such as trichloroethylene, which removes the contrast enhancing layer without affecting the photoresist, as shown in Figure 6D. Thereafter, the exposed portions of the photoresist are removed leaving retaining portions 38, 39 and 40 which are unexposed or insufficiently exposed as shown in Figure 6E.

In order to determine the improvements in contrast threshold obtained for the composite layer of the contrast enhancing layer and photoresist in accordance with the present invention, the aforementioned photobleachable material constituted of α -(4-diethylaminophenyl)-N-phenylnitrone and a styrene/allyl alcohol binder was utilized in conjunction with Shipley 1400 series of positive photoresist to fabricate various patterns. A wafer or substrate of silicon was coated with only photoresist having a thickness of 1.6 microns and another wafer of silicon was coated with a layer of photoresist 1.6 microns thick over which was coated a layer of the photobleachable material specified above to a thickness of .25 microns. An object consisting of an opaque line 2 microns wide, a transparent space 2 microns wide, an opaque line .8 microns wide and a transparent space .8 microns wide was imaged using the Optimetric 10:1 projection system at 405 nanometers onto the wafer with just the layer of photoresist with a range of dosages to form a number of patterns in the photoresist and was also imaged on the wafer which included photoresist and contrast enhancing layer with a range of dosages to form a number of patterns in the photoresist. The photoresist on each of the wafers was developed to obtain the patterns of lines and spaces formed in the photoresist. Patterns produced in the wafer with just photoresist using the minimum exposure or dosage that opened the .8 micron space at the photoresist substrate interface were compared with the patterns produced in the wafer with photoresist and contrast enhancing layer using the minimum exposure or dosage that opened .8 microns space at the photoresist substrate interface. The 2.0 micron wide line and the 2.0 micron wide space, were nearly correct for both the wafer using just the photoresist and the wafer using the photoresist and the contrast enhancing layer thereon. The .8 micron wide line was grossly overexposed on the wafer having just the photoresist using the exposure which produced a .8 micron wide space in the photoresist. The .8 micron wide line was properly exposed producing a .8 wide line in the photoresist on the wafer having both photoresist and contrast enhancing layer using the exposure which produced a .8 wide space in the photoresist. Furthermore, the profiles of the walls of the contrast enhanced patterns were nearly vertical. The poorer resultant patterns produced in the photoresist without the contrast enhancing layer is due to the much lower aerial image contrast obtained at the output of the Optometric projection system due to the higher spatial frequencies present in the image or pattern of radiation obtained therefrom.

While the invention has been described in connection with a particular positive photoresist, other positive and negative photoresists may be utilized. Also, while a particular thickness of photoresist and a particular thickness contrast enhancing layer utilized in one example describing the invention, it will be understood that other thicknesses of photoresist and contrast enhancing layers may be utilized.

Preferably the layer of photoresist should have a thickness less than about 3 microns and the contrast enhancing layer should have a thickness less than about 1 micron.

While in an exemplary composition of the contrast enhancing layer equal weight proportions of the photobleachable compound and the binder therefor were utilized, other proportions may be utilized, if desired.

While in connection with photoresists it was mentioned that they have a characteristic called contrast threshold, it should be noted that this characteristic is a function of conditions of usage of the photoresist as well as of the resist itself, for example, the nature of the substrate on which used and reflections therefrom.

While values of the extinction coefficient to molecular weight ratio in the unbleached state for the photobleachable compound greater than about 100 are preferred and a ratio of the extinction coefficient for the unbleached state to the extinction coefficient for the bleached state of the photobleachable compound greater than about 30 is preferred, values of the above ratios as low as about 10 would be satisfactory.

While a particular class of photobleachable compounds, namely, the aryl nitrones, dependent on unimolecular cyclization were utilized, it will be understood that other photobleachable compounds dependent on unimolecular cyclization and on other bleaching mechanisms such as photofragmentation, for example, may be utilized in accordance with the present invention.

The aforementioned α -(4-diethylaminophenyl)-N-phenylnitrone, also set forth in Table I, was prepared by condensing *p*-diethylaminobenzaldehyde (18.5g, 0.1 mole) with freshly prepared phenylhydroxylamine

(11.4g, 0.1 mole) in 40 ml of absolute ethanol at room temperature for 18 hours. Evaporation of the solvent yielded a red oil which was twice crystallized from toluene/petroleum ether to afford 13.0 g (0.05 mole) of the nitrone, mp 103-105°C. Further recrystallization of an analytical sample raised the melting point to 110-112°C.

Other nitrones having absorption maxima in the wavelength range of 300 to 450 nanometers are also set forth in Table I. In Table I, λ_{\max} (nm) designates absorption maximum in nanometers, ϵ_{\max} designates extinction coefficients at wavelength of maximum absorption, mp designates melting point in degrees Centigrade. 5

These other nitrones were prepared in a manner similar to the manner of preparation to the aforementioned nitrones by the condensation of the appropriate aldehydes and phenylhydroxylamines in 10 polar solvents. 10

Table 1
























		λ_{\max} (nm)	ϵ_{\max}	mp ($^{\circ}$ C)
Ar	Ar'			
α -(4-diethylaminophenyl)-N-phenylnitrono				
1) 		388	41,000	110-112
α -(4-diethylaminophenyl)-N-(4-chlorophenyl)nitrono				
2) 		398	42,500	176-179
α -(4-diethylaminophenyl)-N-(3,4-dichlorophenyl)nitrono				
3) 		409	43,700	154-157
α -(4-diethylaminophenyl)-N-(4-ethoxycarbonylphenyl)nitrono				
4) 		418	31,300	107-109
α -(4-diethylaminophenyl)-N-(4-acetylphenyl)nitrono				
5) 		424	27,000	115
α -(4-dimethylaminophenyl)-N-(4-cyanophenyl)nitrono				
6) 		420	33,000	202-203
α -(4-methoxyphenyl)-N-(4-cyanophenyl)nitrono				
7) 		368	13,000	181-182
α -(9-julolidinyl)-N-phenylnitrono				
8) 		405	38,000	132-133
α -(9-julolidinyl)-N-(4-chlorophenyl)nitrono				
9) 		420	36,600	99-103

TABLE 1 (cont'd)

	$\begin{array}{c} \text{Ar} \\ \\ \text{CH}=\text{N} \\ \\ \text{AR}' \end{array}$							
10	Ar	AR'		$\lambda_{\text{max}}(\text{nm})$	ϵ_{max}	mp ($^{\circ}\text{C}$)		10
10)	α -[2-(1,1-diphenylethenyl)]-N-phenylnitron				366	27,800	140-142	5
15								15
20	11) α -[2-(1-phenylpropenyl)]-N-phenylnitron				340	19,000	468	20

25 In the method of the invention the photobleachable layer is in the form of an in situ mask on the layer of photoresist. The formation of such a composite structure has a number of advantages. The photobleachable layer conforms to the surface of the layer of photoresist and avoids the formation of gaps between the high points of the surfaces of the layer of photobleachable material and the layer of photoresist. Such gaps would be formed when the two layers are formed on separate supports and then brought together. Such gaps would be highly detrimental to the resolution of any image formed in the photoresist particularly when the features to be imaged are of the order of a few microns and also when the depth of field of the projection system is a few microns. Also, bringing a layer of photobleachable material into contact with a layer of photoresist and thereafter separating them runs the risk of having pieces of one layer adhering to the other layer thereby damaging the layers of photoresist.

30 While in describing the invention in an exemplary embodiment, the contrast enhancing layer was situated in contact with the layer of the photoresist, the contrast enhancing layer could have been spaced apart from the layer of the photoresist, if desired, for example, by a thin conformal layer of neutral material formed in situ.

35

While the invention has been described in specific embodiments, it will be understood that modifications such as those described above may be made by those skilled in the art, and it is intended by the appended claims to cover all such modifications and changes as fall within the true spirit and scope of the invention.

40

CLAIMS

- 45 1. A method of producing an image in a layer of photoresist by imagewise exposure of said layer from a light source, emitting light of a predetermined wavelength wherein a contrast-enhancing layer comprising a photobleachable compound is provided between the light source and the photoresist layer, the photobleachable compound is sensitive to light having the predetermined wavelength, and has a ratio of extinction coefficient to molecular weight greater than 10 liters per gram-cm when in the unbleached state, and a ratio of extinction coefficient for the unbleached state to extinction coefficient for the bleached state greater than 10.
- 50 2. A method as claimed in Claim 1 wherein the ratio of extinction coefficient to molecular weight of said photobleachable compound in the unbleached state is greater than 100 and the ratio of the extinction coefficient for the unbleached state to the extinction coefficient for the bleached state of said photobleachable compound is greater than 30.
- 55 3. A method as claimed in Claim 1 wherein the photobleachable compound is an aryl nitron compound.
4. A method as claimed in Claim 3 wherein the aryl nitron is α -(4-diethylaminophenyl)-N-phenylnitron and the predetermined wavelength of light is 405 nanometers.
- 60 5. A method as claimed in any preceding Claim wherein the contrast enhancing layer is contiguous to the layer of photoresist.
6. A method as claimed in Claim 5 wherein the thickness of the photoresist layer is less than 3 microns and the thickness of the contrast enhancing layer is less than 1 micron.
7. A photobleachable composition which comprises an aryl nitron having an extinction coefficient to molecular weight ratio in liters per gram-centimeter in an unbleached state of greater than 10, and a ratio of extinction coefficient for the unbleached state to extinction coefficient for the bleached state greater than 10.
- 65

8. A photobleachable composition as claimed in Claim 7 which comprises a nitron.
9. A photobleachable composition as claimed in Claim 7 which includes a binder.
10. A spin castable mixture capable of forming a photobleachable layer having an absorption maximum in the range of 300 to 450 nanometers which comprises by weight
- 5 (A) 100 parts of an organic solvent. 5
- (B) 1 to 30 parts of an inert organic polymer binder, and
- (c) 1 to 30 parts of an aryl nitron.
11. An aryl nitron having an absorption maximum in the range of 300-450 nanometers selected from
- 10 α -(4-diethylaminophenyl)-N-phenylnitron, 10
- α -(4-diethylaminophenyl)-N-(4-chlorophenyl)nitron,
- α -(4-diethylaminophenyl)-N-(3,4-dichlorophenyl)nitron,
- α -(4-diethylaminophenyl)-N-(4-ethoxycarbonylphenyl)nitron,
- α -(4-diethylaminophenyl)-N-(4-acetylphenyl)nitron,
- 15 α -(9-julolidinyl)-N-phenylnitron, 15
- α -(9-julolidinyl)-N-(4-chlorophenyl)nitron,
- α -(4-dimethylaminophenyl)-N-(4-cyanophenyl)nitron,
- α -(4-methoxyphenyl)-N-(4-cyanophenyl)nitron,
- α -[2-(1-phenylpropenyl)]-N-phenylnitron, and
- α -[2-(1,1-diphenylethenyl)]-N-phenylnitron.