

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 December 2008 (18.12.2008)

PCT

(10) International Publication Number  
**WO 2008/153565 A1**

(51) International Patent Classification:  
*D21C 3/00* (2006.01) *D21D 5/02* (2006.01)

(74) Agent: COHEN, Neil G.; 1021, Main Campus Drive,  
Raleigh, North Carolina 27606, (US).

(21) International Application Number:  
PCT/US2007/070927

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 12 June 2007 (12.06.2007)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): MEAD-WESTVACO CORPORATION [US/US]; MeadWestvaco Corporate Center, 11013 West Broad Street, Glen Allen, Virginia 23060 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(72) Inventors; and

(75) Inventors/Applicants (for US only): HART, Peter W. [US/US]; 1735 Peachtree Street NE, Unit 328, Atlanta, Georgia 30309 (US). WAITE, Darrell M. [US/US]; 1009 River Chase Drive, Raleigh, North Carolina 27610 (US). NUTTER, Dale E., Jr. [US/US]; 245 Willowbrook Circle, Clayton, North Carolina 27527 (US).

Published:  
— with international search report

(54) Title: A FIBER BLEND HAVING HIGH YIELD AND ENHANCED PULP PERFORMANCE AND METHOD FOR MAKING SAME

FIGURE 1

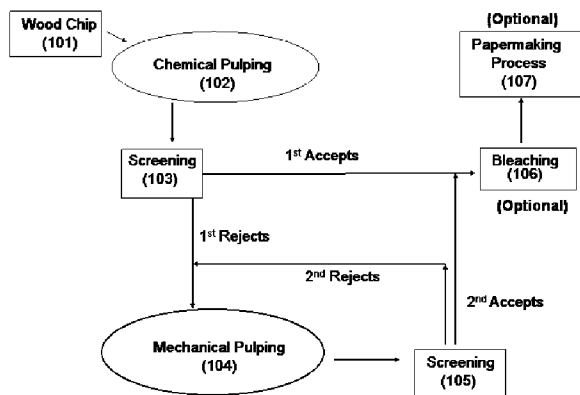

(57) Abstract: The present disclosure relates to producing paper or paperboard having improved stiffness and strength, compared to the conventional paperboard at the same basis weight. It also discloses a method of wood pulping having a significantly increased yield and providing fiber pulps with enhanced properties such as strength and stiffness. Wood chips are chemically pulped to a high kappa number, providing a rejects component and an accepts component. The rejects component is subjected to a substantially mechanical pulping process, optionally in a presence of bleaching agent, prior to blending back into the accepts component. The resulting fiber blend is washed, optionally bleached, and subjected to a papermaking process to provide paper or paperboard with enhanced strength and stiffness at low basis weight.

WO 2008/153565 A1

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
Acting as the International Receiving Office

International Patent Application For

5           **A FIBER BLEND HAVING HIGH YIELD AND ENHANCED PULP  
              PERFORMANCE AND METHOD FOR MAKING SAME**

10                           BACKGROUND OF THE INVENTION

10

[0001] Two main processes have been used for wood pulping: mechanical pulping and chemical pulping. Mechanical pulping primarily uses mechanical energy to separate pulp fibers from wood without a substantial removal of lignin. As a result, the yield of mechanical pulping is high, typically in the range of 85-98%. The produced fiber pulps generally have high bulk and stiffness properties. However, mechanical pulping consumes a high level of operational energy, and the mechanical pulps often have poor strength.

15

[0002] In order to reduce the required energy level and improve fiber strength, other process options have been used in a combination with mechanical energy.

20

Thermomechanical pulping (TMP) grinds wood pulps under steam at high pressures and temperatures. Chemi-thermomechanical pulping (CTMP) uses chemicals to break up wood pulps prior to a mechanical pulping. The CTMP pulping has somewhat lower yield than mechanical pulping, but it provides pulp fibers with a slightly improved strength. Sodium sulfide has been the main chemical used for CTMP pulping. Within the past 10 years, the industry has begun to use hydrogen peroxide as an impregnation chemical and as a chemical directly applied to a high consistency refiner treatment for CTMP pulping. This pulping process, known as alkaline peroxide mechanical pulping (APMP), provides fiber pulps with enhanced brightness and improved strength compared to the traditional CTMP pulping.

25

Additionally, recent breakthroughs in the APMP pulping have been associated with a reduction of the required refining energy through an application of a secondary, low consistency refining system and an enhancement of barrier screening technology to selectively retain rejects while allowing the desirable fibers to pass through to a paper machine.

30

[0003] Chemical wood pulping is a process to separate pulp fibers from lignin by employing mainly chemical and thermal energy. Normally, lignin represents about 20 - 35% of the dry wood mass. When the majority of the lignin is substantially removed, the pulping provides approximately a 45 - 53% pulp yield.

[0004] Chemical pulping reacts wood chips with chemicals under pressure and temperature to remove lignin that binds pulp fibers together. Chemical pulping is categorized based on the chemicals used into kraft, soda, and sulfite. Alkaline pulping (AP) uses an alkaline solution of sodium hydroxide with sodium sulfide (kraft process) or without sodium sulfide (soda process). Acid pulping uses an acidic solution of sodium sulfite (sulfite process). Chemical pulping provides pulp fibers with, compared to mechanical pulping, improved strength due to a lesser degree of fiber degradation and enhanced bleachability due to a lignin removal.

15

[0005] In the chemical process, wood is "cooked" with chemicals in a digester so that a certain degree of lignin is removed. A kappa number is used to indicate the level of the remaining lignin. The pulping parameters are, to a large degree, able to be modified to achieve the same kappa number. For example, a shorter pulping time may be compensated for by a higher temperature and/or a higher alkali charge in order to produce pulps with the same kappa number.

20

[0006] Kraft pulping has typically been divided into two major end uses: unbleached pulps and bleachable grade pulps. For unbleached softwood pulps, pulping is typically carried out to a kappa number range of about 65-105. For bleachable grade softwood kraft pulps, pulping is typically carried out to a kappa number of less than 30. For bleachable grade hardwood kraft pulps, pulping is typically carried out to a kappa number of less than 20.

25

[0007] For bleachable grade pulps, kraft pulping usually generates about 1-3 weight % of undercooked fiber bundles and about 97-99 weight % of liberated pulp fibers. The

30

undercooked, non-fiberized materials are commonly known as rejects, and the fiberized materials are known as accepts pulp. Rejects are separated from accepts pulp by a multiple stage screening process. Rejects are usually disposed of in a sewer, recycled back to the digester, or thickened and burned. In a few circumstances, rejects are collected and recooked  
5 in the digester. However, using this prior technology, drawbacks exist from re-cooking the rejects which include an extremely low fiber yield, a potential increase in the level of pulp dirt, and a decrease in pulp brightness (poorer bleachability).

[0008] Modern screen rooms are typically designed to remove about 1-2 weight % of  
10 rejects from a chemical pulping process. If a mill experiences cooking difficulties and accidentally undercooks the pulp, the amount of rejects increases exponentially. Modern bleachable grade kraft pulp screen rooms are not physically designed to process pulps with greater than about 5% by weight of rejects. When the level of rejects increases to slightly above 4-5% by weight, either the screen room plugs up and shuts down the pulp mill, or the  
15 screen room is bypassed and the pulp is dumped onto the ground or into an off quality tank and disposed of or gradually blended back into the process. Therefore, bleachable grade kraft pulps are conventionally cooked to relatively low kappa numbers (20-30 for softwoods and 12 – 20 for hardwoods) to maintain a low level of rejects and good bleachability.

[0009] There has been a continuing effort to increase the yield of a chemical pulping  
20 process, while maintaining the chemical pulp performance such as high strength. In 2004-2007, the U.S. Department of Energy's Agenda 20/20 program sponsored several research projects to achieve this manufacturing breakthrough endeavor. The Agenda 20/20 program, American Forest and Products Association (AF&PA), and the U. S. Department of Energy  
25 jointly published a book in 2006 that define one of the performance goals for breakthrough manufacturing technologies would be "Produce equivalent / better fiber at 5% to 10% higher yield". Target pulp yield increases of 5-10% are considered to be revolutionary to the pulp producing industry. To date, the Agenda 20/20 funded projects have achieved, at best, a 2-5% pulp yield increase. These developed technologies include a double oxygen treatment of  
30 high kappa pulps, a use of green liquor pretreatment prior to pulping, and a modification of pulping chemicals and additives used for pulping. However, all other known attempts to

achieve a breakthrough of 5-10% yield increase have failed. Other known chemical pulping modifications to increase pulp yield include a use of digester additives such as anthraquinone, polysulfide, penetrant or various combinations of these materials. Again in all instances, only 1-5% yield increase over a traditional kraft pulping process has been realized. Additionally,  
5 the modified chemical pulping process often provides fiber pulps with lower tear strength.

[0010] Accordingly, there is a need for a novel pulping process with a breakthrough yield (i.e., 5-10% increase) that is economically feasible. Furthermore, the pulp fibers from such pulping process should exhibit equivalent or enhance physical properties to those of the  
10 convention, lower yield pulping processes.

[0011] Two of the critical areas of performance for paperboard packaging are stiffness and bulk. Therefore, the packaging industry strives for paper/paperboard with high stiffness at the lowest basis weight possible in order to reduce the weight of paper/paperboard  
15 needed to achieve a desired stiffness and, therefore, reduce raw material cost.

[0012] One conventional approach to enhance the board stiffness is through using single-ply paperboard with a higher basis weight. However, a single-ply paperboard with an increased basis weight is economically undesirable because of a higher raw material cost and  
20 higher shipping cost for the packaging articles made of such board.

[0013] Another conventional practice is to use multi-ply paperboard having at least one middle or interior ply designed for high bulk performance with top and bottom plies designed for stiffness. U.S. Patent 6,068,732 teaches a method of producing a multi-ply  
25 paperboard with an improved stiffness. Softwood is chemically pulped, and the resulting fiber pulps are screened into a short fiber fraction and a long fiber fraction. The outer plies of paperboard are made of the softwood long fiber fraction. The center ply of paperboard is formed from a mixture of the softwood short fiber fraction and chemically pulped hardwood fibers. The paperboard has about 12-15% increase in Taber stiffness. PCT Patent  
30 Application No. 2006/084883 discloses a multi-ply paperboard having a first ply to provide good surface properties and strength and a second ply comprising hardwood CTMP (chemi-

thermomechanical) pulps to provide bulkiness and stiffness.

[0014] Multi-ply paperboards are commonly prepared from one or more aqueous slurries of cellulosic fibers concurrently or sequentially laid onto a moving screen.

Production of multi-ply board requires additional processing steps and equipments (e.g.,  
5 headbox and/or fourdrinier wire) to the single ply boards. Conventionally, a first ply is formed by dispensing the aqueous slurry of cellulosic fibers onto a long horizontal moving screen (fourdrinier wire). Water is drained from the slurry through the fourdrinier wire, and additional plies are successively laid on the first and dewatered in similar manner.

Alternatively, additional plies may be formed by means of smaller secondary fourdrinier  
10 wires situated above the primary wire with additional aqueous slurries of cellulosic fibers deposited on each smaller secondary fourdrinier wire. Dewatering of the additional plies laid down on the secondary fourdrinier wires is accomplished by drainage through the wires usually with the aid of vacuum boxes associated with each fourdrinier machine. The formed additional plies are successively transferred onto the first and succeeding plies to build up a  
15 multi-ply mat. After each transfer, consolidation of the plies must be provided to bond the plies into a consolidated multi-ply board. Good adhesion between each ply is critical to the performance of multi-ply board, leading to an additional factor that may deteriorate board properties. The plies must be bonded together well enough to resist shear stress when under load and provide Z-direction fiber bond strength within and between plies to resist splitting  
20 during converting and end use. However, a multiply-ply paperboard with an increased basis weight is economically undesirable because of a higher production cost and higher shipping cost for the packaging articles made of such board.

[0015] Therefore, there is a need for paperboard having an enhanced stiffness at a  
25 lower basis weight that is more economical than conventional single-ply and multi-ply paperboards.

#### SUMMARY OF THE INVENTION

30 [0016] The present disclosure relates to producing paper or paperboard having improved stiffness and strength, compared to the conventional paperboard at the same basis weight. It also discloses a method of wood pulping having a significantly increased yield and

providing fiber pulps with enhanced properties such as strength and stiffness.

[0017] Wood chips are chemically pulped to a high kappa number, providing a rejects component and an accepts component. The rejects component is subjected to a substantially  
5 mechanical pulping process, optionally in a presence of bleaching agent, prior to blending back into the accepts component. The resulting fiber blend is washed, optionally in a presence of bleaching agent, and subjected to a papermaking process to provide paper or paperboard with enhanced strength and stiffness at low basis weight.

10

#### DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 is a schematic diagram showing one embodiment of the pulping process of the present disclosure;

[0019] FIG. 2 is a schematic diagram showing one embodiment of the pulping process of the present disclosure; and

15

[0020] FIG 3. is a graph showing weight percents of the fibers retained on the Bauer-McNett screen of different mesh sizes for the fiber blend of the present disclose and for the conventional Kraft fibers.

20

#### DETAILED DESCRIPTION OF THE INVENTION

[0021] The preferred embodiments of the present inventions now will be described more fully hereinafter, but not all possible embodiments of the invention are shown. Indeed, these inventions may be embodied in many different forms and should not be construed as  
25 limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will satisfy applicable legal requirements. The detailed description is not intended to limit the scope of the appended claims in any manner.

[0022] FIGURE 1 shows the pulping process of the present disclosure. Wood chips  
30 provided in (101) are subjected to a chemical pulping (102) to provide a first amount of pulp. The first amount of pulp is screened at (103) to separate the first rejects component from the first accepts component. The first rejects component is then subjected to a substantially

mechanical pulping process (104), providing the second rejects component and the second accepts component. The second accepts component is separated from the second rejects component through screening (105). The second rejects component is combined with the first reject component and sent back to the substantially mechanical pulping processing (104).

5 The second accepts component is blended with the first accepts component, providing a fiber blend. The resulting fiber blend may be subjected to bleaching (106) prior to a papermaking process (107) or subjected directly to a papermaking process (107).

[0023] The substantially mechanical pulping process used for treating the rejects  
10 component of the present disclosure may be any mechanical process performed in a presence of chemical agent(s). Such chemical agent may be the chemical compound retained in the rejects component from the chemical pulping of wood chips, or the chemical compound added during the mechanical pulping of the rejects components, or combinations thereof.

15 [0024] A more specific embodiment of the pulping process is disclosed in detail in FIGURE 2. Wood chips provided in (201) are subjected to a chemical pulping (202) in a digester, providing the first amount of pulp. The first amount of pulp is screened at (203) to separate the first rejects component from the first accepts component. The first rejects component is then put through a rejects processing procedure (204), where the first rejects  
20 component is subjected to a high consistency refining (205) and then discharged into a retention device (206) for a predetermined retention time. The resulting refined pulps may be further subjected to at least one more refining process (207), or sent directly to a screening (208) without an additional refining process to separate the second rejects component from the second accepts component. The second rejects component is combined with the first  
25 reject component and sent back to the substantially mechanical pulping processing (204). It is to be understood that FIG. 2 represents one example of such rejects processing, but other mechanisms for the rejects processing procedure may be used in the present disclosure. The second accepts component is blended with the first accepts component, providing a fiber blend. The resulting fiber blend may be subjected to bleaching (209) prior to a papermaking  
30 process (210), or subjected directly to a papermaking process (210).



[0025] The chemical pulping process of the wood chips is designed to provide about 6-50% weight of the rejects component, which is unlike a conventional kraft process that typically generates about 1-5% weight of the rejects component. In some embodiments, the pulping process provides about 30-35% weight of the rejects component. In order to obtain such an extraordinary high level of the rejects component, kraft pulping for bleachable grade is carried to a kappa number range of about 20-70 for hardwood and 30-95 for softwood, compared to a kappa number of less than 20 for conventional hardwood and less than 30 for a conventional softwood processes. In some embodiments, the pulping process is carried out to a kappa number of about 55. As is known in the art, several operational parameters for pulping may be adjusted and optimized to achieve pulping with such high kappa number. These parameters include, but are not limited to, lower cooking temperature, lower cooking time, reduced chemical level, and combinations thereof.

[0026] The resulting pulp fibers are screened through a multi-stage screening process to separate the first rejects component from the first accepts component. For example, the resulting pulp fibers may be screened through a coarse barrier screen, and subsequently through a second primary screen consisting of fine slots or small holes. The collected rejects component may be further screened through two to three levels of slotted or hole screens to separate a pure reject stream from a stream of good, debris free fiber capable of passing through a typical bleachable grade fiber slot or hole.

[0027] The first rejects component obtained from a screening process is subjected to a rejects processing step, which is substantially a mechanical pulping process. A variety of mechanisms may be used for the rejects processing. In one example, the rejects component is thickened to about 30% consistency and subjected to a high consistency refining in a presence or absence of bleaching agent(s). The compositions and amounts of the bleaching agents may be adjusted to ensure peroxide stabilization and good fiber refinability. The bleaching agent and the rejects component may be added simultaneously to the refiner, or the bleaching agent(s) may be added to the rejects component after the refining process. The rejects component may be refined in either an atmospheric or pressurized refiner using about 5-30 hpd/ton energy. The refined rejects component is then discharged into a retention

device for a retention time of about 0-60 minutes. In some embodiments of the present disclosure, the refined rejects are retained for about 30 minutes. Subsequently, the resulting treated rejects component may either be screened through a fine slotted, multistage screening or passed through a set of low consistency secondary refiners and then through a multi-stage screening process, generating the second accepts component and the second rejects component. The second accepts component is blended back to a stream of the first accepts component, while the second rejects component is fed back to the rejects processing step for a further treatment.

10 [0028] The refining process suitable for use in the present disclosure may be a pure mechanical, a thermal mechanical, or a chemi-thermomechanical process. Any known mechanical techniques may be used in refining the fibers of the present disclosure. These include, but are not limited to, beating, bruising, cutting, and fibrillating fibers.

15 [0029] Suitable bleaching agents for use in bleaching include, but are not limited to, chlorine dioxide, sodium hypochlorite, sodium hydrosulfite, elemental chlorine, ozone, peroxide, and combinations thereof. Furthermore, the pulp may be bleached by an oxygen delignification process or by an extraction with base in the presence of peroxide and/or oxygen. In some embodiments of the present disclosure, the rejects component is bleached with bleaching liquor consisting of peroxide, caustic, and sodium silicate.

25 [0030] The second accepts component is blended back into a stream of the first accepts component, providing a fiber blend. In some embodiments of the present disclosure, about 70 % by weight of the first accepts component is blended with about 30 % by weight of the second accepts component. The ratio of the first accepts component to the second accepts component will typically be similar to the ratio of the first accepts component to the first rejects component produced in the first screening process. If the fibers are for an unbleached grade of paper or paperboard, the resulting blended fibers may be further subjected to a traditional papermaking processes. If the fibers are for a bleached grade paper/paperboard, the resulting blended fibers may be bleached prior to being subjected to a traditional papermaking processes. Several bleaching techniques may be used, including subjecting the

fiber blend to an oxygen delignification process or passing the fiber blend directly to a conventional or ozone containing bleach plant.

[0031] The fibers used in the present disclosure may be derived from a variety of sources. These include, but are not limited to, hardwood, softwood, or combinations thereof.

[0032] The wood pulping process of the present disclosure provides an increased yield in a range of about 8-20% compared to conventional pulping processes. Additionally, when the process of the present disclosure is carried out to a higher kappa number, the pulp yield further increases but at a higher processing cost. (TABLE 1) This substantial yield improvement is even higher than the level considered as a breakthrough innovation defined by the DOE Agenda 20/20 program (i.e., 5-10% yield increase). The fibers obtained from the described pulping process provide paper or paperboard with improved stiffness at a lower basis weight compared to the paper or paperboard comprising conventional pulps, and yet without any reduction in tear strength, tensile strength, and other physical properties.

TABLE 1

Pulp Type	Conventional Pulping Process	Pulping Process of the Present Disclosure	Increase in %Yield
Unbleached Pulp	50%	65%	15%
Bleached Pulp	46%	54%	8%

20

TABLE 2

Bulk Level (cm <sup>3</sup> /g)	Stiffness Level (mN)	
	Conventional Kraft Fiber	Fiber of the Present Disclosure
1.35	3	16
1.40	10	23
1.50	23	32

[0033] The fiber blends of the present disclosure provide paperboard with higher stiffness, at the same bulk, than the paperboard made of conventional fibers. (TABLE 2) This significant improvement in stiffness at the same bulk may allow a mill to reduce the fiber level conventionally required for producing paperboard with the same stiffness level by 13%.

[0034] Additionally, the paper/paperboard made with the disclosed fibers provides a desired strength property at a lower basis weight than those made of the conventional kraft pulps. The single ply-paper/paperboard made of the disclosed fibers at an unconventionally low basis weight shows strength and stiffness characteristics approaching those of conventional multi-ply paper/paperboard. Therefore, the disclosed novel pulping process allows a single-ply paper/paperboard to be used in the end use markets that have been limited to only a multi-ply paper/paperboard due to the desired high strength. The paperboard containing the fibers of the present disclosure may be used for packaging a variety of goods. These include, but are not limited to, tobacco, aseptic liquids, and food.

#### EXAMPLES

[0035] Hardwood chips were Kraft pulped in a digester to a kappa number of 50 to provide a first amount of pulp containing a first accepts component and a first rejects component. The first accepts component was separated from the first rejects component using a 0.006" slotted screen. The first rejects component was then thickened to 30% consistency, and then refined and pre-bleached by an APMP type alkaline pulping process using alkaline peroxide in a high consistency refiner to generate a second amount of pulp containing a second accepts component and a second rejects component. The second accepts component was separated from the second rejects component and shives using a 0.008" slotted screen, and then from the smaller fiber bundles that passed the 0.008" screen using a 0.006" slotted screen.

30

[0036] The resulting second accepts component was added back to a stream of the

first accepts component. The resulting fiber blend, comprising 70% by weight of the first accepts component and 30% by weight of the second accepts component, was bleached to about 87 GE brightness and then subjected to a Prolab refining at two different energy levels: 1.5 hpd/ton and 3.0 hpd/ton. The resulting refined fibers were measured for a degree of freeness (CSF) using the TAPPI standard procedure No. T-227. The resulting refined fibers were also tested for the amount of light weight fines (%LW fines on a length-weighted basis), the length, width, fiber coarseness, and fiber deformation properties such as curl, kink, and kirk angle. A Fiber Quality Analyzer (FQA) instrument was used to obtain these measurements.

[0037] Additionally, the fiber length distribution of the resulting fiber blend was determined using a Bauer-McNett Classifier and compared to that of the conventional kraft fibers. The Bauer-McNett Classifier fractionates a known weight of pulp fiber through a series of screens with continually higher mesh numbers. The higher the mesh number, the smaller the size of the mesh screen. The fibers larger than the size of the mesh screen are retained on the screen, while the fibers smaller than the size of the mesh screen are allowed to pass through the screen. The weight percent fiber retained on the screens of different mesh sizes was measured. (TABLE 3, FIGURE 3)

TABLE 3

Bauer-McNett Screen Size, Mesh Size	Fiber Retained (Weight Percent)	
	Traditional Kraft Fiber	Fiber Blend of the Present Disclosure
14	0.2	4.73
28	19.1	12.97
48	39.9	34.81
100	27.2	23.69
200	7.3	6.7
200+	6.3	17.1

[0038] The disclosed fiber blend showed a fiber length distribution containing at least

2 weight percent of long fibers and at least 15 weight percent of short fibers, as defined by the 14 mesh-size and 200 mesh-size screens of the Bauer-McNett classifier. On the contrary, traditional kraft fiber pulp contained less than 0.5 weight percent of long fibers (i.e., fibers retained on a 14 mesh-size screen), and less than 8 weight percent of short fibers (i.e., fibers  
5 passed through a 200 mesh-size screen).

[0039] The fiber length distribution of the disclosed fiber blend is much broader than that of traditional kraft fibers. The fiber blend of the present disclosure has a higher level of long fibers than the convention kraft fiber pulp, as shown by an increase in weight percent of  
10 the fiber retained on the 14 mesh-size screen. Furthermore, the fiber blend of the present disclosure has a significantly higher level of short fibers than the convention kraft fiber pulp, as indicated by a substantial increase in weight percent of the fiber passing through a 200 mesh-size screen.

[0040] The fiber blend at the same rejects ratio, but without being refined in a Prolab refiner was used as a starting point to determine the impact of refining energy upon fiber physical property development. Additionally, hardwood pulps obtained from a pulp washing line in a commercially operating kraft pulping process were subjected to a Prolab refining process using 1.5 and 3.0 hpd/t, and used as controls.  
15

20

[0041] The fiber blend of the present disclosure showed a lower freeness and higher level disclosed pulp blend had a greater degree of fiber deformation than the baseline pulp, especially with regard to fiber kink. (TABLE 4)

[0042] Modified TAPPI board-weight handsheets ( $120 \text{ g/m}^2$  basis weight) made of the disclosed fiber blend were produced and tested for tensile energy absorption (TEA), strain, elastic modulus, and maximum loading value using the TAPPI standard procedure No. T-494. Furthermore, the handsheets were tested for internal bonding strength based on Scott Bond test as specified in the TAPPI standard procedure No. T-569 and Z-direction tensile  
25  
30 (ZDT) strength using the TAPPI standard procedure No. T-541.

TABLE 4

Sample	Refining Energy (hpd/t)	CSF (ml)	%LW Fines	Fiber		Fiber Deformations		
				Length (mm)	Width (microns)	Curl	Kink	Kink Angle
Control	0	640	13.47	0.990	20.9	0.083	1.27	21.63
	1.5	510	13.64	1.021	20.5	0.073	1.11	18.96
	3.0	390	13.08	0.975	20.4	0.073	1.06	17.71
Blend	0	540	10.37	1.018	22.4	0.100	1.46	26.73
	1.5	390	14.53	0.950	20.6	0.087	1.34	22.52
	3.0	240	15.15	0.899	20.6	0.079	1.41	22.16

5

TABLE 5

Sample	Refining Energy (hpd/t)	CSF (ml)	TEA (lb/in)	Strain (%)	Max Load (lbf)	Modulus (Kpsi)	Max Load (inch)	Scott bond (0.001ft - lbs/in <sup>2</sup> )	ZDT (psi)
Control	0	640	0.47	2.30	16.6	415.4	0.121	101.9	56.4
	1.5	510	0.84	3.22	21.6	475.4	0.167	148.1	89.7
	3.0	390	1.21	3.91	26.6	521.7	0.202	279.1	100.6
Blend	0	540	0.86	3.10	23.0	487.1	0.161	149.7	84.5
	1.5	390	1.25	3.63	28.6	596.5	0.188	261.8	104.6
	3.0	240	1.91	5.30	31.1	555.3	0.272	329.7	98.7

[0043] At a given level of applied refining energy, the handsheets made of the

disclosed fiber blend had higher tensile energy absorption (TEA), strain, maximum loading values, and elastic modulus than those of handsheets made of the control pulps. Moreover, the strength properties enhanced as the energy applied to the pulps in a Prolab refiner increased. The handsheets were also tested for the internal bond strength based on Scott Bond value and Z-direction strength. The handsheets of the disclosed pulp blend showed higher internal bond strength than those of handsheets made of the control pulps. When compared at equivalent freeness or bulk levels, the strength properties for the disclosed blend pulps are similar to the control pulp. (TABLE 5)

[0044] Additionally, the handsheets were tested for physical properties such as L &W stiffness based on the TAPPI standard procedure Lorentzen & Wettre No. T-556, smoothness based on Sheffield smoothness as described in the TAPPI standard procedure No. T-538, and fold endurance based on MIT fold endurance as described in the TAPPI standard procedure No.T-511. The handsheets made of the disclosed fibers had lower caliper, and therefore lower bulk, than those made of the control pulps at the same levels of refining energy. However, even at those lower bulk levels, the handsheets of the disclosed pulp blend showed about the same level of L&W bending stiffness (measured as it was and as indexed for differences in basis weight) as the handsheets made of the control pulps. Therefore, compared at the same bulk, the handsheets of the disclosed fibers had a significantly improved bending stiffness, compared to the handsheets made of the control pulps. Smoothness and fold values are essentially the same for the control and blend pulps when compared at constant bulk levels. (TABLE 6)

[0045] The disclosed fibers impart an improved bending stiffness; therefore, a lower amount of fiber furnish is needed to obtain a given stiffness and thereby reducing the required basis weight of the finished paper/ paperboard to achieve a given stiffness. Fiber furnish is the highest cost in papermaking process. The ability to reduce the amount of fiber in the furnish in the present disclosure provides a significant economic and performance competitive advantage compared to the conventional pulping process.



TABLE 6

Sample	Refining Energy (hpd/t)	CSF (ml)	Basic Weight (g/m <sup>2</sup> )	Soft Caliper		L&W Bending Stiffness		Sheffield Smoothness	MIT Fold (#folds)
				mils	bulk	As was	bw index		
Control	0	640	121.9	7.32	1.52	44.5	42.5	294.3	23
	1.5	510	123.7	6.44	1.32	22.6	20.7	216.0	90
	3.0	390	123.0	5.71	1.18	3.0	2.8	206.2	534
Blend	0	540	126.0	6.37	1.28	28.1	24.3	239.2	79
	1.5	390	128.6	5.77	1.14	25.3	20.5	129.3	856
	3.0	240	124.8	5.11	1.04	3.5	3.1	278.0	2170

- 5 [0046] It is to be understood that the foregoing description relates to embodiments that are exemplary and explanatory only and are not restrictive of the invention. Any changes and modifications may be made therein as will be apparent to those skilled in the art. Such variations are to be considered within the scope of the invention as defined in the following claims.

We claim:

1. A process for producing a fiber blend, comprising steps of:
  - 5 (a) chemically pulping wood chips to generate a first amount of pulp including a first accepts component and a first rejects component;
  - (b) separating the first accepts component from the first rejects component;
  - (c) performing a substantially mechanical pulping of the first rejects component to generate a second amount of pulp including a second accepts component; and
  - 10 (d) combining the first and the second accepts components to produce the fiber blend.
2. The process of Claim 1, wherein the chemically pulping in step (a) comprises a step of chemically pulping the wood chips to a kappa number of at least 20.
- 15 3. The process of Claim 2, wherein the wood chips comprise hardwood.
4. The process of Claim 1, wherein the chemically pulping in step (a) comprises a step of chemically pulping the wood chips to a kappa number of at least 30.
- 20 5. The process of Claim 4, wherein the wood chips comprise softwood.
6. The process of Claim 1, wherein the chemically pulping in step (a) comprises a step of chemically pulping the wood chips to a kappa number of about 55.
- 25 7. The process of Claim 1, wherein the first amount of pulp includes a first weight associated therewith, wherein the first rejects component includes a first weight associated therewith, and wherein the ratio of the first weight of the first rejects component to the first weight of the first amount of pulp comprises about 6% to about
- 30 50%.

8. The process of Claim 1, wherein the first amount of pulp includes a first weight associated therewith, wherein the first rejects component includes a first weight associated therewith, and wherein the ratio of the first weight of the first rejects component to the first weight of the first amount of pulp comprises about 30% to about  
5 35%.
9. The process of Claim 1, wherein the chemically pulping in step (a) comprises a chemical pulping process selected from the group consisting of kraft pulping, soda pulping, and sulfite pulping.  
10
10. The process of Claim 1, wherein the chemically pulping in step (a) comprises a kraft pulping.
11. The process of Claim 1, wherein the chemically pulping in step (a) comprises a kraft  
15 pulping including a chemical additive selected from the group consisting of anthraquinone, polysulfide, penetrating aids, thiourea, and combinations thereof.
12. The process of Claim 1, wherein the separating step in step (b) comprises a step of  
20 passing the first amount of pulp through a screen to separate the first accepts component from the first rejects component.
13. The process of Claim 1, wherein the substantially mechanical pulping in step (c)  
25 comprises a pulping process selected from the group consisting of mechanical pulping, alkaline mechanical (APMP) pulping, alkaline thermomechanical pulping, thermomechanical pulping, and chemi-thermomechanical pulping.
14. The process of Claim 1, wherein the substantially mechanical pulping in step (c) comprises a step of refining the first rejects component.
- 30 15. The process of Claim 1, wherein the substantially mechanical pulping in step (c) comprises steps of:

- (c1) refining the first rejects component; and
- (c2) pre-bleaching the first rejects component.

- 5 16. The process of Claim 1, wherein the substantially mechanical pulping in step (c) comprises steps of:
- (c1) refining the first rejects component;
  - (c2) pre-bleaching the first rejects component; and
  - (c3) retaining the first rejects component treated at steps (c1) and (c2) for a predetermined time period.
- 10 17. The process of Claim 1, wherein the substantially mechanical pulping of the first rejects component in step (c) generates the second amount of pulp including a second rejects component.
- 15 18. The process of Claim 17, further comprising a step of separating the second accepts component from the second rejects component.
19. The process of Claim 1, further comprising a step of bleaching the fiber blend.
- 20 20. The process of Claim 1, wherein the fiber blend includes a first weight associated therewith, wherein the first accepts component includes a first weight associated therewith, and wherein the ratio of the first weight of the first accepts component to the first weight of the fiber blend comprises about 50% to about 90%.
- 25 21. The process of Claim 1, wherein the fiber blend includes a first weight associated therewith, wherein the first accepts component includes a first weight associated therewith, and wherein the ratio of the first weight of the first accepts component to the first weight of the fiber blend comprises about 65% to about 75%.
- 30 22. The process of Claim 1, wherein the wood chips have a weight associated therewith, wherein the combined the fiber blend has a weight associated therewith, and wherein

the weight of the combined the fiber blend is at least 45% of the weight of the wood chips.

23. A process of for producing a fiber blend, comprising steps of:
- 5 (a) chemically processing wood chips to a predetermined kappa number to produce a first amount of pulp including a first accepts component and a first rejects component, wherein the first rejects component comprises more than 30% of the first amount of pulp;
- (b) separating the first accepts component from the first rejects component;
- 10 (c) substantially mechanically pulping the first rejects component to produce a second amount of pulp including a second accepts component and a second rejects component; and
- (d) combining the first and the second accepts components to produce the fiber blend.
- 15
24. The process of Claim 23, wherein the wood chips comprise hardwood, and wherein the kappa number is at least 20.
25. The process of Claim 23, wherein the wood chips comprise softwood, and wherein the kappa number is at least 30.
- 20
26. The process of Claim 23, wherein the kappa number is about 55.
27. The process of Claim 23, wherein the chemically processing in step (a) comprises a chemical pulping process selected from the group consisting of kraft pulping, soda pulping, and sulfite pulping.
- 25
28. The process of Claim 23, wherein the chemically processing in step (a) comprises a kraft pulping.
- 30
29. The process of Claim 23, wherein the chemically pulping in step (a) comprises a kraft

pulping including a chemical additive selected from the group consisting of anthraquinone, polysulfide, penetrating aids, thiourea, and combinations thereof.

- 5 30. The process of Claim 23, wherein the separating step (b) comprises a step of passing the first amount of pulp through a screen to separate the first accepts component from the first rejects component.
- 10 31. The process of Claim 23, wherein the substantially mechanically pulping in step (c) comprises a pulping process selected from the group consisting of mechanical pulping, alkaline mechanical (APMP) pulping, alkaline thermomechanical pulping, thermomechanical pulping, and chemi-thermomechanical pulping.
- 15 32. The process of Claim 23, wherein the substantially mechanically pulping in (c) comprises a step of refining the first rejects component.
- 20 33. The process of Claim 23, wherein the substantially mechanically pulping in (c) comprises steps of:  
(c1) refining the first rejects component; and  
(c2) pre-bleaching the first rejects component.
- 25 34. The process of Claim 23, wherein the substantially mechanically pulping in (c) comprises steps of:  
(c1) refining the first rejects component;  
(c2) pre-bleaching the first rejects component; and  
(c3) retaining the first rejects component treated at steps (c1) and (c2) for a predetermined time period.
- 30 35. The process of Claim 23, further comprising a step of separating the second accepts component from the second rejects component.
36. The process of Claim 23, further comprising a step of bleaching the fiber blend.

37. The process of Claim 23, wherein the fiber blend includes a first weight associated therewith, wherein the first accepts component includes a first weight associated therewith, and wherein the ratio of the first weight of the first accepts component to the first weight of the fiber blend comprises about 50% to about 90%
- 5
38. The process of Claim 23, wherein the fiber blend includes a first weight associated therewith, wherein the first accepts component includes a first weight associated therewith, and wherein the ratio of the first weight of the first accepts component to the first weight of the fiber blend comprises about 65% to about 75%.
- 10
39. The process of Claim 23, wherein the wood chips have a weight associated therewith, wherein the combined the fiber blend has a weight associated therewith, and wherein the weight of the combined the fiber blend is at least 45% of the weight of the wood chips.
- 15
40. A process for producing a fiber blend, comprising steps of:
- (a) chemically processing wood chips in a digester to a predetermined kappa number to produce a first amount of pulp including a first accepts component and a first rejects component;
  - 20 (b) separating the first accepts component from the first rejects component;
  - (c) refining the first rejects component to produce a second amount of pulp including a second accepts component and a second rejects component;
  - (d) retaining the second amount of pulp for a predetermined time period;
  - (e) separating the second accepts component from the second rejects component;
  - 25 and
  - (f) combining the first and the second accepts components to produce the fiber blend.
41. The process of Claim 40, wherein the wood chips comprise hardwood, and wherein the kappa number is at least 20.
- 30

42. The process of Claim 40, wherein the wood chips comprise hardwood, and wherein the kappa number is in a range of about 20 to about 70.
43. The process of Claim 40, wherein the wood chips comprise softwood, and wherein the kappa number is at least 30.
44. The process of Claim 40, wherein the wood chips comprise softwood, and wherein the kappa number is in a range of about 30 to about 95.
45. The process of Claim 40, wherein the chemically processing in step (a) comprises a pulping process selected from the group consisting of kraft pulping, soda pulping, and sulfite pulping.
46. The process of Claim 40, wherein the chemically processing in step (a) comprises a kraft pulping.
47. The process of Claim 40, wherein the chemically pulping in step (a) comprises a kraft pulping including a chemical additive selected from the group consisting of anthraquinone, polysulfide, penetrating aids, thiourea, and combinations thereof.
48. The process of Claim 40, wherein the separating in step (b) comprises a step of passing the first amount of pulp through a screen to separate the first accepts component from the first rejects component.
49. The process of Claim 40, wherein the refining in step (c) comprises a step of pulping selected from the group consisting of mechanical pulping, alkaline mechanical (APMP) pulping, alkaline thermomechanical pulping, thermomechanical pulping, and chemi-thermo mechanical pulping.
50. The process of Claim 40, wherein the refining in step (c) includes a step of pre-bleaching.



51. The process of Claim 50, wherein the pre-bleaching agent is selected from the group consisting of chlorine dioxide; elemental chlorine; sodium hypochlorite; sodium hydrosulfite; ozone; peroxide; oxygen delignification; a bleaching liquor consisting of  
5 peroxide, caustic, and sodium silicate; a bleaching liquor consisting of alkaline chemical and peroxide; and combinations thereof.
52. The process of Claim 40, further comprising a step of bleaching the fiber blend.
- 10 53. The process of Claim 40, wherein the fiber blend includes a first weight associated therewith, wherein the first accepts component includes a first weight associated therewith, and wherein the ratio of the first weight of the first accepts component to the first weight of the fiber blend comprises about 50% to about 90%.
- 15 54. The process of Claim 40, wherein the fiber blend includes a first weight associated therewith, wherein the first accepts component includes a first weight associated therewith, and wherein the ratio of the first weight of the first accepts component to the first weight of the fiber blend comprises about 65% to about 75%.
- 20 55. The process of Claim 40, wherein the wood chips have a weight associated therewith, wherein the combined the fiber blend has a weight associated therewith, and wherein the weight of the fiber blend is at least 45% of the weight of the wood chips.
56. The process of wood pulping comprising steps of:
- 25 (a) pulping of wood chips to generate a first amount of pulp including a first accepts component and a first rejects component; and
- (b) pulping of the first rejects component,  
characterized by a pulp yield of at least 8% higher than a pulp yield of a chemical  
pulping using same wood chips.
- 30 57. The process of Claim 56, wherein the chemical pulping comprises a kraft pulping.

58. The process of Claim 56, wherein the chemically pulping in step (a) comprises a kraft pulping including a chemical additive selected from the group consisting of anthraquinone, polysulfide, penetrating aids, thiourea, and combinations thereof.
- 5
59. The process of wood pulping comprising steps of:
- (a) pulping of wood chips to generate a first amount of pulp including a first accepts component and a first rejects component; and
  - (b) pulping of the first rejects component,
- 10 characterized by a pulp yield of at least 10% higher than a pulp yield of a chemical pulping using the same wood chips.
60. The process of Claim 59, wherein the chemical pulping comprises a kraft pulping.
- 15 61. The process of Claim 59, wherein the chemically pulping in step (a) comprises a kraft pulping including a chemical additive selected from the group consisting of anthraquinone, polysulfide, penetrating aids, thiourea, and combinations thereof.
62. The process of wood pulping comprising steps of:
- (a) pulping of wood chips to generate a first amount of pulp including a first accepts component and a first rejects component; and
  - (b) pulping of the first rejects component,
- 20 characterized by a pulp yield of at least 15% higher than a pulp yield of a chemical pulping using the same wood chips.
- 25
63. The process of Claim 62, wherein the chemical pulping comprises a kraft pulping.
64. The process of Claim 62, wherein the chemically pulping in step (a) comprises a kraft pulping including a chemical additive selected from the group consisting of
- 30 anthraquinone, polysulfide, penetrating aids, thiourea, and combinations thereof.

65. A fiber blend, produced by a process comprising steps of:
- (a) providing wood chips;
  - (b) chemically pulping the wood chips to generate a first amount of pulp including a first accepts component and a first rejects component;
  - 5 (c) separating the first accepts component from the first rejects component;
  - (d) performing a substantially mechanical pulping of the first rejects component to generate a second amount of pulp including a second accepts component; and
  - 10 (e) combining the first and the second accepts components to produce the fiber blend.
66. The fiber blend of Claim 65, comprising from about 50% to about 90% of the first accepts component.
- 15 67. The fiber blend of Claim 65, comprising from about 65% to about 75% of the first accepts component.
68. A fiber blend, produced by a process comprising steps of:
- (a) providing wood chips;
  - 20 (b) chemically processing the wood chips to a predetermined kappa number to produce a first amount of pulp including a first accepts component and a first rejects component, wherein the first rejects component comprises more than 30% of the first amount of pulp;
  - (c) separating the first accepts component from the first rejects component;
  - 25 (d) substantially mechanically pulping the first rejects component to produce a second amount of pulp including a second accepts component and a second rejects component; and
  - (e) combining the first and the second accepts components to produce the fiber blend.
  - 30
69. The fiber blend of Claim 68, comprising from about 50% to about 90% of the first

accepts component.

70. The fiber blend of Claim 68, comprising from about 65% to about 75% of the first accepts component.

5

71. A fiber blend, produced by a process comprising steps of:

- (a) providing wood chips;
- (b) chemically processing the wood chips in a digester to a predetermined kappa number to produce a first amount of pulp including a first accepts component and a first rejects component;
- (c) separating the first accepts component from the first rejects component;
- (d) refining the first rejects component to produce a second amount of pulp including a second accepts component and a second rejects component;
- (e) retaining the second amount of pulp for a predetermined time period;
- (f) separating the second accepts component from the second rejects component; and
- (g) combining the first and the second accepts components to produce the fiber blend.

10

15

20

72. The fiber blend of Claim 71, comprising from about 50% to about 90% of the first accepts component.

73. The fiber blend of Claim 71, comprising from about 65% to about 75% of the first accepts component.

25

74. A fiber blend, characterized by a fiber length distribution containing at least 2 weight percent of long fibers as defined by a 14 mesh-size screen of a Bauer-McNett classifier and at least 15weight percent of short fibers as defined by a 200 mesh-size screen of a Bauer-McNett classifier.

30

75. A paper-based product, including a fiber blend produced by a process comprising steps

of:

- (a) providing wood chips;
- (b) chemically pulping the wood chips to generate a first amount of pulp including a first accepts component and a first rejects component;
- 5 (c) separating the first accepts component from the first rejects component;
- (d) performing a substantially mechanical pulping of the first rejects component to generate a second amount of pulp including a second accepts component; and
- 10 (e) combining the first and the second accepts components to produce the fiber blend.

76. The product of Claim 75, wherein the fiber blend comprises from about 50% to about 90% of the first accepts component.

15 77. The product of Claim 75, wherein the fiber blend comprises from about 65% to about 75% of the first accepts component.

78. A paper-based product, including a fiber blend produced by a process comprising steps of:

- 20 (a) providing wood chips;
- (b) chemically processing the wood chips to a predetermined kappa number to produce a first amount of pulp including a first accepts component and a first rejects component, wherein the first rejects component comprises more than 30% of the first amount of pulp;
- 25 (c) separating the first accepts component from the first rejects component;
- (d) substantially mechanically pulping the first rejects component to produce a second amount of pulp including a second accepts component and a second rejects component; and
- 30 (e) combining the first and the second accepts components to produce the fiber blend.

79. The product of Claim 78, wherein the fiber blend comprises from about 50% to about 90% of the first accepts component.
80. The product of Claim 78, wherein the fiber blend comprises from about 65% to about 75% of the first accepts component.
81. A paper-based product, including a fiber blend produced by a process comprising steps of:
- (a) providing wood chips;
  - (b) chemically processing the wood chips in a digester to a predetermined kappa number to produce a first amount of pulp including a first accepts component and a first rejects component;
  - (c) separating the first accepts component from the first rejects component;
  - (d) refining the first rejects component to produce a second amount of pulp including a second accepts component and a second rejects component;
  - (e) retaining the second amount of pulp for a predetermined time period;
  - (f) separating the second accepts component from the second rejects component; and
  - (g) combining the first and the second accepts components to produce the fiber blend.
82. The product of Claim 81, wherein the fiber blend comprises from about 50% to about 90% of the first accepts component.
83. The product of Claim 81, wherein the fiber blend comprises from about 65% to about 75% of the first accepts component.
84. A paper-based product including a fiber blend, wherein a fiber length distribution of the fiber blend contains at least 2 weight percent of long fibers as defined by a 14 mesh-size screen of a Bauer-McNett classifier and at least 15 weight percent of short fibers as defined by a 200 mesh-size screen of a Bauer-McNett classifier.

- 5 85. A paper-based product, characterized by a stiffness of at least 8% higher than a stiffness of a single ply paper-based product made of kraft pulp at the same basis weight, and wherein the stiffness is determined according to a TAPPI standard procedure Lorentzen & Wettre No. T-556.
- 10 86. The product of Claim 85, characterized by a stiffness of at least 10% higher than a stiffness of a single ply paper-based product made of kraft pulp at the same basis weight, and wherein the stiffness is determined according to a TAPPI standard procedure Lorentzen & Wettre No. T-556.
- 15 87. The product of Claim 85, characterized by a stiffness of at least 15% higher than a stiffness of a single ply paper-based product made of kraft pulp at the same basis weight, and wherein the stiffness is determined according to a TAPPI standard procedure Lorentzen & Wettre No. T-556.
- 20 88. A packaging, including a fiber blend produced by a process comprising steps of:  
(a) providing wood chips;  
(b) chemically pulping the wood chips to generate a first amount of pulp including a first accepts component and a first rejects component;  
(c) separating the first accepts component from the first rejects component;  
(d) performing a substantially mechanical pulping of the first rejects component to generate a second amount of pulp including a second accepts component;  
and  
25 (e) combining the first and the second accepts components to produce the fiber blend.
- 30 89. The packaging of Claim 88, wherein the fiber blend comprises from about 50% to about 90% of the first accepts component.
90. The packaging of Claim 88, wherein the fiber blend comprises from about 65% to about

75% of the first accepts component.

91. A packaging, including a fiber blend produced by a process comprising steps of:
- (a) providing wood chips;
  - 5 (b) chemically processing the wood chips to a predetermined kappa number to produce a first amount of pulp including a first accepts component and a first rejects component, wherein the first rejects component comprises more than 30% of the first amount of pulp;
  - (c) separating the first accepts component from the first rejects component;
  - 10 (d) substantially mechanically pulping the first rejects component to produce a second amount of pulp including a second accepts component and a second rejects component; and
  - (e) combining the first and the second accepts components to produce the fiber blend.
- 15
92. The packaging of Claim 91, wherein the fiber blend comprises from about 50% to about 90% of the first accepts component.
93. The packaging of Claim 91, wherein the fiber blend comprises from about 65% to about
- 20 75% of the first accepts component.
94. A packaging, including a fiber blend produced by a process comprising steps of:
- (a) providing wood chips;
  - (b) chemically processing the wood chips in a digester to a predetermined kappa
  - 25 number to produce a first amount of pulp including a first accepts component and a first rejects component;
  - (c) separating the first accepts component from the first rejects component;
  - (d) refining the first rejects component to produce a second amount of pulp including a second accepts component and a second rejects component;
  - 30 (e) retaining the second amount of pulp for a predetermined time period;
  - (f) separating the second accepts component from the second rejects component;



and

- (g) combining the first and the second accepts components to produce the fiber blend.

5 95. The packaging of Claim 94, wherein the fiber blend comprises from about 50% to about 90% of the first accepts component.

96. The packaging of Claim 94, wherein the fiber blend comprises from about 65% to about 75% of the first accepts component.

10

97. A packaging including a fiber blend, wherein a fiber length distribution of the fiber blend contains at least 2 weight percent of long fibers as defined by a 14 mesh-size screen of a Bauer-McNett classifier and at least 15 weight percent of short fibers as defined by a 200 mesh-size screen of a Bauer-McNett classifier.

15

98. A packaging, including a paper-based product characterized by a stiffness of at least 8% higher than a stiffness of a single ply paper-based product made of kraft pulp at the same basis weight, and wherein the stiffness is determined according to a TAPPI standard procedure Lorentzen & Wettre No. T-556.

20

99. The packaging of Claim 98, wherein the paper-based product has a stiffness of at least 10% higher than a stiffness of a single ply paper-based product made of kraft pulp at the same basis weight, and wherein the stiffness is determined according to a TAPPI standard procedure Lorentzen & Wettre No. T-556.

25

100. The packaging of Claim 98, wherein the paper-based product has a stiffness of at least 15% higher than a stiffness of a single ply paper-based product made of kraft pulp at the same basis weight, and wherein the stiffness is determined according to a TAPPI standard procedure Lorentzen & Wettre No. T-556.

30

FIGURE 1

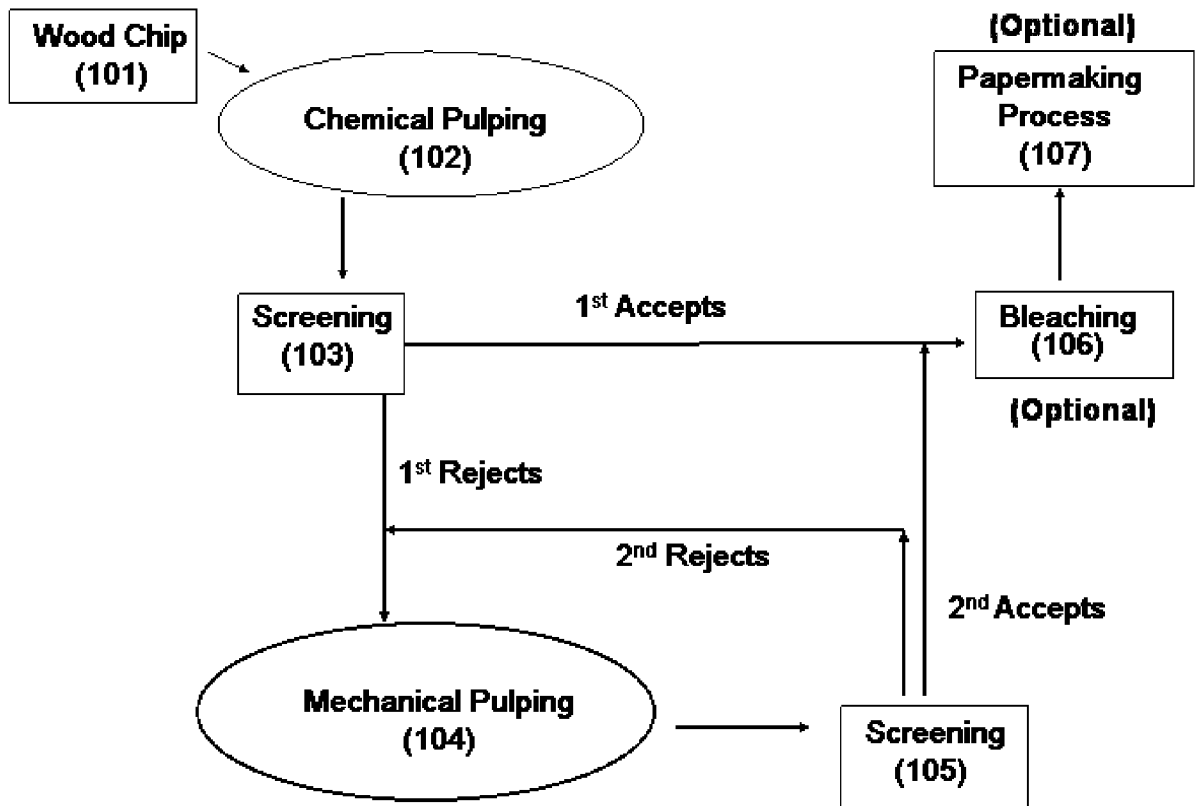


FIGURE 2


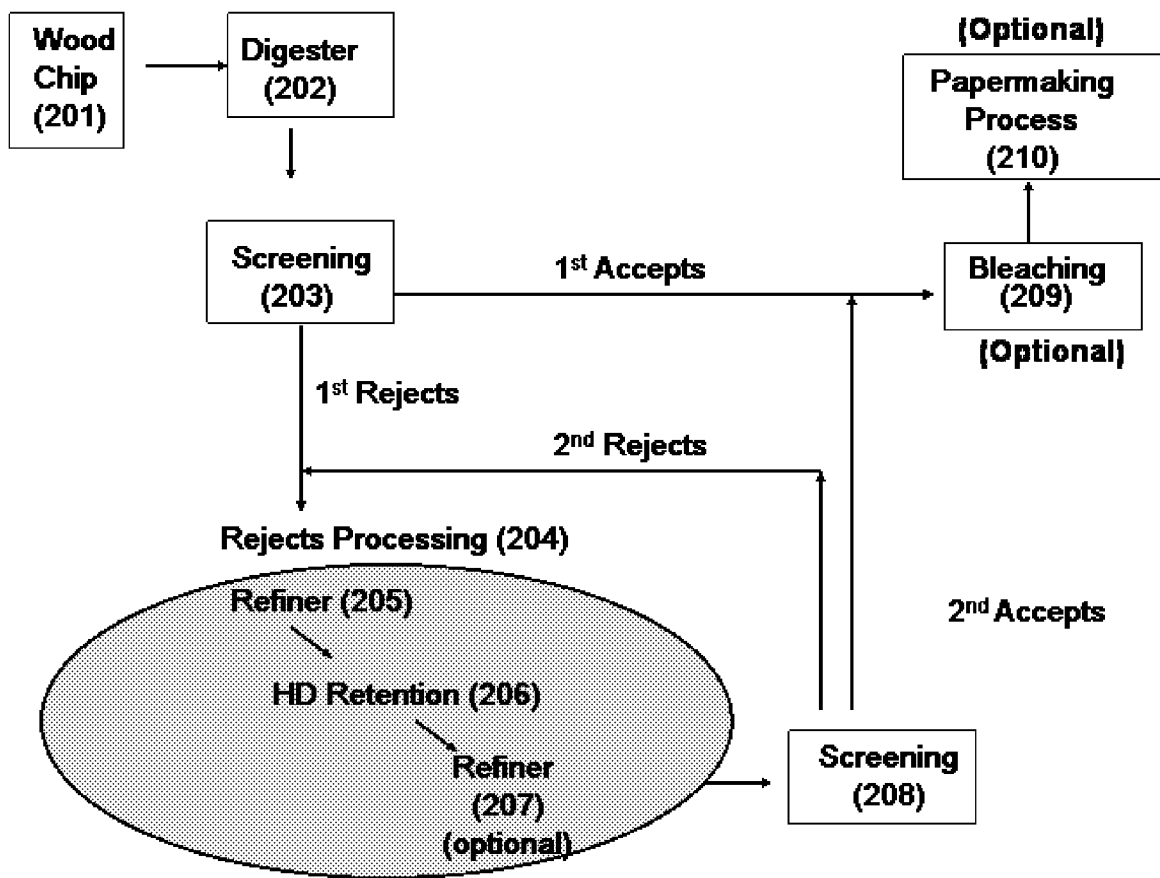


FIGURE 3

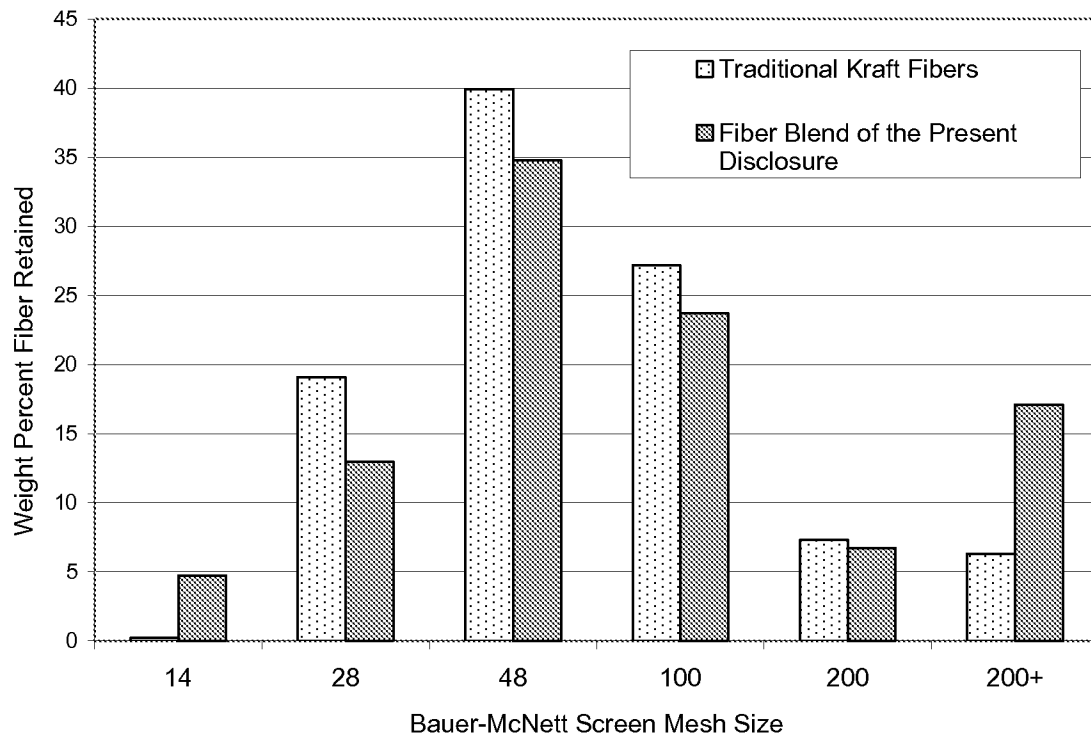

## INTERNATIONAL SEARCH REPORT

International application No

PCT/US2007/070927

A. CLASSIFICATION OF SUBJECT MATTER  
 INV. D21C3/00 D21D5/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
 D21C D21D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 435 249 A (MARKHAM LARRY D [CA] ET AL) 6 March 1984 (1984-03-06)  claims 1-8; figures 1-3; examples 1-3	1, 23, 40, 56, 59, 62, 65, 68, 71, 74, 75, 78, 81, 88, 91, 94
X	WO 2007/063182 A (METSO PAPER INC [FI]; CECCHINI JUAN [FI]; POIKOLAINEN ANTTI [FI]; LEPO) 7 June 2007 (2007-06-07)  paragraphs [0039] - [0041]; claims 1-20; figure 1	1, 23, 40, 56, 59, 62, 65, 68, 71, 74, 75, 78, 81, 88, 91, 94

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

2 April 2008

Date of mailing of the international search report

10/04/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Karlsson, Lennart

## INTERNATIONAL SEARCH REPORT

International application No

PCT/US2007/070927

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 33 22 618 A1 (WIKDAHL NILS ANDERS LENNART) 5 January 1984 (1984-01-05)  ----- claims 1-10; figures 1,2	1,23,40, 56,59, 62,65, 68,71, 74,75, 78,81, 88,91,94
A	WO 87/05954 A (SUNDS DEFIBRATOR [SE]) 8 October 1987 (1987-10-08) the whole document	1-100
A	WO 01/42557 A (UPM KYMMENE CORP [FI]; TIENVIERI TAISTO [FI]; GUMMERUS MARKKU [FI]) 14 June 2001 (2001-06-14) the whole document	1-100
A	EP 0 138 484 A (KAMYR AB [SE]) 24 April 1985 (1985-04-24) the whole document	1-100
A	US 4 502 918 A (MACKIE DAVID M [CA] ET AL) 5 March 1985 (1985-03-05) the whole document	1-100
A	US 4 892 619 A (TISTAD GORAN [SE]) 9 January 1990 (1990-01-09) the whole document	1-100

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2007/070927

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4435249	A	06-03-1984	NONE	
WO 2007063182	A	07-06-2007	NONE	
DE 3322618	A1	05-01-1984	BR 8303539 A CA 1230768 A1 FI 832435 A FR 2536434 A1 SE 431571 B SE 8204104 A	14-02-1984 29-12-1987 03-01-1984 25-05-1984 13-02-1984 03-01-1984
WO 8705954	A	08-10-1987	AU 7201887 A JP 1501953 T SE 8601477 A	20-10-1987 06-07-1989 03-10-1987
WO 0142557	A	14-06-2001	CA 2393783 A1 EP 1266078 A1 FI 992642 A JP 2003516480 T US 2003006016 A1	14-06-2001 18-12-2002 10-06-2001 13-05-2003 09-01-2003
EP 0138484	A	24-04-1985	BR 8405320 A CA 1240456 A1 FI 844071 A JP 60146090 A NO 844062 A	03-09-1985 16-08-1988 21-04-1985 01-08-1985 22-04-1985
US 4502918	A	05-03-1985	CA 1177608 A1	13-11-1984
US 4892619	A	09-01-1990	BR 8801589 A CA 1313966 C FI 881578 A JP 63264994 A SE 8701423 A	08-11-1988 02-03-1993 07-10-1988 01-11-1988 07-10-1988