

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 November 2003 (06.11.2003)

PCT

(10) International Publication Number
WO 03/091498 A1

(51) International Patent Classification⁷: D21F 7/08

(21) International Application Number: PCT/FI03/00325

(22) International Filing Date: 24 April 2003 (24.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20020804 26 April 2002 (26.04.2002) FI

(71) Applicant (for all designated States except US): TAM-
FELT OYJ ABP [FI/FI]; Yrittäjänkatu 21, FIN-33710
Tampere (FI).

(72) Inventor; and

(75) Inventor/Applicant (for US only): HYVÖNEN, Kari
[FI/FI]; Yrittikatu 8 A 1, FIN-33710 Tampere (FI).

(74) Agent: KOLSTER OY AB; Iso Roobertinkatu 23, P.O.
Box 148, FIN-00121 Helsinki (FI).

(81) Designated States (national): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,

MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO utility model (GH),
ARIPO patent (GH), ARIPO utility model (GM), ARIPO
patent (GM), ARIPO utility model (KE), ARIPO patent
(KE), ARIPO utility model (LS), ARIPO patent (LS),
ARIPO utility model (MW), ARIPO patent (MW), ARIPO
utility model (MZ), ARIPO patent (MZ), ARIPO utility
model (SD), ARIPO patent (SD), ARIPO utility model
(SL), ARIPO patent (SL), ARIPO utility model (SZ),
ARIPO patent (SZ), ARIPO utility model (TZ), ARIPO
patent (TZ), ARIPO utility model (UG), ARIPO patent
(UG), ARIPO utility model (ZM), ARIPO patent (ZM),
ARIPO utility model (ZW), ARIPO patent (ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES,
FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI,
SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii)) for the following designations AE,
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,

[Continued on next page]

(54) Title: PRESS FELT

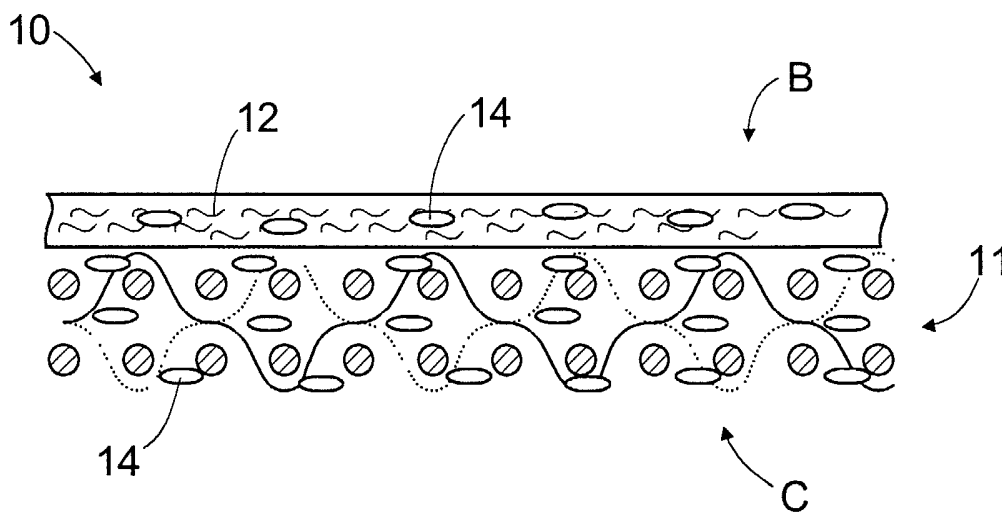

(57) Abstract: The invention relates to a method of manufacturing a press felt, to a press section, and to a press felt. The press felt comprises a base structure (11), a batt fibre layer (12) being attached to a first, web-side surface (B) of the base structure. Further, the structure of the press felt is compacted by treating it with a polymer material at least on the side of the first felt surface (B). After the polymer treatment, the surface of the felt can be ground smooth.

WO 03/091498 A1



KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

PRESS FELT

FIELD OF THE INVENTION

[0001] The invention relates to a press felt comprising at least a base structure having at least a first surface on the fibre-web side and an opposite second surface, and at least one batt fibre layer attached to at least the first surface of the base structure.

[0002] The invention further relates to a method of manufacturing a press felt, comprising forming a base structure having a first surface on the fibre-web side and an opposite second surface, and attaching at least one batt fibre layer to at least the side of the first surface of the base structure.

[0003] Still further, the invention relates to a press section of a paper machine having several successive press positions, each of the press positions comprising at least one press nip in which the fibre web to be dried is supported by means of at least one press felt.

[0004] In addition, the invention relates to a press felt with seams, comprising at least a base structure which is formed of longitudinal yarns and transverse yarns, and which base structure has a first surface on the fibre-web side and an opposite second surface; a first transverse jointing edge and a second transverse jointing edge of the base structure, which jointing edges have seam loops formed by the longitudinal yarns of the base structure for interconnecting the jointing edges; and at least one batt fibre layer attached to at least the first surface of the base structure.

BACKGROUND OF THE INVENTION

[0005] In the press section of a paper machine, water is removed from the fibre web with several successive press units prior to conveying the web to the actual drying section. Generally, there are one to four successive press units. From the viewpoint of the energy consumption of the paper machine, it is advantageous to remove as much water as possible as early as in the press section, so that there is less need to dry the fibre web in the drying section. Prior to the press section the solid matter content of the fibre web is typically about 15 to 25 %, while after the water removal carried out in the press section the solid matter content may have increased to more than 50 %. In the press section, the paper web is pressed in a press nip, which can be formed of two rolls pressed against each other, what is called a shoe press, or another press system. Usually, the press section contains a press felt which

supports the fibre web and into which the water present in the web permeates at the pressing stage. The purpose of the press felt is to retain the water it has received and to carry the water with it after the pressing without allowing it to travel back to the fibre web. It has been observed that problems of present
5 press felts include for instance slow startability and a short lifetime.

BRIEF DESCRIPTION OF THE INVENTION

[0006] An object of the present invention is to provide an improved press felt of a new type and a method of manufacturing it. Further, an object is to provide an improved solution for drying a fibre web in the press section of a
10 paper machine, providing, at the same time, good water removal capability and good strength and surface properties for the web.

[0007] A press felt according to the invention is characterized in that at least the first-side surface of the press felt is treated with a polymer material for compacting the structure of the press felt and for additionally attaching the
15 batt fibre layer; and that the structure of the press felt is porous for receiving water, the air permeability being at least $2 \text{ m}^3/\text{m}^2\text{min}$, 100 Pa.

[0008] A method according to the invention is characterized by treating at least the first surface of the press felt with a polymer material in such a way that the air permeability of the press felt is at least $2 \text{ m}^3/\text{m}^2\text{min}$, 100
20 Pa, whereby, after the treatment, the structure is more dense than before the treatment, yet comprising pores to receive water; and that a polymer treatment is used for additionally attaching the batt fibre layer to the base structure.

[0009] A press section according to the invention is characterized in that at least one press position is provided with a press felt impregnated with a
25 polymer material; that the air permeability of the press felt treated with a polymer is at least $2 \text{ m}^3/\text{m}^2\text{min}$, 100 Pa; and that the press felt treated with the polymer is arranged to receive water from the fibre web during the pressing carried out in the press nip.

[0010] A press felt with seams according to the invention is
30 characterized in that at least the first-side surface of the press felt is treated with a polymer material for compacting the structure of the press felt and for additionally attaching the batt fibre layer; and that the structure of the press felt is porous for receiving water, the air permeability being at least $2 \text{ m}^3/\text{m}^2\text{min}$, 100 Pa.

[0011] An essential idea of the invention is that at least one press nip in the press section of a paper machine comprises a press fabric, i.e. press felt, at least on one side of which there is a layer whose permeability is lower than the permeability of the felt base structure and batt fibre. The felt has been
5 treated in such a way that the felt is still clearly permeable, in other words it receives water and participates in the water removal in the press section. In addition, the felt still has, despite the compacting treatment, a felt-like structure.

[0012] An advantage of the invention is that a smooth-surfaced felt
10 can form a smooth surface for the fibre web as early as at the input end of the press section. Thus, the fibre web needs not be calendered at later stages by using great pressing force. When less pressing force is used than previously, the fibre web is compacted less, owing to which a fibre web of the same thickness that is supplied to the press section can have a lower basis weight.
15 In this way, a significant amount of raw material is saved. Further, since the felt participates in the water removal, good water removal capability is achieved also in the press unit smoothing the surface of the fibre web, which results in high efficiency in the whole press section.

[0013] An essential idea of an embodiment of the invention is
20 forming a coating on at least one surface side of the press felt or a filling extending partly inside the press felt or at least to the side of one of its surfaces. The felt can be treated by, for instance, impregnation, wiping, injecting or coating. The treated felt can be more stable than conventional felts, whereby the felt is not compressed permanently, but retains its shape and permeability for a long time. When in use, i.e. when being wet, the felt can
25 behave elastically in the press nip, in which case it can also dampen vibrations.

[0014] An essential idea of an embodiment of the invention is that the felt is impregnated with a compacting material throughout the whole
30 structure, i.e. from the first outer surface of the felt to its second outer surface.

[0015] An essential idea of an embodiment of the invention is using in the coating and/or filling of the press felt a polymer which can be polyurethane, polycarbonate urethane, polyacrylate, a mixture of these materials or another polymer suitable for the purpose. Alternatively, one of the
35 following resin materials is used; acrylic resin, epoxy resin, phenolic resin or a mixture thereof.

[0016] An essential idea of an embodiment of the invention is that at least the felt surface on the web side has been ground smooth after the compacting treatment.

5 [0017] An essential idea of an embodiment of the invention is that at least the first and/or second press nip of the press section of a paper machine comprises a press felt treated according to the invention.

[0018] An essential idea of an embodiment of the invention is that the press section comprises several successive press nips. The second press nip from the input end of the press section is a smooth-surfaced treated felt according to the invention, while the rest of the press units have a conventional felt.

[0019] An essential idea of an embodiment of the invention is that the fibre web is liquid pack board.

15 [0020] An essential idea of an embodiment of the invention is that the fibre web is fine paper.

[0021] An essential idea of an embodiment of the invention is that a press felt with seams is formed, at least on the web-side surface of which a coating layer is formed of a polymer material, such as resin. Thus, marking due to yarns that form seam loops can be significantly reduced.

20 [0022] An essential idea of an embodiment of the invention is that a substantially similar press felt treated in the manner according to the invention is arranged in the same press section both in the place of a conventional pick-up felt at the input end of the press section and in a typical transfer belt position at the final end of the press section. It has been observed that higher solid matter content can be achieved when there is a felt participating in the water removal also at the final end of the press section.

[0023] The felt according to the invention allows improvement in the runnability of a paper machine, because the cross-machine permeability profile remains uniform more easily than previously. Furthermore, the runnability is improved by the felt having a longer lifetime, whereby felts need not be changed that often and there are less adjusting problems.

35 [0024] A felt according to the invention can be arranged in a press nip having problems relating to changing properties during use, typical for conventional felts. Replacing the conventional felt with a felt according to the invention allows improvement in the runnability.

BRIEF DESCRIPTION OF THE FIGURES

[0025] The invention will now be described in more detail with reference to the attached drawings, of which

5 Figures 1 to 3 show schematic side views of press sections of a paper machine according to the invention;

Figures 4 to 5 show schematic cross-sections of press felts according to the invention;

Figure 6 shows schematically the permeability of a conventional press felt and a press felt according to the invention as a function of time;

10 Figure 7 shows schematically, as a function of time, a vacuum required for conditioning a conventional press felt and a press felt according to the invention;

Figure 8 shows schematically the steps of a manufacturing method of a press felt according to the invention;

15 Figure 9 shows schematically a base structure of a press felt provided with a seam loop; and

Figure 10 shows schematically a seam area of a press felt according to the invention.

20 [0026] For the sake of clarity, the invention is shown in a simplified manner in the figures. Similar parts are indicated with the same reference numerals in different figures.

DETAILED DESCRIPTION OF THE INVENTION

[0027] Figure 1 shows a press section 1 of a paper machine. In this case, it is a press section used in manufacturing liquid pack board. The press section 1 can comprise one or more press nips. Seen from direction of travel A of a fibre web 2, the press section 1 according to Figure 1 comprises a first press nip 3a, a second press nip 3b and a third press nip 3c. The number of press nips can be selected for instance taking into account the fibre web 2 to be treated. In the press section 1 according to the figure, the first felt is what is called a pick-up felt 4, which receives the fibre web 2 from the wire section. After this, the fibre web 2 is supported from below by means of a second felt 5 and from above by means of a third felt 6, supported by which it moves to a first nip 3a and further to a second nip 3b through a press roll 7a. Further, there is a fourth felt 8 in the section of a third nip 3c. The fibre web 2 exits the third nip 3c to the drying section of the paper machine. In practice, good test

25
30
35

results have been obtained when a press felt treated according to the invention has been used as the third felt 6, i.e. in the first and the second nip. In the tests performed, liquid pack board was run, and the results showed that a very high surface quality was achieved.

5 **[0028]** In Figure 2, the fibre web 2 is run in direction A to the first felt, i.e. pick-up felt 4, and to the second felt 5, between which the web travels to the first press nip 3a. Further, the felt 4 supports the web in the second press nip 3b. The third felt 6, in turn, participates in the water removal together with an intermediate roll 7b in the third nip 3c. Furthermore, the press section 1
10 can, in some cases, comprise a fourth press nip 3d, i.e. a separate press, in the section of which there is the fourth felt 8. Any of these four felts 4, 5, 6, 8 can be a press felt treated according to the invention.

[0029] With the so-called separate press 3d shown in the solution of Figure 2, the smoothness of the second surface side of the paper can be
15 improved, and thus also the one-sided surface quality caused in preceding positions of the press section can be alleviated. When the felt 8 according to the invention is used in the separate press, the runnability of the felt may be better. This is because, for example, the felt 8 treated according to the invention carries less air with it than a conventional felt, which reduces what is
20 called blowing. Further, between the felt 8 according to the invention and the paper web, adhesive forces may be generated which improve the runnability. Adhesive forces are generated because, for instance, the surface of the felt 8 may be treated to be relatively smooth. Further, adhesive forces are generated because a moisture film may be formed on the surface of the felt 8 due to the
25 felt surface being relatively smooth and the surface structure of the felt being compacted.

[0030] Figure 3 shows a press felt 1 having two press nips 3a and 3b, a pick-up felt 4 and a second felt 5, a third felt 6 and a fourth felt 20. Usually, an impermeable transfer belt is used instead of the felt 20 in this
30 position of the press section of this kind. Now, however, a permeable press felt 20 according to the invention is arranged in this position. The permeable press felt 20 forms a slightly felt-like surface in the paper web, whereby one-sided quality of the paper web surface can be prevented. When a press felt according to the invention was mounted in what is called a transfer belt
35 position in the above manner, it was noted that significantly higher solid matter content in the paper web could be achieved in the press section than

previously when impermeable transfer belts were used. Further, in the press section according to Figure 3, also any of the other felts 4, 5, 6 and/or 8 can be a permeable press felt according to the invention.

[0031] Figure 4 shows a cross-section of a press felt 10 according to the invention. The felt 10 comprises a base structure 11, which can be a one-layer or multi-layer structure woven of longitudinal and transverse yarns, a non-woven structure, a wound structure, a knitted fabric or any other supportive fabric suitable for the purpose. Batt fibre layers 12 and 13 are arranged on both surfaces of the base structure 11, for instance by needling. At least on the web-side surface B, there is a batt fibre layer 12. By contrast, the batt fibre layer 13 of the backside is not always necessary, as can be seen from Figure 5. In Figure 4, a filling material 14 is arranged on the web-side surface B in such a way that the filling material 14 extends over a distance from surface B to the inside of the structure. In Figure 5, the filling material 14 is arranged throughout the whole felt structure from surface B to the backside. The felts of both Figure 4 and Figure 5 have been ground smooth on the side of surface B after the treatment with filling material, whereby the batt fibres form permeable channels in the structure. In addition, the grinding ensures a smooth surface on the web-side surface B. Also combinations of above solutions are feasible.

[0032] The press felt can be manufactured as a piece shaped as a closed loop. Alternatively, the felt can be a planar piece, at two edges of which there are jointing loops formed by monofilaments. The jointing loops can, when arranged to intermesh, form a seam loop channel, in which a seam yarn can be arranged to interconnect the felt ends in such a way that a closed-loop piece is formed. Typically, a problem with a felt with seams has been that the yarns forming seam loops must, in practice, be selected to be rather thick, and they must be monofilaments, whereby the yarns forming seam loops have easily caused marking through the batt fibre layer. Further, attachment of the batt fibres to thick monofilament yarns has been poor. Now, marking can be prevented as at least the web-side surface of the felt with seams has been treated with a polymer, such as resin or the like. The treatment can make the felt structure more rigid, which reduces marking due to the seam. In addition, marking can be reduced due to the polymer or the like treatment attaching the batt fibres firmly to the press felt, whereby the batt fibres are more durable than previously and protect the seam area longer. Further, since the press felt is

polymer-treated according to the invention completely, no discontinuity point is formed in the seam area due to the treatment. It is further to be noted that the felt with seams can be arranged in any press nip or press position in the press section.

5 **[0033]** There are also situations where such weave structures or yarns must be used that easily cause marking despite the batt fibre layer. Also in such a case a treatment according to the invention contributes to avoiding marking.

10 **[0034]** An advantage of a press felt according to the invention is that the polymer treatment of the felt surface attaches the batt fibres firmly to the base structure in such a way that disturbances caused by its detachment can be avoided. For instance in what are called supercalenders, i.e. SC machines, detachment of batt fibres is nowadays a significant problem, which causes marking in the calender and thus also quality errors in the paper web. In
15 addition, a batt fibre stuck to the paper web can cause significant problems in further processing stages of paper, particularly in printing of paper, where a batt fibre can clog and damage sensitive printing machines. Further, a detaching batt fibre can even damage an SC calender. There have been attempts to solve the problem of detaching batt fibres, long known in the field,
20 by using bi-component batt fibres/yarns in the press felt, but no satisfactory solution has been found by merely using bi-component batt fibres and/or yarns.

[0035] It is also advantageous to use a felt treated according to the invention as a pick-up felt, because a uniform cross-machine profile is
25 achieved with it. The edges are important in a pick-up felt. The permeability of a pick-up felt can be easily dimensioned greater than that of the felts used in other positions.

[0036] A felt according to the invention can be produced by impregnating, for instance. Thus, the base structure of the press felt is formed
30 first, after which the required batt fibre layers are attached to the base structure. Subsequently, at least the web-side surface of the felt is treated with a water dispersion consisting of a polymer and possible additional chemicals. The impregnation is done in such a way that the desired permeability is achieved. The permeability of the final product can be affected by the selection
35 of the base structure, the batt fibre, and further by changing the extent of the polymer treatment and the amount of polymer material used for the treatment.

After the impregnation, the felt is dried, after which the polymer is crosslinked. For example heat, chemical or irradiation can be used for crosslinking the polymer. Ultraviolet light, electron irradiation or IR light, for example, can be used for the irradiation. In the polymer treatment, for instance polyurethane, polycarbonate urethane, polyacrylate, a mixture thereof or another polymer suitable for the purpose can be used. When the felt has been hardened and cooled, it is finished by grinding at least its web-side surface smooth. Grinding paper can be used for the grinding. The fineness of the grinding paper can be selected according to how smooth a surface is desired for the press felt each particular time. The fineness of the grinding paper can thus be for instance 100, 180, 240 or 360. The surface roughness R_z of the press felt can be at least 20 μm . Preferably, R_z is between 20 to 100 μm . In some cases, the grinding is not quite necessary if the desired surface smoothness is obtained in another way. The surface smoothness of the press felt can be affected at least by the selection of the base fabric and the batt fibre, the extent of the polymer treatment and the polymer used for the treatment. Further, the press felt can be calendered to obtain a smooth surface. The polymer treatment can be performed by injecting or wiping instead of the above-mentioned impregnation.

[0037] With grinding, suitable smoothness and the right micro roughness are achieved for the felt surface. Micro roughness can be adjusted not only with the roughness of the grinding means but also with the fineness of the batt fibres. The fibre material can vary depending on the object of use and the fibre web to be treated. The roughness of the batt fibre can be 3.1 to 100 dtex, or the fibres can be microfibrils of even below 2 dtex. There may be fibres of either one or more finenesses, the length of the fibres being typically 10 to 150 mm before the needling. The fibres can have round, flat or angular profiles. Further, the fibres can be coated, for example polyamide fibres coated with a copolyamide.

[0038] In the invention, one or more polymer materials can form a mixture with a liquid. Thus, the polymer treatment can be carried out with a dispersion of polymer and water, for instance. Also liquids other than water can be used. When the water or other liquid is removed from the press felt after the polymer treatment, pores are formed in the press felt. These pores are formed when space is released as a result of liquid removal. Owing to the pores, the press felt can receive water from the fibre web.

[0039] In Figure 6, curves 15 show the permeability of a conventional felt as a function of time and correspondingly, curve 16 shows the permeability of a felt according to the invention as a function of time. As can be seen from Figure 6, the conventional felts have at the beginning clearly higher permeability, which, however, decreases quickly in use. By contrast, the felt according to the invention can, even as new, have permeability of 70 to 30 of the relative permeability value 100 of a conventional felt. A surprising phenomenon in the felt according to the invention is, however, that the permeability remains significantly constant during the whole lifetime of the felt, as can also be seen from the figure. In practice, conventional felts must be changed at a moment of time t_1 , whereas with a felt according to the invention, running can be continued. Changing felts always results in an interruption in the production. In addition, running parameters of the paper machine must typically be adjusted for some time before the normal production run can start after the change. All this causes production losses and running problems.

[0040] Adjusting the treatment according to the invention allows formation of press felts in different positions of the press section. The permeability value of the pick-up felt used at the input end of the press section can be set between 90 and 60 of the relative permeability value 100 of a conventional felt. A pick-up felt has thus a relatively high permeability, and therefore removes water efficiently. In positions where the amount of water to be removed is smaller and where one of the important characteristics of the felt is good runnability, a press felt can be used which has been subjected to a more complete treatment than a pick-up felt. Permeability of such a felt can be between 60 and 30 of the relative permeability value 100 of a conventional felt.

[0041] With press felts according to the invention, following permeability values are obtained: the air permeability of a pick-up felt is usually more than $6 \text{ m}^3/\text{M}^2\text{min}$, 100 Pa, even between 10 and $30 \text{ m}^3/\text{m}^2\text{min}$, 100 Pa. In the third and fourth nip of the press section, a press felt can be used the permeability of which is 4 to $15 \text{ m}^3/\text{m}^2\text{min}$, 100 Pa. Further, in the press of Figure 3, the permeability of the felt 20 can be 2 to $6 \text{ m}^3/\text{m}^2\text{min}$, 100 Pa.

[0042] Figure 7 shows, as a function of time, the vacuum used in conditioning the felt. In connection with the return passage of the felt, there are typically one or more suction boxes, in which the felt is subjected to what is called conditioning, in other words water and dirt that has stuck to it are removed from it. A vacuum is used for the conditioning. As can be seen from

the figures, the uhle box vacuum of the conditioning increases as a function of time with a conventional felt, whereas with a felt according to the invention the need for a vacuum remains substantially constant, as indicated by curve 18. In this way, the felt according to the invention also improves the runnability of the press section, because now the vacuum of the conditioning needs not be controlled continuously.

[0043] Yet another advantage of the invention is quick start-up. Conventional press felts must be at first run at a lower speed in the press section, so that their structure can be compacted together and made appropriately compact. A press felt according to the invention, by contrast, has a more compact structure as early as after the manufacture. The polymer material has clogged parts of the felt structure, so that there is only a little excess space in it, and therefore, the felt needs not be compacted together in the press section before the start-up. In addition, the elastic structure of the press felt according to the invention contributes to quick start-up. The quick startability of the felt has been observed in all positions of the press section.

[0044] Figure 9 shows a base structure of a press felt, provided with seam loops 51 formed of longitudinal yarns 50. The seam loops 51 are formed at opposite transverse edges 52 of the press felt. The press felt can be connected to form a closed-loop shape by arranging the seam loops of the opposite edges 52 intermeshed, whereby a seam loop channel 53 is formed, in which a seam yarn 54 can be arranged.

[0045] Figure 10 shows a seam area 60 of a press felt according to the invention. The transverse jointing edges 52 of the press felt are interconnected with the seam yarn 54, whereby the press felt is of a closed-loop shape. The seam area 60 is protected by a seam flap 61 comprising batt fibres 12. The batt fibres 12 have been needled into the base structure 11 and additionally attached by means of the polymer material 14. The polymer treatment thus improves the durability of the seam flap 61. Furthermore, the polymer material 14 makes the seam flap 61 more rigid, whereby it gives good protection to the seam area 60.

[0046] The drawings and the related specification are only intended to illustrate the idea of the invention. The details of the invention can vary within the claims.

CLAIMS

1. A press felt comprising at least:
a base structure (11) having at least a first surface (B) on the fibre-
web side and an opposite second surface (C), and
5 at least one batt fibre layer (12) attached to at least the first surface
(B) of the base structure (11), **characterized** in
that at least the first-side surface (B) of the press felt is treated with
a polymer material for compacting the structure of the press felt and for
10 additionally attaching the batt fibre layer (12); and
that the structure of the press felt is porous for receiving water, the
air permeability being at least $2 \text{ m}^3/\text{m}^2\text{min}$, 100 Pa.
2. A press felt according to claim 1, **characterized** in that at
least the first surface (B) of the press felt is ground smooth after the
compacting treatment.
- 15 3. A press felt according to claim 1 or 2, **characterized** in
that one of the following polymer materials or mixtures thereof is used for
compacting the structure of the press felt: polyurethane, polycarbonate
urethane, polyacrylate, acryl resin, epoxy resin, phenolic resin.
4. A press felt according to any one of the preceding claims,
20 **characterized** in that the press felt is treated with a dispersion of one
or more polymer materials and water.
5. A press felt according to any one of the preceding claims,
characterized in that the air permeability of the press felt is 2 to 30
 $\text{m}^3/\text{m}^2\text{min}$, 100 Pa.
- 25 6. A press felt according to any one of the preceding claims,
characterized in that the air permeability of the press felt is at least 6
 $\text{m}^3/\text{m}^2\text{min}$, 100 Pa.
7. A press felt according to claim 6, **characterized** in that the
press felt is a pick-up felt for the first press position of the press section and
30 that the structure of the press felt is compacted by means of a polymer
material in such a way that its air permeability is 6 to 30 $\text{m}^3/\text{m}^2\text{min}$, 100 Pa.
8. A press felt according to claim 5, **characterized** in that the
structure of the press felt is compacted by means of a polymer material in such
a way that its air permeability is 2 to 6 $\text{m}^3/\text{m}^2\text{min}$, 100 Pa, whereby the press

felt is intended to be arranged in the last position, i.e. the transfer belt position, in the press section.

9. A method of manufacturing a press felt, comprising:

5 forming a base structure (11) having a first surface (B) on the fibre-web side and an opposite second surface (C), and

attaching at least one batt fibre layer (12) to at least the side of the first surface (B) of the base structure (11), **characterized** by

10 treating at least the first surface (B) of the press felt with a polymer material in such a way that the air permeability of the press felt is at least 2 m³/m²min, 100 Pa, whereby, after the treatment, the structure is more dense than before the treatment, yet comprising pores to receive water; and

that a polymer treatment is used for additionally attaching the batt fibre layer (12) to the base structure (11).

15 10. A method according to claim 9, **characterized** by grinding, after the compacting treatment, at least the first surface (B) of the press felt to achieve a smoother surface.

11. A method according to claim 9 or 10, **characterized** by the treatment comprising the following steps:

20 treating the press felt with a dispersion of one or more polymer materials and water;

drying the press felt after the dispersion treatment; and

hardening the polymer material brought to the press felt.

25 12. A method according to any one of the preceding claims 9 to 11, **characterized** by impregnating at least the first surface (B) of the press felt with a polymer material.

13. A method according to any one of the preceding claims 9 to 11, **characterized** by injecting polymer material onto at least the first surface (B) of the press felt.

30 14. A method according to any one of the preceding claims 9 to 11, **characterized** by spreading polymer material with a doctor blade onto at least the first surface (B) of the press felt.

35 15. A method according to any one of the preceding claims 9 to 14, **characterized** by using one of the following polymer materials or mixtures thereof for compacting the structure of the press felt: polyurethane, polycarbonate urethane, polyacrylate, acryl resin, epoxy resin, phenolic resin.

16. A method according to any one of the preceding claims 9 to 15, **characterized** by compacting the structure of the press felt by means of a polymer treatment in such a way that its air permeability is 2 to 30 m³/m²min, 100 Pa.

5 17. A method according to claim 16, **characterized** by compacting the structure of the press felt by means of a polymer material in such a way that its air permeability is 6 to 30 m³/m²min, 100 Pa; and

10 arranging the press felt into a pick-up felt to the first position of the press section.

18. A method according to claim 16, **characterized** by compacting the structure of the press felt by means of a polymer material in such a way that its air permeability is 2 to 6 m³/m²min, 100 Pa; and arranging the press felt in the last position, i.e. the transfer belt position, in the press section.

15 19. A press section of a paper machine having several successive press positions, each of the press positions comprising at least one press nip (3a to 3d) in which the fibre web (2) to be dried is supported by means of at least one press felt, **characterized** in that

20 at least one press position is provided with a press felt impregnated with a polymer material;

25 that the air permeability of the press felt treated with a polymer is at least 2 m³/m²min, 100 Pa; and that the press felt treated with the polymer is arranged to receive water from the fibre web during the pressing carried out in the press nip.

30 20. A press section according to claim 19, **characterized** in that at least one press position is provided with a press felt the web-side surface (B) of which has been ground smooth, whereby the smooth-surfaced felt is arranged to smooth the surface of the fibre web.

21. A press section according to claim 19 or 20, **characterized** in that the first press position of the press section is provided with a pick-up felt compacted with a polymer, the air permeability of the pick-up felt being 6 to 30 m³/m²min, 100 Pa.

35 22. A press section according to any one of the preceding claims 19 to 21, **characterized** in that the last press position of the press section

is provided with a press felt compacted with a polymer, the air permeability of the press felt being 2 to 6 m³/m²min, 100 Pa.

23. A press section according to claims 19 to 21, **characterized** in that the press section comprises a separate press and that the separate press has a press felt the air permeability of which is 5 to 10 m³/m²min, 100 Pa.

24. A press section according to any one of the preceding claims 19 to 21, **characterized** in that all press positions of the press section are provided with press felts compacted by means of a polymer treatment.

25. A press felt with seams, comprising at least:

a base structure (11) which is formed of longitudinal yarns and transverse yarns, and which base structure (11) has a first surface (B) on the fibre-web side and an opposite second surface (C);

a first transverse jointing edge and a second transverse jointing edge of the base structure (11), which jointing edges have seam loops (51) formed by the longitudinal yarns of the base structure (11) for interconnecting the jointing edges;

and at least one batt fibre layer (12) attached to at least the first surface (B) of the base structure (11), **characterized** in that

at least the first-side surface (B) of the press felt is treated with a polymer material for compacting the structure of the press felt and for additionally attaching the batt fibre layer (12); and

that the structure of the press felt is porous for receiving water, the air permeability being at least 2 m³/m²min, 100 Pa.

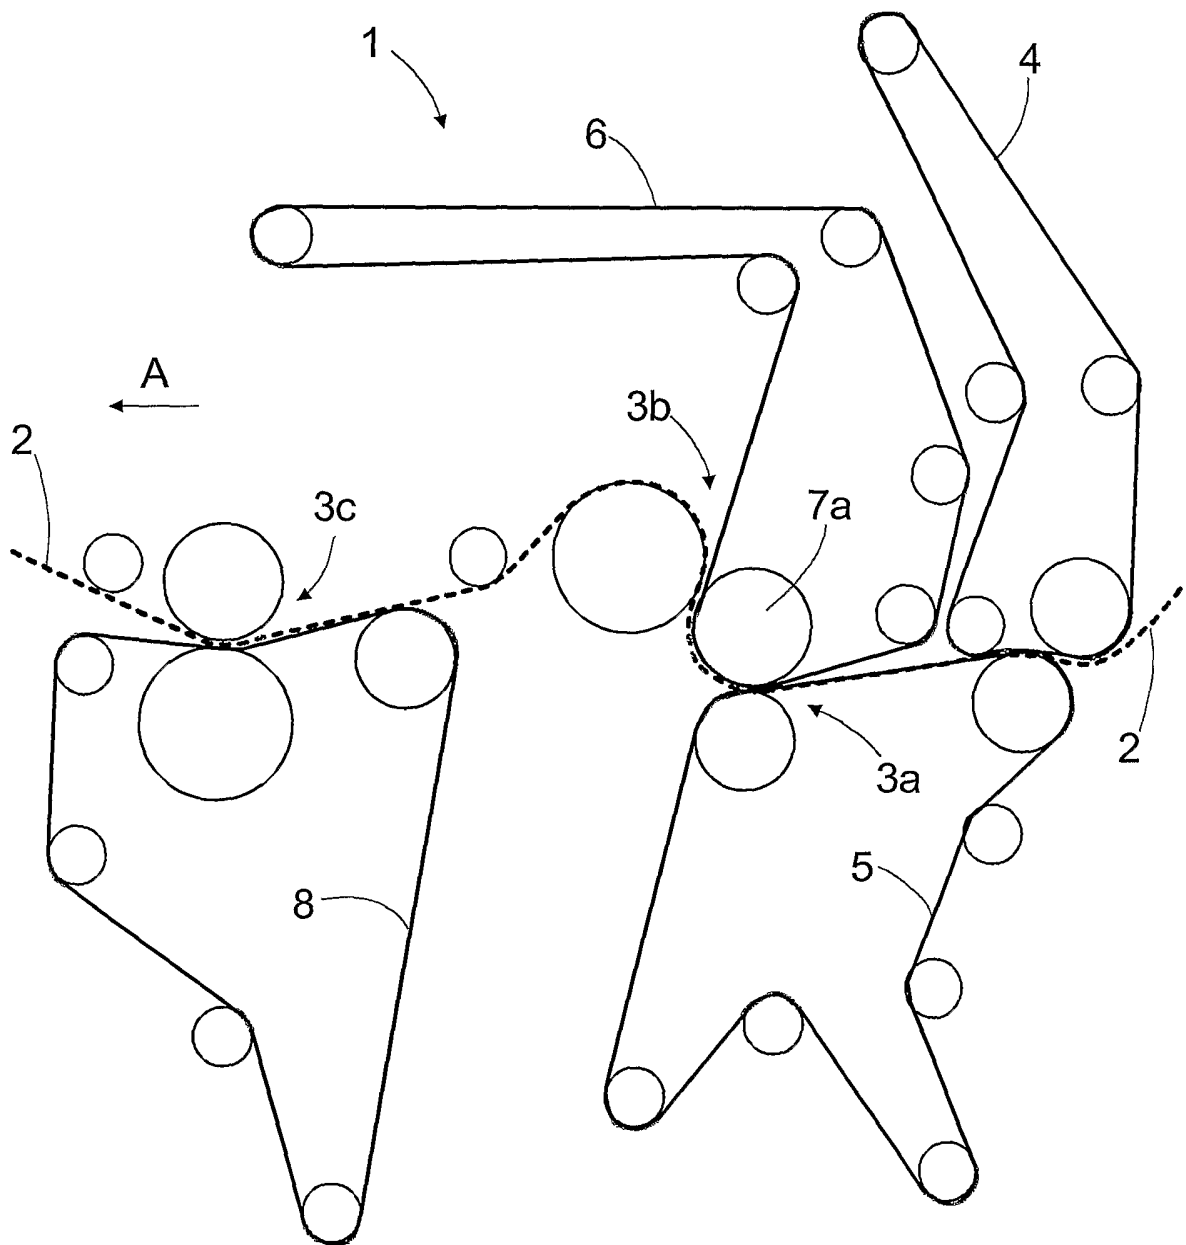


FIG. 1

2/5

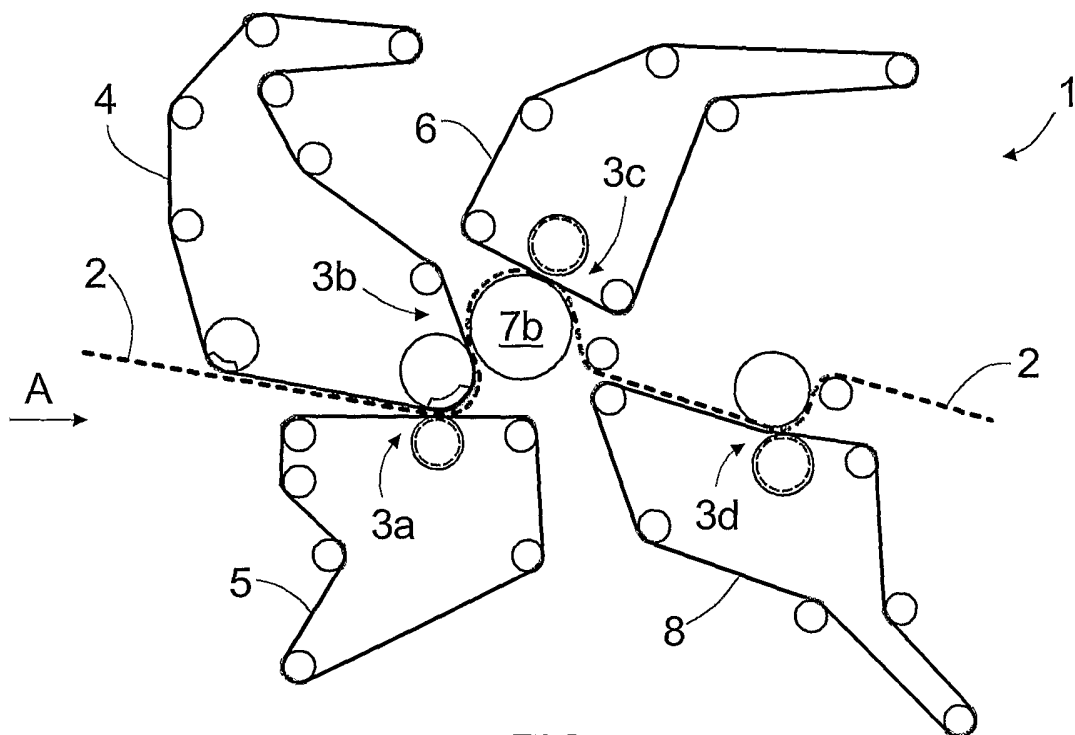


FIG. 2

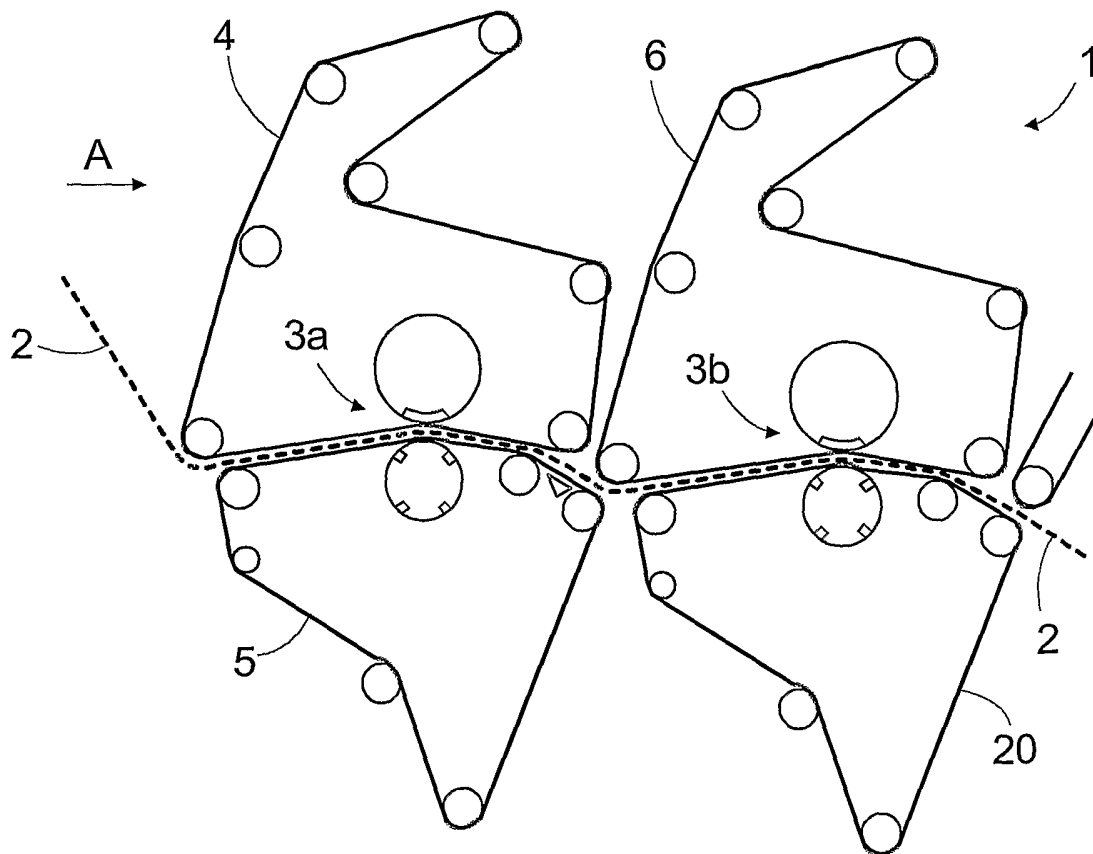


FIG. 3

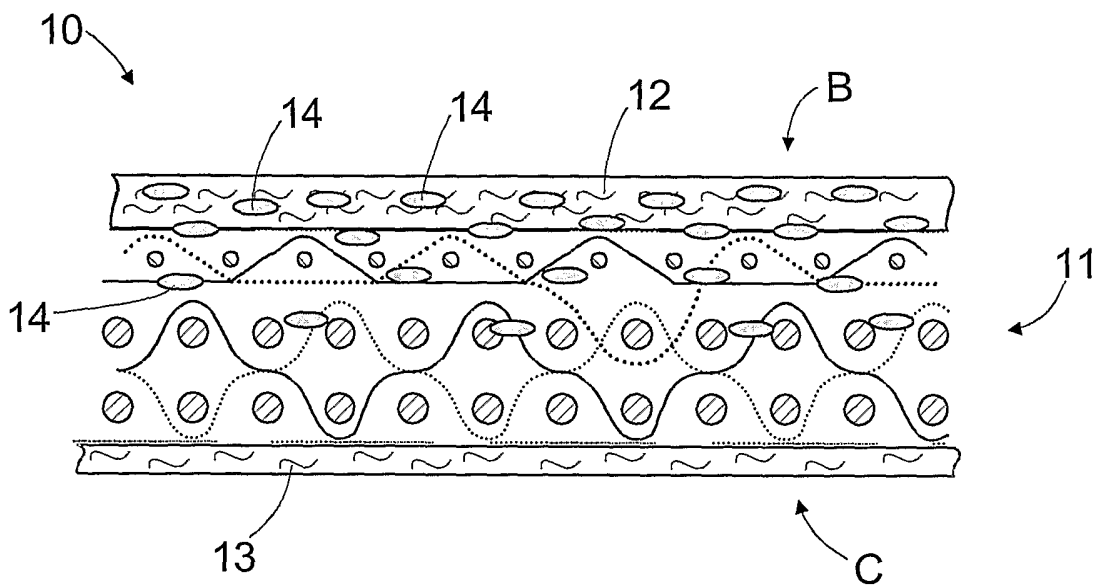


FIG. 4

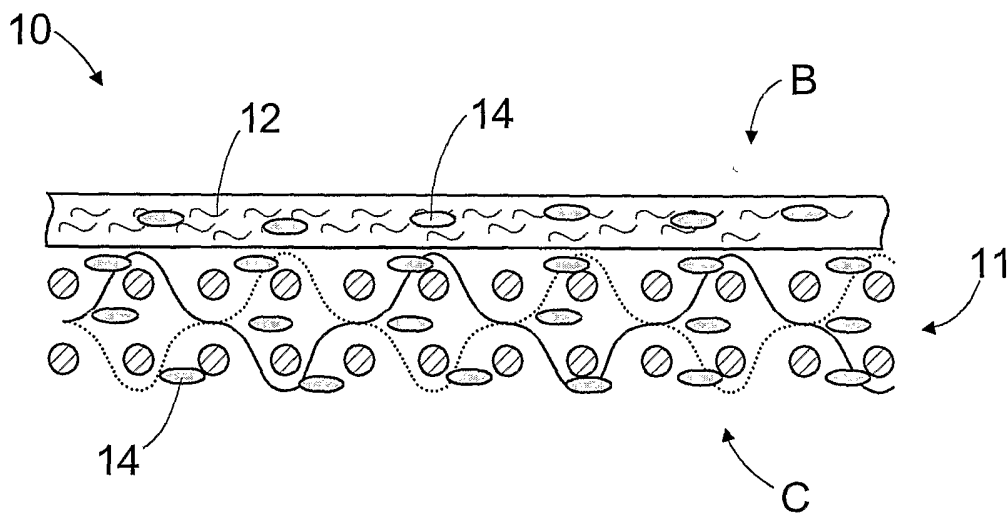


FIG. 5

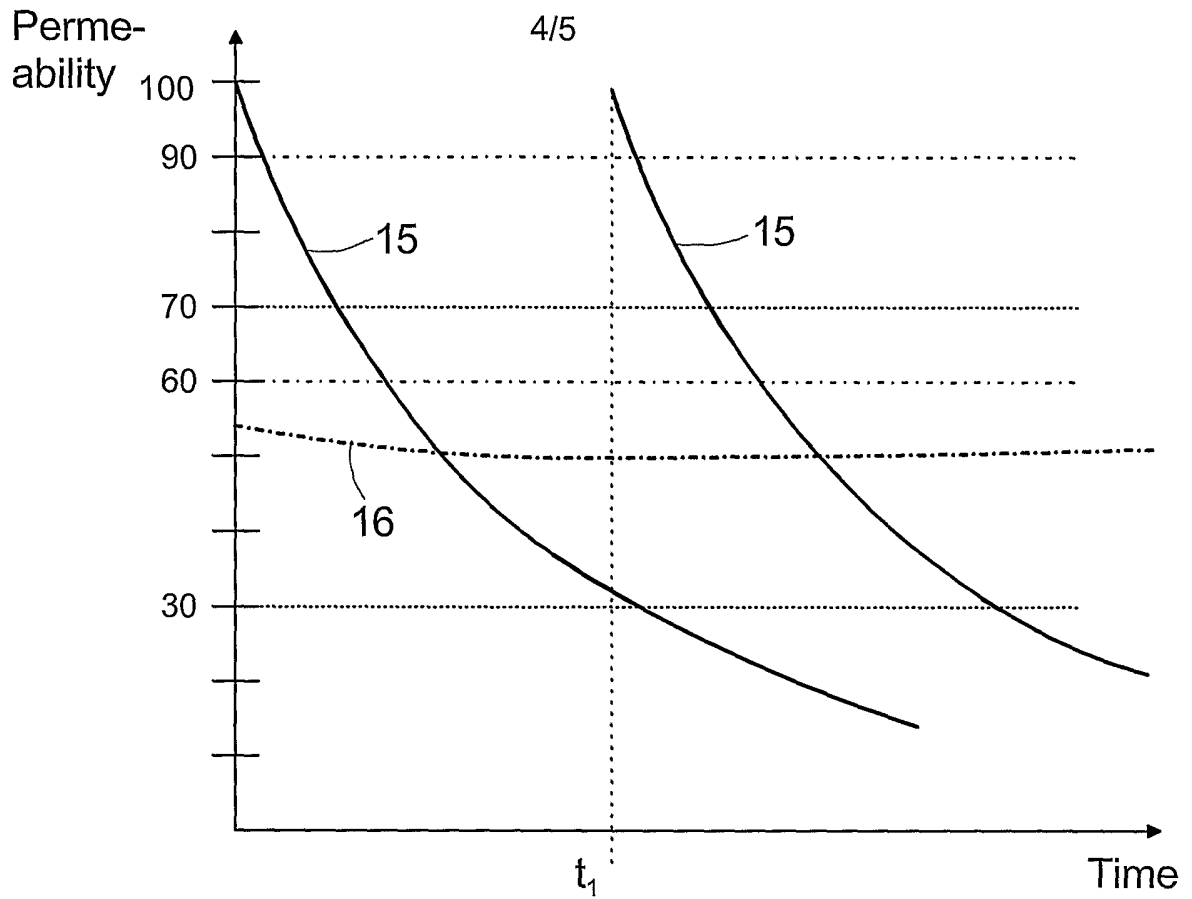


FIG. 6

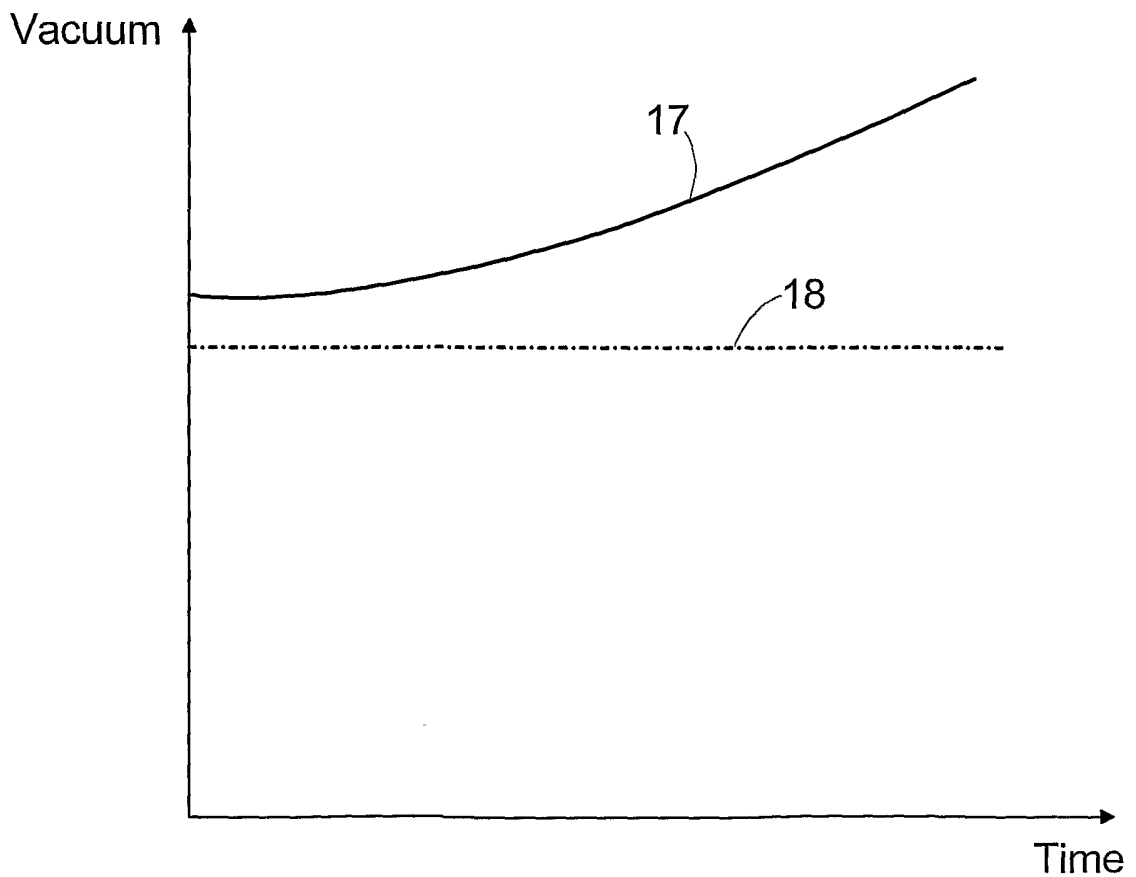


FIG. 7

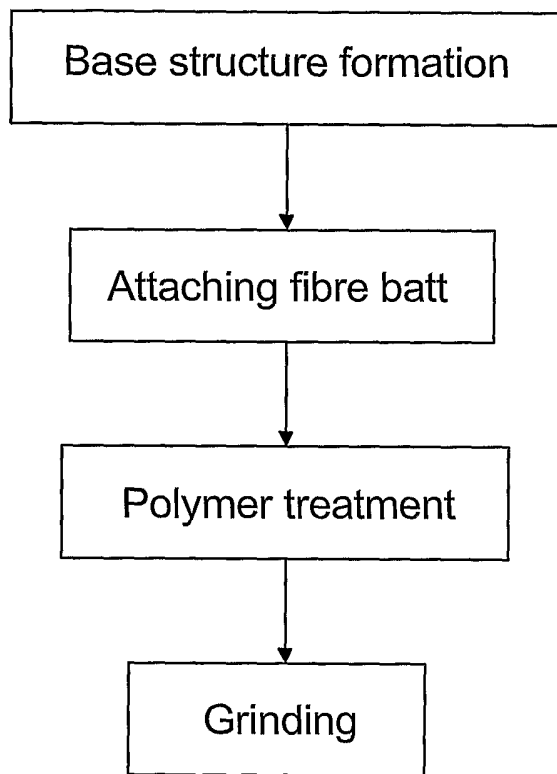


FIG. 8

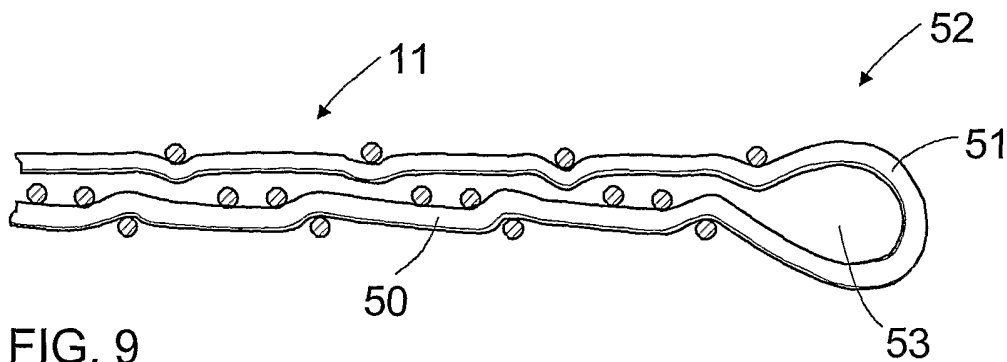


FIG. 9

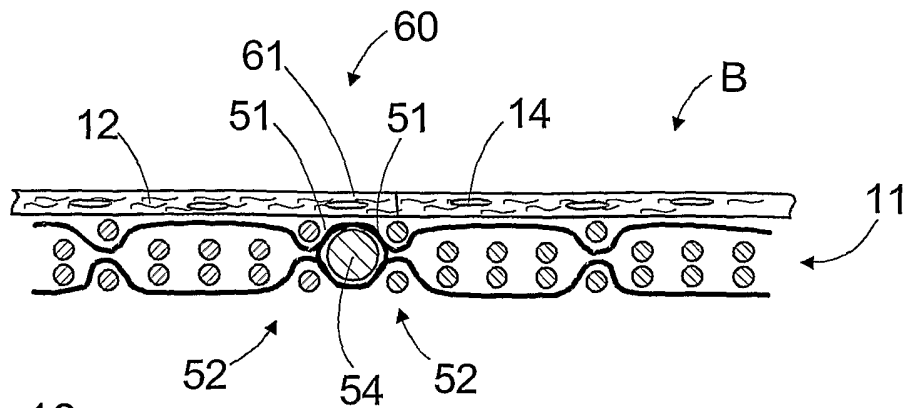


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 03/00325

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: D21F 7/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: D21F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	WO 02053832 A1 (TAMFELT OYJ ABP), 11 July 2002 (11.07.02), page 7, line 3 - line 19, claims 1,7, 8,12,13 --	1,3,4,9, 11-15
X	WO 0210510 A1 (VOITH PAPER PATENT GMBH), 7 February 2002 (07.02.02), page 4, line 13 - line 19; page 9, line 14 - page 10, line 7 --	1,3,4,9, 11-15
X	WO 9941447 A1 (SCAPA GROUP PLC), 19 August 1999 (19.08.99), page 2, line 1 - page 4, line 3; page 6, line 10 - line 15, claims 1,4,12 -----	1,3,4,9, 11-15

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 June 2003

Date of mailing of the international search report

02 -07- 2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Olov Jensén/ELY

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

02/06/03

International application No.

PCT/FI 03/00325

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 02053832 A1	11/07/02	FI 110133 B FI 20002775 A	00/00/00 19/06/02
WO 0210510 A1	07/02/02	DE 10037367 A DE 20107844 U DE 20107846 U EP 1305472 A	14/02/02 26/07/01 16/08/01 02/05/03
WO 9941447 A1	19/08/99	AU 2532599 A AU 9551598 A BR 9907842 A CA 2319452 A CN 1290315 T EP 1027398 A EP 1055027 A GB 9803172 D JP 2001521053 T NO 20004041 A US 6558818 B ZA 9901066 A	30/08/99 17/05/99 24/10/00 19/08/99 04/04/01 16/08/00 29/11/00 00/00/00 06/11/01 06/10/00 06/05/03 10/08/99