



ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

**METHOD AND APPARATUS FOR PERFORMING MEASUREMENTS ON
PACKAGINGS FOR A LIQUID PRODUCT**

The present invention relates to a method and an
5 apparatus for performing measurements on packagings for a
liquid product. Such apparatus have been developed in order
to detect the presence of undesired particles such as glass
particles in a liquid product. This is important since the
presence of such undesired particles can cause damage to the
10 health of end users and can cause financial loss or
commercial damage to the suppliers or manufacturers of such
liquid products.

The international patent application WO 97/14956
describes a method and apparatus wherein a detection
15 apparatus is described for detecting glass particles in glass
bottles filled with beer. The content of this text is deemed
interpolated herein by way of reference. In this apparatus
beer bottles are rotated about their longitudinal axis,
whereafter the beer bottles are stopped abruptly, i.e.
20 decelerated with force. Shortly hereafter the bottle is
illuminated with visible light and image recordings are made
of the bottle. On the basis of these images a computer
determines whether glass particles are present in the bottle.

In order to improve this apparatus and method, the
25 present invention provides a method for performing
measurements on packagings, in particular packagings which
are at least slightly worn or otherwise to a greater or
lesser extent opaque to visible light, which are filled with
a liquid product, wherein the packagings are irradiated with
30 radiation in a wavelength range suitable for the packaging
with product and images of at least a part of the content of
the packaging are recorded for a predetermined time by image
recording means, wherein the obtained image information is

analysed for information indicating the presence of undesired particles, and a part of the radiation has a frequency falling within the infrared range.

At least a part of the radiation preferably has a
5 frequency falling within the infrared range. A number of advantages are achieved by making use of radiation in the infrared range. One advantage that is achieved is that bottles which are not properly transparent can also be processed, such as bottles damaged by so-called "scuffing",
10 bottles of non-homogeneous glass such as the known Coca-Cola™ bottles, bottles with a dark-coloured liquid product, relatively thick-walled bottles, bottles with a product in which for instance yeast or fruit particles are mixed, or for instance decorated or printed bottles or bottles packed by means of a "sleeve". Coloured, for instance blue bottles, for
15 instance for mixed drinks, can also be checked better using infrared radiation, since the radiation is less sensitive to the transmission coefficient of the glass. The stated problems with visible light are avoided as much as possible
20 with infrared radiation. A further advantage is that a lower radiation generating power is required due to the higher energy level of infrared radiation. The mounting bracket of the radiation sources, such as LEDs, can hereby for instance take a smaller form. This has the advantage that, when for
25 instance the radiation sources are applied in a carrousel system to be further described hereinbelow, the total diameter of the carrousel system can become smaller because the individual light sources can take a smaller form. It is also possible to apply radiation sources with different
30 wavelengths, since fewer radiation sources of the same wavelength are required. Two or more different wavelengths can hereby be applied in mounting brackets of the already known format. An advantage hereof is that a specific mix of

frequencies can for instance be used for a specific bottle-product combination.

In a further embodiment a distinction is made between information relating to particles which normally form part of the product and information relating to the undesired particles. For instance in the above mentioned fruit juices or beer with secondary fermentation in the bottle, the products comprise natural particles such as fruit pulp or yeast particles in addition to possibly undesirable particles. The application of the method according to this embodiment makes a distinction between these desirable and undesirable particles. It hereby becomes possible that even these products, which are complex for detection of undesired particles, can still be safely supplied.

A further aspect of the present invention relates to an apparatus for performing measurements on full packagings of a liquid product, comprising:

-rotation means for rotating the packaging on its own axis for setting the packaging with content into a rotating movement,

-stopping means for stopping the rotation of the packaging,

-radiating means for irradiating the packaging,

-image recording means for making image recordings of at least a part of the content of the packaging,

-transmission means for transmitting the image recordings from the recording means to image analysis means,

-image analysis means for analysing image information of the image recordings for the availability of information relating to the presence of undesired particles.

According to a preferred embodiment at least a part of the radiation has a frequency falling within the infrared range. Hereby the above stated advantages can be achieved.

In a preferred embodiment the means for making image recordings comprise at least one camera. The irradiating means further comprise at least one mounting bracket comprising a plurality of radiation sources such as LEDs. For
5 the use of LEDs in the range of the visible light, more specifically light with a wavelength of 590 nanometres, such a mounting bracket is for instance known from the publication of international patent application WO 00/77499.

A preferred embodiment comprises radiating means which
10 are at least partially suitable for emitting radiation with a wavelength falling in the infrared range. An advantage of this embodiment is that specific combinations of radiation with a plurality of wavelengths can be applied which are suitable for specific product-packaging combinations. Using
15 an apparatus as according to this embodiment, such combinations can be readily defined by experimentation.

In a further preferred embodiment the transmission means comprise means for making use of a communication protocol. A very suitable protocol for this purpose is the so-called
20 FireWire or IEEE 1394. This protocol is for instance suitable since it is for instance intended for end user equipment. The application of different communication protocols, such as for instance Ethernet or a faster version of a similar usable protocol, can however also be seriously envisaged.

25 It is particularly advantageous if two-way communication is possible between the image recording means and the image analysis means. It hereby becomes possible to make the camera settings, such as for instance diaphragm or sensitivity, adjustable remotely and by means of software. This is for
30 instance practical for specifically modifying such settings to a bottle-product combination that has to be processed.

In a further preferred embodiment the diameter of the radiating means or the mounting bracket is in the range of

5-11 cm, or even less than 1 cm. As described in the foregoing, this has the advantage that the diameter of the mounting bracket for lighting can be the same size or even smaller than the diameter of the packaging or bottle on which the measurement must be performed.

In a further preferred embodiment the composition of the frequency spectrum of the radiating means is variably adjustable depending on the packaging and/or the product. If radiation sources or LEDs with radiation with a different wavelength are arranged in the mounting bracket, one wavelength or a plurality of wavelengths can be switched on simultaneously. The application of several wavelengths can be optimized for a specific combination of packaging and product.

In a further embodiment a carousel apparatus comprises a number of measuring apparatuses as described above. The carousel is provided with first transfer means for transferring packagings from a transport line to the carousel and second transfer means for transferring packagings from the carousel to the transport line after performing of the measurements. Advantages of the use of the carousel are already known. Advantages of the carousel with measuring apparatus according to the present invention are described in the foregoing, which will be further elucidated hereinbelow.

The carousel apparatus preferably comprises stationary irradiating means for illuminating packagings in the co-rotatable measuring apparatus as they pass the irradiating means. In the known carousel and in the carousel according to the previous embodiment, co-rotating illuminating means are provided for each of the measuring apparatuses for each co-rotating bottle. A plurality of for instance 36 illuminating elements or mounting brackets was hereby

required in a specific practical embodiment. In the present invention there are provided for instance twelve mounting brackets or one segment-shaped mounting bracket the size of for instance twelve mounting brackets which only illuminate 5 rotating bottles from the underside during the period of the measurement. This for instance has the advantages that a smaller number of radiation sources is necessary, that the carrousel has a simpler construction and that the power supply for the mounting brackets becomes simpler.

10 Further advantages, features and details of the present invention will be elucidated on the basis of the following description of preferred embodiments thereof, with reference to the annexed drawings, in which:

- fig. 1 is a schematic view of a measuring apparatus 15 according to the present invention;
- fig. 2 is a cross-sectional view of detail II of fig. 1;
- fig. 3 is a top view of detail III of fig. 2;
- fig. 4 is a schematic top view of a carrousel measuring system according to an embodiment of the present invention;
- 20 - fig. 5 is a schematic side view of a further embodiment of a carrousel system;
- fig. 6 shows a view of a further embodiment of a detail of the embodiment of fig. 5.

A beer bottle B (fig. 1) is clamped in each case between 25 a ring 1 and a head 2 and rotated rapidly and subsequently decelerated by a motor 3, which is coupled to head 2 via a gearing mechanism 4 and a brake 5. Ring 1 and head 2 are therefore mounted rotatably relative to a frame 6. In each case as soon as the bottle is decelerated, light is projected 30 from a light source 7 into the bottle and the movements of possible contaminants in the liquid are transmitted to an image processing station 9 using a CCD-camera 8, wherein they can be made visible on a screen 11 by a processor 10.

The opening in head 1 has a diameter d_1 of 45-50 mm, while the head has a height (h) of about 75 mm. In order to project sufficient light through this opening, the focal point of the beam is situated at a distance a of 25-30 mm
5 relative to a housing 12 of light source 7. In this preferred embodiment the focal length f amounts to about 185 mm.

The wavelength of infrared light lies in the range between about 600 and 6000 nm. In a preferred embodiment the light sources emit radiation between 700 nm and 1000 nm and
10 preferably between 700 nm and 800 nm.

The mounting bracket can take a very compact form through the use of infrared LEDs. A diameter of 5-11 centimetres hereby becomes possible. This is possible since the intensity of infrared light is greater in this application than the
15 intensity of visible light. The result hereof is that, despite the use of smaller mounting brackets, a sufficient signal is available to detect undesired particles in the product. It is recommended that the diameter of the illuminating means is smaller than the diameter of the
20 largest bottle processed in the carrousel.

In a future preferred embodiment there may even be a single LED with for instance a diameter of 0.5-1 cm (or even smaller), whereby the glass casing can be wholly or partially omitted.

25 Although it is conceivable to have focussing take place with a lens, for instance using a flat Fresnel lens, the light source 7 (fig. 2) is provided in the present embodiment with a flat window 21 of translucent material, preferably of hard and scratch-resistant material, whereby light source 7
30 is extremely robust. The casing is further provided with an inclining upper wall 22, whereby moisture and/or dirt in an industrial environment will not adversely affect the intensity of the light source. Because the window is

preferably placed in a surface inside the outer edge of the inclining upper wall using a seal (not shown), it can be easily and properly cleaned.

In this preferred embodiment (fig. 3) a large number of
5 LEDs 31, in the present embodiment about 350, are placed in a spherical holder 32, whereby a focussing action is obtained. The LEDs have a small exit angle in the order of magnitude of 1 -6 .

As can be further seen (fig. 2, fig. 3), different types
10 of LED 31, 33 are applied. These LEDs have a different wavelength. It hereby becomes possible to emit light of two different wavelengths using one mounting bracket. It is possible to apply several different LEDs in one mounting bracket.

15 In a further embodiment (not shown) the mounting bracket is provided with control means for varying the light intensity of the LEDs. A very light bottle can hereby be irradiated using one mounting bracket. It is also possible for instance to illuminate relatively thick or dark bottles
20 by varying the intensity, in order to ensure an efficient detection. Different types of bottle can hereby be processed very flexibly using a detection apparatus with fixedly mounted brackets. It is further possible to select a suitable intensity-wavelength combination for bottles with particular
25 characteristics, such as bottles with "scuffing", the known "Coca-Cola" bottles with non-homogeneous, light-transmitting capacities, shorter or thicker bottles, bottles with a product containing yeast such as determined types of beer, or bottles decorated by means of for instance a print or a
30 sleeve.

A plurality of the detection apparatuses of figure 1 is applied in a detection system 40 (fig. 4) which is coupled to conveyor belt 41 in which bottles are supplied in the

direction of arrow A. In this embodiment carrousel 42 comprises thirty-six detection units 44. In each of the detection units the bottles are rotated, stopped, illuminated and measured as described in the foregoing. For this purpose
5 cameras are arranged at the location of the final twelve positions of carrousel 42 before discharge-transfer unit 48. Once they have been transferred from conveyor belt 41 to carrousel 42 by means of feed-transfer unit 43, bottles can hereby be rotated and stopped and the image recordings can be
10 made before the bottles leave the carrousel again.

Carrousel 42 is shown in the embodiment of figure 5 without co-rotating mounting brackets for lighting. In this embodiment a segment-shaped mounting bracket 45 is placed on the underside of the carrousel. This mounting bracket
15 illuminates the bottles from the underside, precisely at the part where the cameras for making the image recordings are placed. The advantage of this arrangement is a simpler construction of the carrousel. Segment part 45 can optionally be subdivided into sub-segments, as shown in figure 5. An
20 advantage can be that the sub-segments can be controlled independently. Sub-segments can further for instance be replaced independently of each other. Segment part 45 is provided with LEDs (not shown) in similar manner as the mounting bracket of figure 3. As seen in the direction of the
25 arc the mounting bracket preferably takes a curved form in similar manner as in figure 2, for the purpose of focussing the light in the direction of the bottle moving above the mounting bracket. Such a mounting bracket can likewise be provided with a focussing closure such as closure 21 of
30 figure 2. An alternative to segment part 45 is the segment part shown in figure 6. Situated herein are mounting brackets 46 which are similar to those of figure 3. The advantages of the embodiment of figure 3 and figure 5 are hereby combined.

According to a further aspect of the present invention, the connection between computer 10 and camera 8 is embodied by means of a connection with a communication protocol.

Envisaged here is for instance FireWire or IEEE 1394. An
5 advantage hereof is the fast data transfer made possible by this standard. This protocol can be fitted into the system with relatively simple hardware.

A further application of a system according to the present invention is that the filling level of full bottles
10 can be checked. In transparent bottles the filling level could be detected by means of a detection system on the basis of visible light. An embodiment based on the present invention which makes use of infrared light provides the option of checking the filling level in non-transparent
15 bottles such as printed bottles, or a bottle packed for instance using a sleeve. The filling level of such bottles has been checked according to the prior art using X-radiation. Such a solution is very expensive and, in view of the nature of X-radiation, requires structural and
20 organizational measures which are unnecessary for making use of the present invention.

The above described apparatuses are able to determine very precisely the presence of foreign particles such as glass particles. Particularly in the case of particles of a
25 size which are harmful to health, as defined by institutions such as the FDA in the United States of America and the Health Protection Branch in Canada, these apparatus provide very good results, even in the first trials. The above described fine-adjustment to be established experimentally
30 subject to specific product-packaging combinations can result in improvement within the scope of this invention.

The present invention is not limited to the above described preferred embodiment thereof, the rights sought

being rather defined by the following claims, within the scope of which many modifications can be envisaged.

CLAIMS

1. Method for performing measurements on packagings, in
5 particular packagings which are at least slightly worn or
otherwise to a greater or lesser extent opaque to visible
light, which are filled with a liquid product, wherein the
packagings are irradiated with radiation in a wavelength
10 range suitable for the packaging with product, and images of
at least a part of the content of the packaging are recorded
for a predetermined time by image recording means, wherein
the obtained image information is analysed for information
indicating the presence of undesired particles, and a part of
15 the radiation has a frequency falling within the infrared
range.

2. Method for performing measurements on packagings, in
particular packagings which are at least slightly worn or
otherwise to a greater or lesser extent opaque to visible
light, which are filled with a liquid product, wherein the
20 packagings are irradiated with radiation in a wavelength
range suitable for the packaging with product, and images of
at least a part of the content of the packaging are recorded
for a predetermined time by image recording means, wherein
the obtained image information is analysed for information
25 indicating the presence of undesired particles, wherein a
distinction is made between information relating to particles
which normally form part of the product and information
relating to the undesired particles.

3. Apparatus for performing measurements on full
30 packagings of a liquid product, comprising:

-rotation means for rotating the packaging on its own
axis for setting the packaging with content into a rotating
movement,

-stopping means for stopping the rotation of the packaging,

-radiating means for irradiating the packaging,

5 -image recording means for making image recordings of at least a part of the content of the packaging,

-transmission means for transmitting the image recordings from the recording means to image analysis means,

10 -image analysis means for analysing image information of the image recordings for the availability of information relating to the presence of undesired particles.

4. Apparatus as claimed in claim 3, wherein radiating means are at least partly suitable for emitting radiation with a wavelength falling within the infrared range.

15 5. Apparatus as claimed in claim 3 or 4, wherein the image analysis means comprise means for distinguishing between information relating to particles which normally form part of the product and information relating to the undesired particles.

20 6. Apparatus as claimed in claim 3, wherein the radiating means comprise one or more first radiation sources which are suitable for emitting radiation with a first wavelength and at least second radiation sources which are suitable for emitting radiation with a second wavelength.

25 7. Apparatus as claimed in one or more of the claims 3-6, wherein the transmission means comprise means for communication by means of a communication protocol for the purpose of transmitting not only image information but also information for adjusting the image recording means from or via the analysis means.

30 8. Apparatus as claimed in claim 7, wherein two-way communication is possible.

9. Apparatus as claimed in one or more of the claims 3-8, wherein the diameter of the radiating means or a mounting

bracket thereof is smaller than eleven centimetres, and preferably not or only a little larger than the diameter of the packaging to be analysed.

10. Apparatus as claimed in one or more of the claims 5 3-9, comprising intensity control means for variable adjustment of the intensity of the radiating means depending on the packaging and/or the product.

11. Apparatus as claimed in one or more of the claims 3-10, comprising controlling means for constructing the 10 frequency spectrum of the radiating means depending on the packaging and/or the product.

12. Carrousel apparatus, comprising at least the components of one apparatus as claimed in one or more of the claims 3-11, wherein at least the rotation means and the 15 stopping means are movable along the substantially circular periphery of a carrousel.


13. Carrousel apparatus as claimed in claim 11, comprising stationary irradiating means placed close to the carrousel for illuminating packagings in the co-rotatable 20 measuring apparatus as they pass the irradiating means.

14. Carrousel as claimed in claim 12 or 13, wherein the stationary irradiating means comprise one mounting bracket.

15. Carrousel as claimed in claim 12, 13 or 14, wherein the stationary irradiating means comprise a number of 25 mounting brackets similar to those according to claims 3-11.

16. Carrousel as claimed in claims 12-15, wherein the irradiating means comprise a plurality of light sources.

17. Carrousel as claimed in claims 12-15, wherein different types of light source can emit radiation of a 30 different frequency.

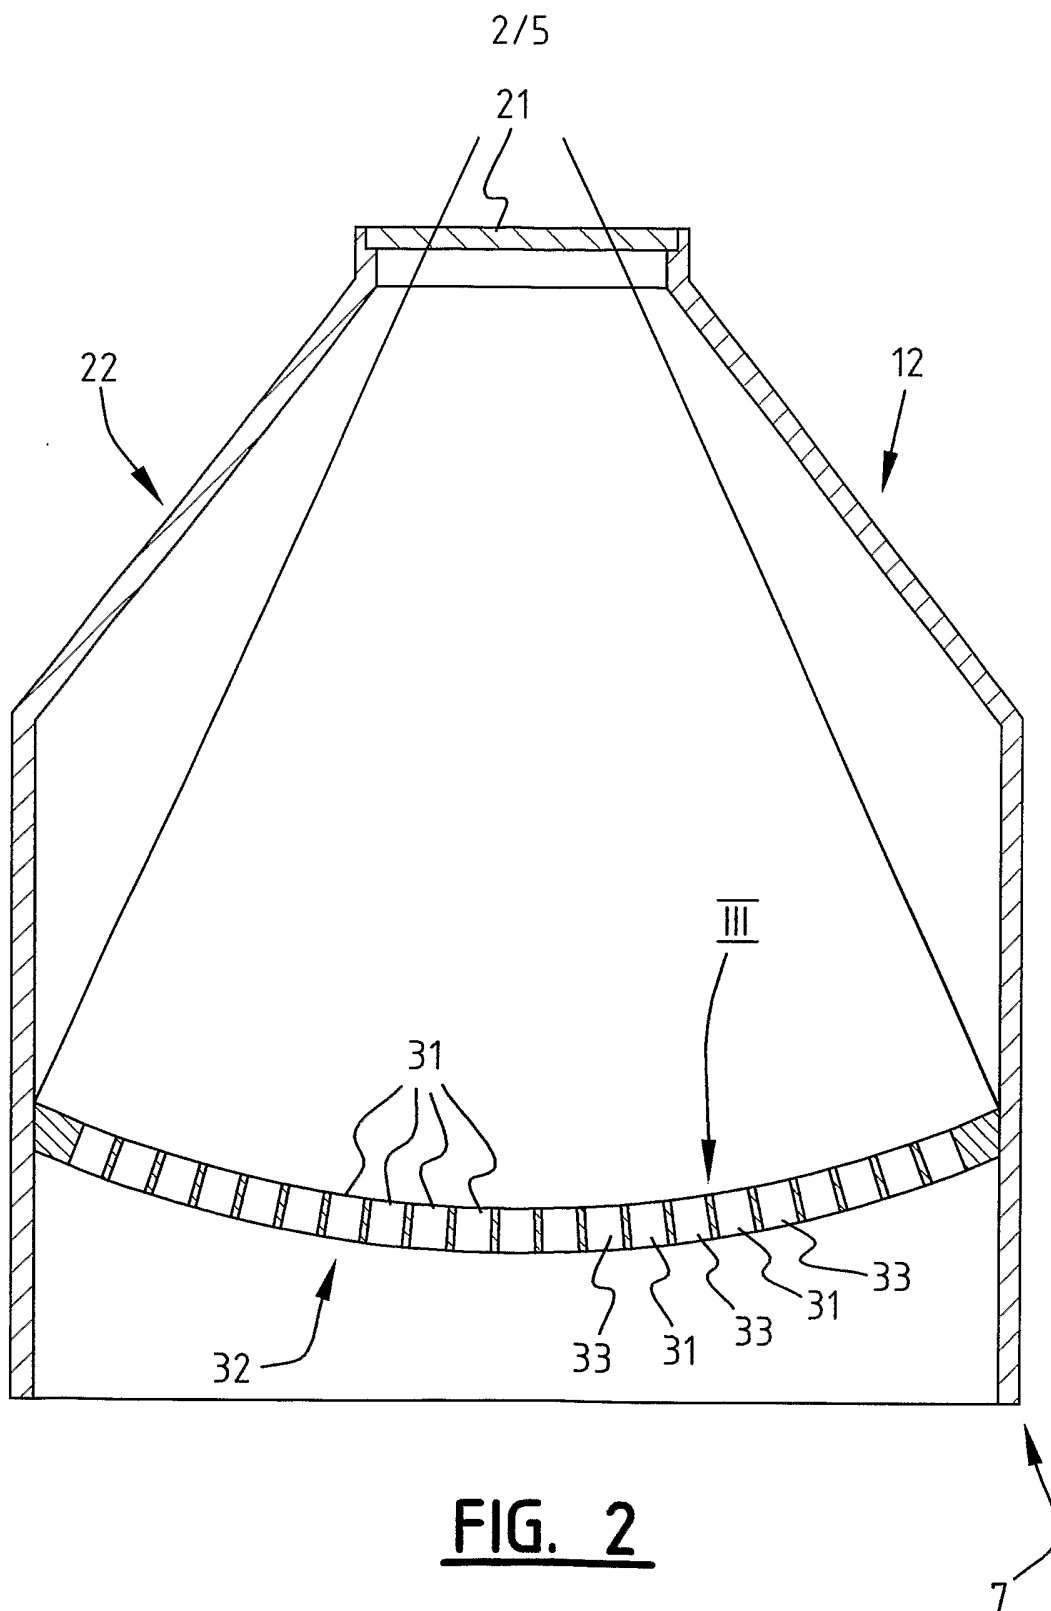

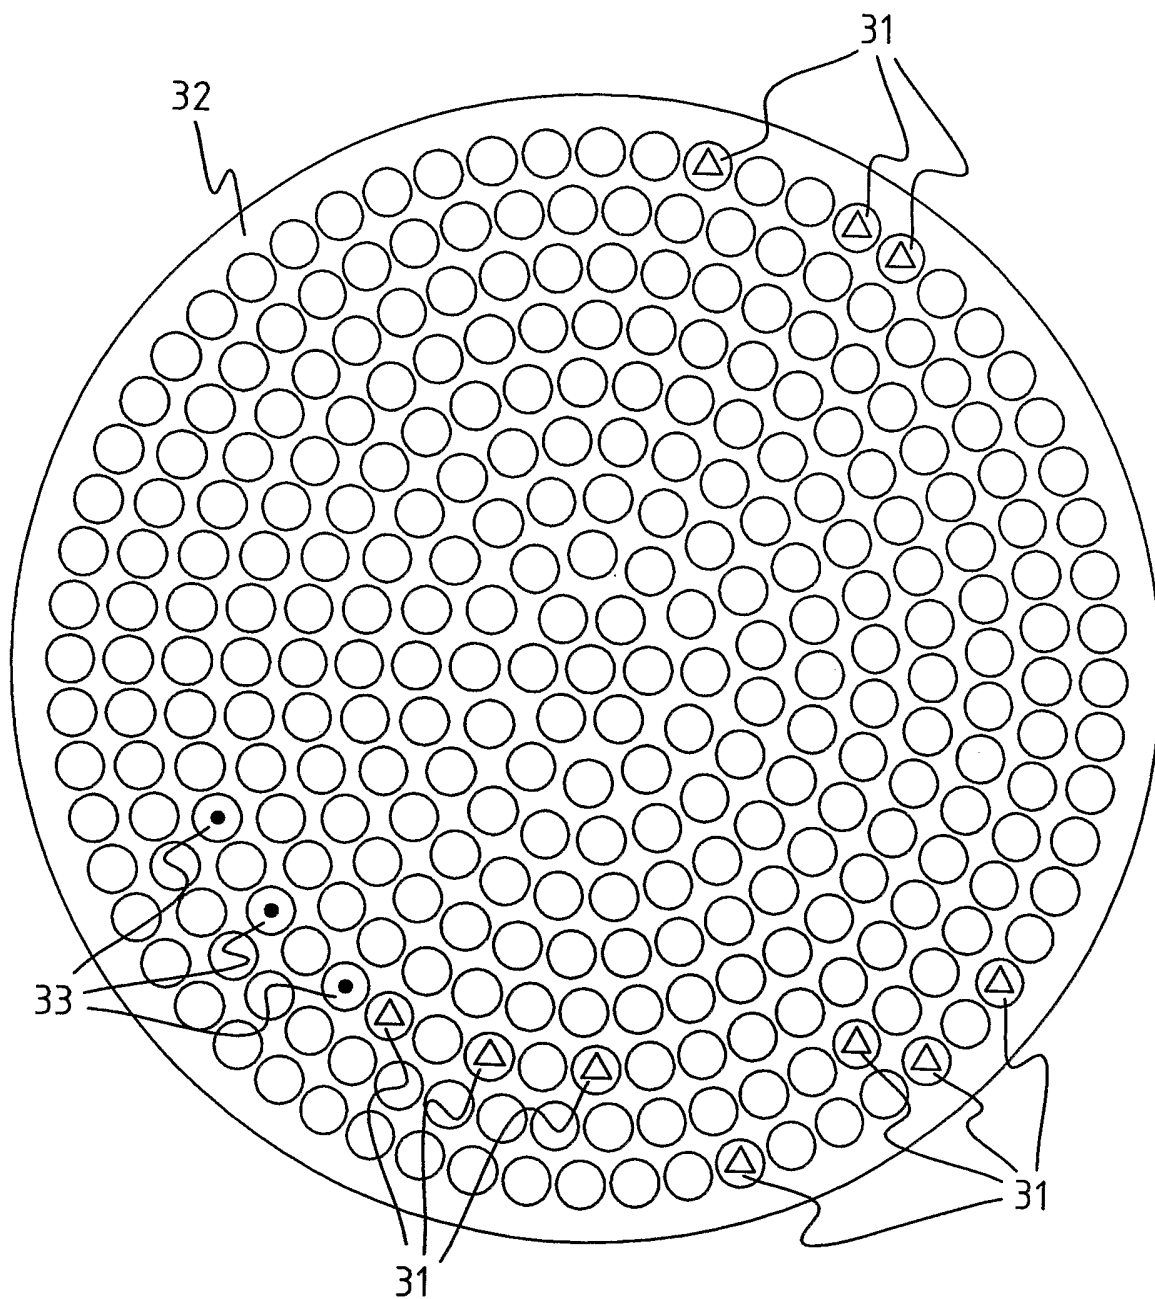


FIG. 3

4/5

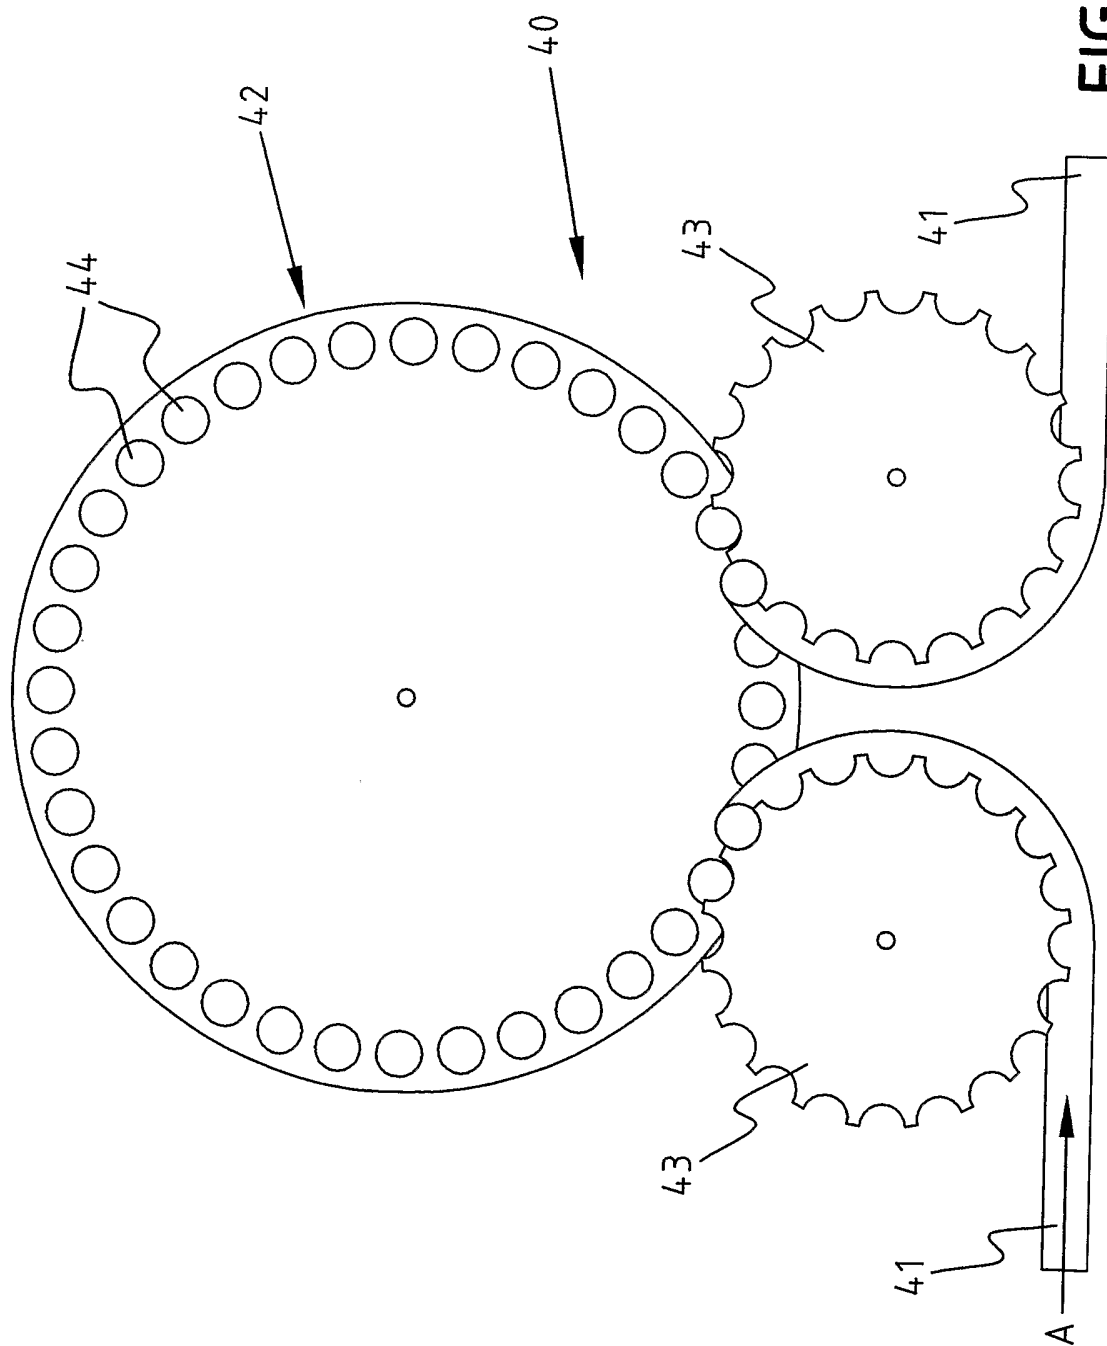


FIG. 4

5/5

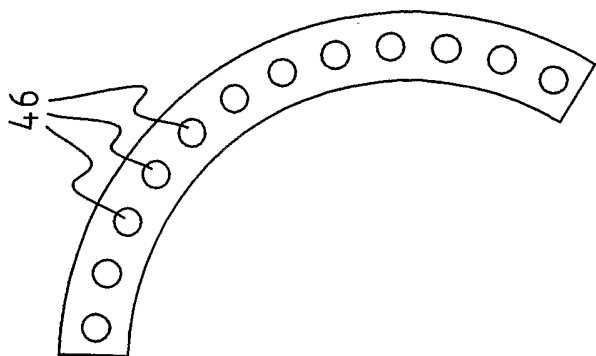


FIG. 6

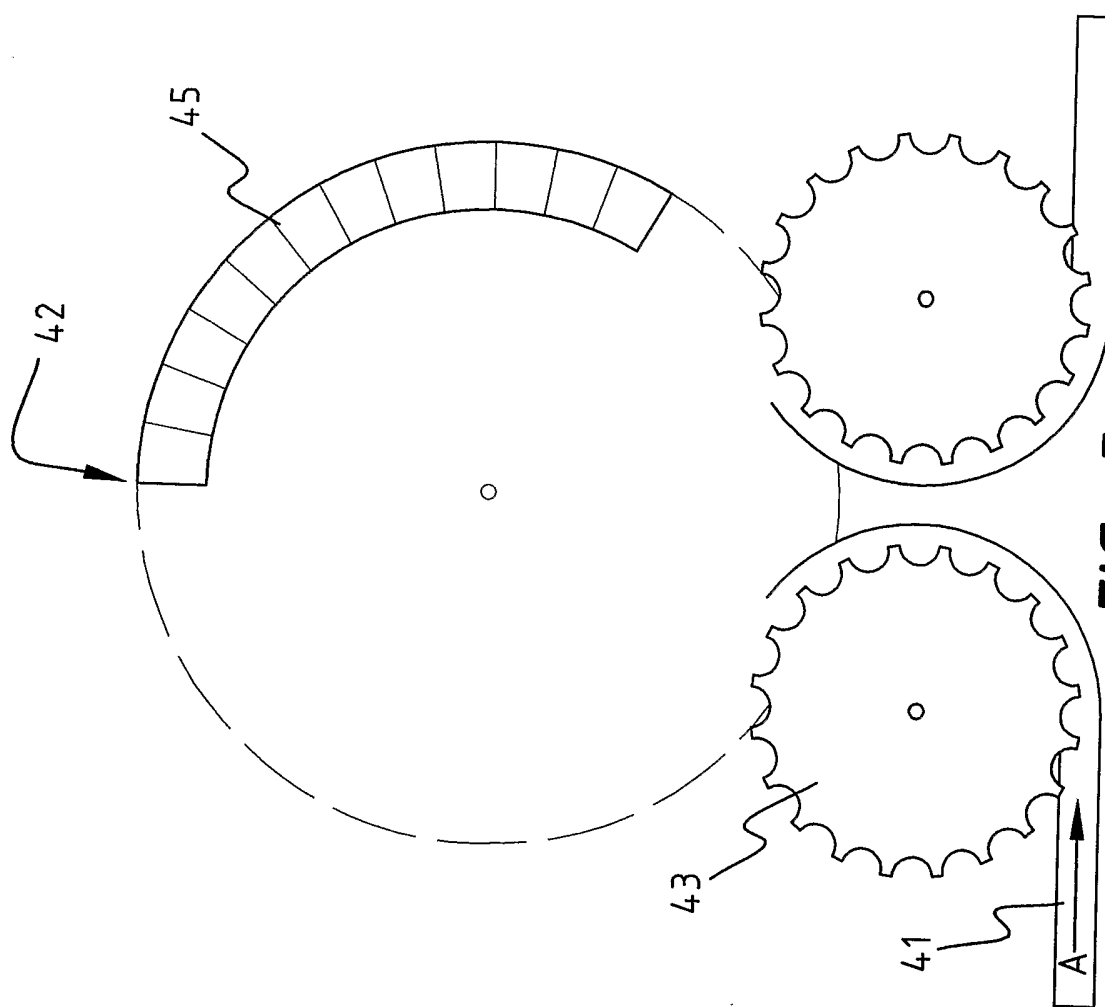


FIG. 5

INTERNATIONAL SEARCH REPORT

Int. Patent Application No
PCT/NL 02/00749

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 G01N21/90		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC 7 G01N B07C B65B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, PAJ, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category ^o	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 77499 A (AKKERMAN JENSEN PETER ;EAGLE VISION SYSTEMS B V (NL); JOORDENS SER) 21 December 2000 (2000-12-21) cited in the application	3, 10
Y	page 1, line 7 - line 21	4, 5, 10-12
A	page 3, line 10 - line 20 page 4, line 17 - line 23 figures 1-3	9
X	US 5 864 395 A (LAURBERG CLAUS KIRKEGAARD) 26 January 1999 (1999-01-26)	1, 2
Y	abstract column 3, line 24 - line 35 column 4, line 36 - line 54 column 5, line 8 - line 11 column 5, line 27 - line 34 column 6, line 25 - line 31	4, 5
	--- -/-- ---	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
^o Special categories of cited documents :		
A document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family		
Date of the actual completion of the international search 15 January 2003		Date of mailing of the international search report 22/01/2003
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Verdoodt, E

INTERNATIONAL SEARCH REPORT

International Application No
PCT/NL 02/00749

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 14956 A (HEINEKEN TECH SERVICES ;CRONSHAW ANTHONY JAMES (GB); HODGES CHRIST) 24 April 1997 (1997-04-24) cited in the application	2
A	column 3, line 32 - line 36 column 9, line 10 - line 33 ---	1,3
Y	DE 197 23 919 A (HITSCHFEL WERNER) 10 December 1998 (1998-12-10) column 3, line 13 - line 15 ---	12
Y	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 21, 3 August 2001 (2001-08-03) & JP 2001 116700 A (ENUTEKKU:KK;YAKULT HONSHA CO LTD; TOHO SHOJI KK), 27 April 2001 (2001-04-27)	11
A	abstract ---	6,16,17
Y	US 3 191 773 A (WYMAN JAMES H) 29 June 1965 (1965-06-29) column 2, line 36 - line 40 ---	10
A	US 4 087 184 A (KNAPP JULIUS Z ET AL) 2 May 1978 (1978-05-02) abstract column 2, line 35 - line 38 column 2, line 46 - line 50 -----	3

INTERNATIONAL SEARCH REPORT

 Int. Patent Application No
 PCT/NL 02/00749

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0077499	A	21-12-2000	NL 1012323 C2	19-12-2000
			AU 5714100 A	02-01-2001
			WO 0077499 A1	21-12-2000
US 5864395	A	26-01-1999	AU 4253996 A	03-07-1996
			BR 9509999 A	30-12-1997
			CA 2207710 A1	20-06-1996
			WO 9618883 A1	20-06-1996
			EP 0797767 A1	01-10-1997
WO 9714956	A	24-04-1997	AU 712622 B2	11-11-1999
			AU 4845996 A	07-05-1997
			BR 9610939 A	02-03-1999
			CA 2234217 A1	24-04-1997
			CN 1200175 A	25-11-1998
			EP 0858595 A1	19-08-1998
			JP 11513799 T	24-11-1999
			WO 9714956 A1	24-04-1997
			US 6275603 B1	14-08-2001
DE 19723919	A	10-12-1998	DE 19723919 A1	10-12-1998
JP 2001116700	A	27-04-2001	NONE	
US 3191773	A	29-06-1965	DE 1432363 A1	27-02-1969
			GB 928651 A	12-06-1963
US 4087184	A	02-05-1978	US 3966332 A	29-06-1976
			IT 1048490 B	20-11-1980
			BE 833255 A1	10-03-1976
			CA 1074887 A1	01-04-1980
			CH 620029 A5	31-10-1980
			CH 611419 A5	31-05-1979
			DE 2539766 A1	01-04-1976
			FR 2284877 A1	09-04-1976
			GB 1524043 A	06-09-1978
			GB 1524041 A	06-09-1978
			JP 51056287 A	17-05-1976
			NL 7510605 A	16-03-1976
			SE 414675 B	11-08-1980
			SE 7510090 A	07-05-1976