




(22) Date de dépôt/Filing Date: 1994/03/30
 (41) Mise à la disp. pub./Open to Public Insp.: 1994/10/01
 (45) Date de délivrance/Issue Date: 2004/12/21
 (30) Priorité/Priority: 1993/03/31 (5-73293) JP

(51) Cl.Int.⁵/Int.Cl.⁵ B30B 1/32, B21D 28/24
 (72) Inventeur/Inventor:
FUJITA, ORIYA, JP
 (73) Propriétaire/Owner:
AMADA COMPANY, LIMITED, JP
 (74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : MATRICE DE PERFORATION
 (54) Title: PUNCHING DIE

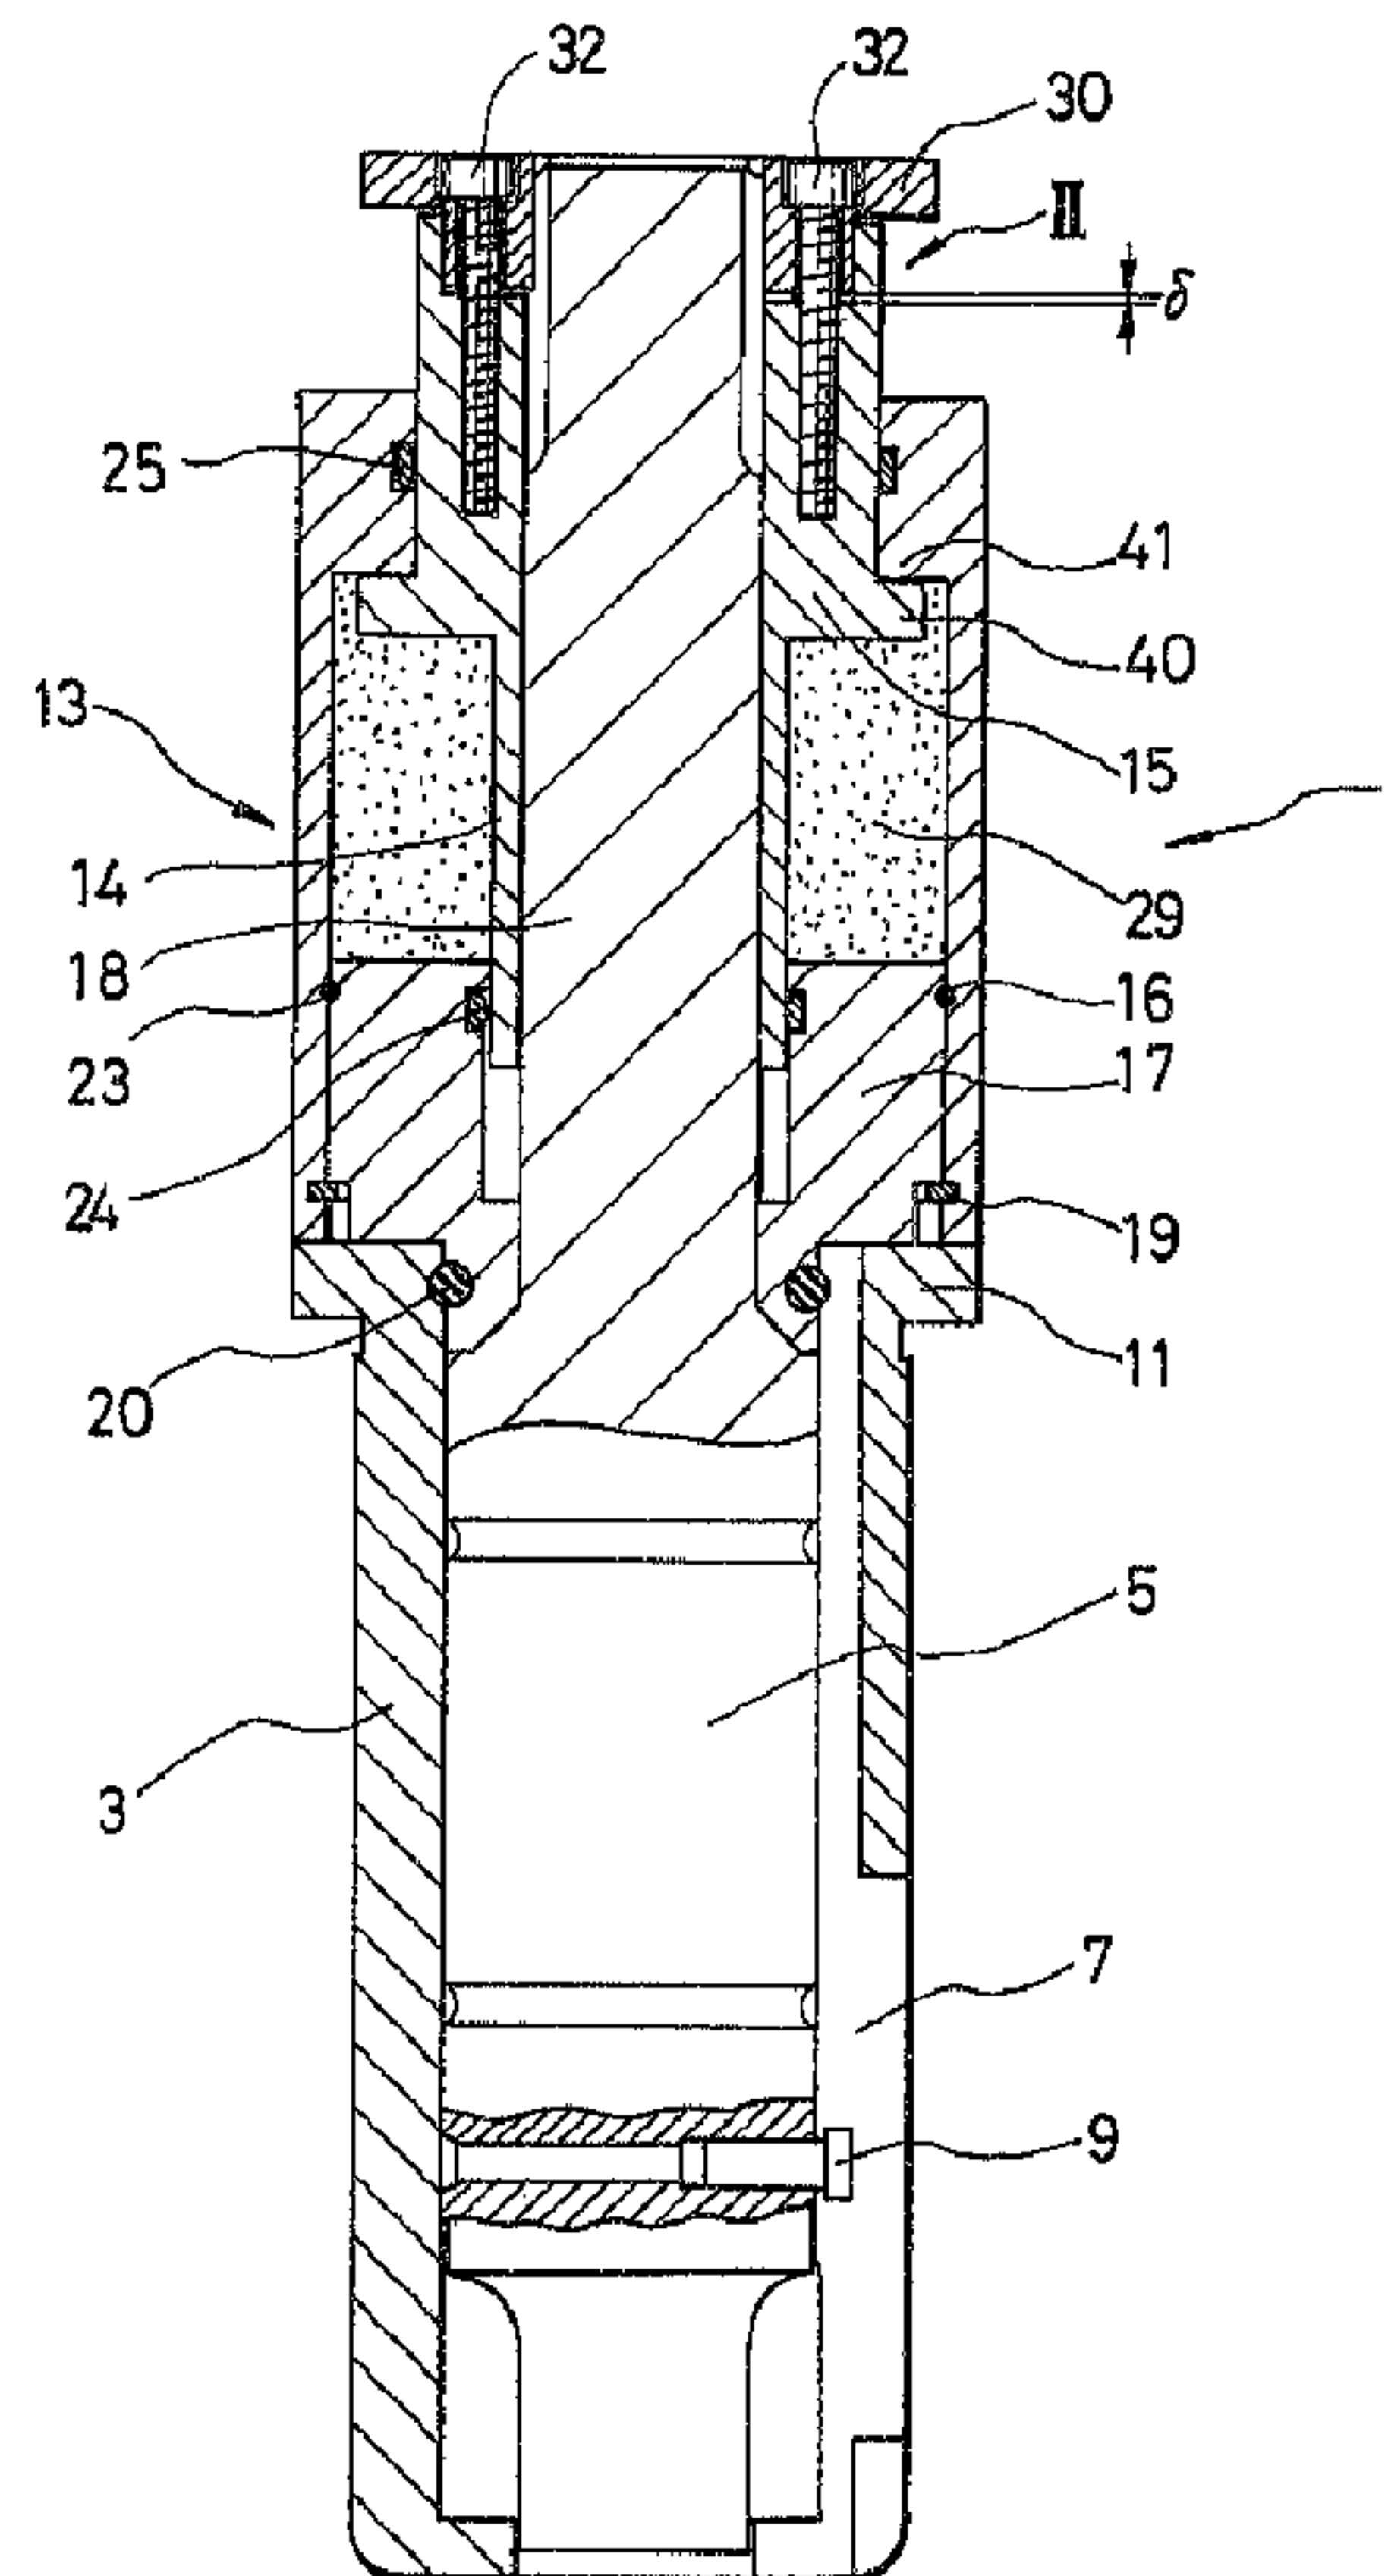

(57) **Abrégé/Abstract:**

A punching die includes a punch body, a punch guide fitted on the punch body movably up and down with respect to the punch body, a punch head provided on a top portion of the punch body, a gaseous spring provided between the punch body and the punch guide for pushing the punch guide downwardly with respect to the punch body. The gaseous spring is cylindrical and fitted on the punch body detachably, and includes device for restricting a maximum length of the gaseous spring.



ABSTRACT OF THE DISCLOSURE

A punching die includes a punch body, a punch guide fitted on the punch body movably up and down with respect to the punch body, a punch head provided on a top portion of the punch body, a gaseous spring provided between the punch body and the punch guide for pushing the punch guide downwardly with respect to the punch body. The gaseous spring is cylindrical and fitted on the punch body detachably, and includes device for restricting a maximum length of the gaseous spring.

15

20

25

30

35

PUNCHING DIE

5 BACKGROUND OF THE INVENTIONField of the Invention

10 The present invention relates to a punching die using a gaseous spring.

Description of the related Art

15 In the conventional punching die, a punch body movable up and down is fitted to a punch guide, and further a spring such as coil spring, a disk spring, an urethane spring, etc. are interposed between the retainer collar and a punch head fixed to the upper portion of the punch guide.

20 In the above-mentioned conventional technique, however, when the spring is assembled between the retainer collar and the punch head, there exists a problem in that the spring must be deformed to some extent so a strong force is required to deform the spring for assembly. In addition, when the cutting
25 edge of the punch body is required to be ground again, the retainer collar, the punch head and the spring must be all disassembled. In this disassembly work, since some parts are tightly assembled or fitted from the standpoint of the punch head structure, it is not easy to disassemble these parts.

30 Further, after the cutting edge of the punch body has been ground again, the length of the assembled punch body must be adjusted. In this case, since a strong force is required for assembly, there exists a problem in that the adjustment
35 work is not easy.

SUMMARY OF THE INVENTION

With these problems in mind, therefore, it is the object of the present invention to provide a punching die easy to assemble the spring, easy to adjust the punch body length after cutting edge of the punching body has been ground and
5 easy to manage the cutting edge of the punching body, for keeping the punching die under excellent conditions all the time.

To achieve the above-mentioned object, the present
10 invention provides a punching die. This punching die comprises a punch body, a punch guide fitted on said punch body movably up and down with respect to said punch body, a punch head provided on a top portion of said punch body, and a gaseous spring provided between said punch body and said punch
15 guide for pushing said punch guide downwardly with respect to said punch body.

In the punching die according to the present invention, the gaseous spring can be easily assembled to the punching die
20 in such a way that the piston is interposed between the cylinder and the cylinder end and further the gas charging chamber is filled with a gas. Further, the punch body is fitted to the piston and further the punch head is fixed to the upper portion of the piston.

25

Accordingly, since the length of the gaseous spring is initially determined when the piston is in contact with the cylinder at an initial stroke end, it is possible to assemble the punch body with the gaseous spring without any adjustment,
30 thus allowing an easy assembling after the cutting edge of the punch body has been ground. Since the punch head is fixed to the piston by a fastener, the force of the gas spring is not exerted on the punch head. Therefore it is easy to fix or detach the punch head.

35

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a cross-sectional view showing an embodiment of

the punching die according to the present invention; and

Fig. 2 is an enlarged cross-sectional view showing the portion designated by an arrow II in Fig. 1.

5

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

An embodiment of the punching die according to the present invention will be described hereinbelow with reference
10 to the attached drawings.

In Fig. 1, a punch guide 3 for constituting a part of a punching die 1 is fitted to an upper turret of a turret punch press (not shown), for instance so as to be movable up and
15 down. In this punch guide 3, a punch body 5 extending in the vertical direction is fitted movably in the vertical direction. In addition, the punch guide 3 is formed with a key groove 7 with which a key 9 of the punch body 5 is engaged. Accordingly, since the key 9 can be moved up and
20 down along the key groove 7, the punch body 5 can be also moved up and down relative to the punch guide 3. In this vertical movement of the punch body 5, the rotational motion of the punch body 5 is prevented by the presence of the key 9.

25 A gaseous spring 13 is mounted on a retainer collar 11 of the punch guide 3. The gaseous spring 13 includes an inner cylinder 14, a piston 15, an outer cylinder 16, and cylinder end 17. The inner cylinder 14 is fitted on an upper portion
18 of the punch body 5. The piston 15 is provided on an upper
30 portion of the inner cylinder 14. The outer cylinder 16 is fitted on the piston 15 movably in upward and downward directions with respect to said piston 15. The cylinder end 17 is provided in a lower portion of said outer cylinder 16. The cylinder end 17 is fixed to the outer cylinder 16 by a
35 ring 19. The cylinder end 17 is fitted on said inner cylinder 14 movably in upward and downward directions with respect to said inner cylinder 14. The cylinder end 17 is fixed to the punch guide 3 by an O-ring 20 which is interposed between a lower portion of the cylinder end 17 and a top portion of the

punch guide 3. A gas charging chamber 29 is defined by the inner cylinder 14, said piston 15, said outer cylinder 16, and said cylinder end 17.

5 Further, the piston 17 is provided with a female thread 21 on the upper inner circumference thereof, as depicted in Fig. 2. In the same way, a top portion of the punch body 5 is provided with a male thread 22 on an outer circumference thereof. Therefore, the piston 17 can be fixed to the punch
10 body 5 by mesh of the male thread 22 with the female thread 21.

Another O-ring 23 is fitted between the outer cylinder 16 and the cylinder end 17, and a ring 24 is additionally fitted
15 between the inner cylinder 14 and the cylinder end 17 for prevention of gas leakage. In addition, another ring 25 is fitted between the outer cylinder 16 and the piston 15 also for prevention of gas leakage.

20 A punch head 30 is provided at the top portion of the punch body 5. The punch head 30 is formed with a female thread 31 on the inner circumference thereof, as depicted in Fig. 2. Therefore, the punch head 30 can be fixed to the punch body 5 by mesh of the male thread 22 formed on the upper
25 circumference of the punch body 5 with the female thread 31 formed on the inner circumference of the punch head 30. In addition the punch head 30 is disposed above the piston 15 apart from the piston 15 in a axial direction. A gap δ is between the punch head 30 and the piston 15. The punch head
30 30 is fixed to the piston 15 by a plurality of bolts 32. These bolts 32 exert a attractive force on the punch head 30 and the piston 15 therebetween. Therefore the female thread 31 of the punch head 30 and the female thread 21 of the piston
35 punch head 30 and the piston 15 are fixed to the punch body 5 securely.

The lower portion of the piston 15 is provided with a flange 40, and the upper portion of the outer cylinder 16 is

provided with a reduced diameter portion 41 extending inwardly from said outer cylinder 16. The flange 40 is engaged with the reduced diameter portion 41, so that the length of the gaseous spring 13 can be determined at the initial stage of the assembly without any adjustment. Therefore it is possible to assemble the gaseous spring 13 to the punch body 5 easily without any adjustment. Further, the punch head 30 is fixed to the piston 15 perfectly by mesh of the male and female threads 22 and 21, 31 and additionally with the use of the bolts 32 via the gap δ .

Owing to the above-mentioned structure, the gaseous spring 13 can be assembled easily with the punch body 5 without any adjustment. Further the punch body 5 can be assembled and adjusted easily with the punch guide 3 after the cutting edge of the punch body 5 has been ground again. Therefore, the cutting edge of the punching body can be managed easily and thereby to keep the punching die under excellent conditions all the time.

The present invention can be modified without being limited to only the above-mentioned embodiment.

As described above, in the punching die according to the present invention, the gaseous spring can be easily assembled to the punching die, without any adjustment of the punch body length after cutting edge of the punching body has been ground. Therefore, the cutting edge of the punching body can be managed easily, so that it is possible to keep the punching die under excellent conditions all the time.

Claims:

1. A punching die comprising:
 - a punch body;
 - a punch guide fitted on said punch body movably up and down with respect to said punch body;
 - a punch head provided on a top portion of said punch body;
 - a gaseous spring provided between said punch body and said punch guide for pushing said punch guide downwardly with respect to said punch body;
 - said gaseous spring being cylindrical and detachably fitted on said punch body, and including means for restricting a maximum length of said gaseous spring;
 - said gaseous spring including:
 - an inner cylinder provided on said punch body;
 - a piston provided on an upper portion of said inner cylinder;
 - an outer cylinder fitted on said piston movably in upward and downward directions with respect to said piston;
 - a cylinder end provided in a lower portion of said outer cylinder and fitted on said inner cylinder movably in upward and downward directions with respect to said inner cylinder;
 - a gas charging chamber being defined by said inner cylinder, said piston, said outer cylinder, and said cylinder end;
 - said restricting means being means for engaging said outer cylinder with said piston; and
 - said engaging means including a flange provided on said piston and a reduced diameter portion extending inwardly from said outer cylinder.

2. The punching die of claim 1, wherein said punch head is screwed on a top portion of the punch body,
 - wherein said piston is screwed on said top portion of the punch body under said punch head,

wherein said punch head is fixed to the said piston by a plurality of bolts.

3. The punching die of claim 1 or 2,
wherein said punch body is configured so as to be inserted into said inner cylinder from an underside of said inner cylinder during assembly.

4. The punching die of claim 2 or 3,
wherein said punch head is separate from said piston in an axial direction.

FIG. 1

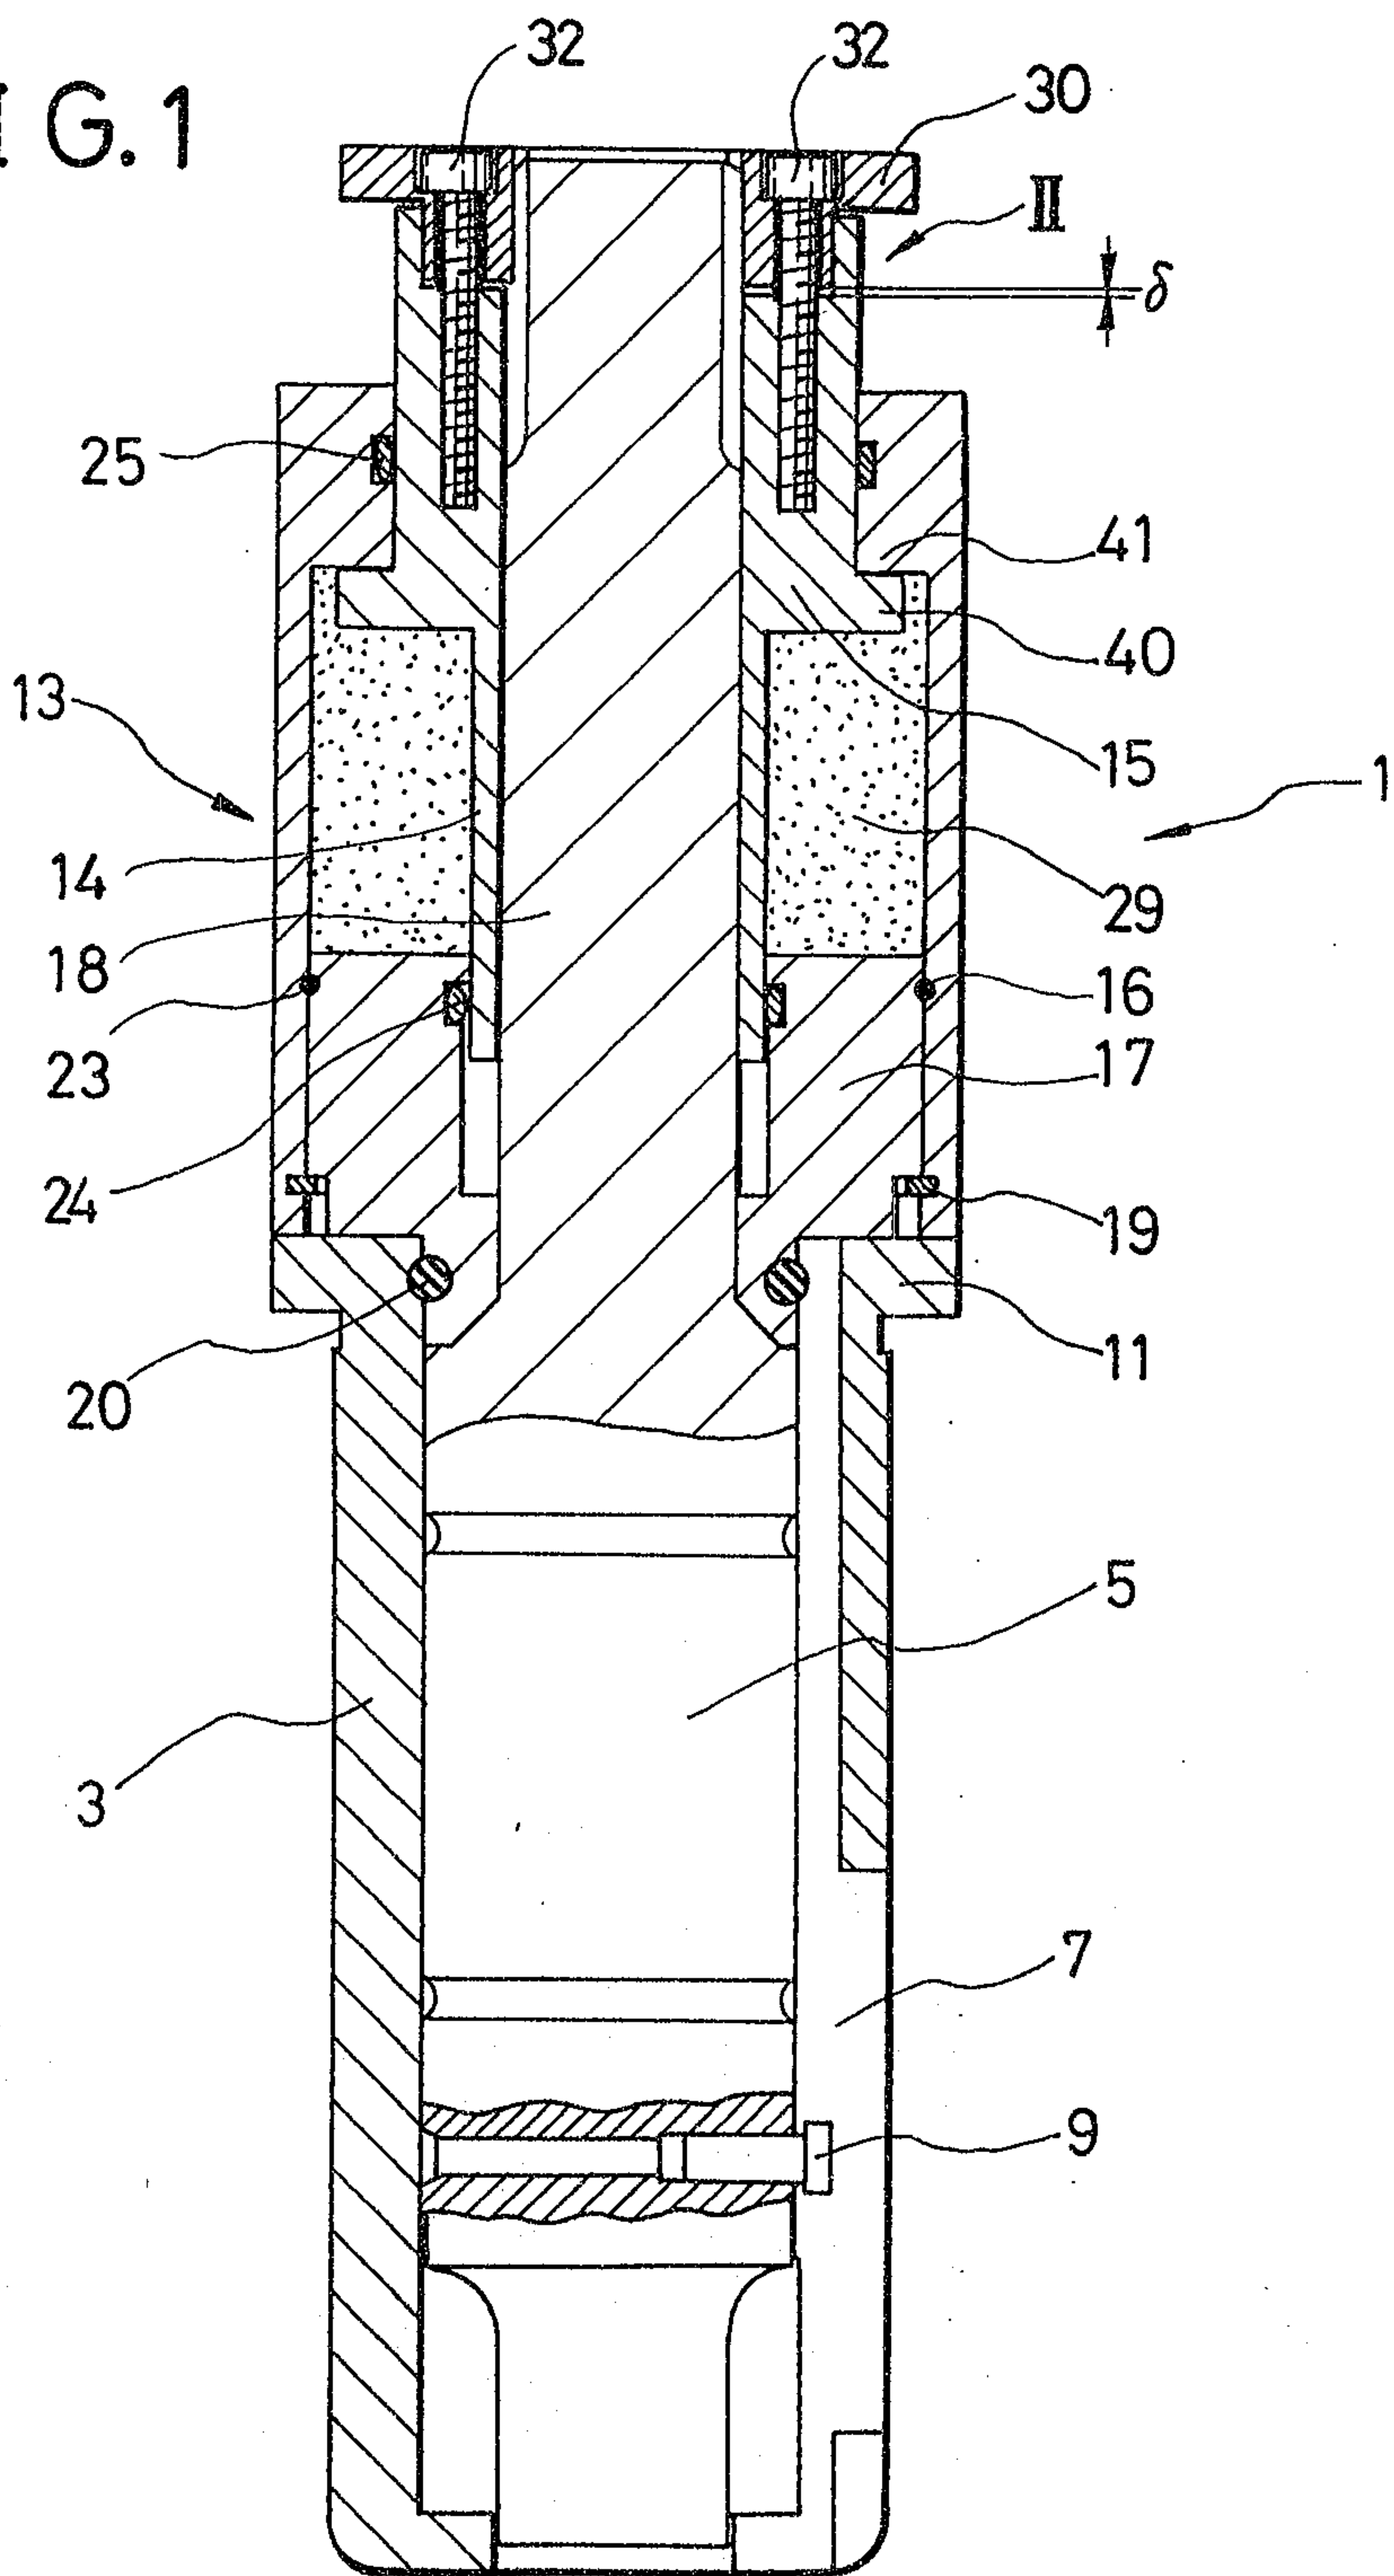


FIG. 2

