

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 February 2008 (21.02.2008)

PCT

(10) International Publication Number
WO 2008/021387 A2

(51) International Patent Classification:
G06F 19/00 (2006.01)

(74) Agents: JACOBSON, Harvey Jr. et al.; Jacobson Holman, PLLC, 400 Seventh Street, N.W., Washington, District Of Columbia 20004 (US).

(21) International Application Number:
PCT/US2007/018045

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 16 August 2007 (16.08.2007)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
60/838,151 17 August 2006 (17.08.2006) US
60/838,152 17 August 2006 (17.08.2006) US
60/838,153 17 August 2006 (17.08.2006) US
60/838,155 17 August 2006 (17.08.2006) US
60/838,201 17 August 2006 (17.08.2006) US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicants and
(72) Inventors: HOVIS, Gregory [US/US]; 355 Heath Way, Martinez, Georgia 30907 (US). RANSON, William [US/US]; 4015 Devereaux Road, Columbia, South Carolina 29205 (US). VACHON, Reginald [US/US]; 1414 Epping Forest Drive, Atlanta, Georgia 30319 (US).

Published:
— without international search report and to be republished upon receipt of that report

(54) Title: MULTI-FORMAT, BINARY CODE SYMBOL FOR NON-LINEAR STRAIN MEASUREMENT

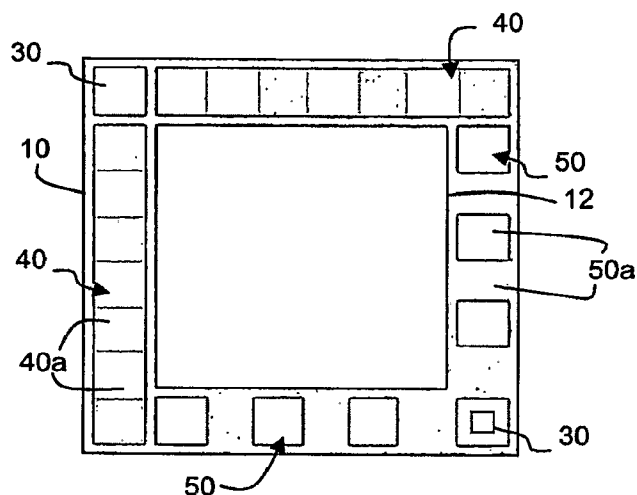

(57) Abstract: A binary code symbol for non-linear strain measurement that can be constructed in any geometric shape having a solid, continuous perimeter containing straight line segments. The symbol includes finder cells to "orient" the symbol in order to associate strain measurements with physical dimensions; and contains encoded data in "data regions" and/or "utility regions." The data and utility regions can be distinct and separate, combined, exclusive (i.e. data regions and no utility regions, or utility regions and no data regions), or omitted. The data "density" can be varied depending upon the application, by varying the number of distinct data or utility cells present in the data regions or utility regions.

WO 2008/021387 A2

MULTI-FORMAT, BINARY CODE SYMBOL FOR NON-LINEAR STRAIN MEASUREMENT

5 CROSS-REFERENCE TO RELATED APPLICATIONS

The present patent application is based on, and claims priority from, U.S. provisional Application No. 60/60/838,151, 60/838,152, 60/838,153, 60/838,155, and 60/838,201, all filed August 17, 2006, which are incorporated herein by reference in its entirety.

10

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a binary code symbol for non-linear strain measurement. More specifically, the invention relates to an improvement of the binary code symbol for non-linear strain measurement that is the subject of co-pending U.S. Published Application No. 2006-0289652-A1 (Application Serial No. 11/167,558, filed June 28, 2005) for "Binary Code Symbol for Non-Linear Strain Measurement and Apparatus and an improvement of Method for Analyzing and Measuring Strain"; and in particular, additional examples of binary code symbol formats that can encode a range of data values using an error-correcting code (ECC) technique.

20

2. Related Art

There are numerous one-dimensional (1D) and two-dimensional (2D) symbols in use today, and most utilize a majority of the symbol's surface area to store the encoded

information. These symbols are typically comprised of large, distinguishable blocks, dots, or bars called “cells” that enable data encoding. The spacing, relative size, state (i.e. black or white), or some combination of cell attributes is exploited to encode and decode data. These types of symbols are designed for inexpensive, low-resolution reading devices (or sensors); therefore cell dimensions can be relatively large with respect to the overall symbol size.

While many applications require that a symbol’s encoded information be “read,” there are additional applications that warrant a detailed accounting of the symbol’s spatial characteristics. Metrology is one such application, which involves making precise geometric measurements of the symbol’s features. Symbols optimized for “reading” purposes are not necessarily, nor are they normally, optimized for “metrology” purposes.

Examples of common symbols are a UPC symbol, a Data Matrix symbol, and a MaxiCode symbol, which are shown in FIGURES 1A-1C of U.S. Application Serial No. 11/167,558, the disclosure of which is incorporated herein by reference in its entirety. As shown in FIGURES 1A-1C of U.S. Published Application No. 2006-0289652-A1, typical 1D and 2D symbols utilize cell arrangements that result in a broken (or non-continuous) symbol perimeter. Additionally, each has cells that are distributed somewhat uniformly across the entire symbol area. These characteristics are an efficient use of the symbol’s surface area as a data encoder/decoder, but can cause a reduction in accuracy for certain types of deformation analyses, e.g. strain measurement.

Sensor resolution for machine-enabled metrology is typically higher than the sensor resolution required to simply encode and decode symbol information. Therefore with high-resolution sensors, it is possible to relax some of the “reader” requirements

placed on existing symbol design, and produce symbols specifically for deformation/strain measurement.

It is to the solution of these and other problems that the present invention is directed.

5

SUMMARY OF THE INVENTION

It is accordingly a primary object of the present invention to provide a binary code symbol for non-linear strain measurement having a unique geometry and attributes.

10 It is another object of the present invention to provide a binary code symbol for non-linear strain measurement having features that enhance deformation and strain measurement.

It is still another object of the present invention to provide a binary code symbol for non-linear strain measurement that is designed specifically for perimeter-based deformation and strain analysis.

15 It is still another object of the present invention to provide a perimeter strain analysis method for use with a binary code symbol for non-linear strain measurement.

It is still another object of the present invention to provide a binary code symbol for non-linear strain measurement with near-perimeter data encoding.

20 It is another object of the present invention to provide a binary code symbol for non-linear strain measurement that can encode a range of data values using an error-correcting code ("ECC") technique.

These and other objects of the invention are achieved by the provision of a binary code symbol for non-linear strain measurement that can be constructed in any geometric

shape having a perimeter constructed of line segments. "Line segment" is used herein to designate a part of a line that is bounded by two end points, and that can be straight or curved and can be continuous or include discontinuities. Examples of geometric shapes composed of straight line segments include, but are not limited to, three-, four-, and six-
5 sided shapes.

The symbol includes one or more finder cells to "orient" the symbol in order to associate strain measurements with physical dimensions; and contains encoded data in "data regions" and/or "utility regions."

The data and utility regions can be distinct and separate, combined, exclusive (i.e.
10 data regions and no utility regions, or utility regions and no data regions), or omitted.

The data "density" of the symbol can be varied depending upon the application, by varying the number of distinct data or utility cells present in the data regions or utility regions.

A non-linear strain gage in accordance with the invention comprises a target
15 associated with an object for which at least one of strain and fatigue damage is to be measured, sensor means for pre-processing a detectable physical quantity emitted by the target and output data representing the physical quantity, the sensor means being compatible with the detectable physical quantity, means for analyzing the data output by the sensor means to define the binary code symbol, and means for measuring the strain on
20 the object directly based on the pre-processed and analyzed data, wherein the target comprises the binary code symbols in accordance with the present invention.

In another aspect of the invention, the non-linear strain gage further comprises means for utilizing the strain measurement to provide information on at least one of

fatigue damage and strain hysteresis for materials of known and unknown mechanical properties.

In a method of measuring strain on an object directly, in accordance with the present invention, the binary code symbol is associated with an object in such a way that
5 deformation of the binary code symbol and deformation under load of the object bear a one-to-one relationship, wherein the binary code symbol emits a detectable physical quantity. The changes in the binary code symbol are identified as a function of time and change in the load applied to the object. The changes in the binary code symbol is then
into a direct measurement of strain.

10 Other objects, features, and advantages of the present invention will be apparent to those skilled in the art upon a reading of this specification including the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

15 The invention is better understood by reading the following Detailed Description of the Preferred Embodiments with reference to the accompanying drawing figures, in which like reference numerals refer to like elements throughout, and in which:

FIGURES 1A-1C illustrate examples of different shapes of a binary code symbol in accordance with the present invention.

20 FIGURES 2A-2F illustrate examples of finder cell arrangements for a binary code symbol in accordance with the present invention having a shape as shown in FIGURE 1B.

FIGURES 3A-3F illustrate examples of data region and/or utility region arrangements for a binary code symbol in accordance with the present invention having a shape as shown in FIGURE 1B.

FIGURES 4A-4E illustrate examples of data densities for a binary code symbol in
5 accordance with the present invention having a shape as shown in FIGURE 1B.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In describing preferred embodiments of the present invention illustrated in the drawings, specific terminology is employed for the sake of clarity. However, the
10 invention is not intended to be limited to the specific terminology so selected, and it is to be understood that each specific element includes all technical equivalents that operate in a similar manner to accomplish a similar purpose.

A binary code symbol for non-linear strain measurement in accordance with the present invention is designed specifically for perimeter-based deformation and strain
15 analysis, while providing for robust, self-checking/self-correcting data encoding. Specific geometric features of the symbol are optimized for perimeter-based, non-linear strain measurement using discrete or analog deformation analysis methods.

The invention relates to an improvement of the binary code symbol for non-linear strain measurement that is the subject of U.S. Published Application No. 2006-0289652-
20 A1 for "Binary Code Symbol for Non-Linear Strain Measurement and Apparatus and Method for Analyzing and Measuring Strain" and as described in U.S. Patent No. 6,934,013 B2 for "Compressed Symbology Strain Gage." In particular, the present invention provides additional examples of binary code symbol formats.

The binary code symbol can be constructed in any geometric shape having an outer perimeter constructed of line segments, and enables data encoding near the symbol's perimeter. This unique combination of attributes significantly increases both the quantity and quality of distantly-spaced symbol features. These unique characteristics enable high-accuracy deformation analysis using discrete or analog techniques. Data is encoded in proportionately smaller regions of the symbol (compared to current symbols); therefore a higher resolution sensor is required to read and analyze the symbol.

In addition to the outer perimeter, the binary code symbol also can have an inner perimeter, which is constructed of line segments, although in general an inner perimeter is not required. The inner perimeter can be an enlargement of the outer perimeter having a fractional scale factor greater than 0 and less than 1; that is, it can be the same as the outer perimeter, but smaller, but this is not a requirement. Also, the inner and outer perimeters can be concentric, but this also is not a requirement. Further, it is not a requirement that the inner and outer perimeters have the same shape or be constructed in the same fashion.

Examples of first, second, and third binary code symbol shapes 100a, 100b, and 100c are shown respectively in FIGURES 1A-1C, each having an outer perimeter 10 and an inner perimeter 20. Although FIGURES 1A-1C show regular polygons having three, four, and six sides, respectively, the binary code symbol can have a perimeter constructed from any number of line segments, and need not be a polygon.

The binary code symbol includes at least one distinct feature 30 to "orient" it, in order to associate strain measurements with physical dimensions. Such features are referred to as "finder cells." Using the "rectangular" shape 100b shown in FIGURE 1B, several examples of finder cell arrangements are shown in FIGURES 2A-2F. Similar

finder-cell arrangements can be constructed for any binary code symbol geometric shape. At least one finder cell 30 is required to determine the orientation of the binary code symbol, and two or more can be utilized for redundancy and to enable robust algorithms to determine symbol orientation.

5 The binary code symbol contains encoded data in “data regions” 40 and may also contain encoded data in “utility regions” 50. As shown in FIGURES 4A-4E, each data region 40 is made up of any number of data cells 40a, and as shown in FIGURES 4C-4E, can contain multiple rows 40b of data cells 40a. Also as shown in FIGURES 4A-4E, if present, the utility regions are made up of utility cells 50a with alternating appearance
10 (i.e. foreground, background, foreground, etc.). There are no restrictions placed on cell foreground and background appearance except that sufficient contrast is provided to enable a sensor to determine cell state.

 The utility regions 50 assist in symbol location, orientation, and analysis. In addition, the utility regions 50 can contain multiple rows 50b of utility cells 50a, as
15 shown in FIGURES 4C-4E, which can be used to store auxiliary information and/or codes (e.g. vendor ID, application ID, function ID, version information, date/time, materials ID/info, etc.)

 Using just the “rectangular” shape 100b shown in FIGURE 1B, several examples of data/utility region arrangement are shown in FIGURES 3A-3F. The data and utility
20 regions 40 and 50 can be distinct and separate (FIGURES 3A and 3B), combined (FIGURES 3C and 3D), exclusive (i.e. data regions and no utility regions (FIGURES 3C and 3D), or omitted (FIGURES 3E and 3F): More specifically, FIGURES 3A and 3B show data regions 40 and utility regions 50 designated by different shades of gray, as a

result of which, the data regions 40 and the utility regions 50 are separate and distinct. It does not matter which region is shaded which color, as the regions are interchangeable. FIGURES 3C and 3D show all regions 40 and 50 shaded a single color, as a result of which the data and utility regions 40 and 50 are combined. The combined data and utility
5 regions 40 and 50 can encode all data, all utility, or some combination within the cell rows as shown in FIGURES 4A-4E. With respect to FIGURES 3E and 3F, in which the data and utility regions are omitted, the perimeter analysis for non-linear strain measurement does not require that data or utility regions be present.

Similar arrangements of data and/or utility regions can be constructed for any
10 binary code symbol geometric shape. Various finder-cell arrangements can also be used in combination with different data region and/or utility region arrangements.

For a binary code symbol containing at least one of one or more data region and one or more utility regions, the data "density" can also be varied depending upon the application. The density depends upon the number of distinct data or utility cells
15 respectively present in the data regions or the utility regions. As disclosed in U.S. provisional application No. 60/838,153, refinement of the marking process can be used to increase the density of the data. More specifically, the cells must have well defined (not fuzzy) edges, and as the imaging lens magnifies the image and the edges, the selection of the marking process affects the quality of the edges. If a short wave length laser is used
20 for marking, as compared to a long wave laser, the definition and quality for the edge can be refined and smaller cells can be produced.

Using just the "rectangular" shape shown in FIGURE 1B, several examples of data density are shown in FIGURES 4A-4E. The data density can be can be varied by

changing the width of distinct data or utility cells respectively present in the data regions or the utility regions, and/or by changing the number of distinct data or utility cells respectively present in the data regions or the utility regions. Although data densities of 4, 28, 56, 84, and 112 data cells are shown (in FIGURES 4A-4E, respectively), a binary code symbol can be constructed of any number of data cells. Similar data densities can be constructed for any binary code symbol geometric shape. The examples in FIGURES 4A-4E show regions with equal numbers of cells; however this is not a requirement, and different regions may contain different numbers of cells.

Various finder-cell arrangements can also be used in combination with different data cell arrangements and data densities. Additional high-density configurations are described in our co-pending U.S. provisional application No. 60/838,151, filed August 17, 2006 and entitled "High Density Binary Code Symbol," the disclosure of which is incorporated herein in its entirety.

Inner and outer quiet regions are designated whereby the data regions, the utility regions, and the finder cells can be distinguished from their background.

As disclosed in U.S. Published Application No. 2006-0289652-A1, in a binary code symbol in accordance with the present invention, information can be encoded via the symbol's data cells. An individual data cell represents a single bit of information; that is, its state is either "on" or "off" (i.e. "1" or "0"). The order and state of individual bit values combine to represent an encoded data value. The binary contribution of a single data cell is indicated by the cell's state, which is determined by a sensor. Data cells that have the same appearance as the symbol's background (or quiet region) are considered

“on” or bit value “1.” Data cells that have the same appearance as the foreground (or perimeter) are considered “off” or bit value “0.”

It is desirable that encoded data be somewhat “self correcting” in the event that part of the symbol is damaged, scratched, or otherwise degraded. Therefore, the binary data in each data region of the symbol is encoded using an error-correcting code (ECC) algorithm. The ECC algorithm combines vector-space mathematics and set theory to convert numeric quantities into encoded values that provide limited self-checking and self-correcting capability during decoding. The use of ECC algorithms plus data redundancy provides for robust encoding and limited protection against data loss.

The ECC algorithm used is a Hamming 7-4 technique. This encoding method takes the original data value (un-encoded) and breaks it into 4-bit “words.” Each 4-bit word is encoded into a 7-bit word containing the original value and three “check bits.” This method permits the original 4-bit word to be recovered in the event that the sensor cannot determine the state of one of the 7-bit word’s bits. Therefore, the original data value can be recovered if up to one bit in each word is lost.

The Hamming technique used has an encoding “efficiency” of 0.571. This is calculated as the ratio of the number of original bits (N_1) to the number of encoded bits (N_2). For the example in Figure 3, $N_1 = 16$ and $N_2 = 28$, giving:

$$E = \frac{N_1}{N_2} = \frac{16}{28} = 0.571$$

Therefore the data capacity (or number of unique combinations of data values) for a single data region in a symbol that uses ECC encoding, expressed in terms of the number of data cells per region (N_2) is roughly:

$$C = 2^{N_2 \cdot E}$$

The symbol is specifically designed to enable high-accuracy deformation analysis. The symbol's solid perimeter and perimeter-encoding technique are unique attributes that significantly increase both the quantity and quality of distantly-spaced symbol features. These qualities improve the accuracy of deformation analyses using discrete or analog
5 machine-enabled techniques.

The multi-format, binary code symbol in accordance with the present invention can be used as the target of a non-linear strain gage for measuring the strain on an object under load, as described in U.S. Published Application No. 2006-0289652-A1. A non-linear strain gage employing the high density, rectangular, binary code symbol as a target
10 also uses the same theory, algorithms, and computer programs as described in U.S. Published Application No. 2006-0289652-A1, which (1) identify the binary code symbols and the changes therein as a function of time and change in the load, (2) translate the changes in the binary code symbols into strain, and (3) display it in a suitable format.

The perimeter analysis for non-linear strain measurement does not require that
15 data or utility regions be present. Therefore, symbols as described above in which the data and utility regions are exclusive (i.e. data regions and no utility regions as shown in FIGURES 3C and 3D, or utility regions and no data regions, or omitted (as shown in FIGURES 3E and 3F) can be used as targets for non-linear strain measurement.

The binary code symbol in accordance with the present invention can be used as
20 the target of a non-linear strain gage for measuring the strain on an object under load, as described in U.S. Published Application No. 2006-0289652-A1. Deformation analysis of the symbol's spatial characteristics and strain measurement can be carried out as

disclosed in U.S. Published Application No. 2006-0289652-A1, using the methods, algorithms, and apparatus as disclosed therein.

A non-linear strain gage employing the binary code symbol as a target also uses the same computer programs as described in U.S. Published Application No. 2006-
5 0289652-A1, which (1) identify the binary code symbols and the changes therein as a function of time and change in the load, (2) translate the changes in the binary code symbols into strain, and (3) display it in a suitable format.

It is to be understood that the present invention is not limited to the illustrated user interfaces or to the order of the user interfaces described herein. Various types and styles
10 of user interfaces may be used in accordance with the present invention without limitation.

Modifications and variations of the above-described embodiments of the present invention are possible, as appreciated by those skilled in the art in light of the above teachings. It is therefore to be understood that, within the scope of the appended claims
15 and their equivalents, the invention may be practiced otherwise than as specifically described.

WHAT IS CLAIMED IS:

1. A binary code symbol for perimeter-based, non-linear strain measurement using discrete or analog deformation analysis methods, comprising:
 - an outer perimeter constructed of line segments,
 - 5 orienting means for determining the orientation of the binary code symbol, in order to associate strain measurements with physical dimensions, wherein the orienting means is bounded at least in part by the outer perimeter, and
 - inner and outer quiet regions for distinguishing the orienting means from its background.
- 10 2. The binary code symbol of claim 1, wherein the orienting means comprises at least one distinct feature.
3. The binary code symbol of claim 2, wherein the at least one distinct feature is a finder cell.
4. The binary code symbol of claim 1, wherein the orienting means comprises at
15 least two distinct features to provide redundancy and to enable robust algorithms to determine symbol orientation.
5. The binary code symbol of claim 1, further comprising an inner perimeter constructed of line segments.
6. The binary code symbol of claim 5, wherein the inner perimeter is an enlargement
20 of the outer perimeter having a fractional scale factor greater than 0 and less than 1.
7. The binary code symbol of claim 5, wherein the inner and outer perimeters are concentric.

8. The binary code symbol of claim 5, wherein the inner and outer perimeters have different shapes.
9. The binary code symbol of claim 1, wherein the outer perimeter is a polygon.
10. The binary code symbol of claim 1, further comprising at least one data region
5 containing encoded data region data, wherein the at least one data region is bounded at least in part by the outer perimeter, and wherein the inner and outer quiet regions further distinguish the at least one data region from its background.
11. The binary code symbol of claim 10, further comprising an inner perimeter constructed of line segments, wherein the at least one data region is bounded at least in
10 part by the inner perimeter.
12. The binary code symbol of claim 10, wherein the at least one data region comprises a plurality of data cells, and the encoded data region data is encoded in the data cells.
13. The binary code symbol of claim 12, wherein the density of the data region data is
15 determined by one of the number and width of the data cells.
14. The binary code symbol of claim 12, wherein the at least one data region contains multiple rows of data cells.
15. The binary code symbol of claim 10, further comprising at least one utility region containing encoded utility data, wherein the at least one utility region is bounded at least
20 in part by the outer perimeter, and wherein the inner and outer quiet regions further distinguish the at least one utility region from its background.

16. The binary code symbol of claim 15, further comprising an inner perimeter constructed of line segments, wherein the at least one utility region is bounded at least in part by the inner perimeter.
17. The binary code symbol of claim 15, wherein the at least one utility region
5 comprise a plurality of utility cells with alternating appearance, and the utility data is encoded in the utility cells.
18. The binary code symbol of claim 17, wherein the density of the utility data is determined by one of the number and width of utility cells.
19. The binary code symbol of claim 15, wherein the at least one utility region
10 contains multiple rows of utility cells.
20. The binary code symbol of claim 19, wherein the multiple rows of encoded utility data store at least one of auxiliary information and codes.
21. The binary code symbol of claim 15, wherein the at least one data region and the at least one utility region are distinct and separate.
- 15 22. The binary code symbol of claim 15, wherein the at least one data region and the at least one utility region are combined.
23. The binary code symbol of claim 22, wherein the combined data and utility regions encode one of all data region data, all utility data, and a combination of data region data and utility data.

24. A non-linear strain gage comprising:

a target associated with an object for which at least one of strain and fatigue damage is to be measured and emitting a detectable physical quantity, the target comprising a binary code symbol in accordance with claim 1,

5 sensor means for pre-processing the detectable physical quantity emitted by the target and output data representing the physical quantity, the sensor means being compatible with the detectable physical quantity;

means for analyzing the data output by the sensor means to define the binary code symbol; and

10 means for measuring the strain on the object directly based on the pre-processed and analyzed data.

25. A method of measuring strain on an object directly, comprising the steps of:

associating a binary code symbol in accordance with claim 1 with an object in such a way that deformation of the binary code symbol and deformation under load of the
15 object bear a one-to-one relationship, wherein the binary code symbol emits a detectable physical quantity;

identifying the changes in the binary code symbol as a function of time and change in the load applied to the object; and

20 translating the changes in the binary code symbol into a direct measurement of strain.

FIG. 1A

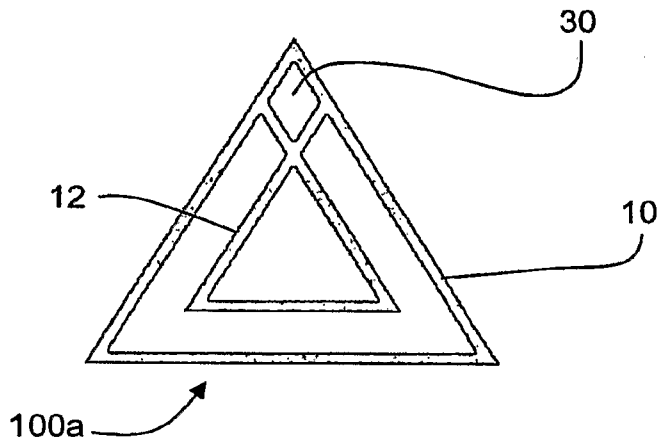


FIG. 1B

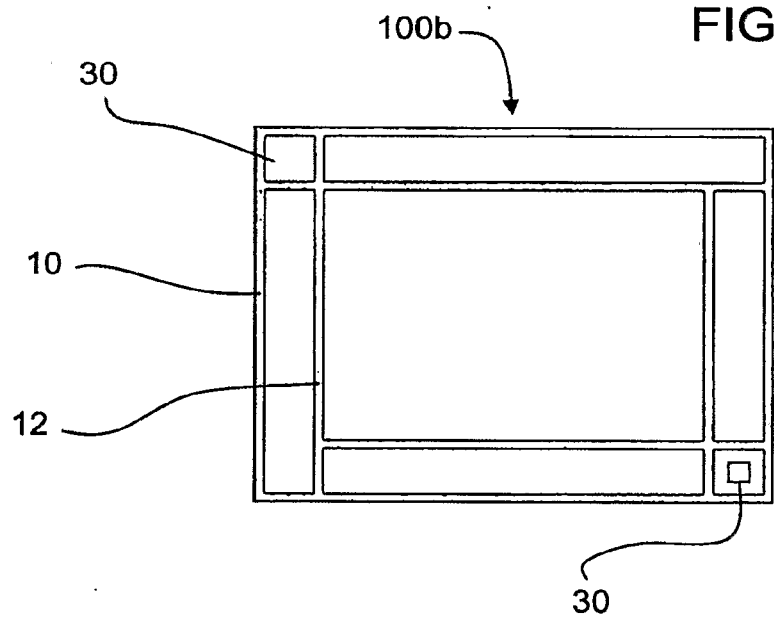


FIG. 1C

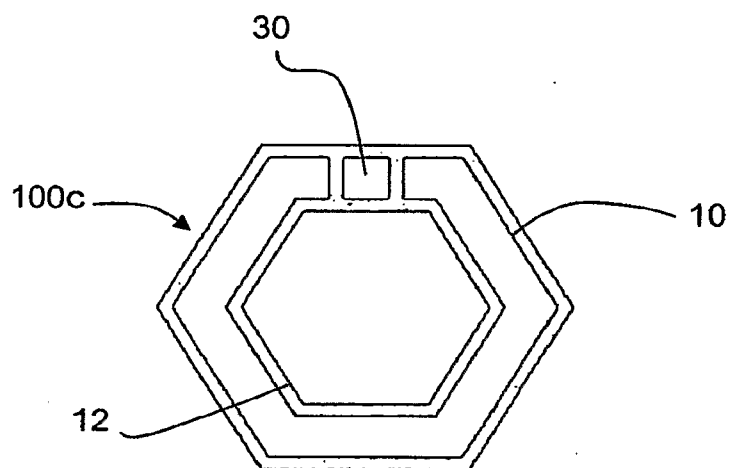


FIG. 2A




FIG. 2B




FIG. 2C

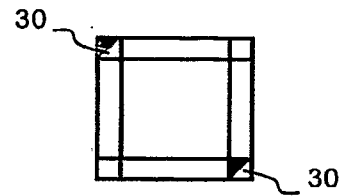


FIG. 2D




FIG. 2E




FIG. 2F




FIG. 3A




FIG. 3B

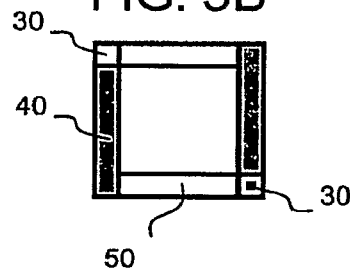


FIG. 3C

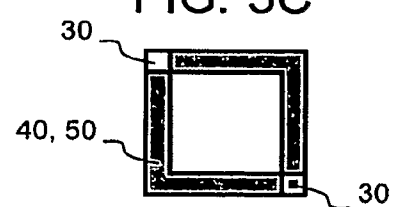


FIG. 3D




FIG. 3E




FIG. 3F

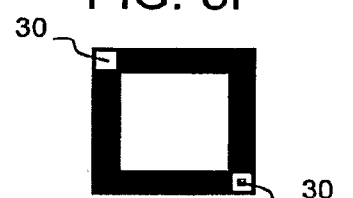


FIG. 4A

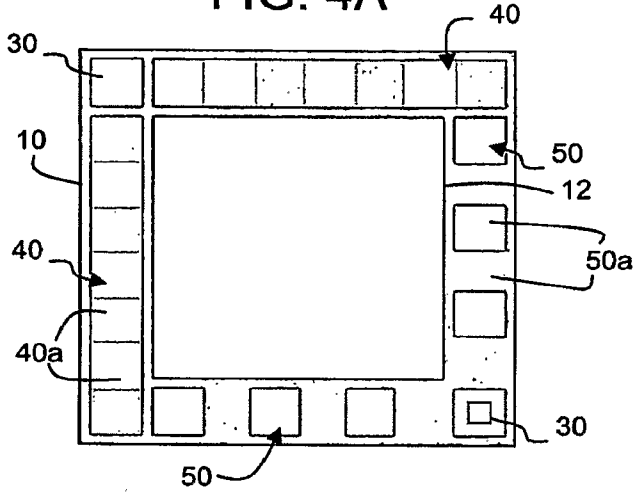


FIG. 4B

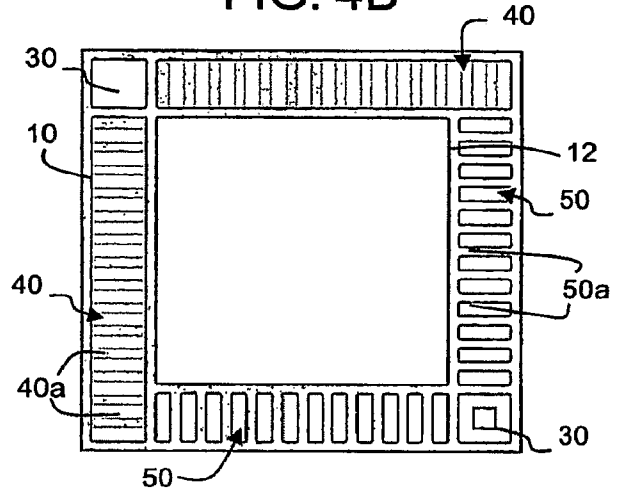


FIG. 4C

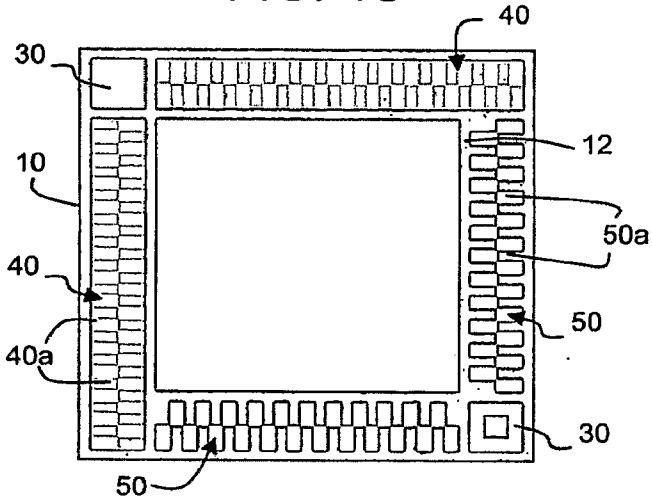


FIG. 4D

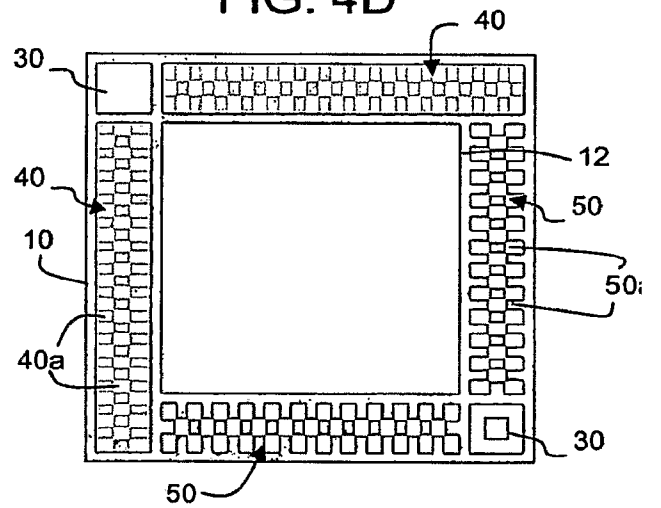


FIG. 4E

