



(86) Date de dépôt PCT/PCT Filing Date: 2004/06/18  
 (87) Date publication PCT/PCT Publication Date: 2004/12/23  
 (45) Date de délivrance/Issue Date: 2012/07/31  
 (85) Entrée phase nationale/National Entry: 2005/11/07  
 (86) N° demande PCT/PCT Application No.: IE 2004/000086  
 (87) N° publication PCT/PCT Publication No.: 2004/111147  
 (30) Priorité/Priority: 2003/06/18 (US10/463,461)


(51) Cl.Int./Int.Cl. *C09J 4/00* (2006.01),  
*C08F 222/30* (2006.01), *C08K 5/10* (2006.01)

(72) Inventeurs/Inventors:  
 KNEAFSEY, BRENDAN J., IE;  
 WOOLFSON, HARRY J., IE;  
 BIRKETT, DAVID P., IE;  
 MISIAK, HANNS R., IE;  
 MULCAHY, KIERNAN, IE;  
 KELLY, RUTH A., IE;  
 TIERNEY, FERGAL W., IE

(73) Propriétaire/Owner:  
 LOCTITE (R & D) LIMITED, IE

(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : COMPOSITIONS DE CYANOACRYLATE  
 (54) Title: CYANOACRYLATE COMPOSITIONS

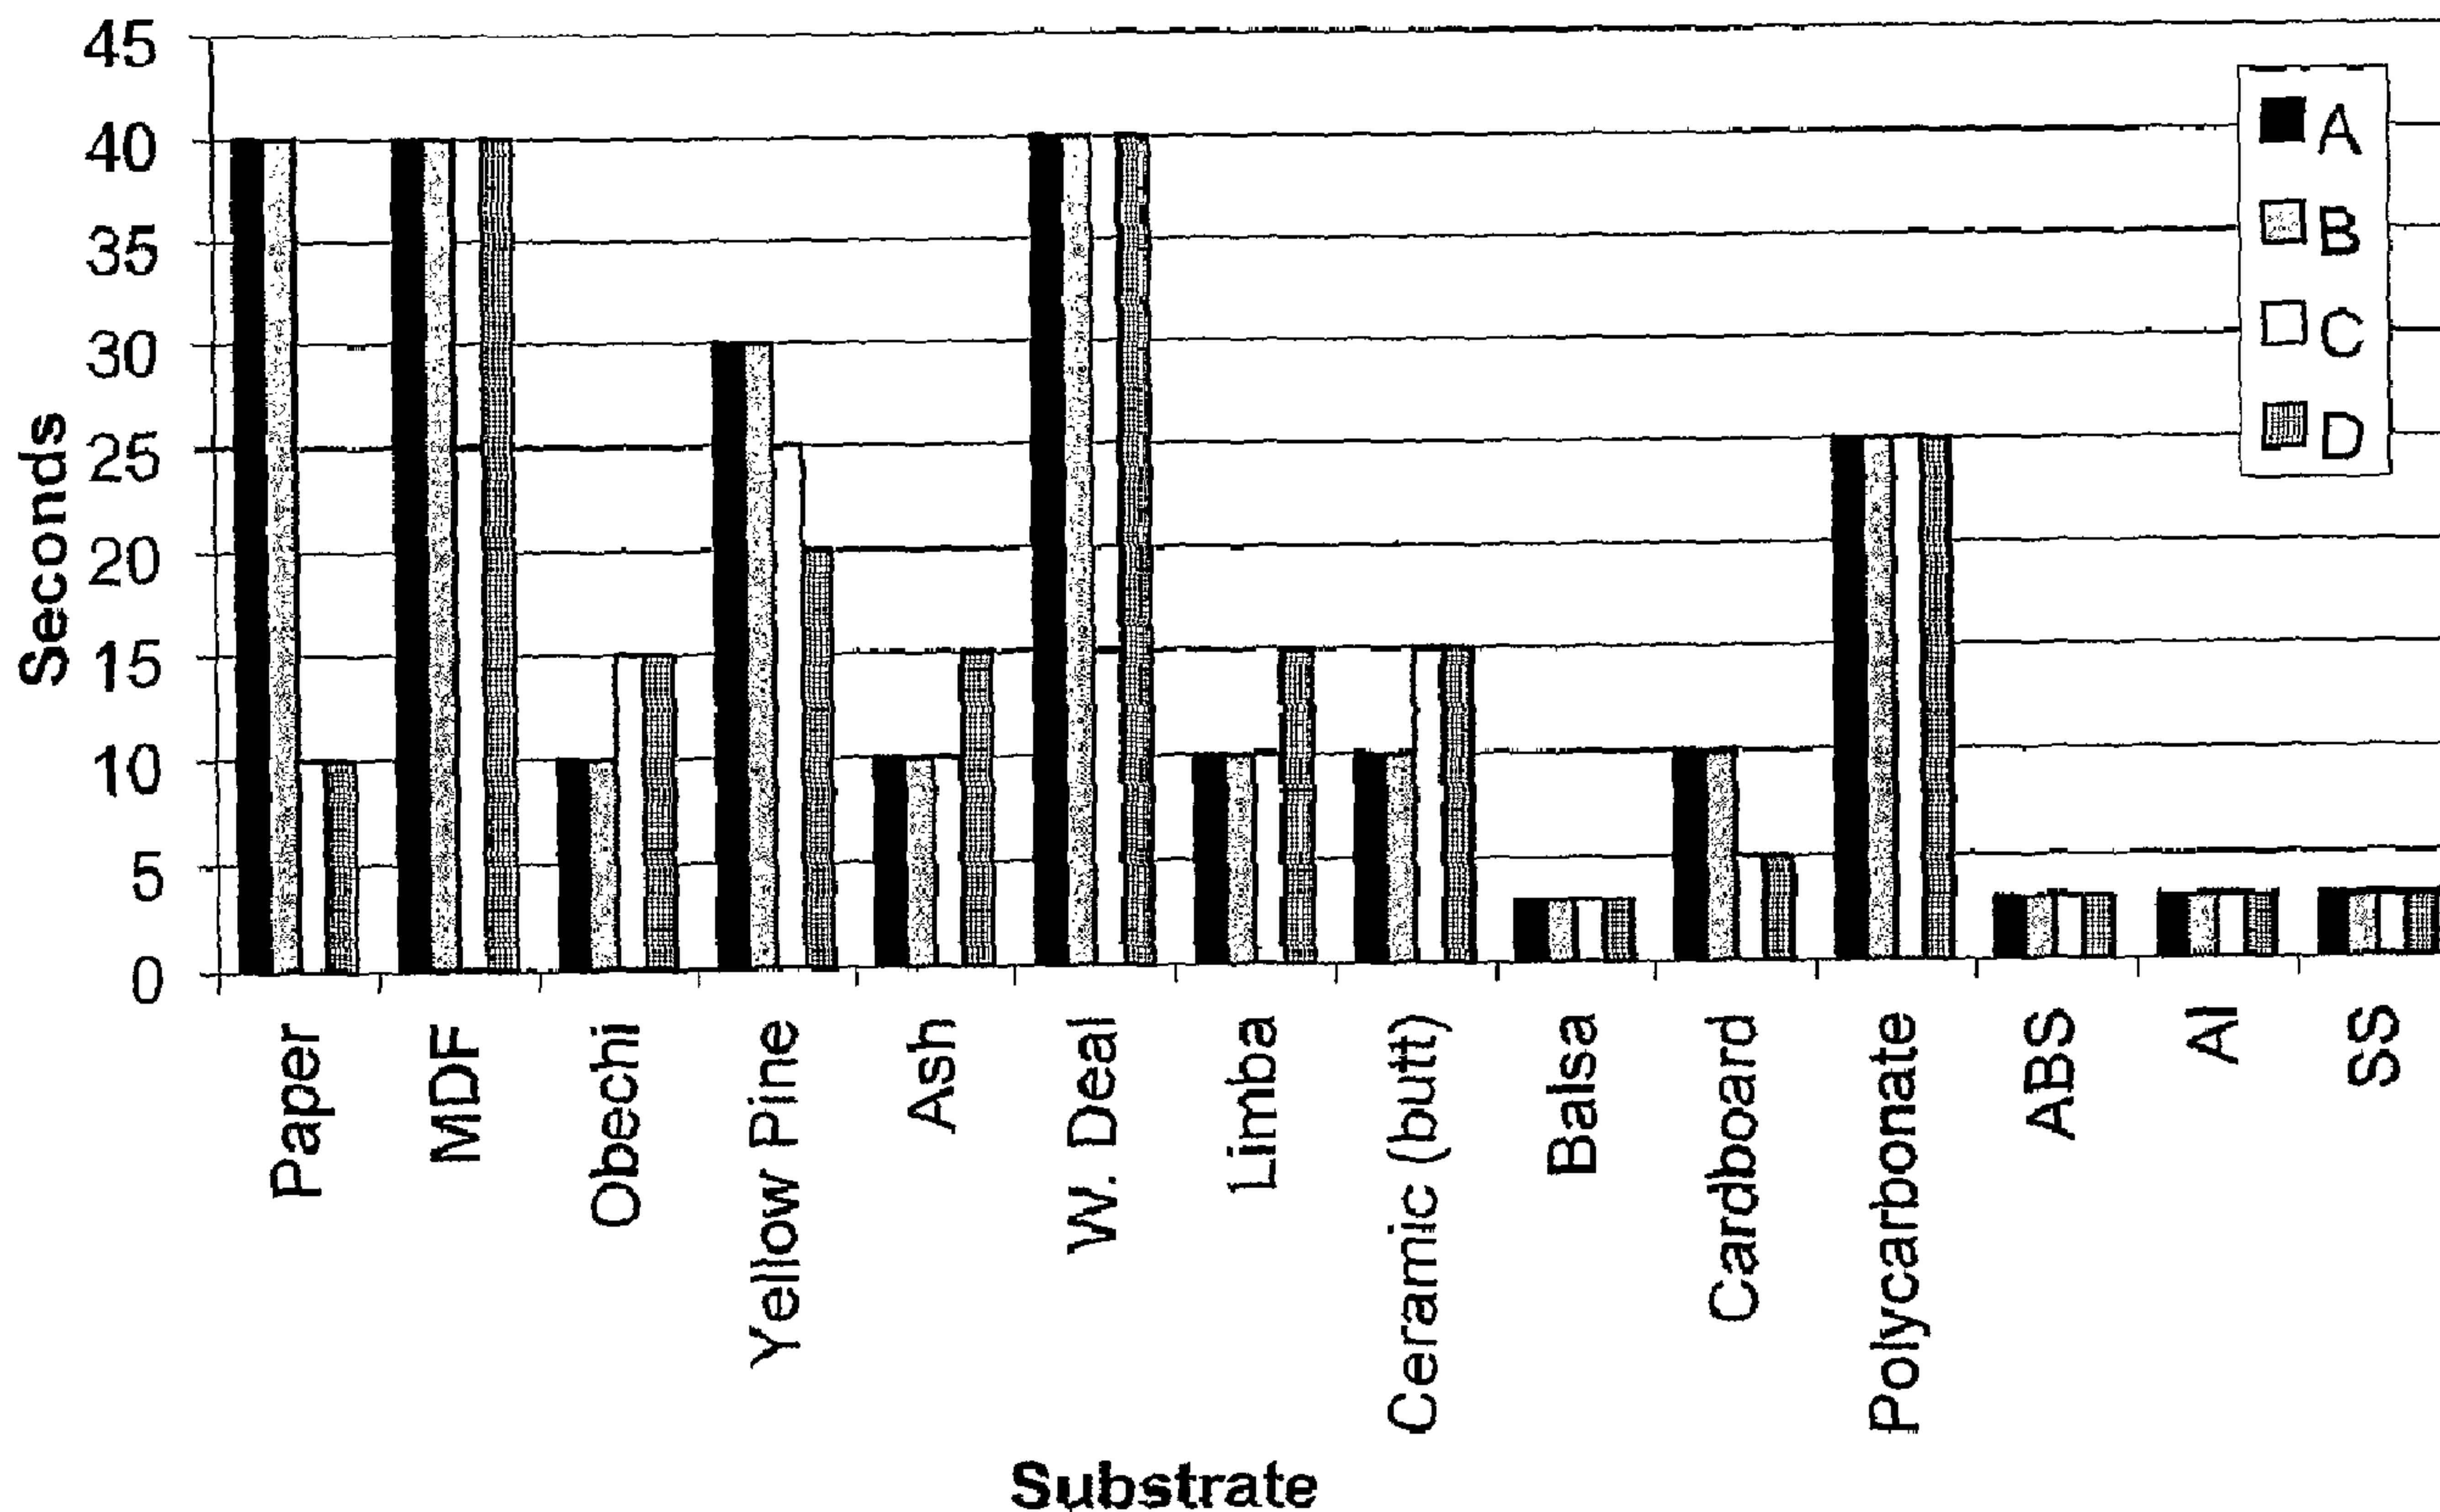

(57) Abrégé/Abstract:

This invention relates to cyanoacrylate-containing compositions that include, in addition to the cyanoacrylate component, certain accelerators to improve fixture speeds on certain substrates.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
23 December 2004 (23.12.2004)


PCT

(10) International Publication Number  
**WO 2004/111147 A3**

- (51) International Patent Classification<sup>7</sup>: **C09J 4/00**, C08F 222/30, C08K 5/10
- (74) Agents: **LANE, Cathal, Michael** et al.; Tomkins & Co., 5 Dartmouth Road, Dublin 6 (IE).
- (21) International Application Number: PCT/IE2004/000086
- (22) International Filing Date: 18 June 2004 (18.06.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
10/463,461 18 June 2003 (18.06.2003) US
- (71) Applicant (for all designated States except US): **LOC-TITE (R & D) LIMITED** [IE/IE]; Tallaght Business Park, Whitestown, Tallaght, Dublin 24 (IE).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **KNEAFSEY, Brendan, J.** [IE/IE]; 75 Hermitage Road, Hermitage Park, County Dublin (IE). **WOOLFSON, Harry, J.** [IE/IE]; 55 Sandford Road, Ranelagh, Dublin 6 (IE). **BIRKETT, David, P.** [GB/IE]; 113 The Park, Sallins Road, Naas, County Kildare (IE). **MISIAK, Hanns, R.** [DE/IE]; 22 Cypress Avenue, Scholarstown Road, Dublin 24 (IE). **MULCAHY, Kiernan** [IE/IE]; 10 Ashgrove Park, Naas, County Kildare (IE). **KELLY, Ruth, A.** [IE/IE]; 43 Hansfield Clonee, Dublin 15 (IE). **TIERNEY, Fergal, W.** [IE/IE]; 67 The Walled Gardens, Castletown, Celbridge, County Kildare (IE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
- with international search report
  - before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: CYANOACRYLATE COMPOSITIONS

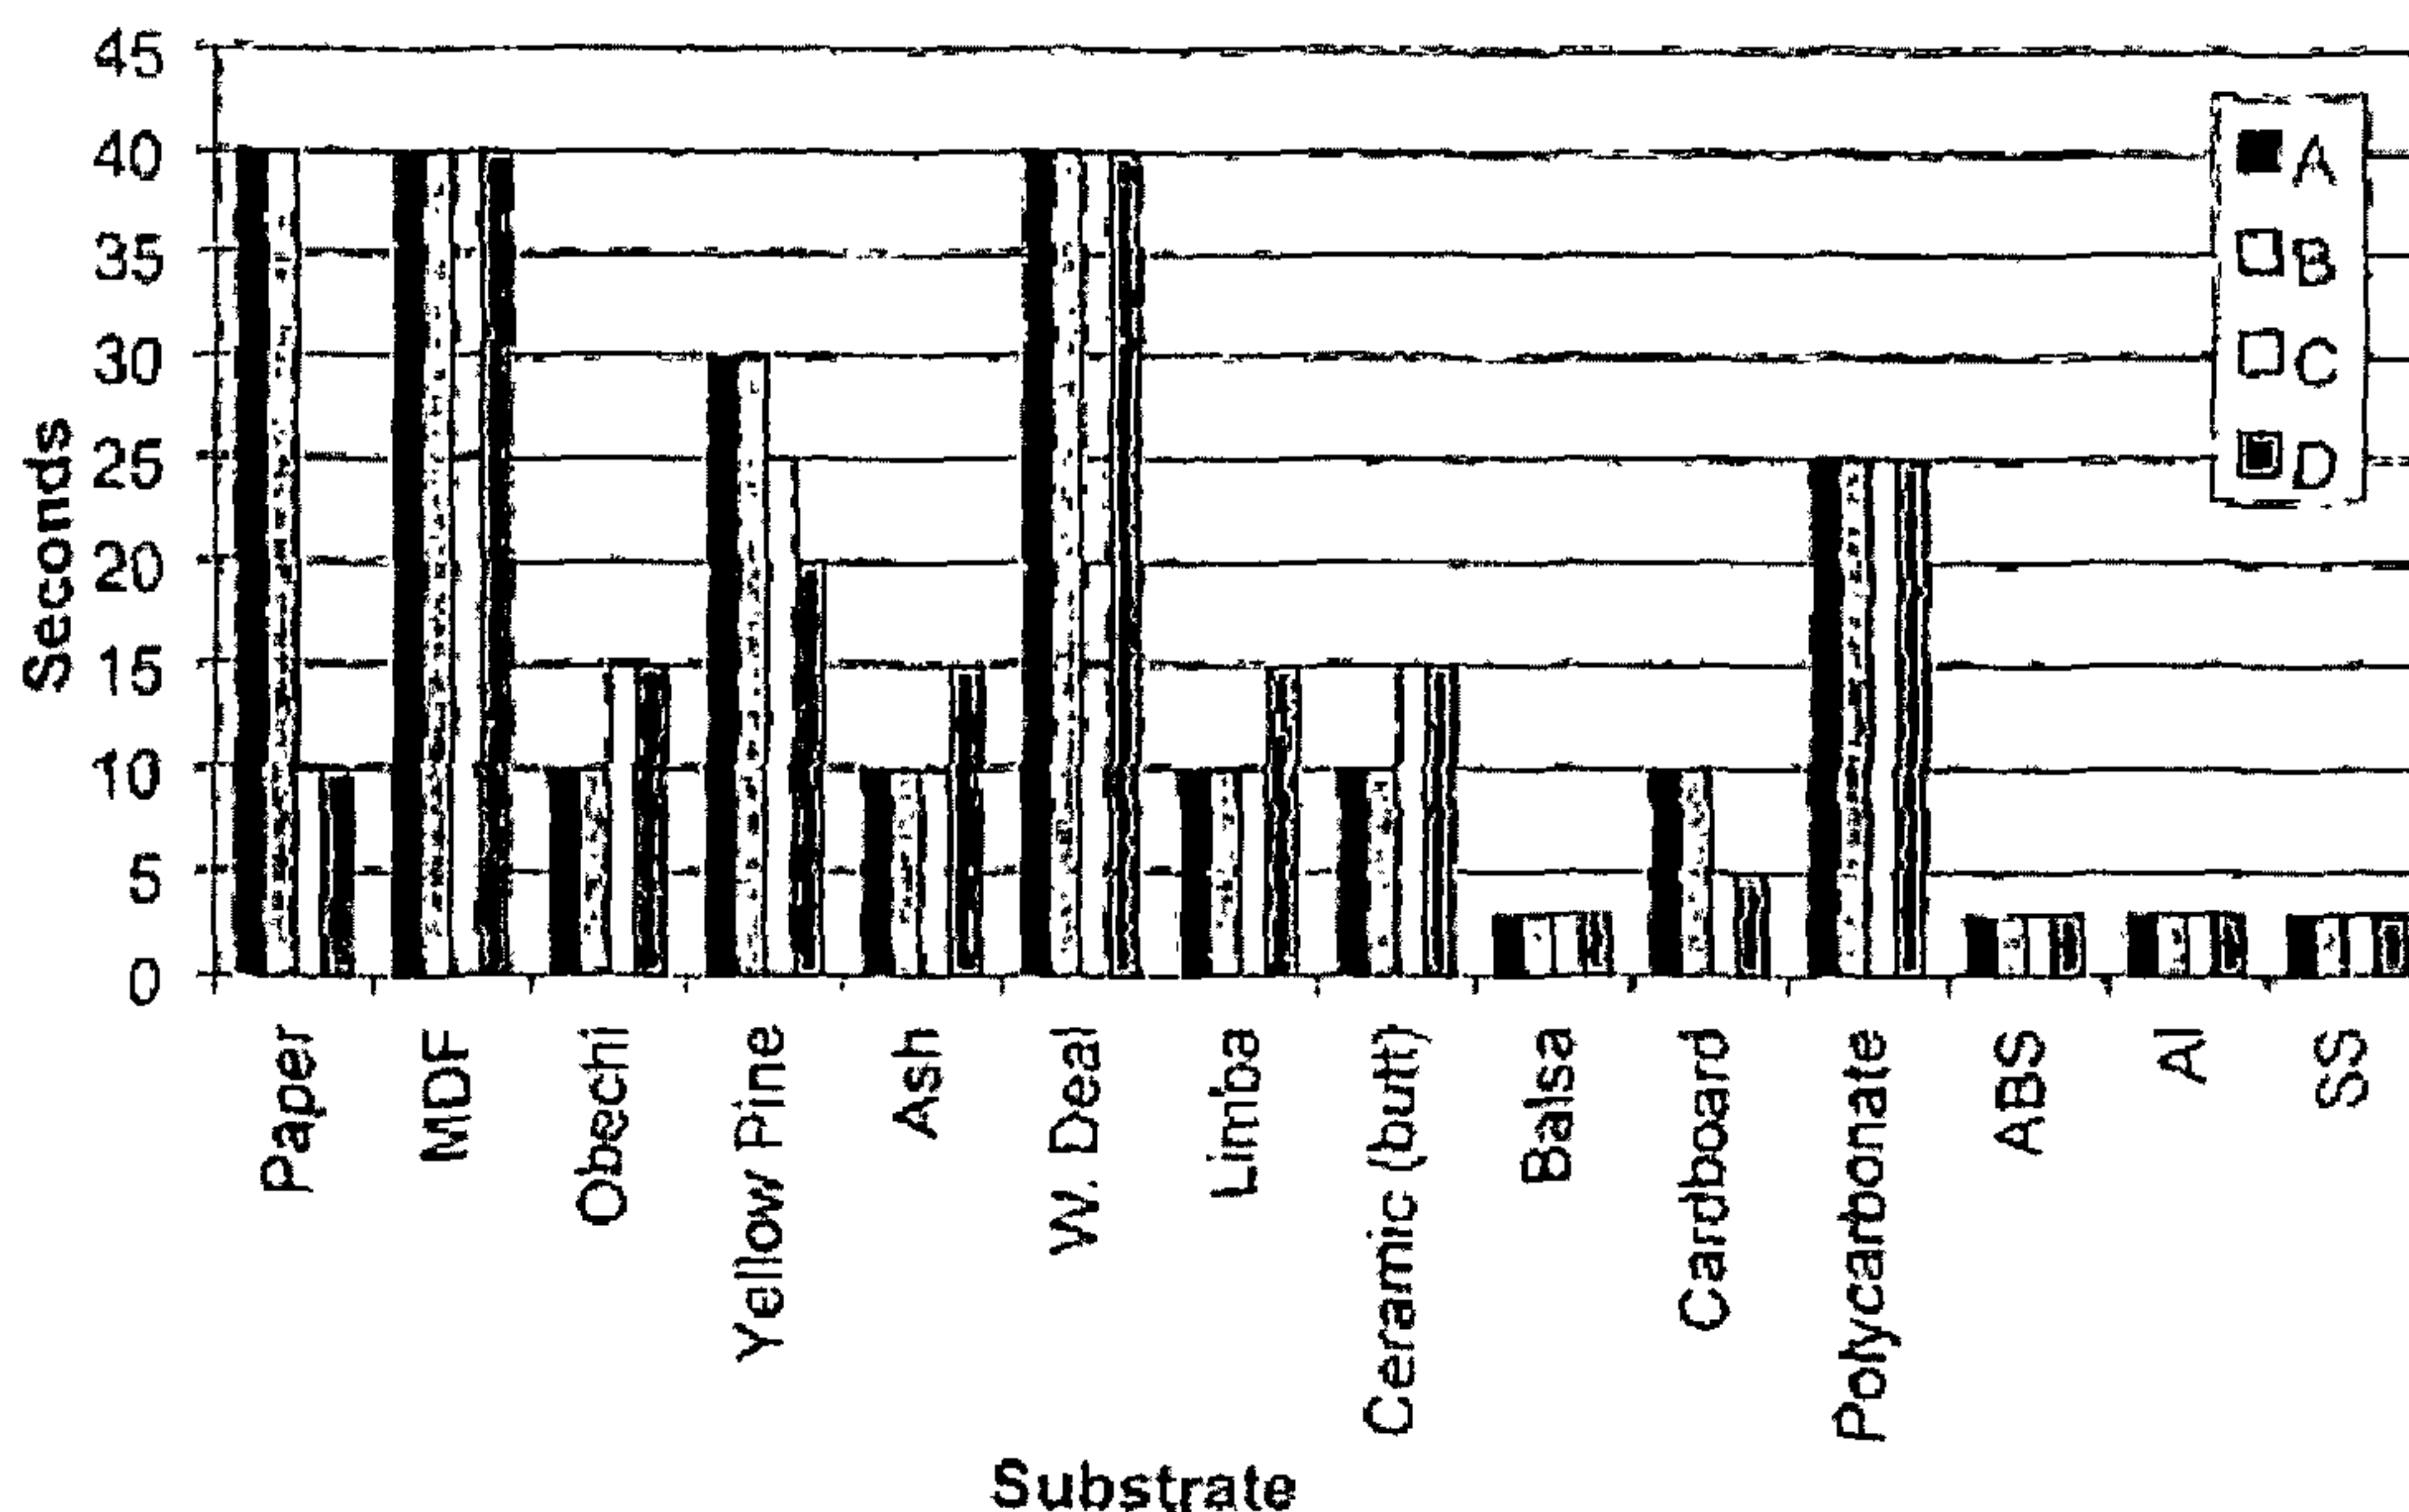

(57) Abstract: This invention relates to cyanoacrylate-containing compositions that include, in addition to the cyanoacrylate component, certain accelerators to improve fixture speeds on certain substrates.

WO 2004/111147 A3

**WO 2004/11147 A3**



---

**(88) Date of publication of the international search report:**  
24 March 2005

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



-1-

**CYANOACRYLATE COMPOSITIONS****BACKGROUND OF THE INVENTION****Field of the Invention**

5 [0001] This invention relates to cyanoacrylate-containing compositions that include, in addition to the cyanoacrylate component, a certain accelerator to improve fixture speeds on certain substrates.

**10 Brief Description of Related Technology**

[0002] Cyanoacrylate adhesive compositions are well known, and widely used as quick setting, instant adhesives with a wide variety of uses. See H.V. Coover, D.W. Dreifus and J.T. O'Connor, "Cyanoacrylate Adhesives" in Handbook of Adhesives,  
15 27, 463-77, I. Skeist, ed., Van Nostrand Reinhold, New York, 3rd ed. (1990). See also G.H. Millet "Cyanoacrylate Adhesives" in Structural Adhesives: Chemistry and Technology, S.R. Hartshorn, ed., Plenum Press, New York, p. 249-307 (1986).

[0003] Nonetheless, various techniques have been used to  
20 improve further the fixture times of such adhesive compositions for certain applications where it is important to be able to secure one substrate to another quickly, while allowing the bond

-2-

strength to develop over time. In addition, substrates constructed of certain materials have proven in the past difficult to bond, irrespective of the application to which the adhesive and the substrate are to be placed.

5 [0004] To combat these issues, Henkel Loctite Corporation [then Loctite Corporation, at least in part through its Loctite (Ireland) Ltd. affiliate] developed a technology based on calixarene and oxacalixarene compounds. Generally, the addition of such materials to a cyanoacrylate allow for accelerated  
10 fixturing of substrates to-be-bonded together. See U.S. Patent Nos. 4,556,700, 4,622,414, 4,636,539, 4,695,615, 4,718,966, and 4,855,461.

[0005] In addition to calixarene compounds, Henkel Loctite Corporation also developed technology based on the addition of  
15 silacrown compounds to cyanoacrylate adhesive compositions to accelerate fixturing. For instance, U.S. Patent No. 4,906,317 (Liu) is directed to cyanoacrylate adhesive compositions which include silacrown compounds as additives to give substantially reduced fixture and cure times on de-activating substrates such  
20 as wood. The silacrown compounds are preferably employed at levels of about 0.1-5% by weight of the composition.

[0006] Henkel KGaA developed technology based on the addition to cyanoacrylate compositions of cyclodextrins to accelerate  
25 fixturing. In U.S. Patent No. 5,312,864 (Wenz), the acceleration of the setting properties of a cyanoacrylate adhesive composition by adding thereto a hydroxyl group derivative of an  $\alpha$ -,  $\beta$ - or  $\gamma$ -cyclodextrin which is at least partly soluble in the cyanoacrylate is described.

[0007] Other approaches have also been investigated, such as  
30 in U.S. Patent No. 4,837,260 (Sato), in which it is reported the use of crown ethers in cyanoacrylate adhesive compositions.



-3-


[0008] More recently, Loctite (R&D) Ltd. investigated other ways in which to accelerate the curing of cyanoacrylate adhesive compositions. In U.S. Patent No. 6,294,629 (O'Dwyer), a cyanoacrylate adhesive composition is provided with a first  
5 accelerator component selected from calixarenes and oxacalixarenes, silacrowns, cyclodextrins, crown ethers, and combinations thereof; and a second accelerator component selected from poly(ethyleneglycol) di(meth)acrylates, ethoxylated hydric compounds, and combinations thereof.

10 [0009] And Henkel Loctite Corporation developed a cyanoacrylate adhesive composition, based on a cyanoacrylate component; and an accelerator component consisting essentially of (i) calixarenes, oxacalixarenes, or a combination thereof, and (ii) at least one crown ether, where the composition exhibits a  
15 fixturing speed of less than 20 seconds for bonding two substrates, at least one of which is constructed of a material selected from steel, epoxy glass or balsawood, as described in U.S. Patent No. 6,475,331 (O'Connor).

20 [0010] Notwithstanding the state-of-the-technology it would be desirable to provide alternative technologies to improve the fixturing speed of cyanoacrylates.


#### SUMMARY OF THE INVENTION

25 [0011] The present invention is directed to a cyanoacrylate-based composition, which includes beyond the cyanoacrylate component,

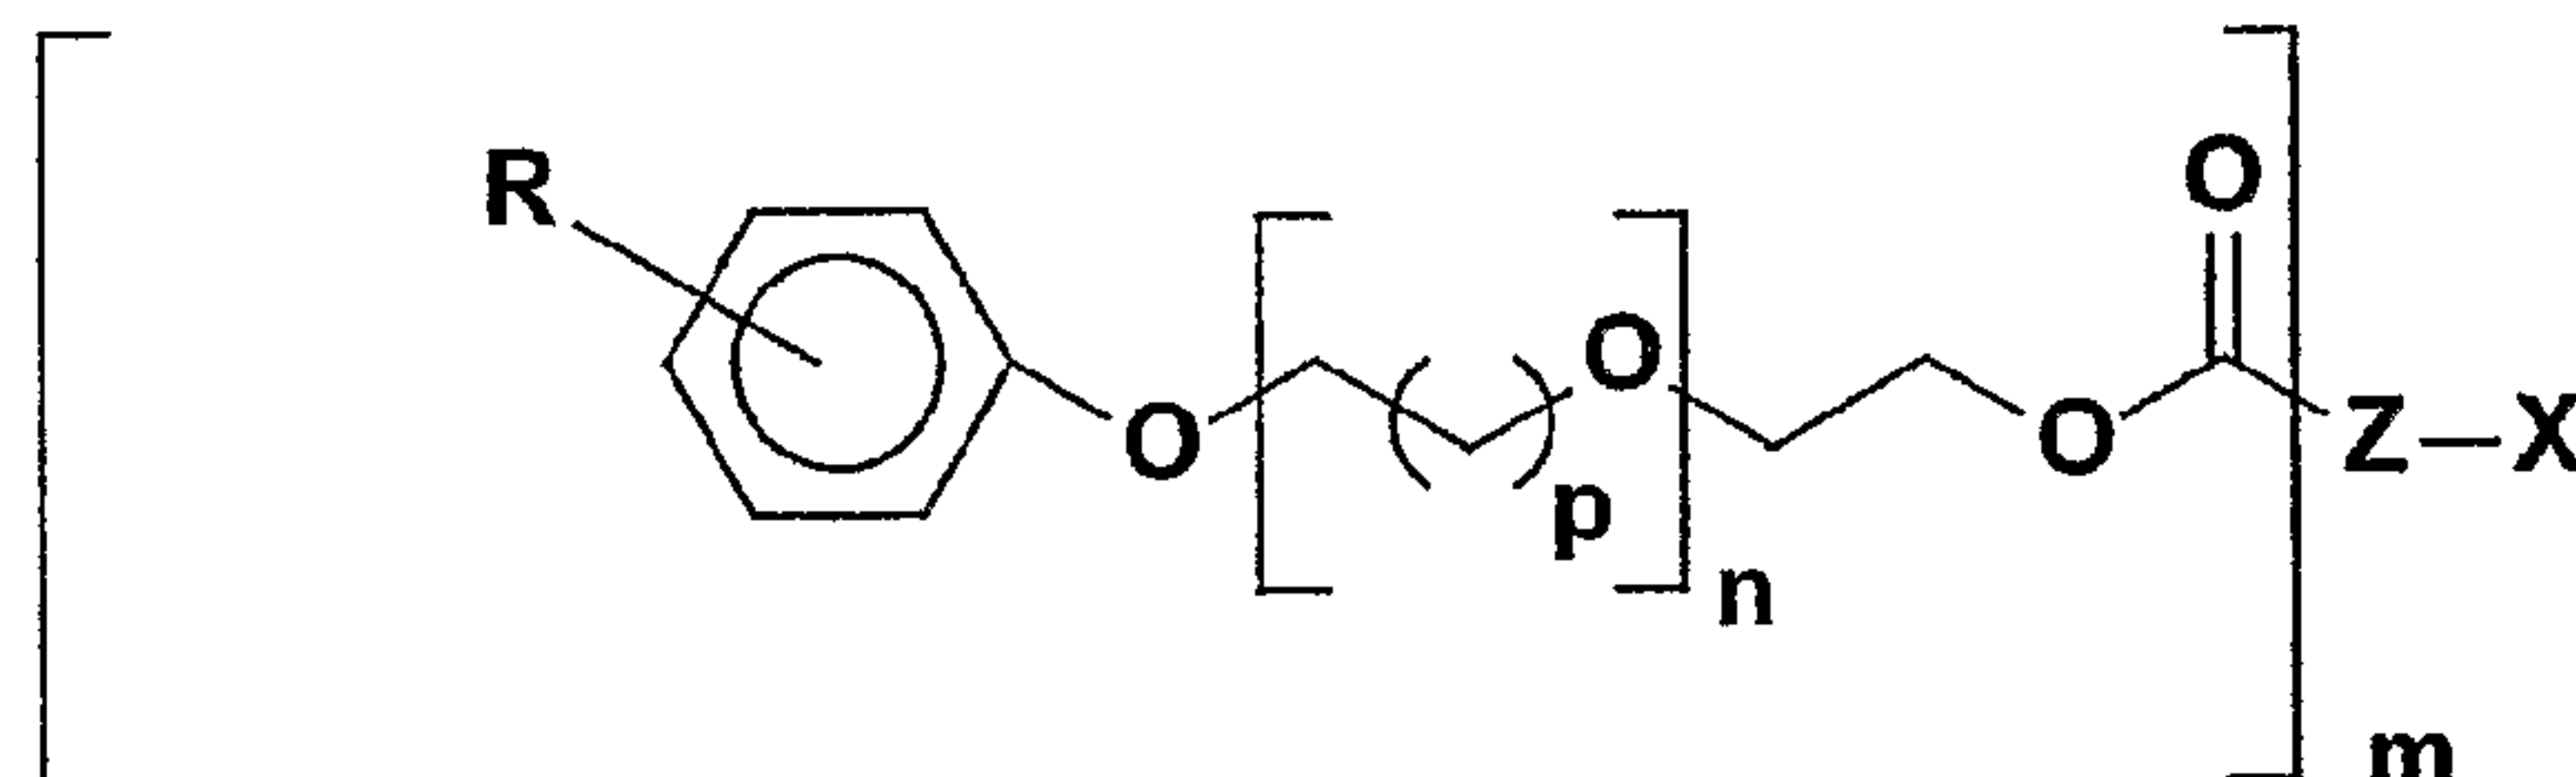

-4-


I, as an accelerator, where R is hydrogen, alkyl, alkyloxy, alkyl thioethers, haloalkyl, carboxylic acid and esters thereof, sulfinic, sulfonic and sulfurous acids and esters, phosphinic, phosphonic and phosphorous acids and esters thereof, X is an aliphatic or aromatic hydrocarbyl linkage, which may be substituted by oxygen or sulfur, and Z is a single or double bond, such as

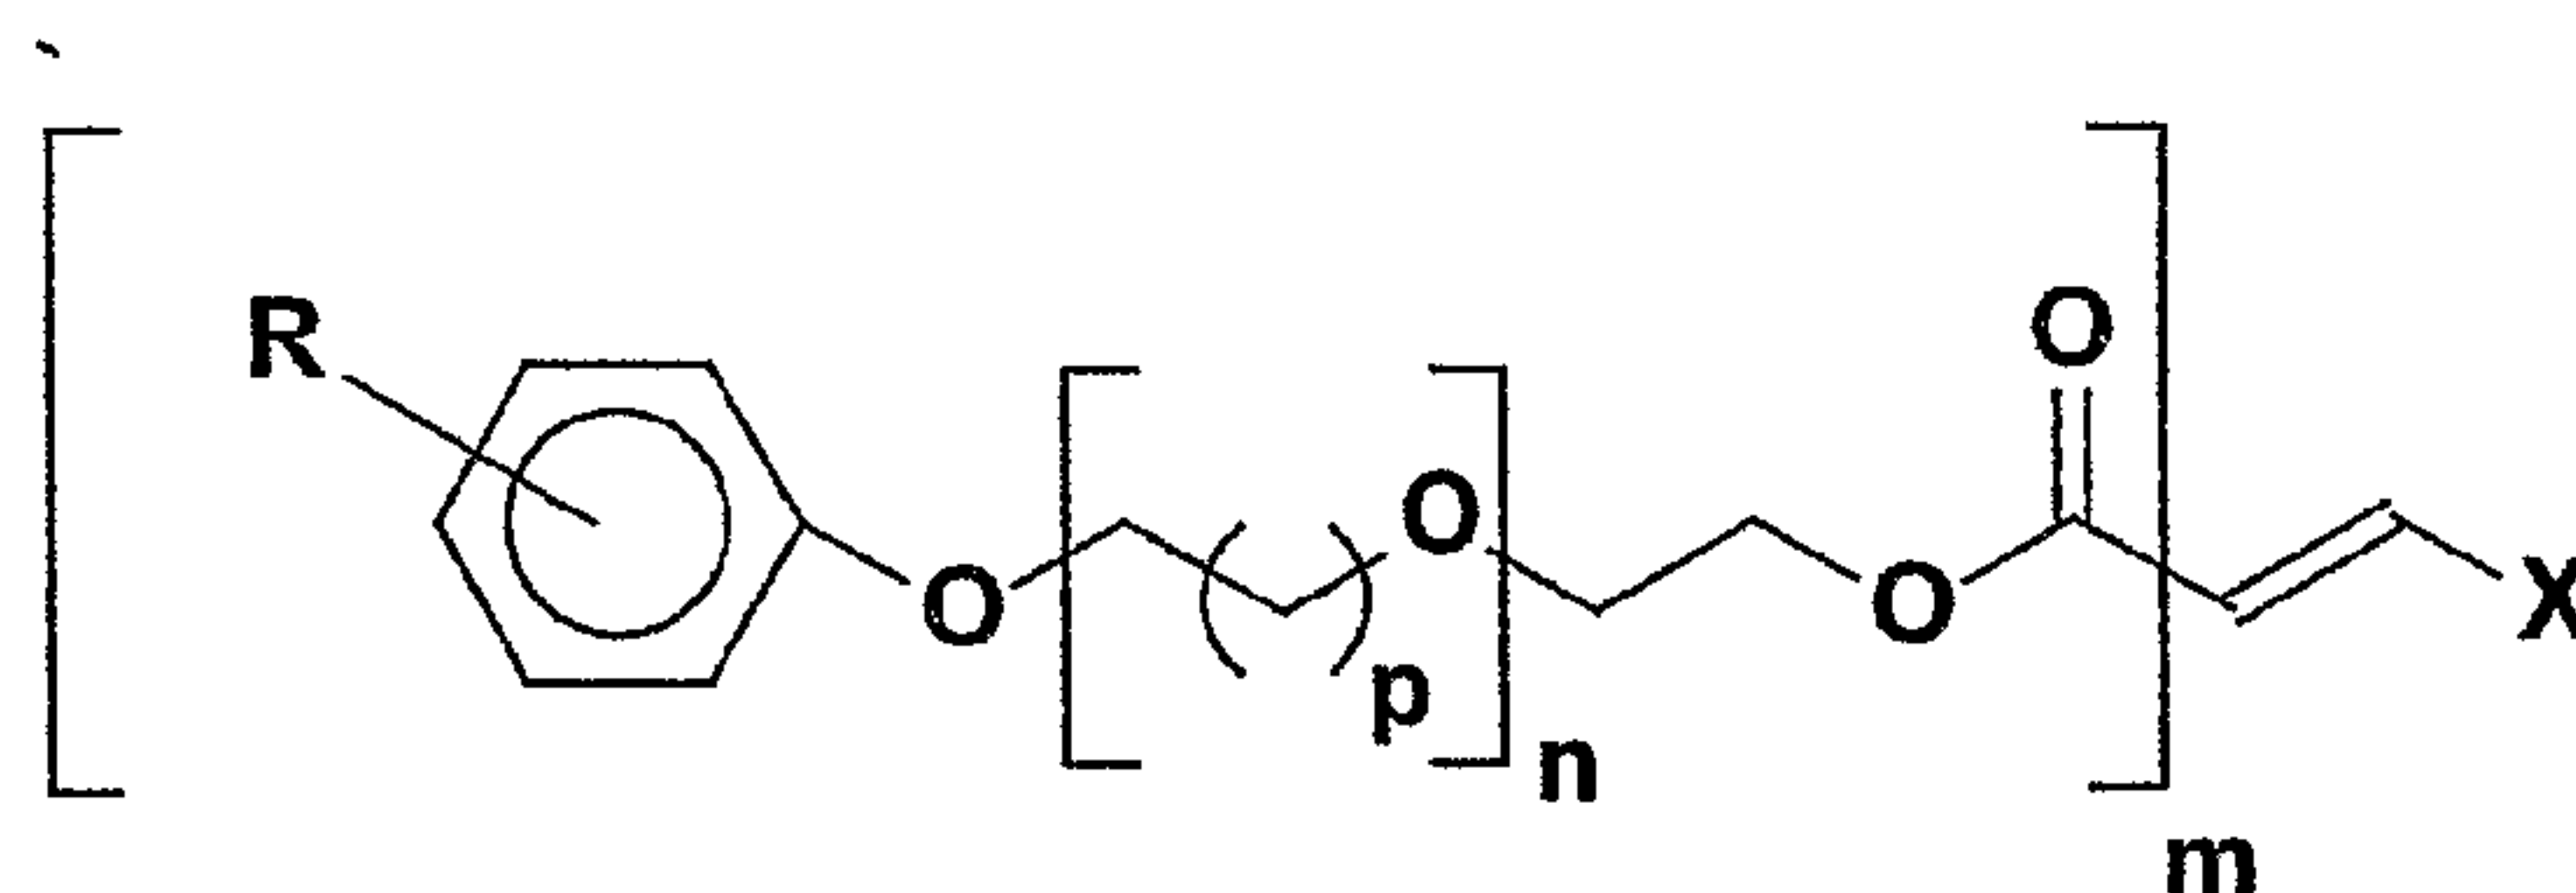

10

II, where R and X are as defined above, and n is 1-12, m is 1-4, and p is 1-3.


[0012] For instance, a particularly desirable chemical class embraced by these structures is

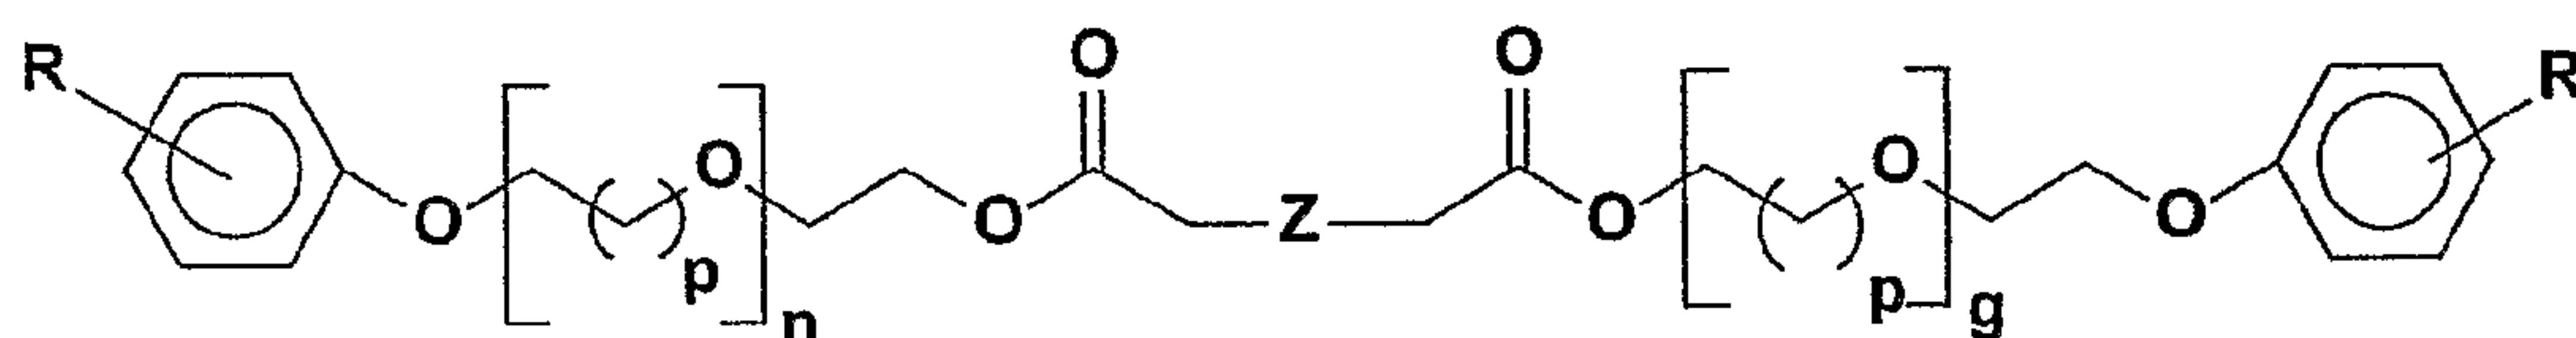

15

III, where R, Z and n are as defined above, and R' is the same as R, where g is the same as n.

[0013] A particularly desirable chemical within this class as an accelerator component is

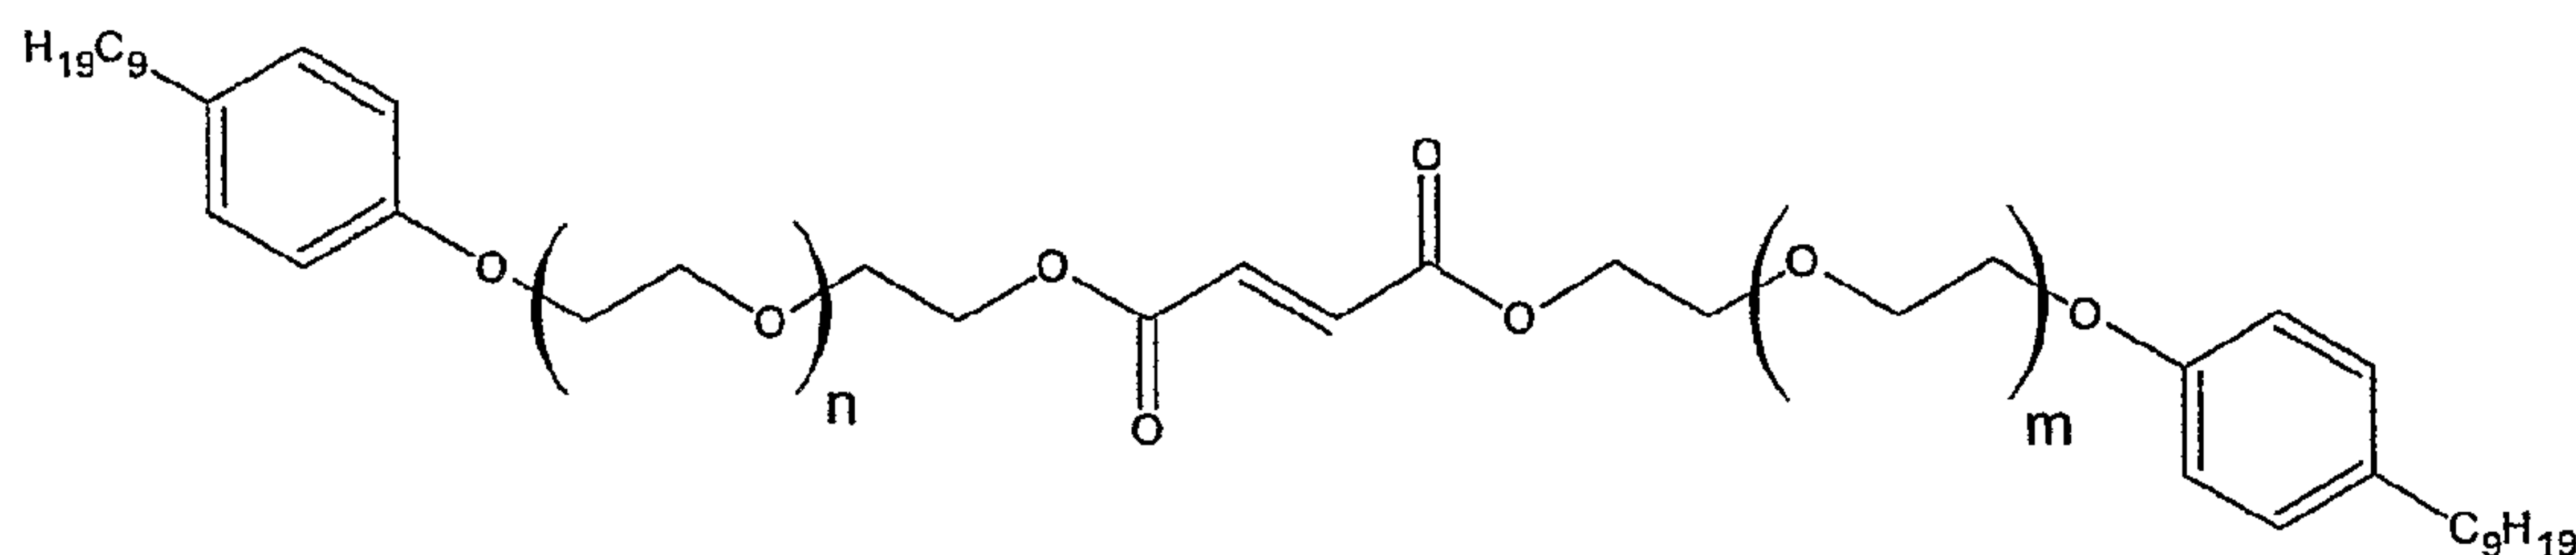

20

IV, where n and m combined is greater than or equal to 12.

-5-

[0014] The inclusion of these accelerators into a cyanoacrylate composition provides for a demonstrated improved fixture speeds, particularly on substrates constructed of certain woods, and ceramic and combinations thereof, without  
5 sacrificing shelf life.

[0015] This invention is also directed to a method of bonding together two substrates, at least one of which is constructed of certain woods, and ceramic, and combinations thereof. The  
0 method includes applying to at least one of the substrates a composition as described above, and thereafter mating together the substrates.

[0016] In addition, the present invention is directed to reaction products of the inventive compositions.

[0017] Also, the invention is directed to a method of  
5 preparing the inventive compositions.

[0018] The invention will be more fully understood by a reading of the section entitled "Detailed Description of the Invention", which follows.

#### BRIEF DESCRIPTION OF THE FIGURE


[0019] Fig. 1 shows a comparative chart of Samples A-D, where  
10 MDF is medium density fiberboard, ABS is acrylonitrile butadiene styrene copolymer, Al is aluminum and SS is stainless steel.

#### DETAILED DESCRIPTION OF THE INVENTION


[0020] As noted above, this invention is directed to a  
15 cyanoacrylate-based composition, which includes beyond the cyanoacrylate component,



-6-

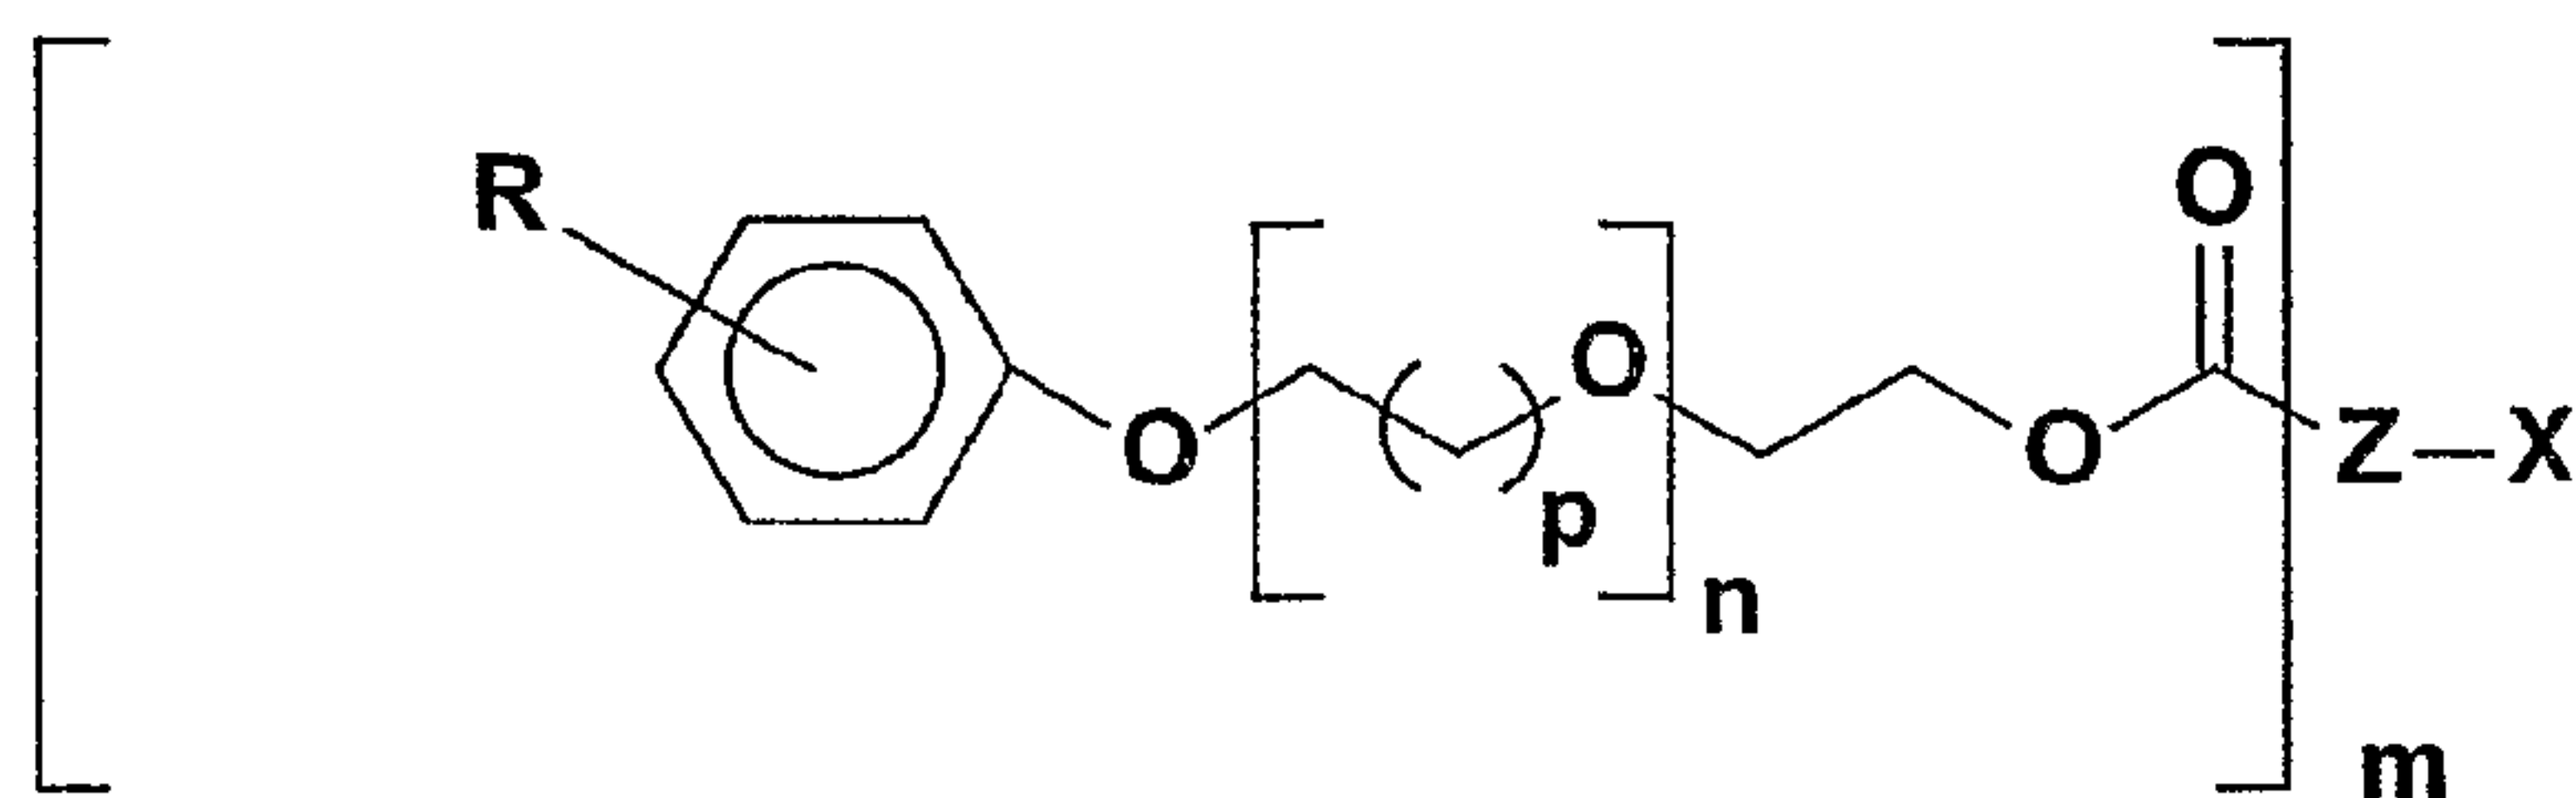


I, as an accelerator, where R is hydrogen, alkyl, alkyloxy, alkyl thioethers, haloalkyl, carboxylic acid and esters thereof, sulfonic, sulfonic and sulfurous acids and esters, phosphinic, phosphonic and phosphorous acids and esters thereof, X is an aliphatic or aromatic hydrocarbyl linkage, which may be substituted by oxygen or sulfur, and Z is a single or double bond, such as

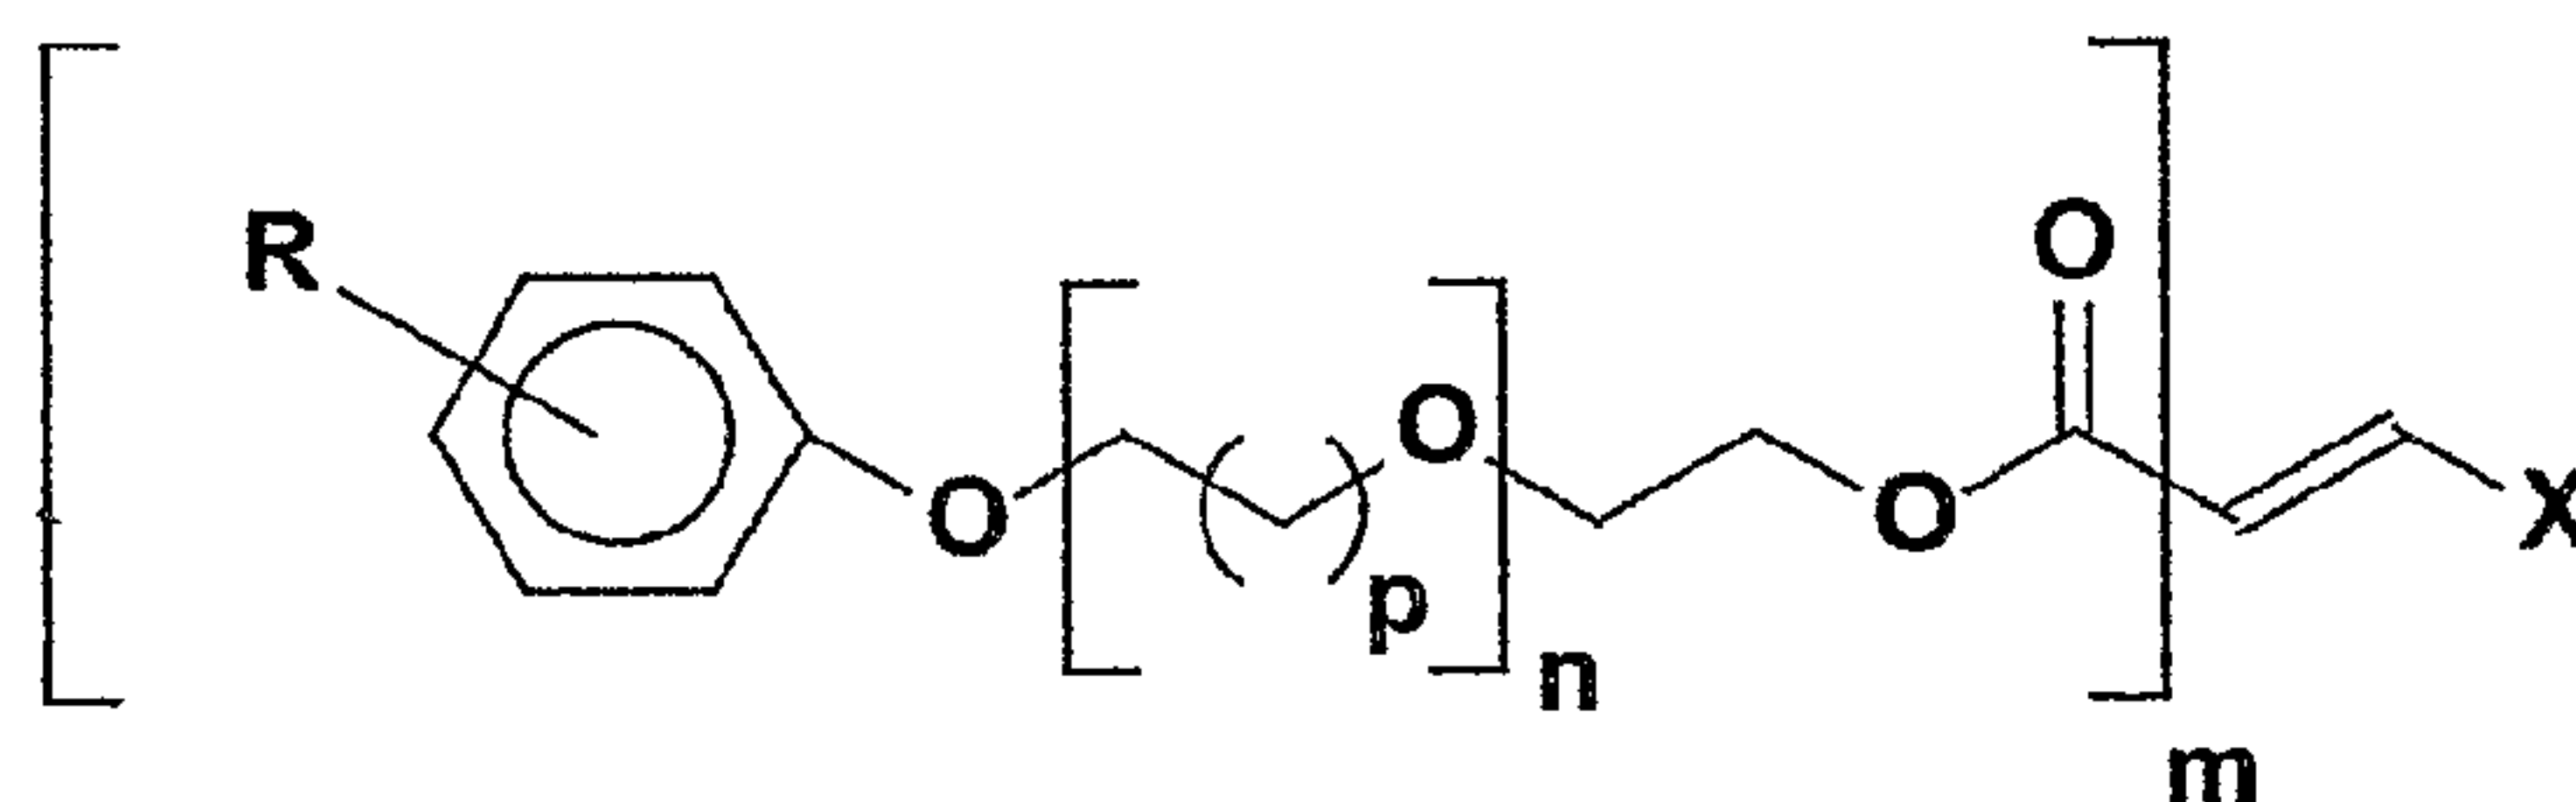

10

II, where R and X are as defined above.


[0021] For instance, a particularly desirable chemical class embraced by these structures is

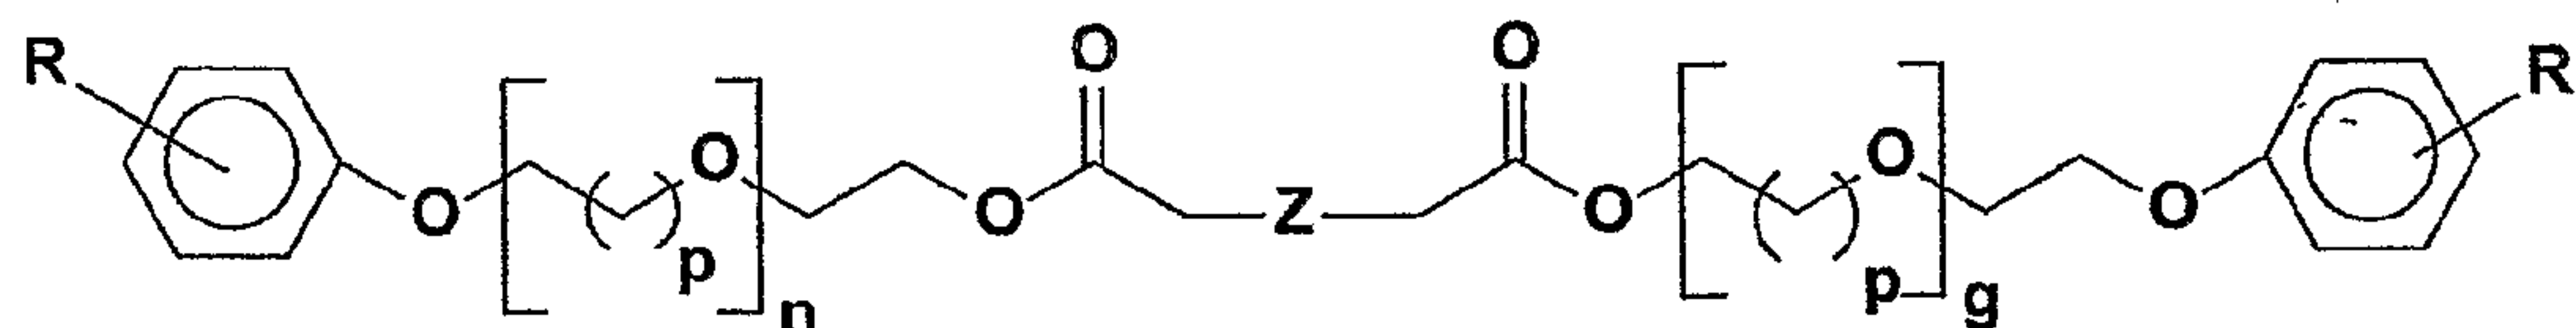

15 III, where R, Z and n are as defined above, and R' is the same as R, and g is the same as n.

[0022] A particularly desirable chemical within this class as an accelerator component is

-7-

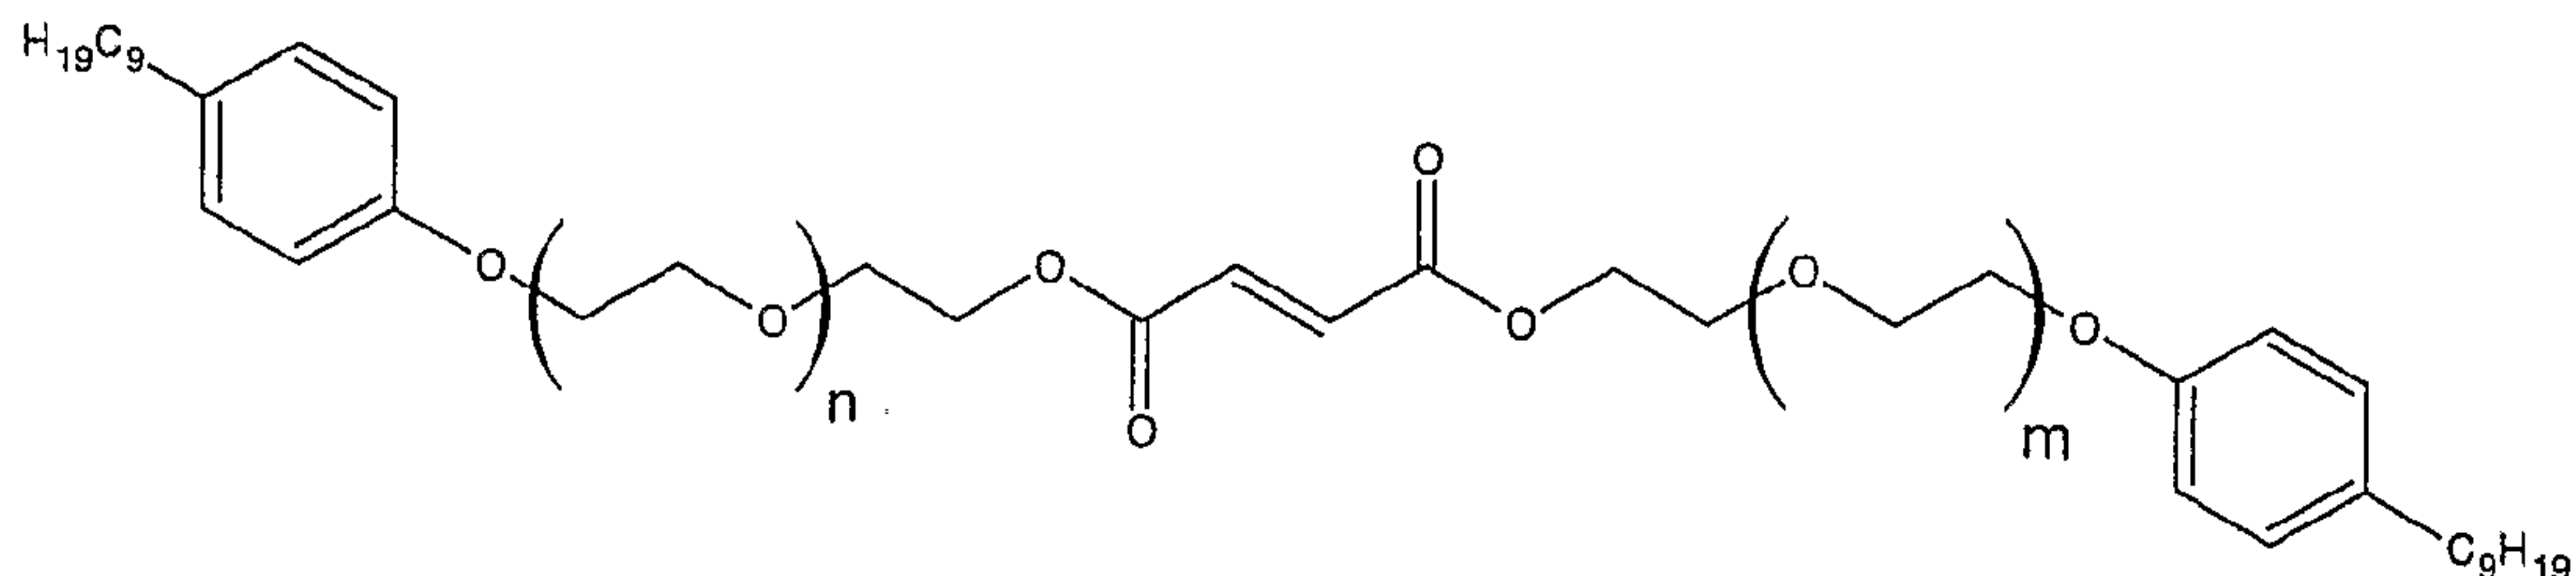

**IV**, where n and m combined are greater than or equal to 12.

[0023] The inclusion of such an accelerator into a cyanoacrylate composition provides for a demonstrated improved fixture speeds, particularly on substrates constructed of certain woods, such as obechi, and ceramic, and combinations thereof, without sacrificing shelf life.

[0024] The cyanoacrylate component includes cyanoacrylate monomers which may be chosen with a raft of substituents, such as those represented by  $H_2C=C(CN)-COOR$ , where R is selected from  $C_{1-15}$  alkyl,  $C_{2-12}$  alkoxyalkyl such as  $C_{2-12}$  alkoxyalkyl,  $C_{3-10}$  cycloalkyl,  $C_{3-10}$  alkenyl,  $C_{6-18}$  aralkyl,  $C_{4-18}$  aryl, allyl and  $C_{1-15}$  haloalkyl groups. Desirably, the cyanoacrylate monomer is selected from methyl cyanoacrylate, ethyl-2-cyanoacrylate, propyl cyanoacrylates, butyl cyanoacrylates (such as n-butyl-2-cyanoacrylate), octyl cyanoacrylates, allyl cyanoacrylate,  $\beta$ -methoxyethyl cyanoacrylate and combinations thereof. A particularly desirable one is ethyl-2-cyanoacrylate.

[0025] The cyanoacrylate component should be included in the compositions in an amount within the range of from about 50% to about 99.98% by weight, with the range of about 90% to about 99% by weight being desirable, and about 95% by weight of the total composition being particularly desirable.


[0026] In addition to the accelerator embraced by the chemical structures above, one or more additional accelerators may also be included in the composition. Such accelerators may be selected from calixarenes and oxacalixarenes, silacrowns, crown ethers, cyclodextrins, poly(ethyleneglycol)

-8-

di(meth)acrylates, ethoxylated hydric compounds and combinations thereof.

[0027] Of the calixarenes and oxacalixarenes, many are known, and are reported in the patent literature. See e.g. U.S. Patent  
5 Nos. 4,556,700, 4,622,414, 4,636,539, 4,695,615, 4,718,966, and 4,855,461.

[0028] For instance, as regards calixarenes, those within structure V are useful herein:

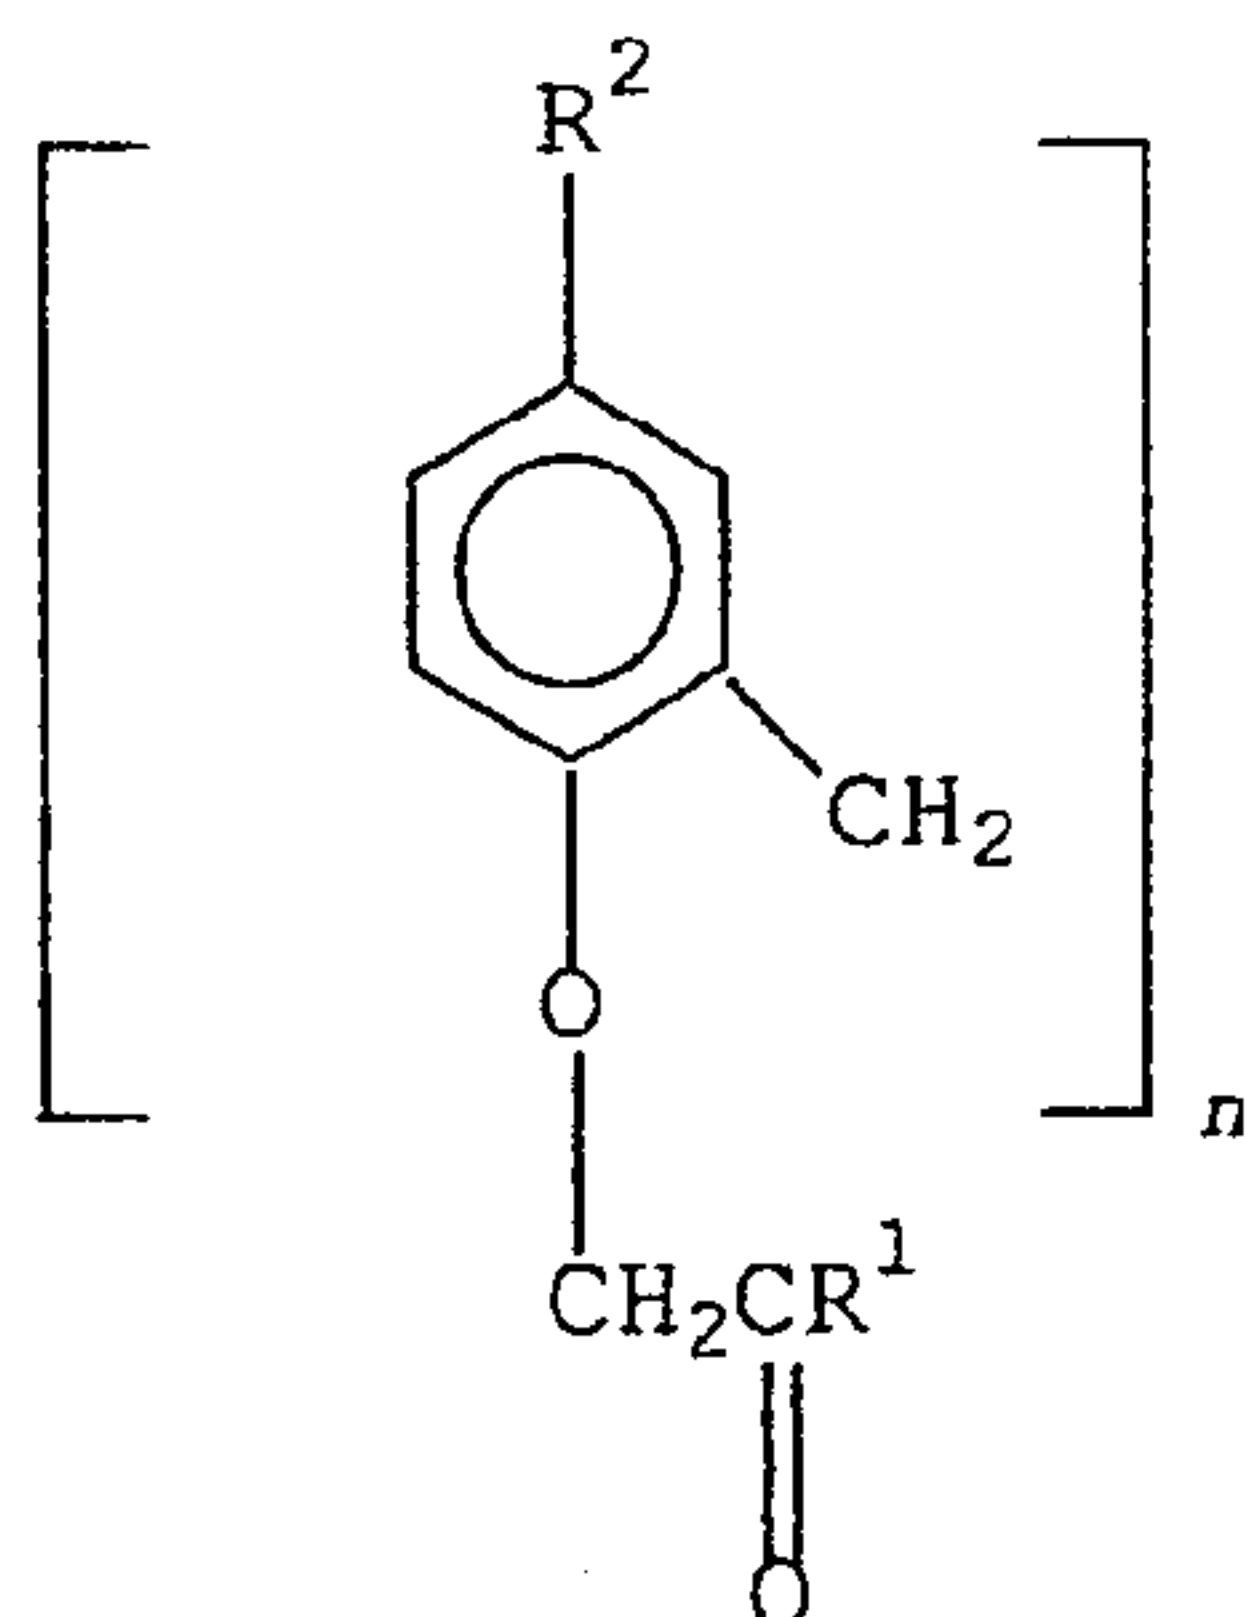

10 where R<sup>1</sup> is alkyl, alkoxy, substituted alkyl or substituted alkoxy; R<sup>2</sup> is H or alkyl; and n is 4, 6 or 8.

[0029] One particularly desirable calixarene is tetrabutyl tetra[2-ethoxy-2-oxoethoxy]calix-4-arene ("TBTEOCA").

[0030] A host of crown ethers are known. For instance,  
15 examples which may be used herein either individually or in combination, or in combination with other first accelerators include 15-crown-5, 18-crown-6, dibenzo-18-crown-6, benzo-15-crown-5-dibenzo-24-crown-8, dibenzo-30-crown-10, tribenzo-18-crown-6, asym-dibenzo-22-crown-6, dibenzo-14-crown-4,  
20 dicyclohexyl-18-crown-6, dicyclohexyl-24-crown-8, cyclohexyl-12-crown-4, 1,2-decalyl-15-crown-5, 1,2-naphtho-15-crown-5, 3,4,5-naphthyl-16-crown-5, 1,2-methyl-benzo-18-crown-6, 1,2-methylbenzo-5, 6-methylbenzo-18-crown-6, 1,2-t-butyl-18-crown-6,




-9-

1,2-vinylbenzo-15-crown-5, 1,2-vinylbenzo-18-crown-6, 1,2-t-butyl-cyclohexyl-18-crown-6, asym-dibenzo-22-crown-6 and 1,2-benzo-1,4-benzo-5-oxygen-20-crown-7. See U.S. Patent No. 4,837,260 (Sato).

5

[0031] Of the silacrowns, again many are known, and are reported in the literature. For instance, a typical silacrown may be represented within the following structure (VI):


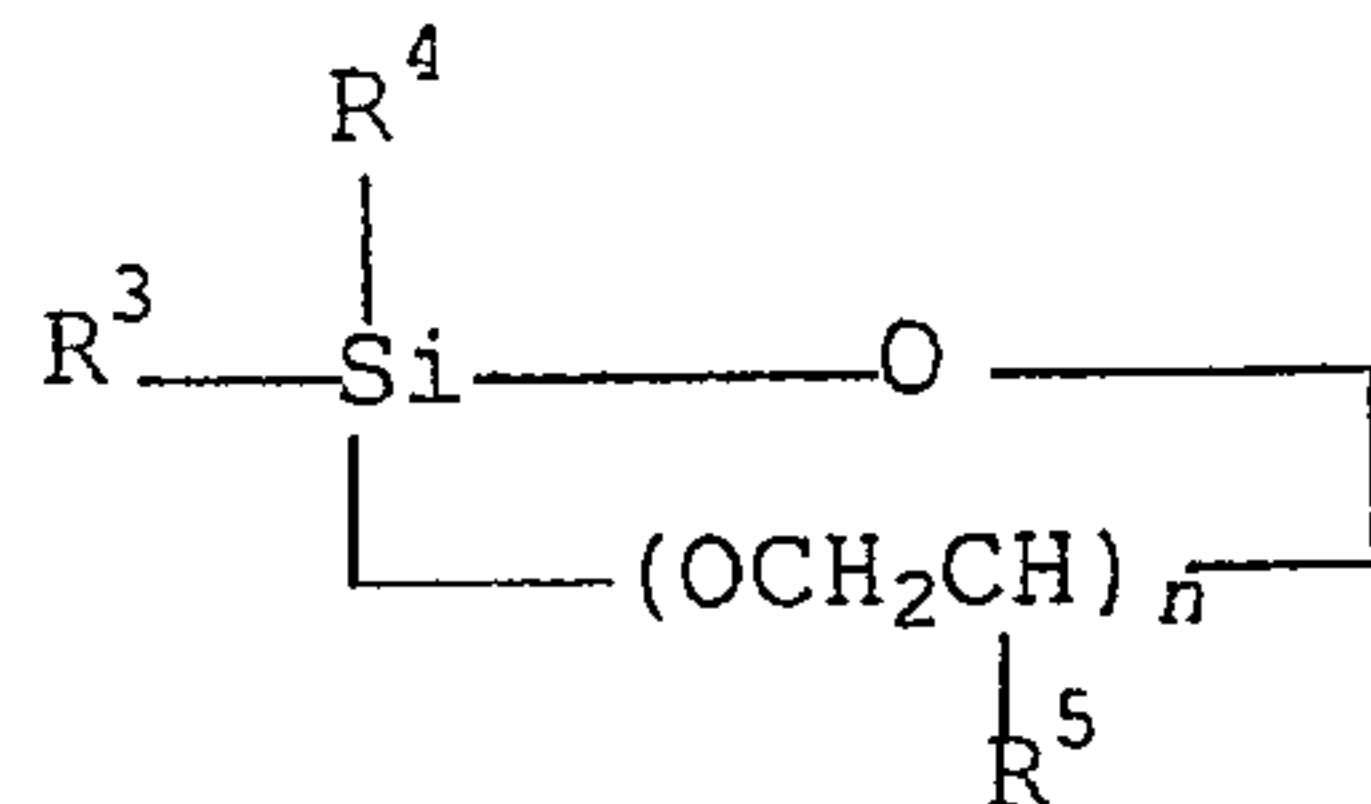


where  $R^3$  and  $R^4$  are organo groups which do not themselves cause polymerization of the cyanoacrylate monomer,  $R^5$  is H or  $CH_3$  and  $n$  is an integer of between 1 and 4. Examples of suitable  $R^3$  and  $R^4$  groups are R groups, alkoxy groups, such as methoxy, and aryloxy groups, such as phenoxy. The  $R^3$  and  $R^4$  groups may contain halogen or other substituents, an example being trifluoropropyl.


5 However, groups not suitable as  $R^4$  and  $R^5$  groups are basic groups, such as amino, substituted amino and alkylamino.

[0032] Specific examples of silacrown compounds useful in the inventive compositions include:

-10-

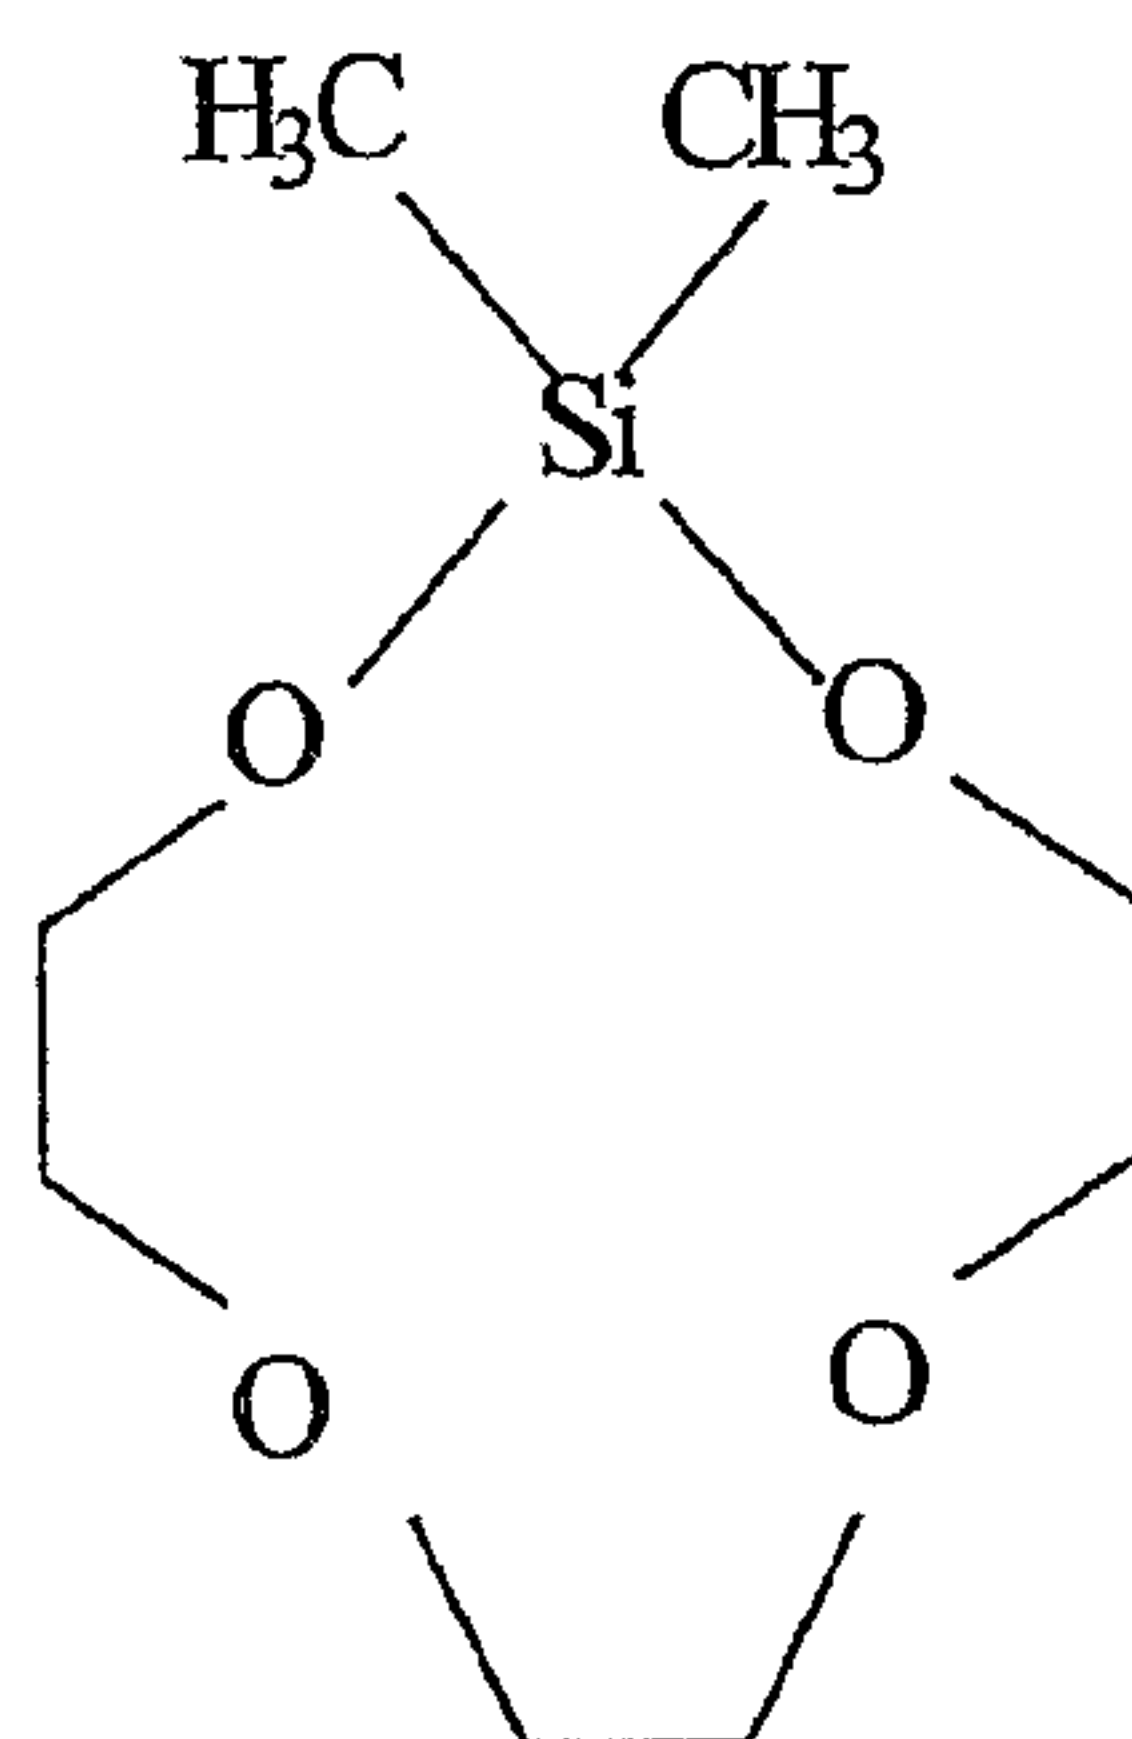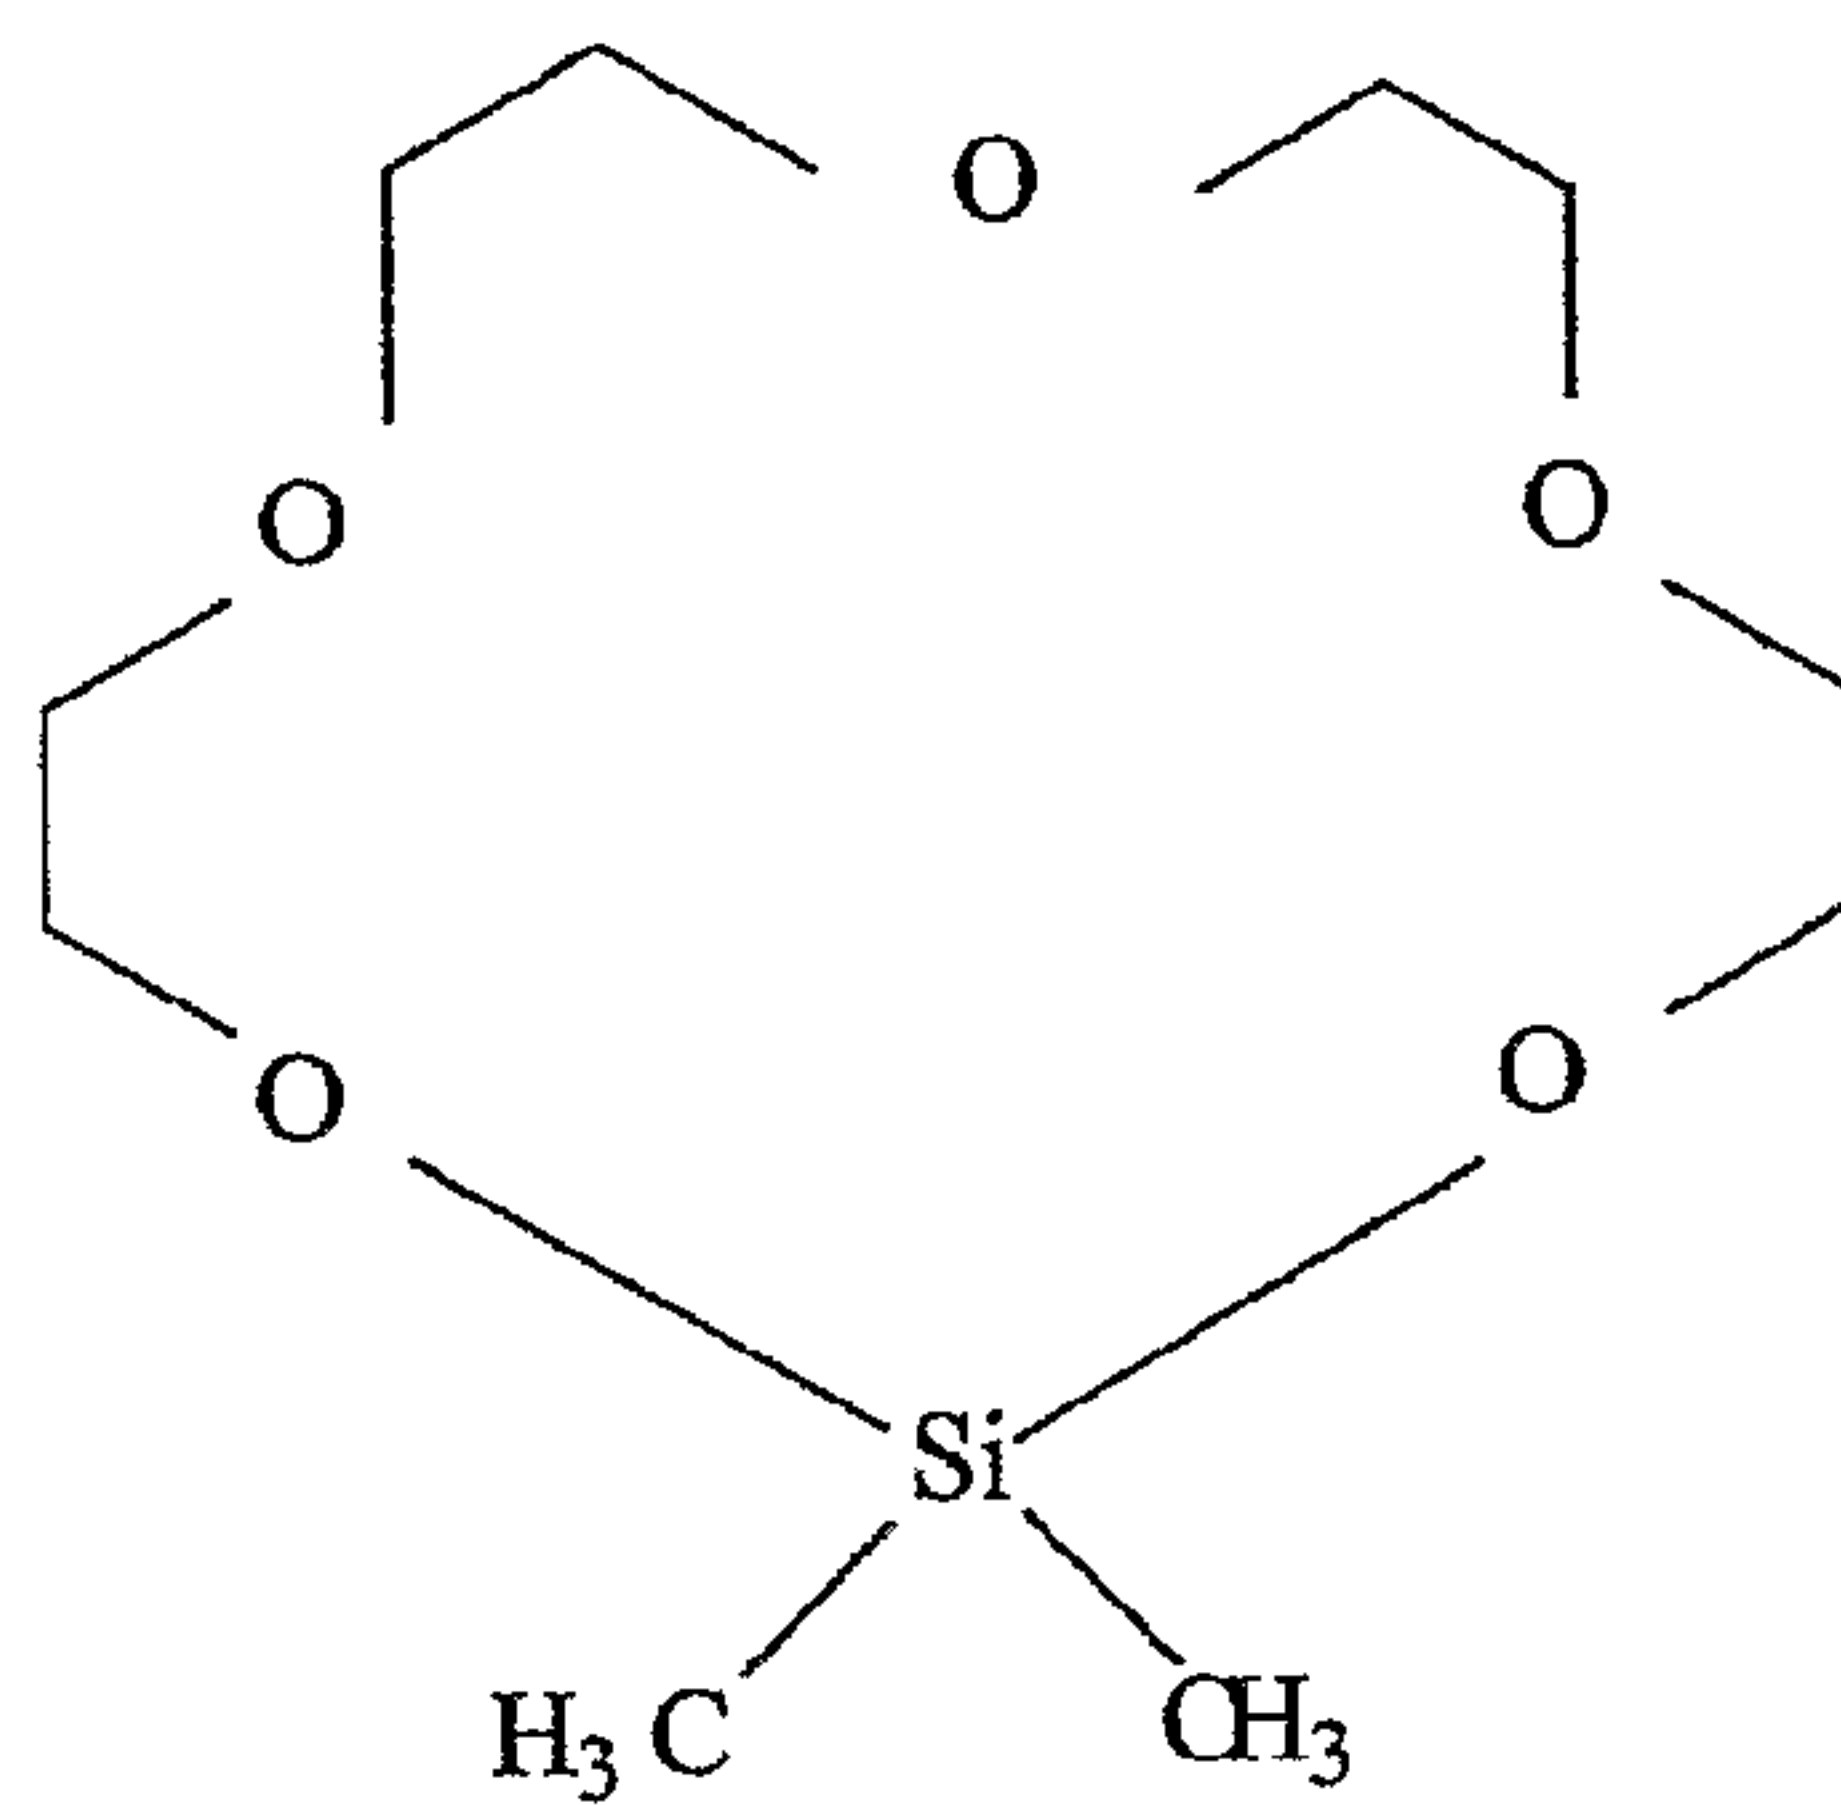dimethylsila-11-crown-4 (VII);5 dimethylsila-14-crown-5 (VIII);

-11-

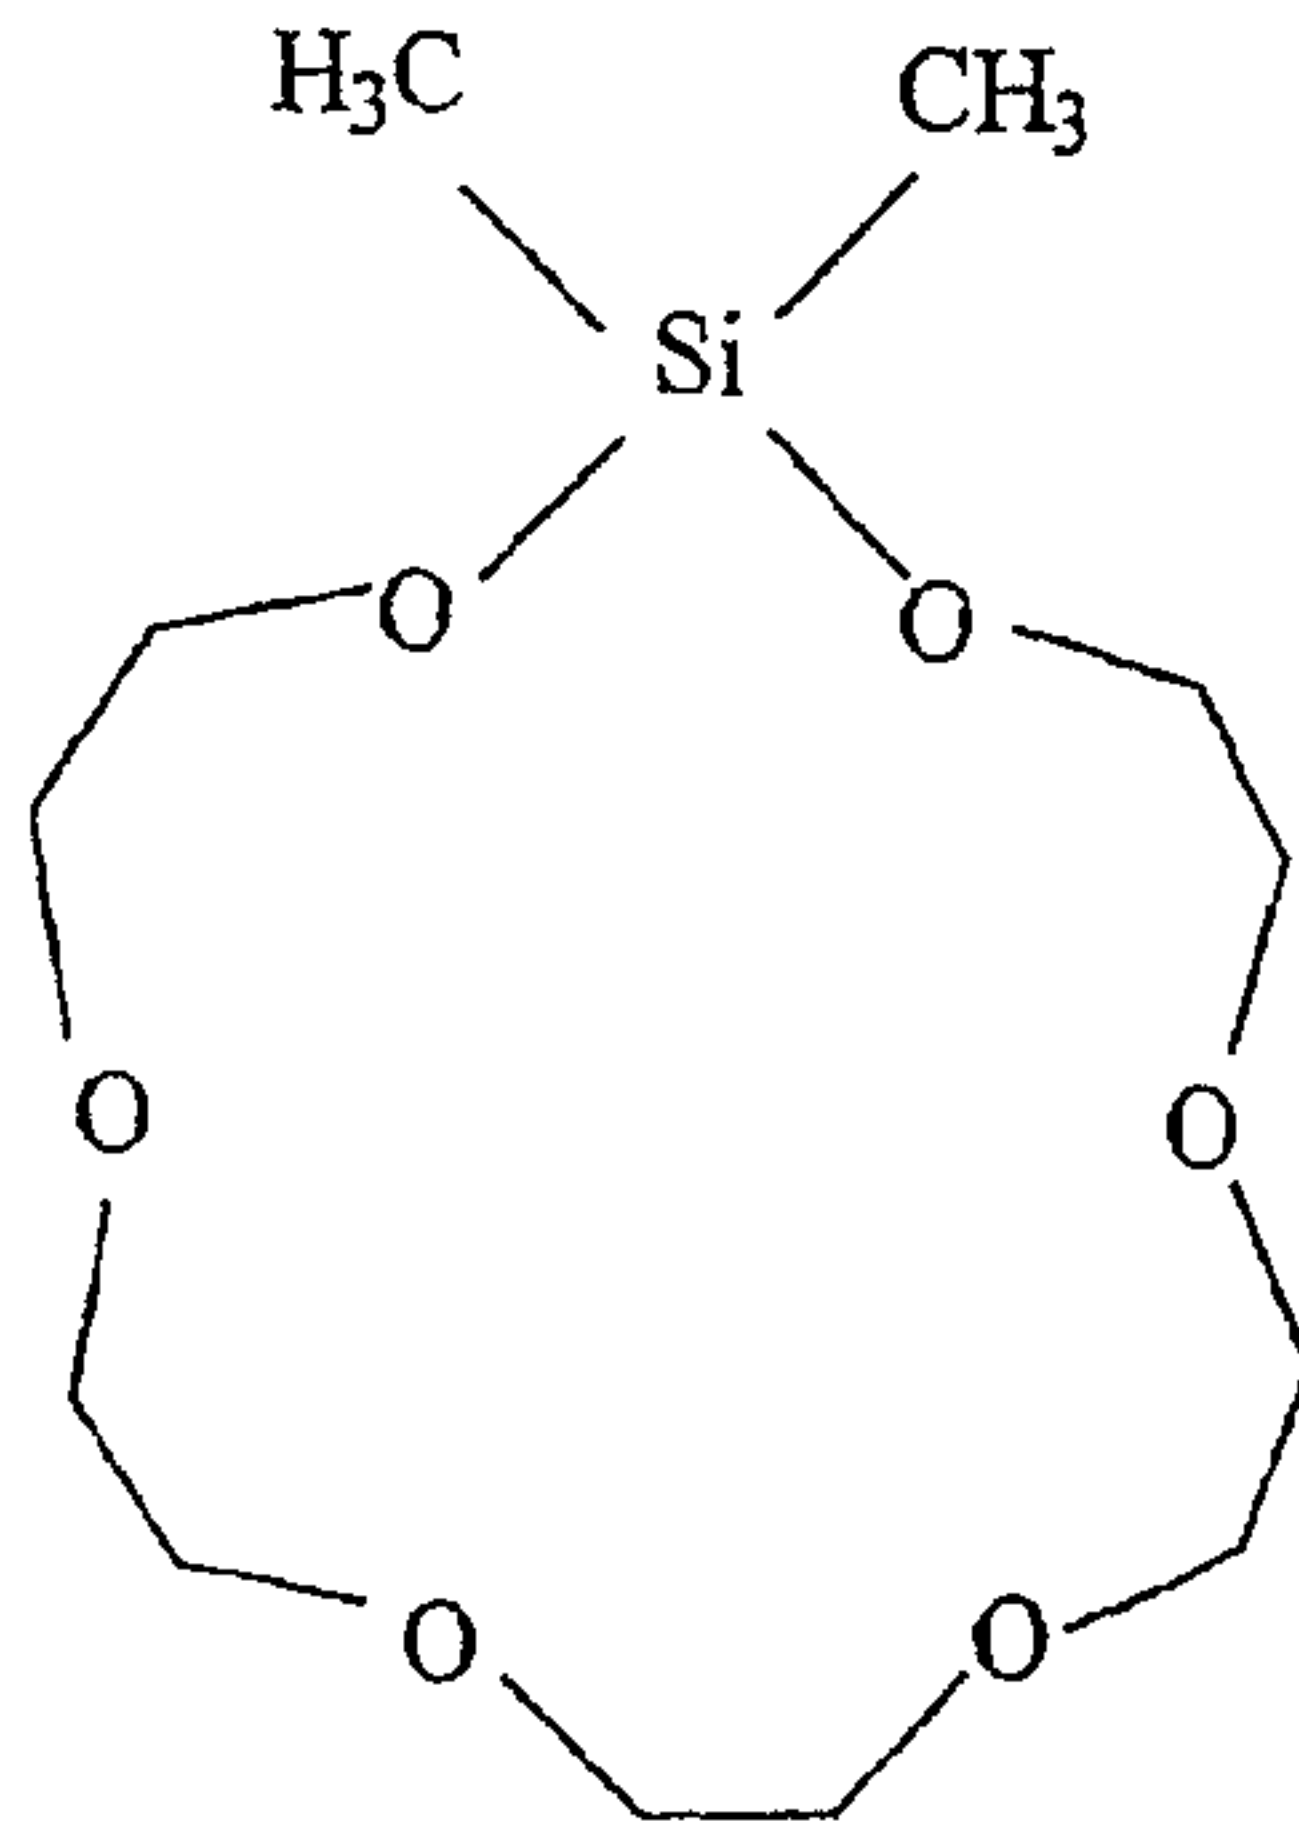


and dimethylsila-17-crown-6 (IX).

[0033] See e.g., U.S. Patent No. 4,906,317 (Liu).

5 [0034] Many cyclodextrins may be used in connection with the present invention. For instance, those described and claimed in U.S. Patent No. 5,312,864 (Wenz), as hydroxyl group derivatives of an  $\alpha$ ,  $\beta$  or  $\gamma$ -cyclodextrin which is at least partly soluble in the cyanoacrylate would be appropriate choices for use herein as  
 10 the first accelerator component.

[0035] For instance, poly(ethylene glycol) di(meth)acrylates suitable for use herein include there within structure X below:

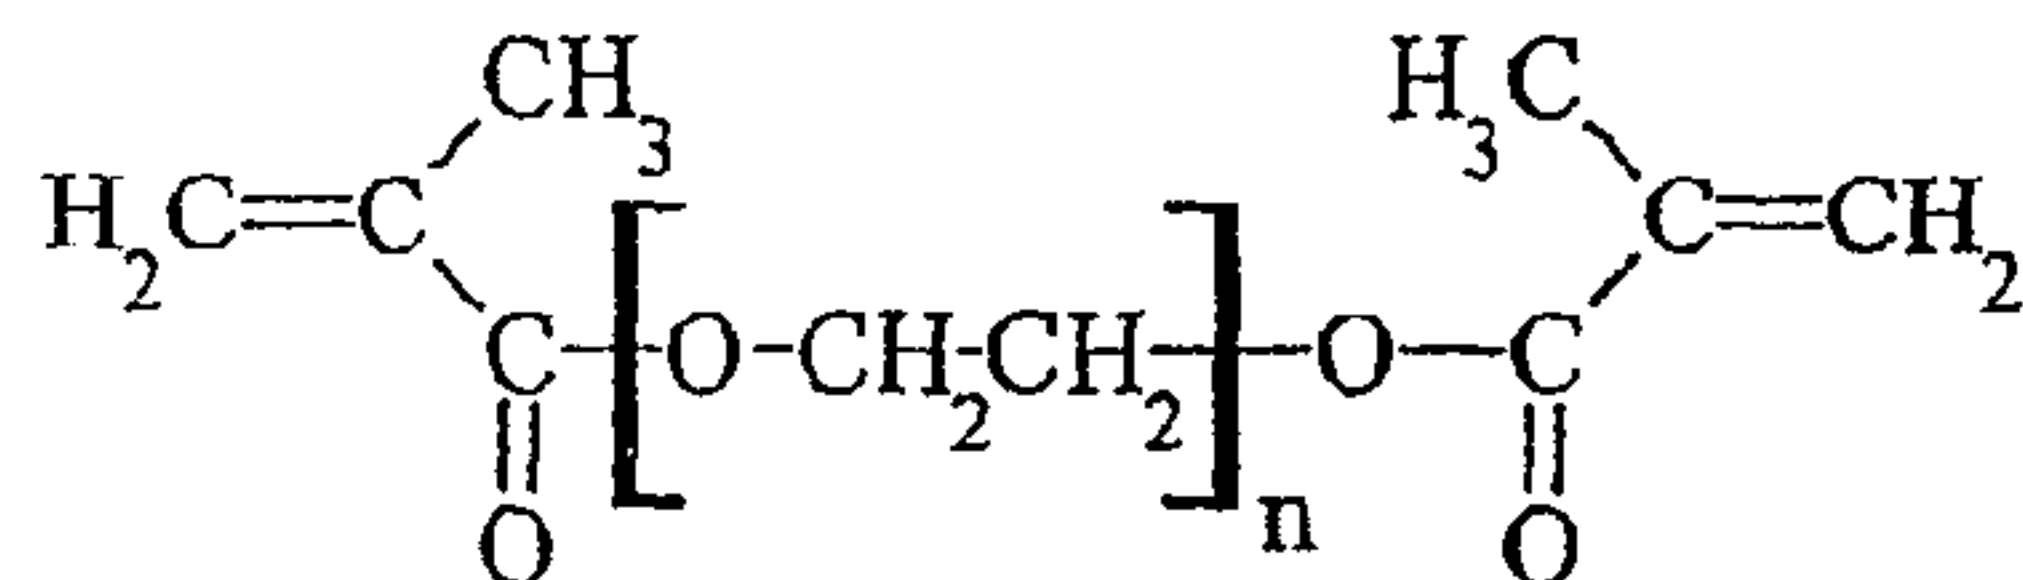

15


where n is greater than 3, such as within the range of 3 to 12, with n being 9 as particularly desirable. More specific examples include PEG 200 DMA, (where n is about 4) PEG 400 DMA (where n is about 9), PEG 600 DMA (where n is about 14), and PEG



-12-

800 DMA (where n is about 19), where the number (e.g., 400) represents the average molecular weight of the glycol portion of the molecule, excluding the two methacrylate groups, expressed as grams/mole (i.e., 400 g/mol). A particularly desirable PEG DMA is PEG 400 DMA.

[0036] And of the ethoxylated hydric compounds (or ethoxylated fatty alcohols that may be employed), appropriate ones may be chosen from those within structure XI:

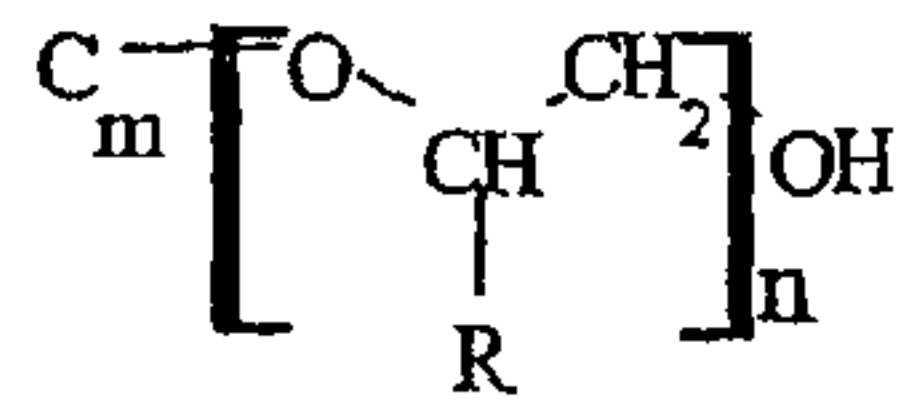

where  $C_m$  can be a linear or branched alkyl or alkenyl chain, m is an integer between 1 to 30, such as from 5 to 20, n is an integer between 2 to 30, such as from 5 to 15, and R may be H or alkyl, such as  $C_{1-6}$  alkyl.

[0037] Commercially available examples of materials within structure XI include those offered under the DEHYDOL trademark from Cognis Deutschland GmbH & Co. KG, Dusseldorf, Germany, such as DEHYDOL 100.

[0038] The accelerator embraced by structures I-IV should be included in the compositions in an amount within the range of from about 0.01% to about 10% by weight, with the range of about 0.1 to about 0.5% by weight being desirable, and about 0.4% by weight of the total composition being particularly desirable.

[0039] Additives may be included in the inventive compositions to confer additional physical properties, such as improved shelf-life stability, flexibility, thixotropy, increased viscosity, color, improved toughness, and enhanced resistance to thermal degradation. Such additives therefore may be selected from free radical stabilizers, anionic stabilizers, gelling agents, thickeners [such as polymethyl methacrylate

-13-

(PMMA)], thixotropy conferring agents (such as fumed silica), dyes, toughening agents, thermal degradation enhancers, plasticizers and combinations thereof.

5 [0040] In another aspect of the invention, there is provided a method of bonding together two substrates, at least one of which is constructed of materials, such as certain woods, cotton and cork. The method includes applying to at least one of the substrates a composition as described above, and thereafter mating together the substrates for a time sufficient to permit the adhesive to fixture. For many applications, the substrate should become fixed in less than 30 seconds, and depending on substrate as little as 1-3 seconds.

[0041] In yet another aspect of the invention, there is provided reaction products of the so-described compositions.

15 [0042] In still another aspect of the invention, there is provided a method of preparing the so-described compositions. The method includes providing a cyanoacrylate component, and combining therewith with mixing a first and second accelerator component.

20 [0043] In an additional aspect of the invention, there is provided a method of bonding together two substrates, at least one of which is constructed of a material selected from the group consisting of wood, cotton and cork, using the compositions of this invention. The method includes applying the compositions to at least one of the substrates and mating together the substrates for a time sufficient to permit the composition to fixture.

[0044] These aspects of the invention will be further illustrated by the examples which follow.

-14-

EXAMPLES

[0045] We prepared four samples to evaluate their fixture speeds on a variety of substrates. The samples were prepared by mixing together the constituents in any order for a sufficient period of time to ensure substantial homogeneity of the constituents. Ordinarily, about 30 minutes would suffice, depending of course on the quantity of the constituents used. The constituents of these samples are listed below in Table 1.

Table 1

Component		Sample			
Type	Identity	A	B	C	D
CA	Ethyl-2-CA	82.4983	82.4983	82.3983	82.3983
Accelerator	Compound IV	0.5	0.5	0.4	--
	TBTEOCA	--	--	0.2	0.2
	PEG 400 DMA	--	--	--	0.4
Plasticizer	Glycerol triacetate	12.5	12.5	12.5	12.5
Stabilizer	HQ	0.5	0.5	0.5	0.5
Thickener	PMMA	4.0	4.0	4.0	4.0

[0046] We applied each of Samples A-D to the substrates listed below in Table 2, and measured their fixture speeds in bonding the substrates (each being made from the same material) to one another. The fixture speed is the time from joining the two substrates (each of which being about 1 inch wide and being aligned with about a 0.5 inch overlap) sufficient to hold a 3 kg weight. The results are illustrated below in Table 2 and shown in Fig. 1.



-15-

Table 2

Physical Properties	Substrate	Sample/ (secs)			
		A	B	C	D
Fixture Times	Paper	40	40	10	10
	MDF	40	40	25	40
	Obechi	10	10	15	15
	Yellow Pine	30	30	25	20
	Ash	10	10	10	15
	W. Deal	40	40	15	40
	Limba	10	10	10	15
	Ceramic/butt	10	10	15	15
	- Balsa	3	3	3	3
	Cardboard	10	10	5	5
	Polycarbonate	25	25	25	25
	ABS	3	3	3	3
	Aluminum	3	3	3	3
	Stainless steel	3	3	3	3

5

[0047] As can be seen from Table 2 and Fig. 1, Samples A and B (cyanoacrylate with compound IV) demonstrates improved fixture speeds on certain substrates, namely the woods, obechi; ash and limba, and ceramic, as compared with Sample D, which is the cyanoacrylate with the combination of the noted calixarenes and polyethylene glycol dimethacrylate.

[0048] In addition, the combination of the accelerator used in the present invention together with the noted calixarene (Sample C) improves fixture speed compared with the combination of the noted calixarene together with the noted polyethylene glycol dimethacrylate on certain substrates namely, MDF, ash, white deal and limba.

20

-16-

Table 3

Physical Properties	Sample			
	A	B	C	D
Viscosity (MPas)	32	32	34.4	34.1
GBMS Bond Strength 24 hr. (N/mm <sup>2</sup> )	13.57 +/- 1.56	12.70 +/- 1.54	13.86 +/- 1.00	12.70 +/- 1.15

[0049] The results shown in Table 3 illustrate that the inventive compositions (Samples A-C) behave as adhesives, yielding bond strength comparable to the control composition (Sample D), while demonstrating with reference to Table 2 improved fixture speeds on certain substrates, namely the woods, obechi, ash and limba, and ceramic.

[0050] In Table 4, stability data for Samples A-D filled in aluminum tubes and aged at 82°C for the specified period of time is shown. The results in Table 4 demonstrate that the inventive compositions retain the benefits noted above even after ageing under the noted conditions.


15

Table 4

Aged Data	Sample			
	A	B	C	D
<b>3 days @ 82°C</b>				
Viscosity (Mps)	36	35.7	35.8	36.5
Ratio	1.13	1.12	1.04	1.07
Fixture time (secs) on paper	40 - 50	40 - 50	5 - 10	10 - 15
<b>6 days @ 82°C</b>				
Viscosity (Mps)	38.2	39.4	40.3	39.2
Ratio	1.19	1.23	1.17	1.15
Fixture time (secs) on paper	80 - 100	80 - 100	15 - 20	30 - 40

**What is Claimed is:**

1. A cyanoacrylate adhesive composition comprising:  
 a cyanoacrylate component; and  
 5 an accelerator represented by the following chemical structure  
 structure

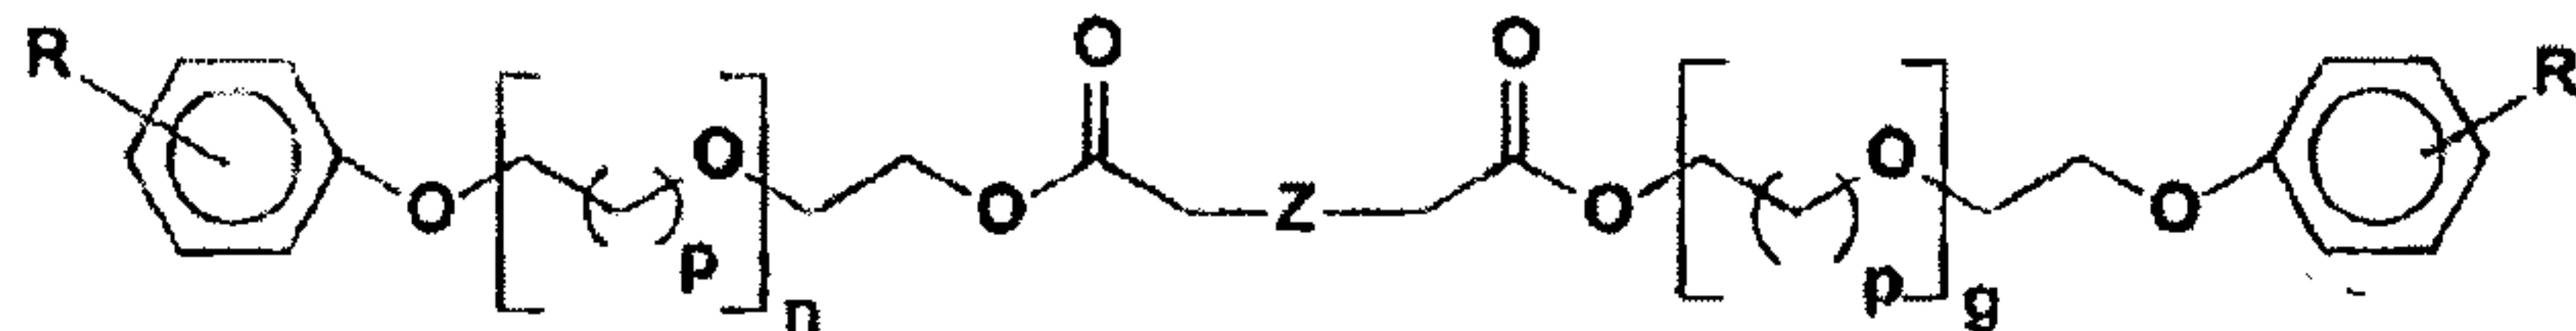


- wherein R is a member selected from the group consisting of  
 10 hydrogen, alkyl, alkyloxy, alkyl thioethers, haloalkyl,  
 carboxylic acid and esters thereof, sulfinic acid and esters  
 thereof, sulfonic acid and esters thereof, sulfurous acid and  
 esters thereof, phosphinic acid and esters thereof, phosphonic  
 acid and esters thereof, and phosphorous acid and esters  
 15 thereof,

Z is a single or double bond, n is 1-12, p is 1-3, R' is  
 the same as R, and g is 1-12.

2. The composition of claim 1, wherein the accelerator is  
 represented by the following chemical structure

20

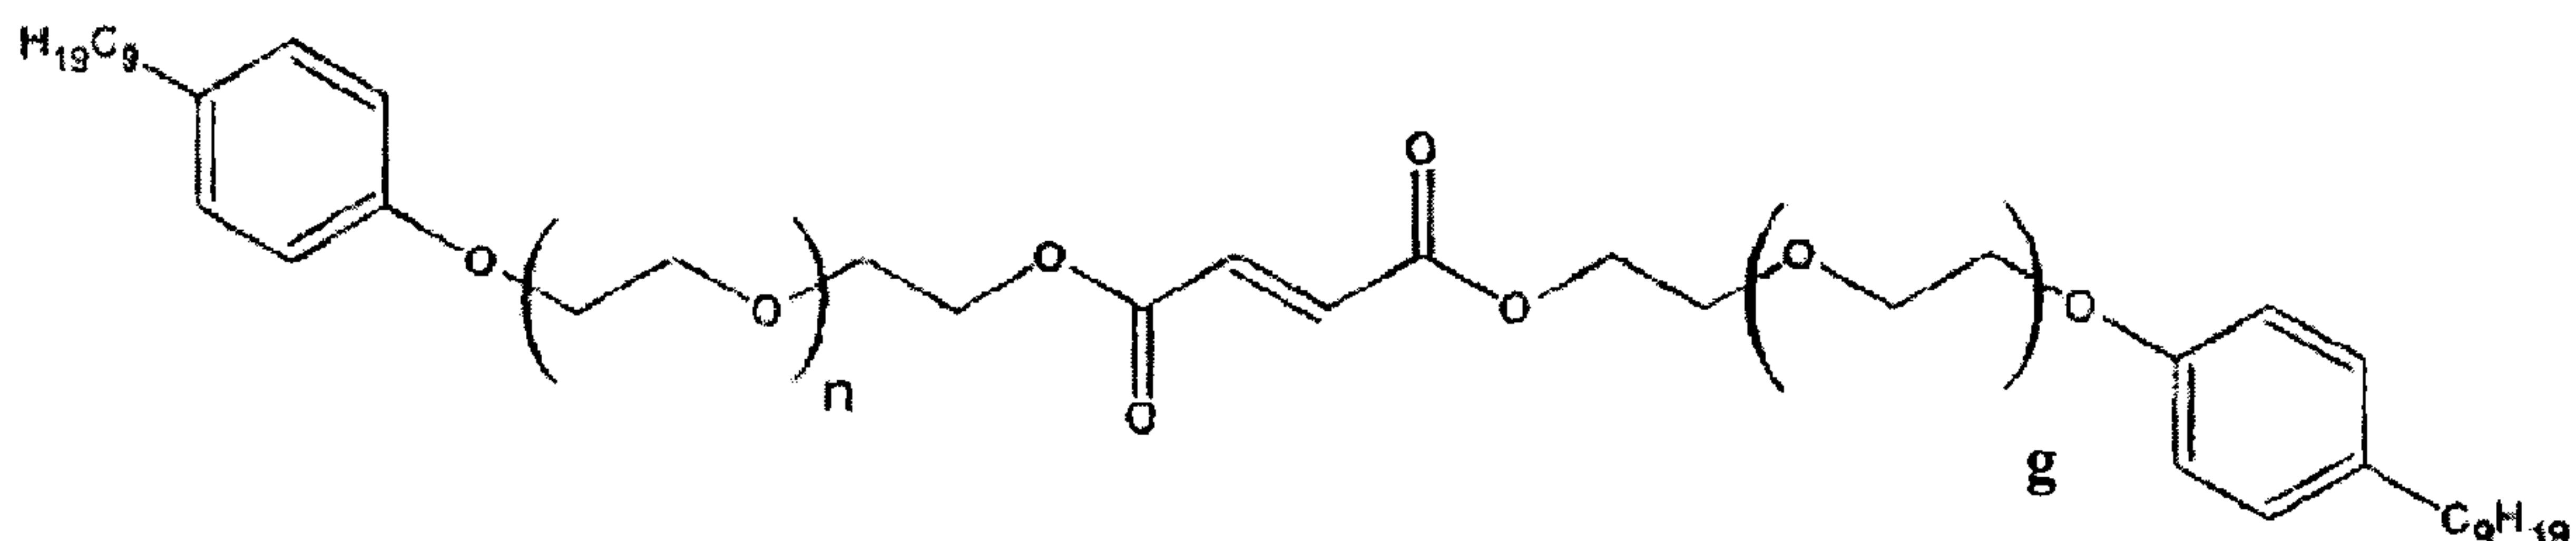

wherein n and g combined are greater than or equal to 12.

3. The composition according to claim 1, wherein the  
 cyanoacrylate component is selected from materials within the  
 structure  $H_2C=C(CN)-COOR$ , wherein R is selected from  $C_{1-15}$  alkyl,  
 25 alkoxyalkyl, cycloalkyl, alkenyl, aralkyl, aryl, allyl and  
 haloalkyl groups.



-18-

4. The composition according to claim 1, wherein the cyanoacrylate component comprises ethyl-2-cyanoacrylate.

5. The composition according to claim 1, further comprising an additional accelerator component selected from the group consisting of calixarenes, oxacalixarenes, silacrowns, cyclodextrins, crown ethers, poly(ethyleneglycol) di(meth)acrylates, ethoxylated hydric compounds, and combinations thereof.

6. The composition according to claim 1, wherein the accelerator is used in an amount within the range of from about 0.01% by weight to about 5% by weight based on the total composition.

7. The composition according to claim 5, wherein the additional accelerator component is used in an amount within the range of from about 0.01% by weight to about 5% by weight based on the total composition.

8. The composition according to claim 1, further comprising additives selected from the group consisting of free radical stabilizers, anionic stabilizers, plasticizers, thixotropy conferring agents, thickeners, dyes, toughening agents, thermal degradation enhancers, and combinations thereof.

9. A cure product of the composition according to claim 1.

10. A method of bonding together two substrates, at least one of which is constructed of a material selected from the group consisting of wood and ceramic, comprising the steps of:

applying a cyanoacrylate-containing adhesive composition according to claim 1, to at least one of the substrates, and mating together the substrates for a time sufficient to permit the adhesive to fixture.

-19-

11. A method of preparing a cyanoacrylate-containing composition according to claim 1, comprising the steps of:  
providing a cyanoacrylate component, and  
combining therewith with mixing an accelerator component as  
5 defined in claim 1.

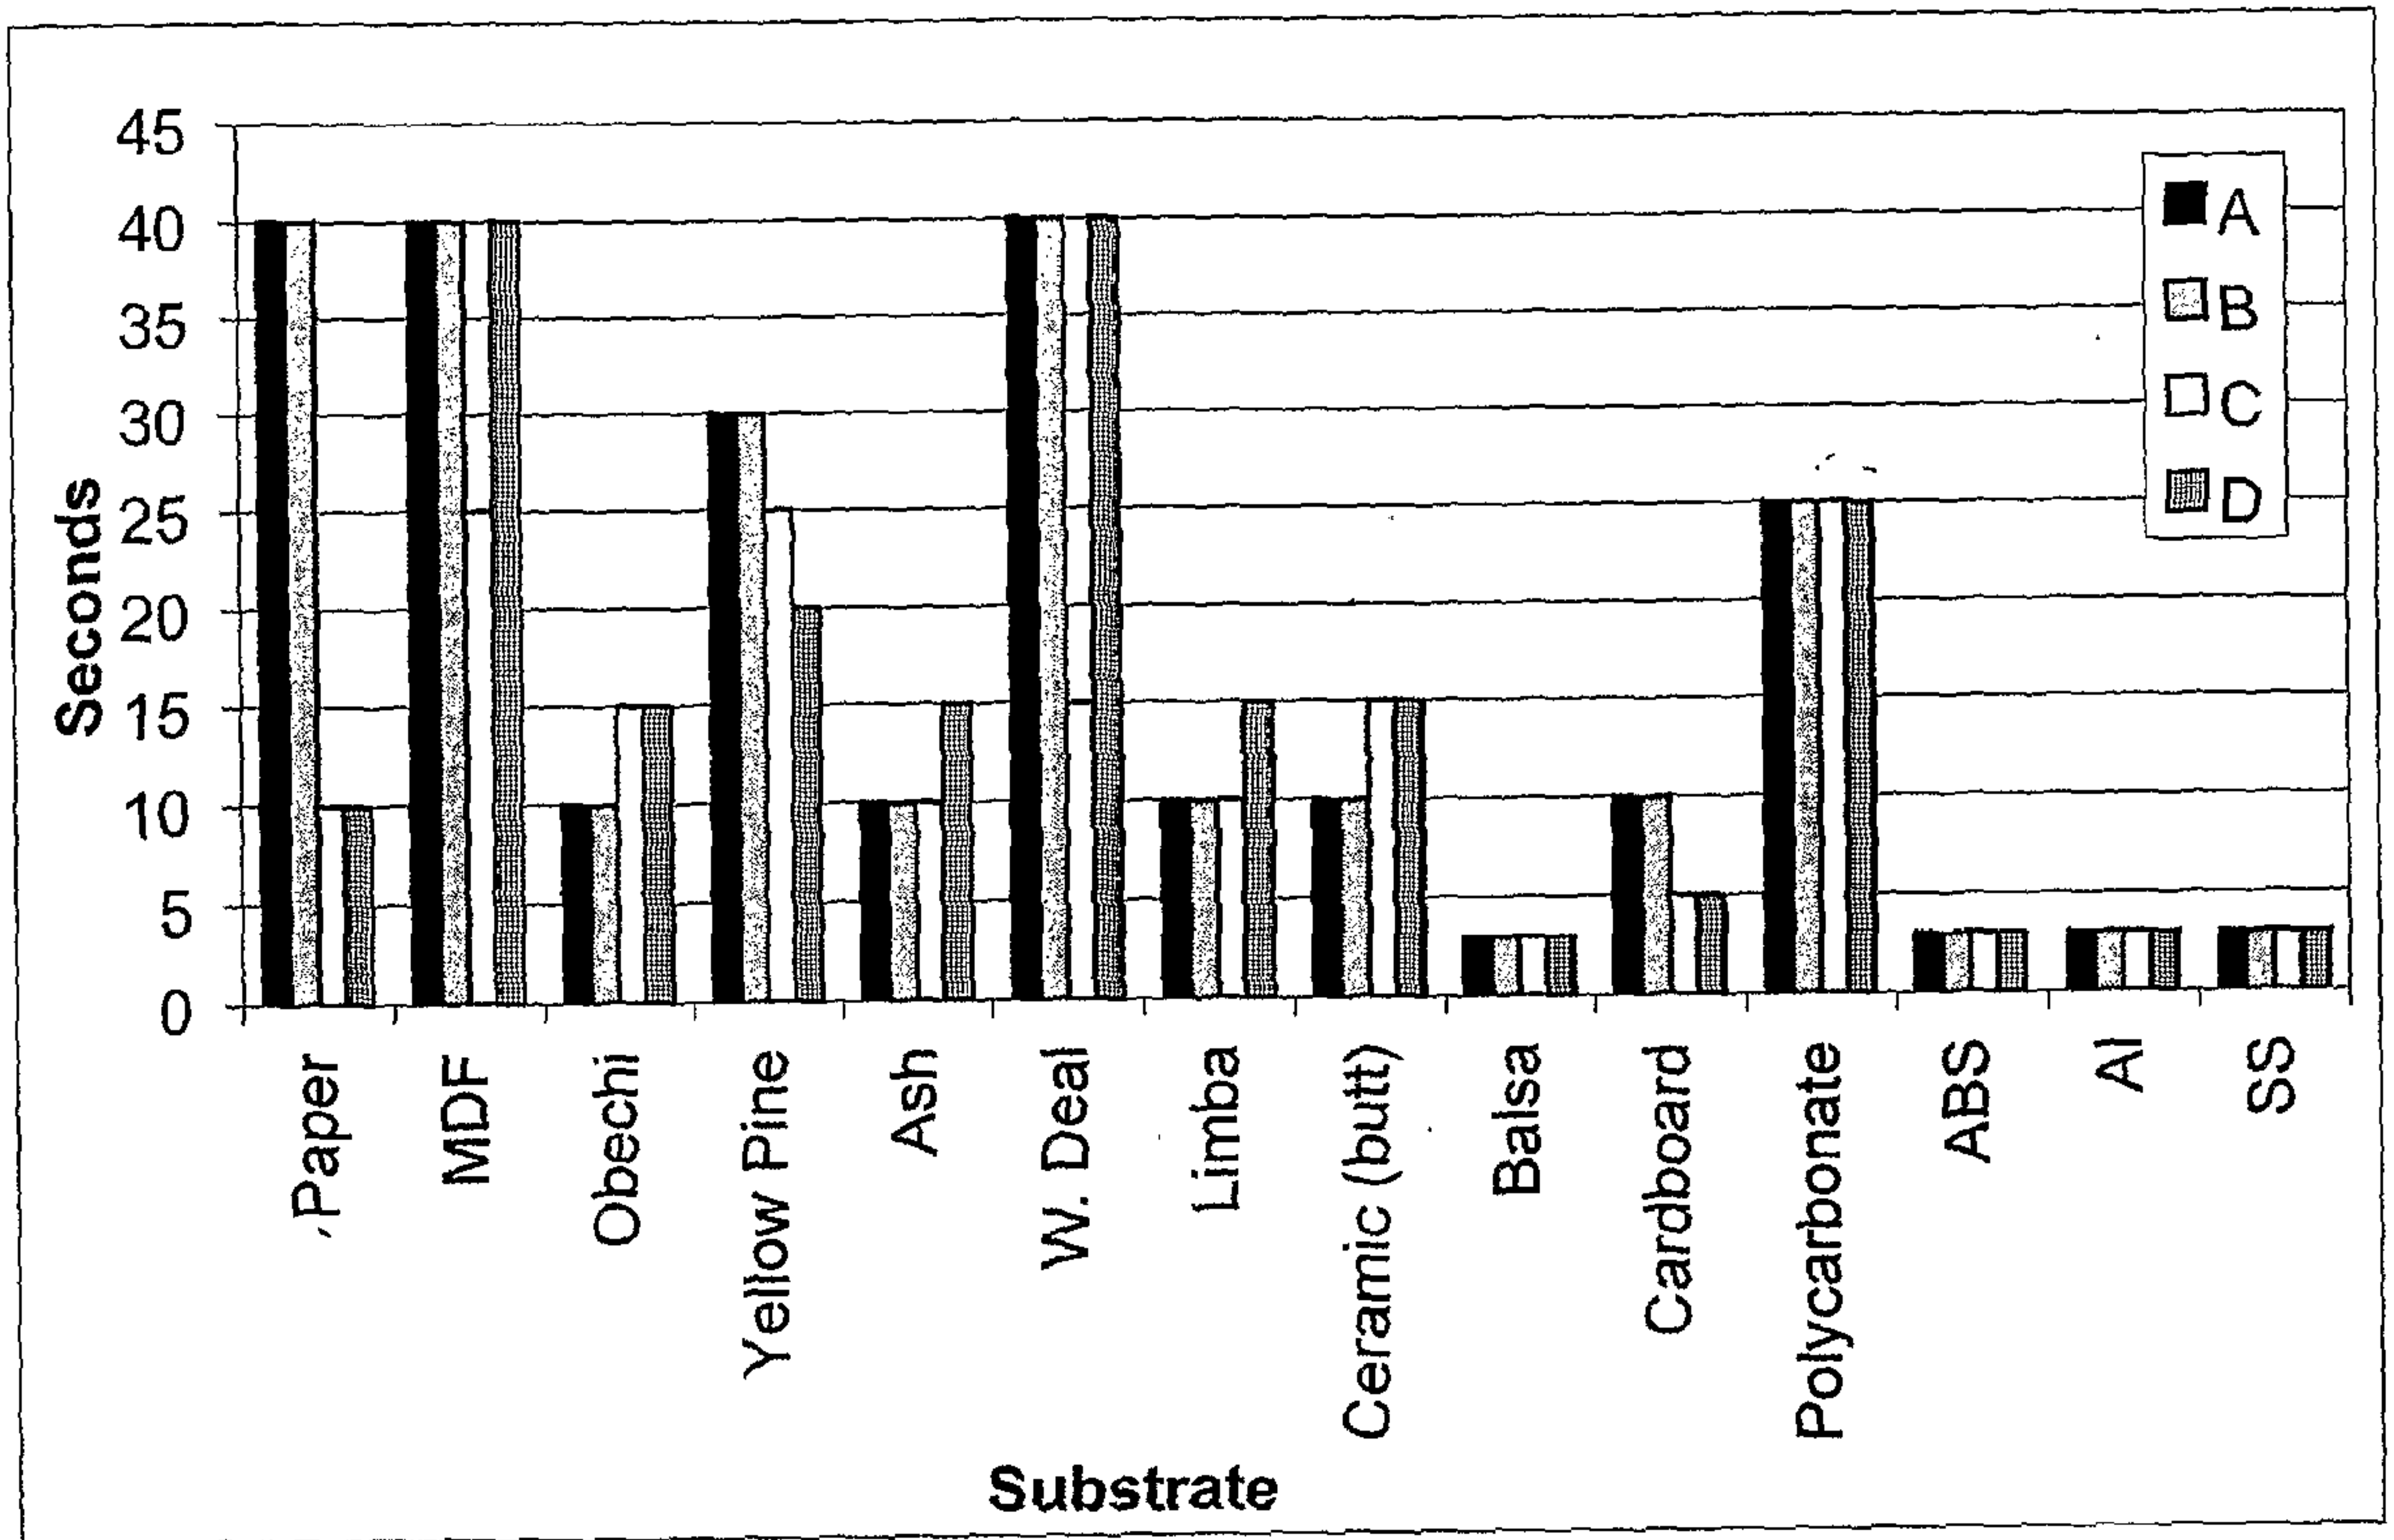


FIG. 1



