



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(22) Date de dépôt/Filing Date: 2018/03/05

(41) Mise à la disp. pub./Open to Public Insp.: 2018/09/03

(30) Priorité/Priority: 2017/03/03 (US62/466,883)

(51) Cl.Int./Int.Cl. *E01C 23/06* (2006.01),
E01C 23/10 (2006.01)


(71) Demandeur/Applicant:
PAVEGARD PRODUCTS INC., CA

(72) Inventeur/Inventor:
HARCO, PETER, CA...

(74) Agent: FINLAYSON & SINGLEHURST

(54) Titre : DISTRIBUTEUR DE MEMBRANE DESTINE A UNE MACHINE DE PAVAGE

(54) Title: PAVING MACHINE MEMBRANE DISPENSER

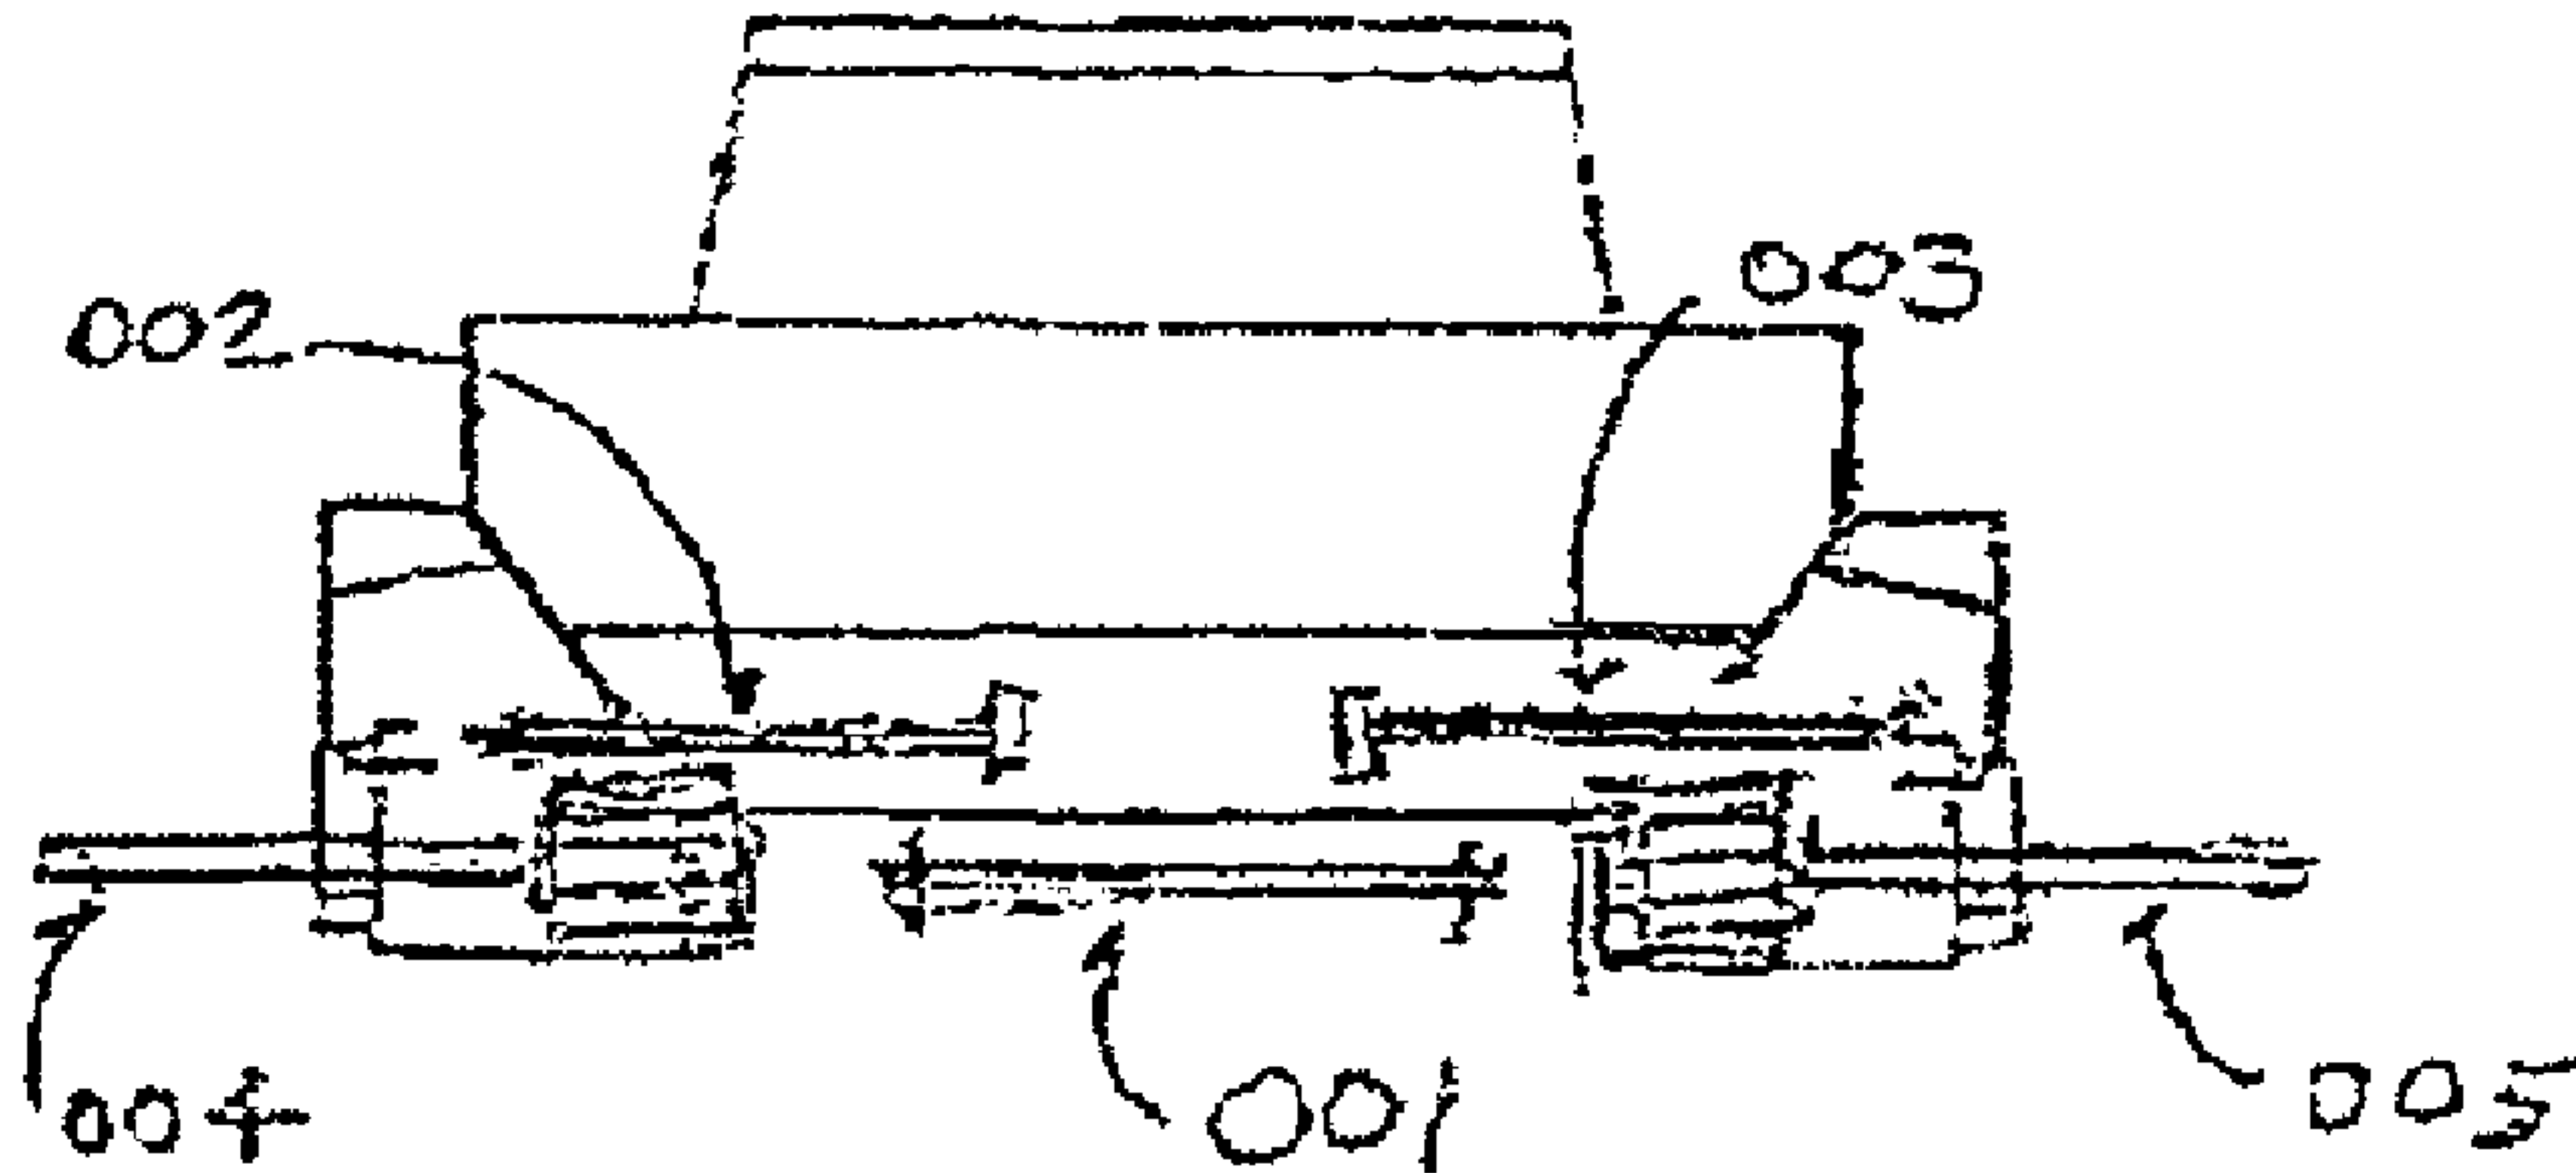

(57) Abrégé/Abstract:

The present invention is directed to an improved design and improved method of installation of stress absorbing membrane interlayers, commonly known as SAMIs, used for strengthening and waterproofing asphalt pavements in road or highway surfacing

(57) **Abrégé(suite)/Abstract(continued):**

operations. By a novel method of modifying a standard paving machine the present invention makes it easier and more convenient to install SAMI membranes beneath a layer of new asphalt pavement, thus providing greater resistance to pavement cracking resulting in lower overall maintenance costs.

ABSTRACT

The present invention is directed to an improved design and improved method of installation of stress absorbing membrane interlayers, commonly known as SAMIs, used for strengthening and waterproofing asphalt pavements in road or highway surfacing operations. By a novel method of modifying a standard paving machine the present invention makes it easier and more convenient to install SAMI membranes beneath a layer of new asphalt pavement, thus providing greater resistance to pavement cracking resulting in lower overall maintenance costs.

PAVING MACHINE MEMBRANE DISPENSER

RELATED APPLICATIONS

[0001] This application (Attorney's Ref. No. P219436) claims priority of U.S. Provisional Patent Application Serial No. 62/466,883 filed March 3, 2017.

BACKGROUND AND FIELD OF THE INVENTION

[0002] Asphalt pavement is one of the most useful inventions in human society. It provides a low cost surface layer for roads, highways, and multiple other areas where human activity takes place. Asphalt pavement is a combination of two components, asphalt bitumen and suitably sized road gravel. These two components are blended in specific proportions such that the bitumen coats all of the gravel components and bonds them together once they are compacted onto a base surface.

[0003] Asphalt bitumen is produced as the end product in the refining of crude oil after lighter components such as gasoline and diesel have been extracted. So road surfacing has turned out to be the perfect end use for the

very large quantities of asphalt bitumen which result from the production of fuels to power vehicles, which ultimately need a surface upon which to travel.

[4] It is well understood by experts in the paving industry and even non-experts who drive vehicles over paved roads, that asphalt pavement has one very common and serious flaw which is that it typically develops many cracks at some point in its life. The cracks typically extend through the pavement thickness to the gravel base or subgrade. After this cracking occurs, much expense is usually incurred by towns, cities, governments and all parties responsible for roads and highways in attempts to render the cracked pavement waterproof with crack sealants applied to the cracks. Crack sealants are typically only applied to the bigger cracks while many smaller less visible cracks remain unsealed and may still allow water penetration. It is well understood by experts in this field that if sufficient rain water penetrates through pavement cracks, it will inevitably enter the subgrade, weaken the subgrade and eventually lead to more cracking and more maintenance costs, including pot-hole repairs.

[5] Typically after a number of years of paying for annual crack sealing and other crack related maintenance the decision may finally be made to install a new layer of pavement. This usually involves milling out and removing only two to three inches of the old pavement surface but leaving the remainder of the slab intact. The new layer of pavement is then installed over the surface of the remaining old pavement. If no crack isolating membrane is used, as is usually

the case, the cracks which still remained in the old sub-layer of pavement will eventually propagate upwards through the new surface layer by a process known as crack propagation. Crack propagation is a well-known process in the engineering field and is usually caused by repetitive stresses. Pavement constantly undergoes such repetitive stresses due to intermittent vehicle traffic and day time heating versus night time cooling thermal stresses. Inevitably after a few years of stresses, the new layer of pavement will crack.

[6] To attempt to prevent or delay cracking of pavement, various inter-layer or sublayer, crack isolating materials have been developed for embedment beneath a layer of new pavement.

[7] A common form of interlayer or sublayer material is a composite membrane composed of an asphalt bitumen coated membrane, a non-woven polyester or polypropylene reinforcement fabric coated with an elastomeric polymer modified asphaltic coating. This waterproof sheet is designed to add strength and isolate existing cracks or joints in existing pavement and be a moisture barrier beneath a layer of new pavement. Typically this type of material has a self-adhesive surface on one side so that it can be temporarily adhered to existing pavement prior to a new layer of pavement being installed.

[8] Commercial examples of such materials are Petromat and Paveguard, produced in North America. These are commonly referred to in the trade as SAMIs, Stress Absorbing Membrane Interlayers.

[9] This latter type of membrane is intended to perform three functions, in that it strengthens the overlay pavement making it more resistant to cracking, and secondly it acts as a crack isolator to prevent or delay crack propagation, and thirdly it waterproofs the underside of the new pavement layer so that even if it should eventually crack, moisture will not be able to enter the subgrade, since the membrane itself will not crack due to the flexible nature of its elastomeric coating and its strong fabric reinforcement. This greatly reduces the potential for pavement cracks and resulting pot-hole formation.

[10] Another type of SAMI is comprised of an uncoated non-woven sheet of full road lane width installed onto a newly sprayed hot tack coat of asphalt cement then embedded with rubber tired rollers. This method requires the use of a tanker truck with a spray dispenser plus other large membrane laying equipment and is usually only used on large highway projects rather than city streets.

[11] One common impediment which often dissuades the use of the SAMI materials is that their method of installation is not always convenient to the

pavement installers and their equipment, and it can cause delays in the paving process.

[12] By virtue of the SAMI materials having to be installed on road surfaces prior to the paving process, various problems can result. Such problems are that the material, whether it be a grid type or a self-adhesive membrane type, may not bond well to the prepared road bed. If the roadbed is an asphalt pavement surface which has been milled, which is often the case, its surface will have a rough texture not conducive to forming a bond to a self-adhesive membrane placed over it.

[13] Also once a SAMI interlayer or sublayer material is installed over a prepared road which is to be paved, machinery and trucks laden with hot pavement mix must travel over the installed material. In doing so, problems may occur such as damage or dislodging of the material, causing serious delays in the paving process. Any unexpected delay in a paving operation can be very serious since trucks loaded with hot mix pavement material must be emptied before it might cool and solidify.

[14] As one can readily deduce, the above described difficulties related to the installation of SAMI materials can serve as an impediment to their use and therefore often deprive the parties paying for the new pavement of the very substantial benefits of the said materials. Paving contractors often resist the use of SAMI materials because of the delays they may create. Accordingly, there is

a desire to provide a better method of installation of stress absorbing membrane interlayers, or SAMIs.

SUMMARY OF THE INVENTION

[15] One objective of the present invention is to modify a standard asphalt paving machine so that as it moves forward during the paving process it can concurrently dispense and lay down a SAMI material beneath itself and beneath a new layer of hot mixed asphalt pavement which it is at the same time dispensing.

[16] This objective is accomplished by the use of one or a plurality of membrane dispensing shafts mounted to a standard asphalt paving machine. These said membrane dispensing shafts are designed to hold wound-up rolls of membrane and dispense the said membrane material in strips beneath the paving machine as it moves forward. Each roll of said membrane may contain 20 or more linear meters (66 ft.) of material preferably 1 meter (40 in.) wide. The length in each roll should result in a roll weight which is suitable for a worker to lift. As each roll becomes fully dispensed, a new roll can be very quickly installed by a worker onto each dispensing shaft and torch-welded to the trailing end of the dispensed roll, so that the paving process can continue with a minimum of interruption. The mounting position of the said membrane dispensing shafts must be such that the said membrane is preferably laid with one edge of each strip over-lapping the edge of each adjacent strip by about 3 inches. The overlapped edges will bond the dispensed strips together under heat and

pressure from the overlain hot pavement, resulting in a final membrane width of about 4.5 meters (15 ft.), or one typical lane of traffic. Alternately the said membrane can be laid with all membrane edges in very close proximity to each other but not overlapped.

[17] The present invention will make it much more convenient and relatively trouble free to install a SAMI membrane beneath new asphalt pavement, resulting in much longer lasting pavement, having fewer cracks and virtually no expense of pothole repair, which can save society significant amounts of money during the lifetime of their streets and highways.

BRIEF DESCRIPTION OF THE DRAWINGS

[18] Figure 1 shows a front view of the first example paving machine in which center membrane dispensing shaft 001, is shown, and under-track dispensing shafts 002 and 003 are shown, and side membrane dispensing shafts, 004 and 005 are shown.

[19] Figure 2 shows a side view of the first example paving machine in which side membrane dispensing shafts 003, and 005 are shown, and mounted rolls of membrane 011 are shown.

[20] Figure 3 shows a top plan view of the first example paving machine, 008, in which front center membrane dispensing shaft 001, under-track dispensing shafts 002 and 003, and side dispensing shafts 004 and 005 are shown and a schematic view of dispensed full width membrane, 006, beneath a pavement layer, 007, is presented.

[21] Figure 4 shows a detail of a membrane dispensing shaft, 007, with support hub 010.

DETAILED DESCRIPTION OF THE PRESENT INVENTION

[22] One preferred aspect of the present invention is to provide " modifications to a typical asphalt paving machine" which modifications would enable the said machine to dispense a stress absorbing membrane interlayer, or SAMI, beneath itself as it moves forward. The said modifications would preferably consist of a multiple number of membrane dispensing shafts attached to the lower front and each side of the said machine. The said membrane dispensing shafts are designed to hold wound-up rolls of a heat-bondable SAMI membrane and continuously allow dispensing of the said membrane onto the road bed beneath the said paving machine and beneath concurrently dispensed hot pavement mix as it moves forward.

[23] The said membrane dispensing shafts shall be preferably made of round metal tubing having an outer diameter of about 62mm.(2.5 inches). The lengths of the said dispensing shafts would about 1.3m (4 ft.) but may be varied to suit their mounting positions. The preferred positioning of the said dispensing shafts would be such to dispense the membrane in adjacent separate strips to cover the width of the lane being paved. Retaining pins would be inserted through holes in the said dispensing shafts in order to hold the rolls of membrane in place as they unwind.

[24] Preferably the center membrane strip mounted on shaft 001 on the drawing herein, dispensed at the front of the machine would cover a portion of the space between the paving machine supporting tracks which space is typically about 60 inches in width. Preferably separate strips of membrane mounted on shafts 002 and 003 herein, would be dispensed beneath each of the machine's tracks and be wider than the said tracks to overlap each edge of the said center strip, at 001. And preferably each of the two side strips of membrane, mounted on shafts labelled as 004 and 005 herein, would be dispensed on the outer side of each track to cover the required lane width of about 4.5 meters or 15 ft. Preferably the edge of each said strip of membrane would overlap the adjacent membrane strip by about 3 inches or greater. However alternatively the membrane edges may be positioned to not overlap each other. The hot pavement mix concurrently being dispensed and spread by the said paving machine would preferably overlay and cover the said membrane strips, transfer heat to them, and heat-activate their upper and lower adhesive surfaces to facilitate bonding of the said membrane.

[25] By dispensing separate said membrane strips beneath each of the paving machine's support tracks, any distortion or wrinkling of the membrane that the tracks may cause during forward motion will be limited to those two strips only and not affect the full width of the membrane as might otherwise occur.

[26] A second aspect of the present invention is to provide a “novel method of paving” whereby a mechanically altered asphalt paving machine can be operated to dispense a Stress Absorbing Membrane Interlayer or SAMI beneath itself as it moves forward while concurrently dispensing a layer of hot pavement mix over the said membrane. As in the normal asphalt paving procedure hot asphalt paving material is intermittantly delivered by a dump truck or other means into the hopper of the paving machine, thence conveyed towards the rear of the machine to a screed area and dispensed onto the road surface in a thickness and width controlled by the screed. With the present invention, the hot asphalt would instead end up on the top surface of a concurrently dispensed pavement membrane beneath the paving machine and be screeded to a desired thickness, for subsequent roller compaction.

[27] A third aspect of the present invention is to provide a “novel SAMI membrane” in wound-up roll form, being about 2.5 mm.(3/32 in.) thick and about 1 meter wide(40 in.), which is comprised of a non-woven polymer fabric coated with a heat-bondable elastomeric modified asphalt bitumen coating and mineral sand surfacing. Bonding of this membrane in place beneath hot pavement can occur due to the heat sensitive adhesive coating on the membrane becoming tackified by heat transfer from overlain hot pavement.

[28] Currently used SAMI membranes must be pre- bonded in place with a hot- sprayed asphalt adhesive or have to be made to be self-adhesive

with a removeable release layer so they can be bonded in place prior to paving over them. This requires the added labor and cost of spraying hot asphalt or removing and disposing of a costly release material. The advantage of the novel SAMI membrane of the present invention is that this said membrane can be dispensed by a suitably modified paving machine and heat- bonded in place with lower overall cost.

[29] The foregoing descriptions and illustrations should not be considered to limit the scope of this invention. Numerous modifications and changes may become evident to those skilled in the art, and accordingly all suitable modifications and equivalence are considered to fall within the scope of the invention as defined by the claims and descriptions stated herein.

[30] The following patent citations are listed herein for reference purposes only, as there is no noted conflict with the present invention described on the pages herein.

CLAIMS

We claim:

1. Modifications made to an asphalt paving machine which modifications consists of one or a plurality of mounted membrane dispensing shafts which said shafts can hold and allow the dispensing of a pavement reinforcing membrane continuously beneath a paving machine as it moves forward.

2. Membrane dispensing shafts in accordance with Claim 1, wherein the said shafts are mounted on the front, or leading, portion of the paving machine or may also be mounted on the sides or center area of the said paving machine.

3. Membrane dispensing shafts in accordance with Claims 1 and 2, wherein the said shafts are positioned such that they can allow dispensing of the said membrane in multiple strips to cover the center width between the machine's two tracks, and concurrently to cover the area beneath each of the machines two support tracks, and concurrently to cover the lateral area on the outer side of each of the machines two tracks, with or without the side edges of each membrane overlapping each adjacent membrane edge.

4. Membrane dispensing shafts in accordance with Claims 1,2,and 3, where the shafts are positioned in a manner so that the edges of the said pavement

reinforcing membrane strips dispensed from each shaft will overlap the edge of each adjacent dispensed membrane strip.

5. A Novel Method of asphalt paving whereby an asphalt paving machine with special membrane dispensing can continuously dispense a pavement reinforcing membrane onto a surface and concurrently dispense hot paving mix onto the said membrane as it moves forward.

6. A Novel pavement reinforcing membrane supplied as rolls and produced by hot-coating and sand surfacing both faces of a non-woven polymer fiber reinforcement sheet with an elastomeric modified asphalt bitumen coating which is formulated to have a heat-activated bonding surface.

7. A Novel pavement reinforcing membrane in accordance with Claim 6, wherein the elastomeric modified asphalt bitumen coating contains the elastomeric Styrene Butadiene Styrene polymer modifier commonly known as SBS polymer.

8. Elastomeric modified asphalt bitumen coating in accordance with Claim 7, wherein the said polymer modifier may be a Styrene Isoprene Styrene polymer, commonly known as SIS, alone or combined with an SBS polymer, or otherwise suitable polymers.

9. A novel pavement reinforcing membrane according to Claims 6, 7, and 8,

wherein the said elastomeric asphalt coating may contain polymer modifier percentages ranging from 0% to 25% with a preferred total percentage of 10%.

10. A novel pavement reinforcing membrane according to Claims 6, 7, 8, and 9 wherein, the non-woven polymer reinforcement sheet may be made of polyester fibers.

11. A novel pavement reinforcing membrane according to Claims 6, 7, 9, and 10, wherein the non-woven polymer reinforcement sheet may be made of other suitable polymer fibers such as polypropylene, or a combination of other suitable fibers.

12. A novel pavement reinforcing membrane in accordance with Claim 6,7,8,and 9, wherein the preferred asphalt bitumen utilized to blend with polymer modifier to coat the membrane is a standard paving grade of asphalt bitumen commonly known as 80/100 penetration grade, however other penetration or roofing grades of asphalt bitumen may be utilized also with or without added tackifying agents.

DRAWINGS:

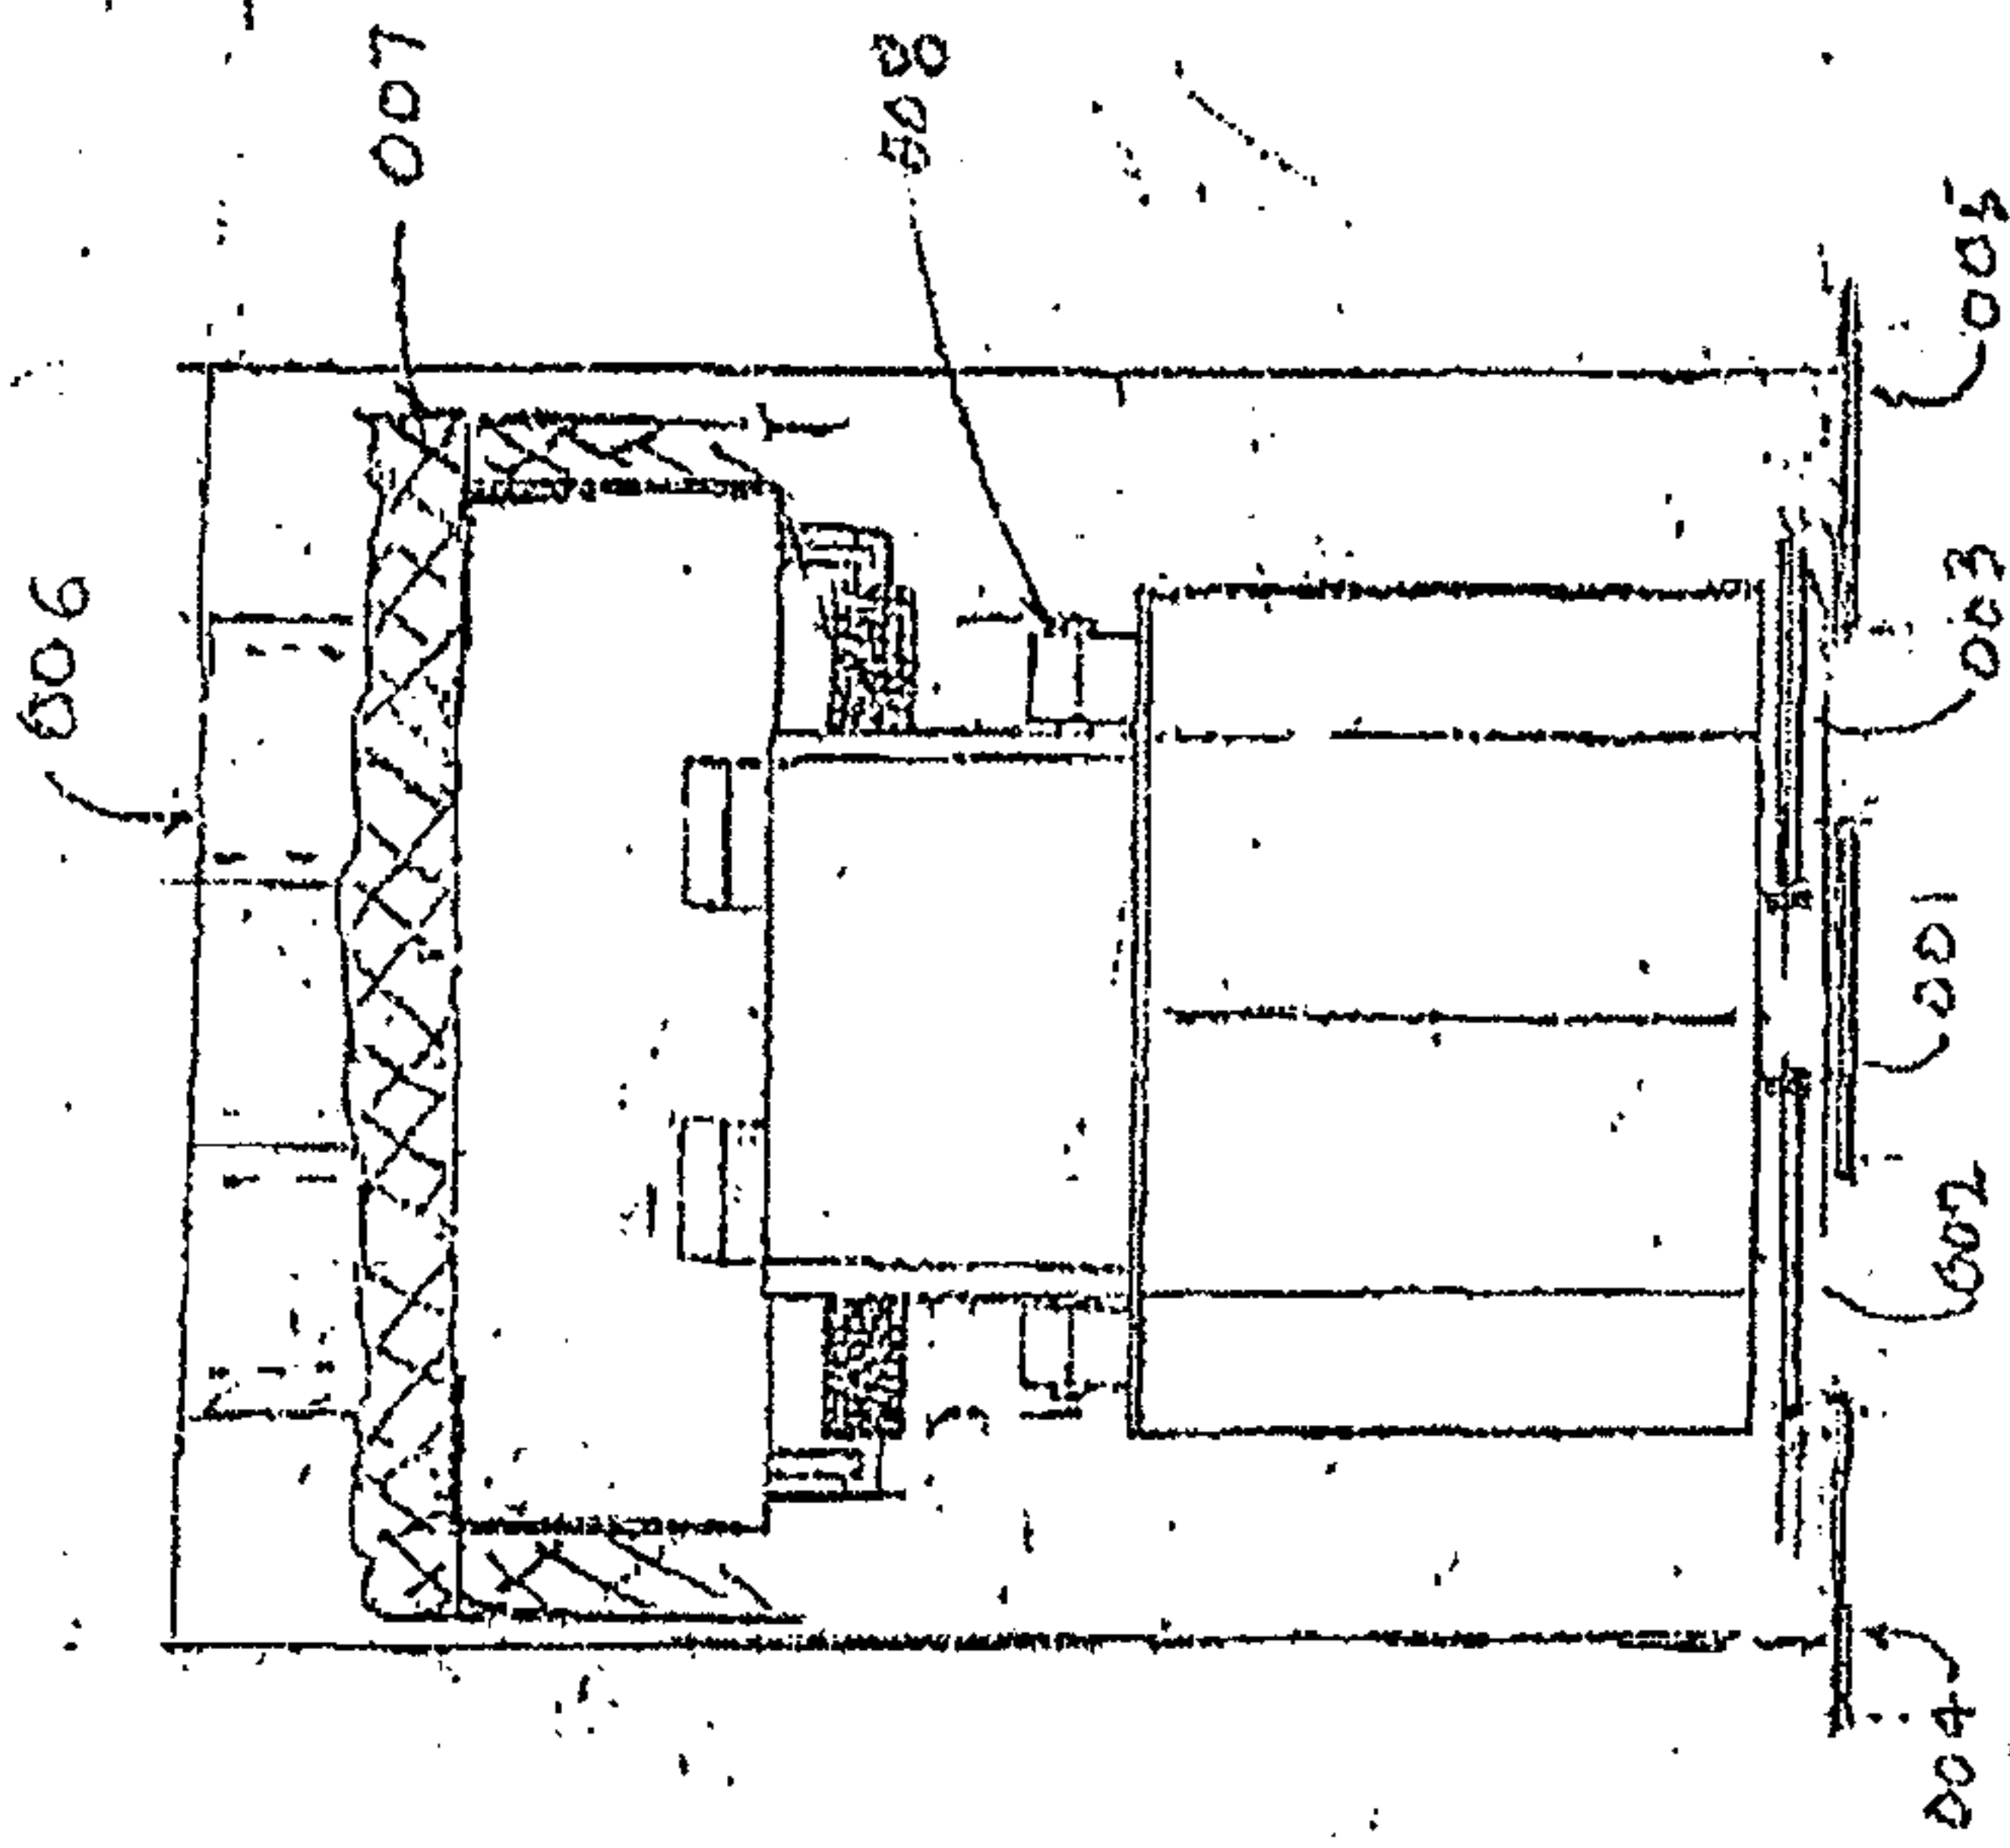


FIG 3

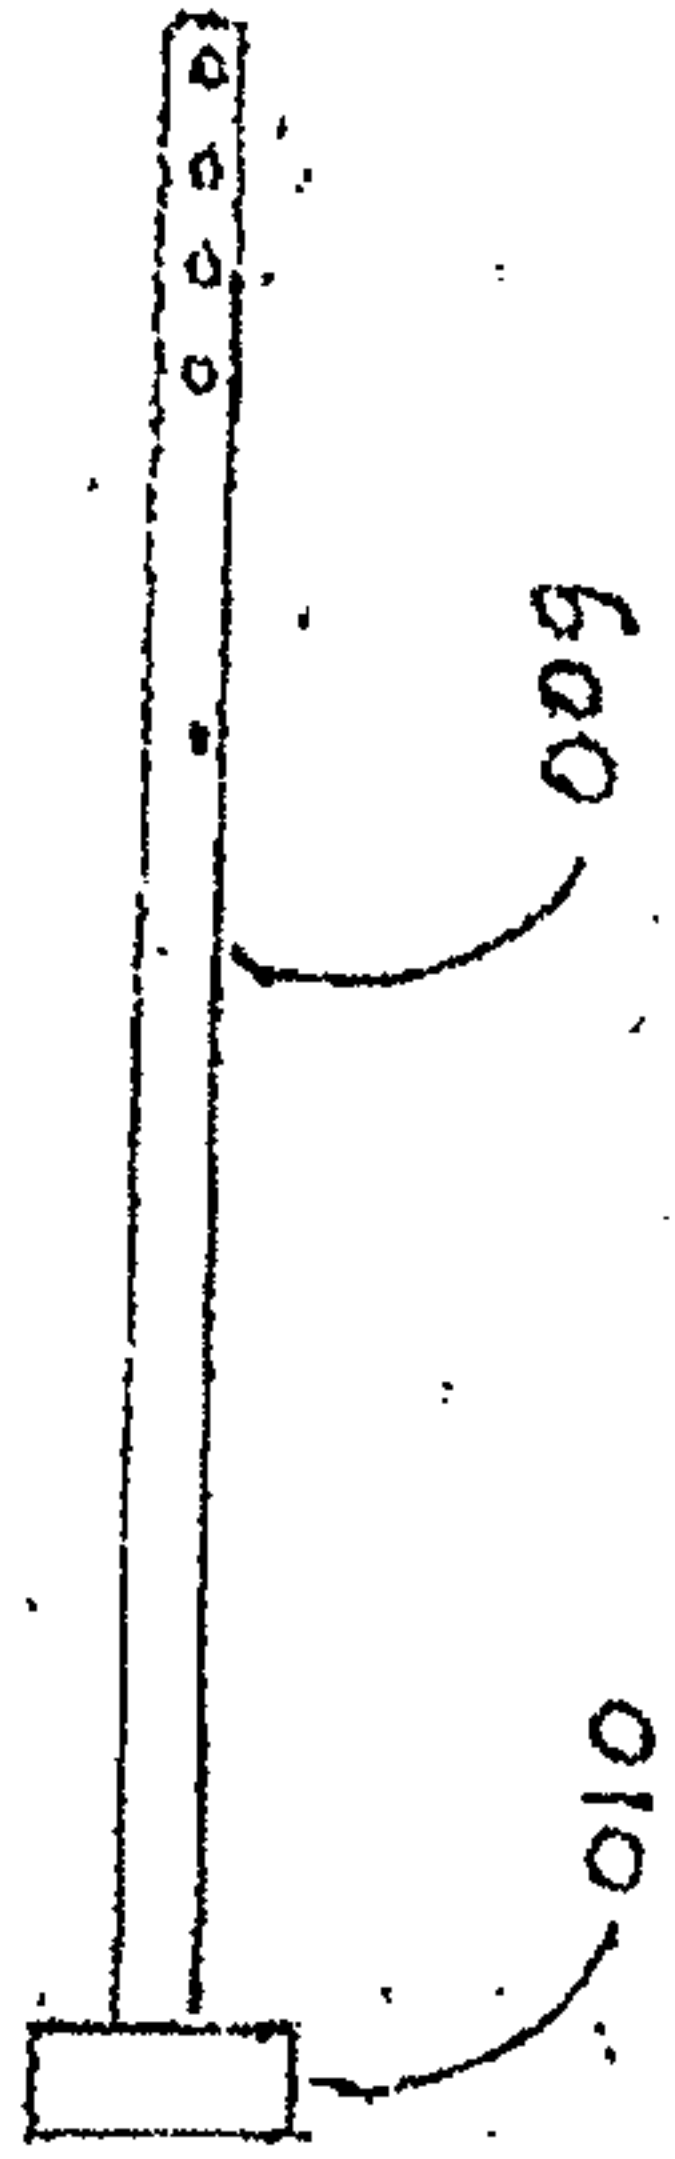


FIG 4

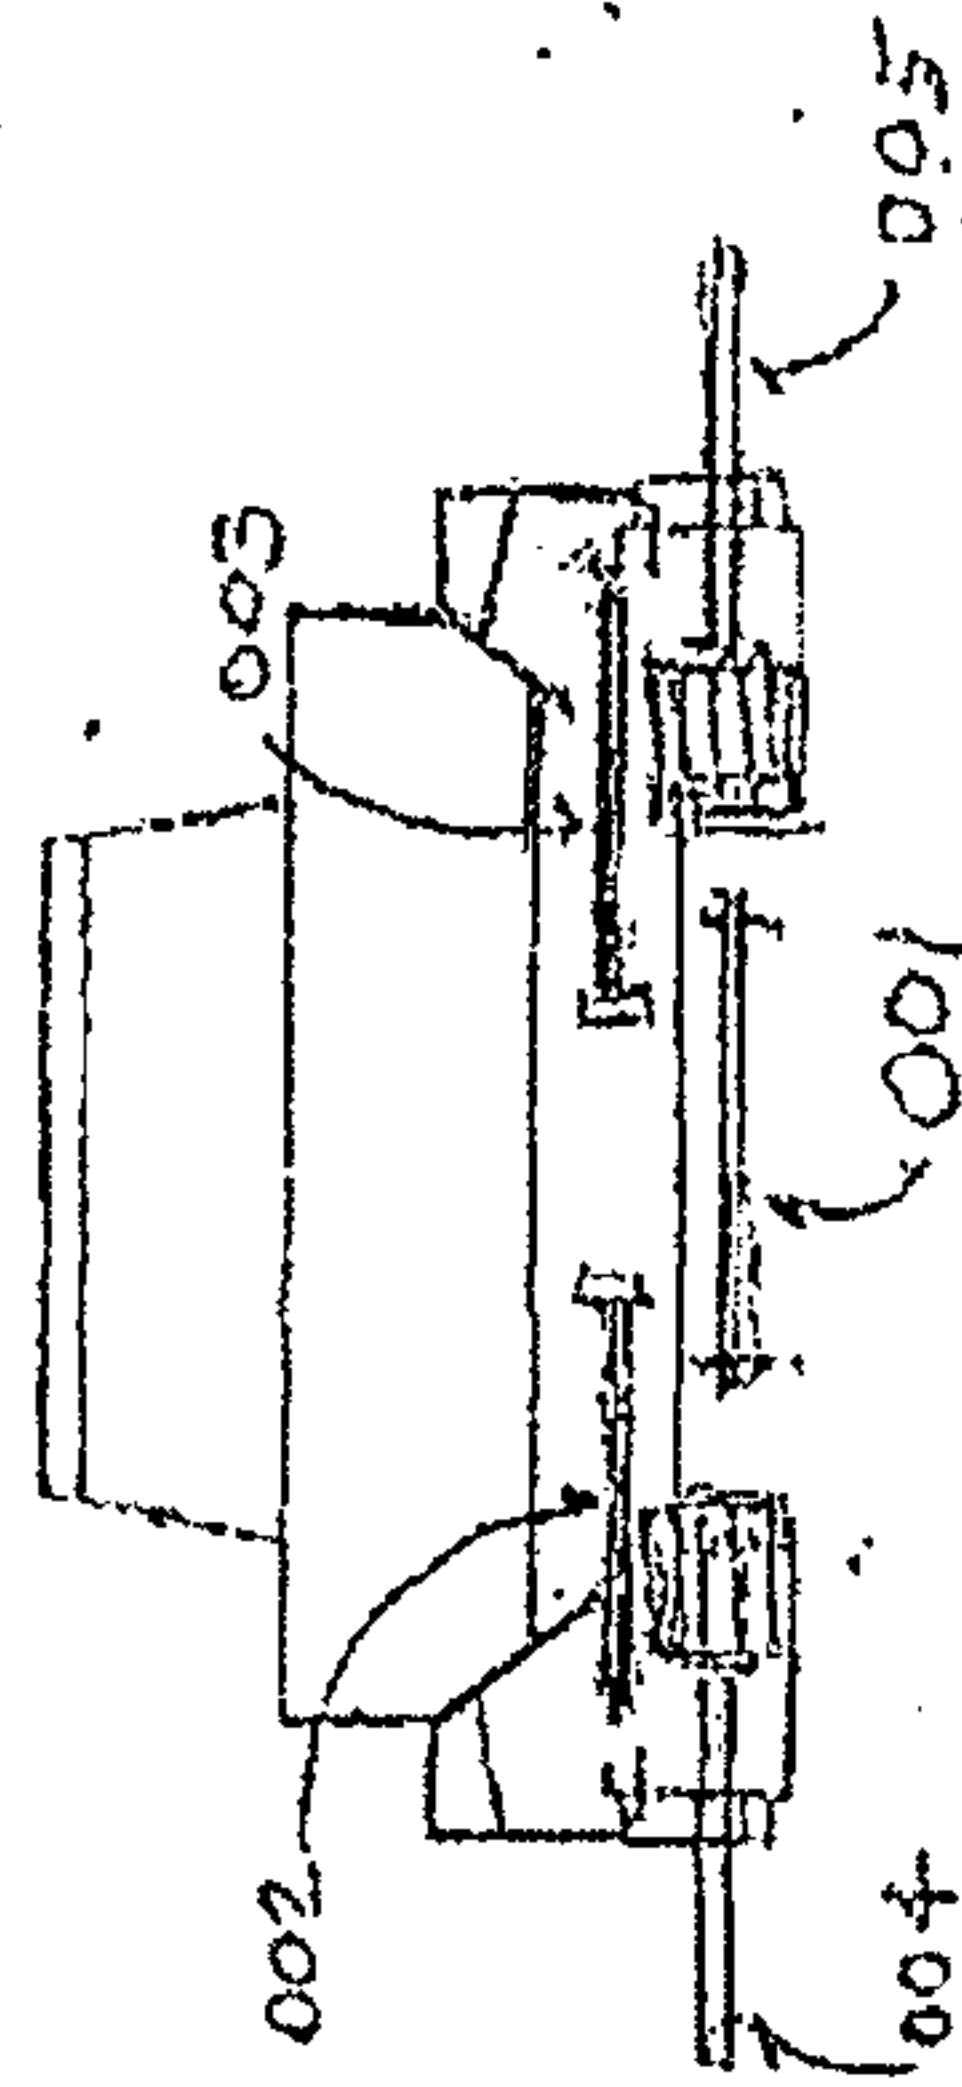


FIG 1

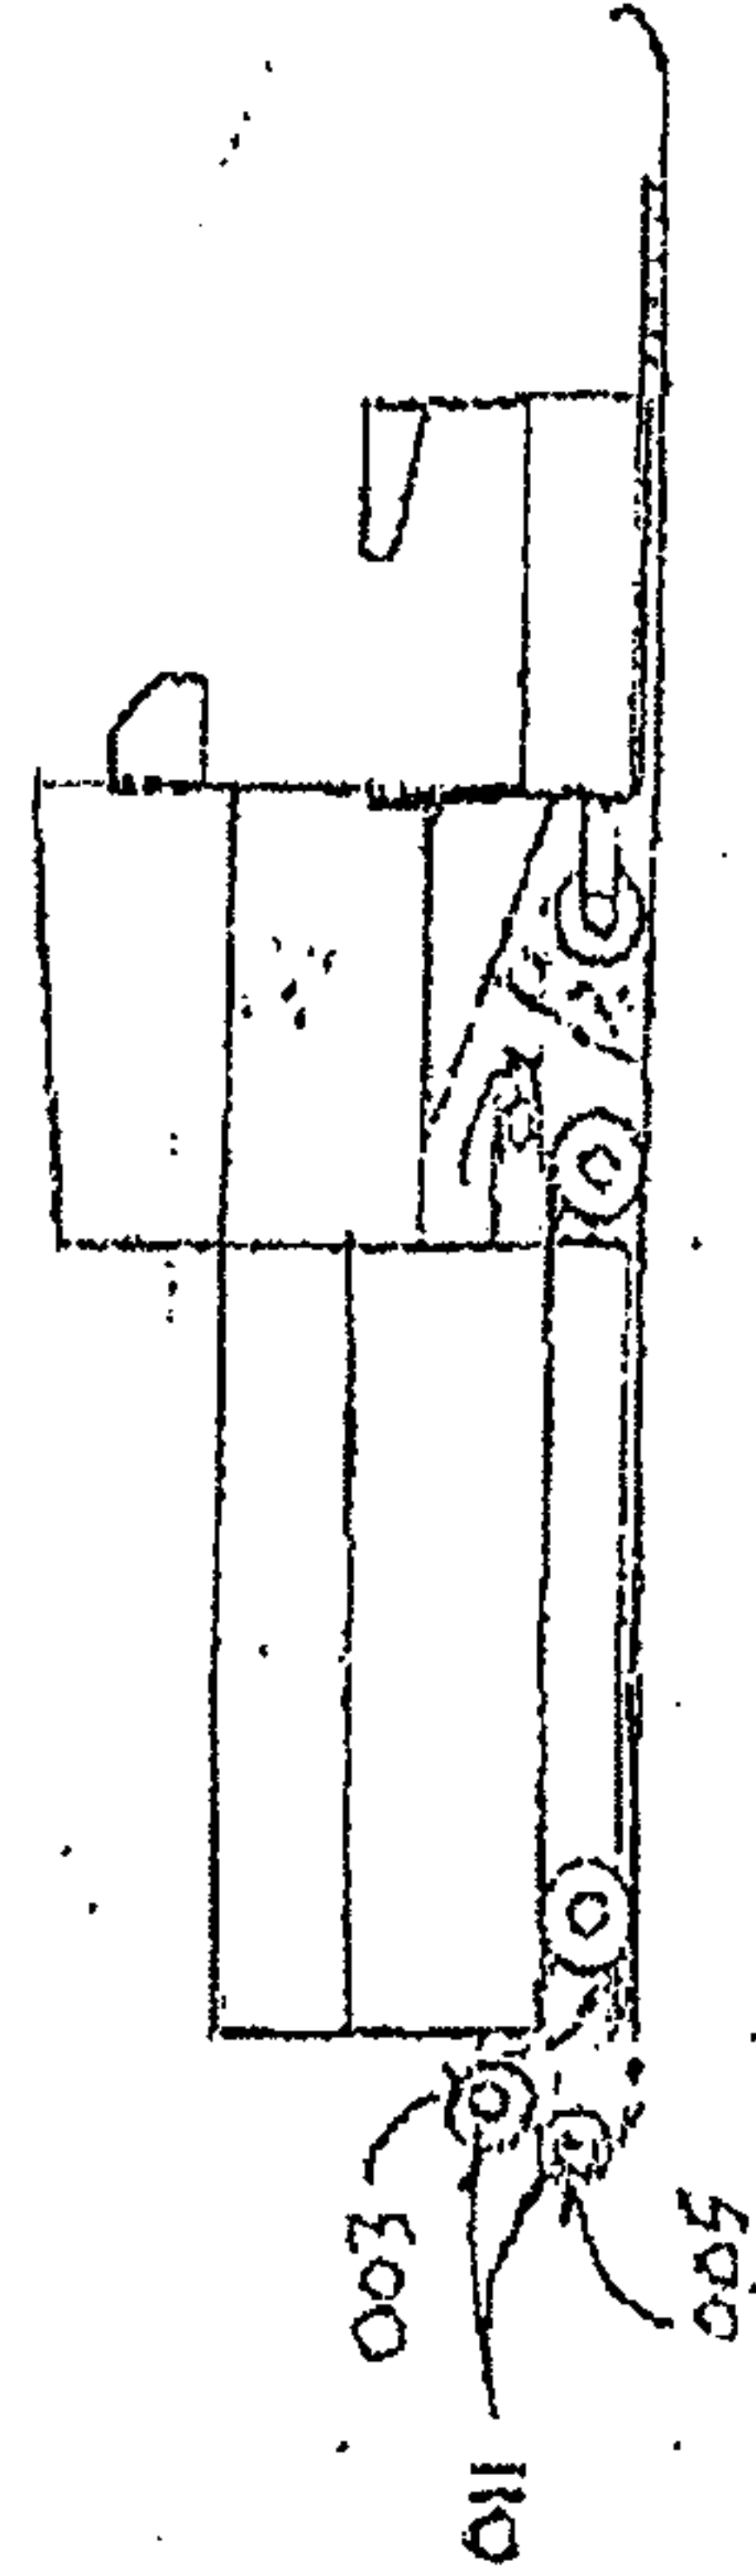


FIG 2

