

(12) **UK Patent Application** (19) **GB** (11) **2 406 362** (13) **A**

(43) Date of A Publication **30.03.2005**

(21) Application No: **0420096.0**
 (22) Date of Filing: **10.09.2004**
 (30) Priority Data:
 (31) **10605390** (32) **26.09.2003** (33) **US**

(71) Applicant(s):
Ford Global Technologies LLC
(Incorporated in USA - Michigan)
600 Parkland Towers East,
One Parklane Boulevard, Dearborn,
Michigan 48126, United States of America

(72) Inventor(s):
Fangjun Jiang
Jonas A. Jerrelind

(74) Agent and/or Address for Service:
Alec Moses Messulam, A Messulam & Co Limited
43-45 High Road, BUSHEY HEATH, Herts,
WD2 1EE, United Kingdom

(51) INT CL⁷:
B60K 6/04 41/00

(52) UK CL (Edition X):
F1K KEX

(56) Documents Cited:
EP 0570234 A1 **JP 080317506 A**
US 5785138 A

(58) Field of Search:
 UK CL (Edition X) **F1K**
 INT CL⁷ **B60K**
 Other: **Online: EPODOC, JAPIO, WPI**

(54) Abstract Title: **A system and method for controlling starting and stopping, in particular standby mode, of a hybrid vehicle engine**

(57) A system and method are provided for determining when to allow the engine of a vehicle with a second power source to be placed in an engine standby mode. Various conditions, including engine conditions, vehicle controller conditions, driver-controlled conditions, vehicle conditions and energy management conditions, are compared to corresponding predetermined conditions. If at least some of the conditions match their corresponding predetermined conditions, the vehicle engine is allowed to be placed in a standby mode.

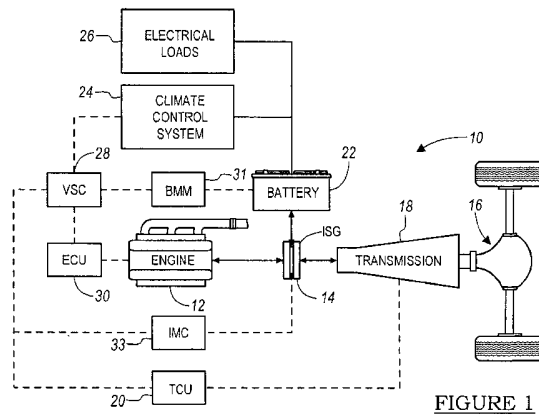


FIGURE 1

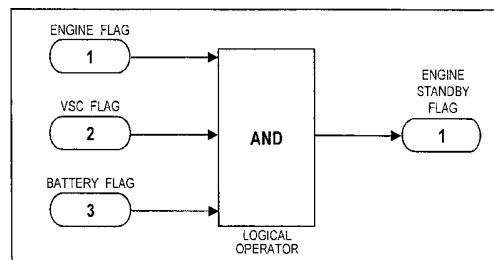
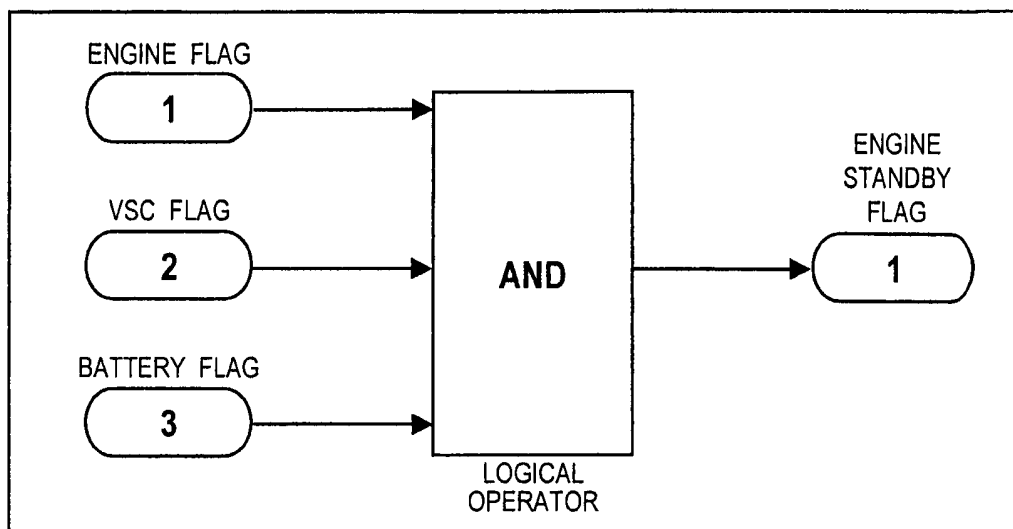
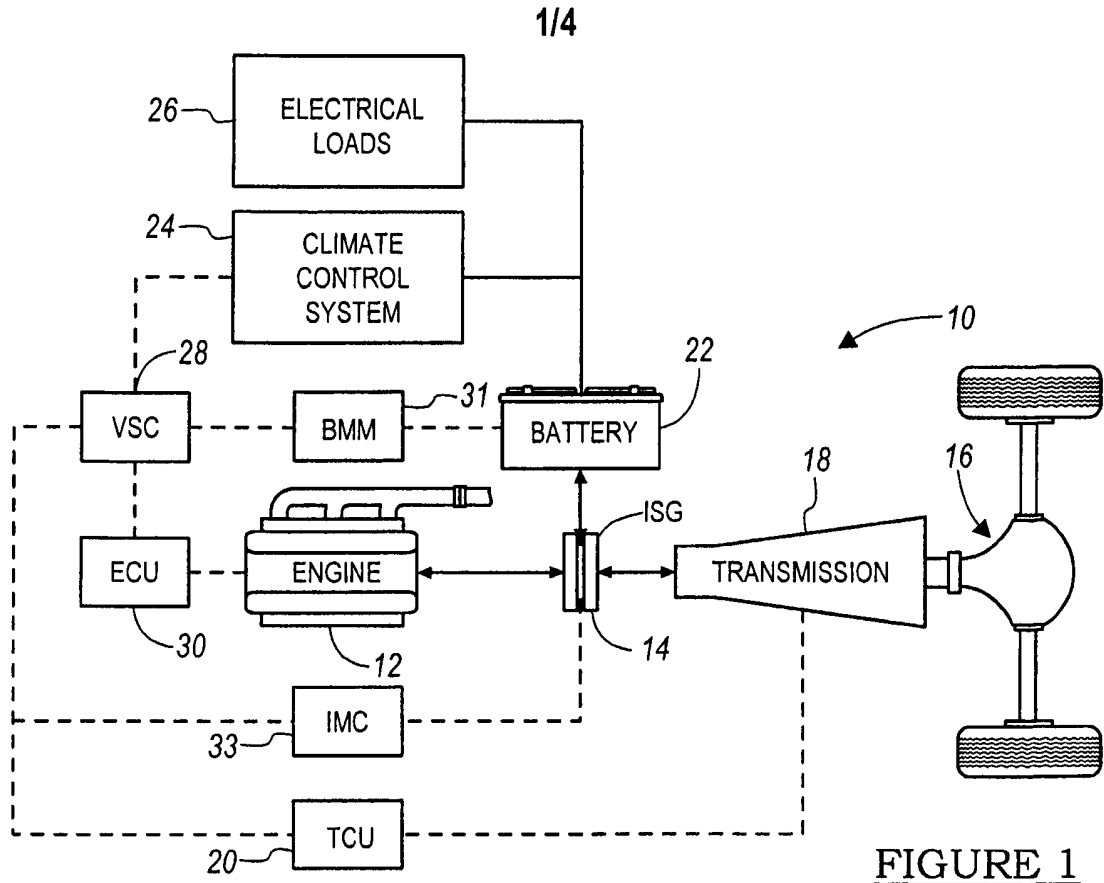


FIGURE 2

GB 2 406 362 A



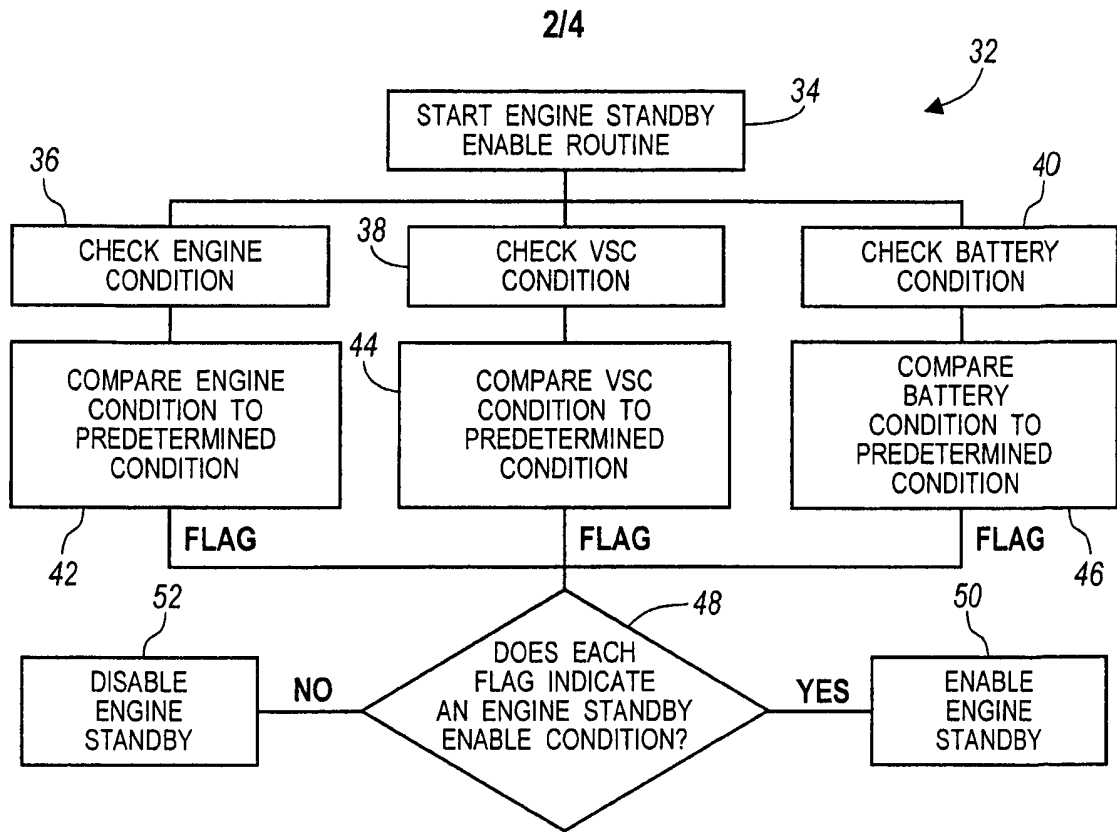


FIGURE 3

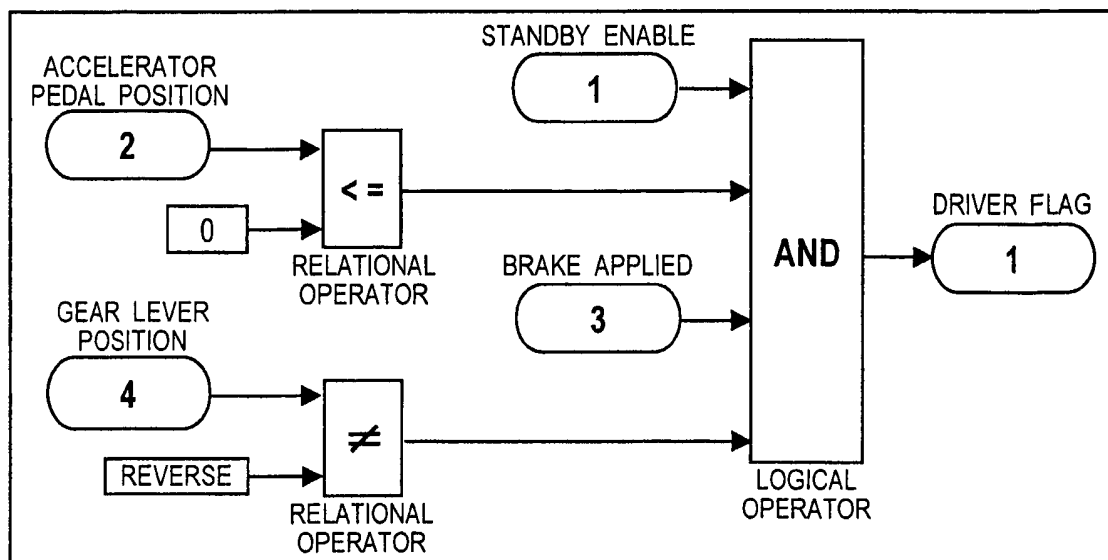


FIGURE 4

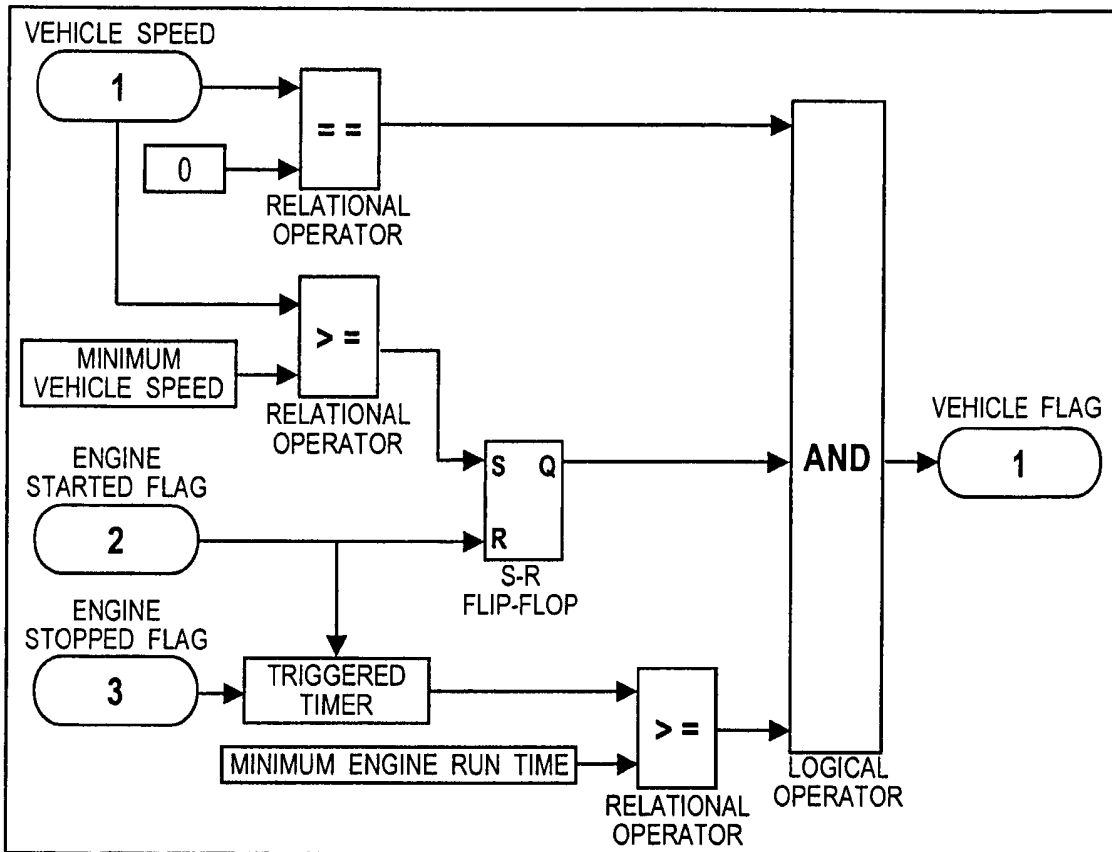


FIGURE 5

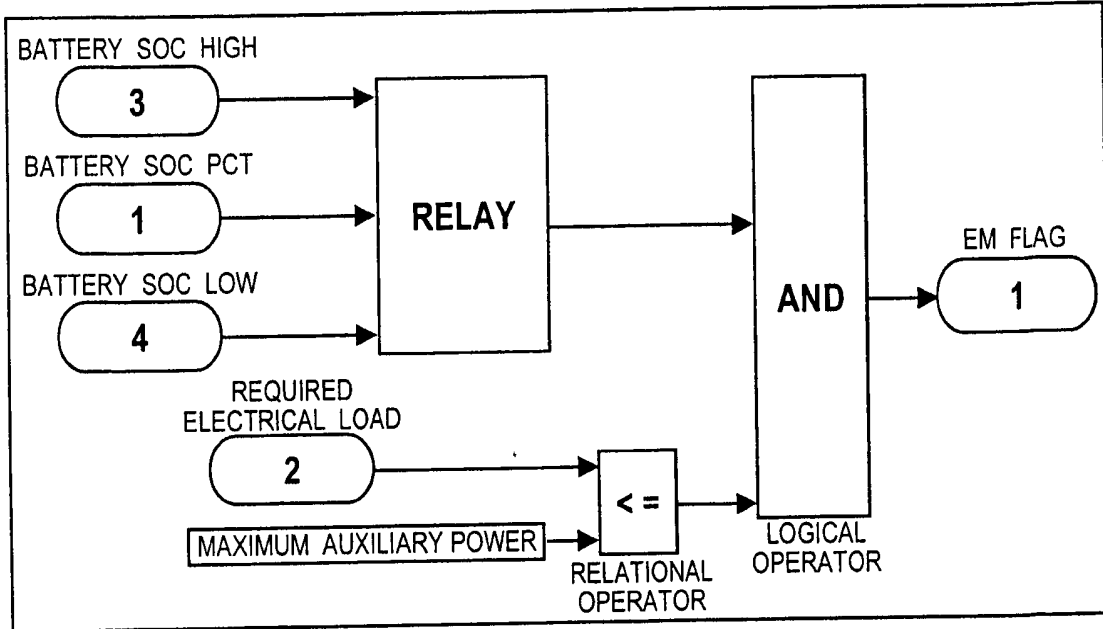


FIGURE 6

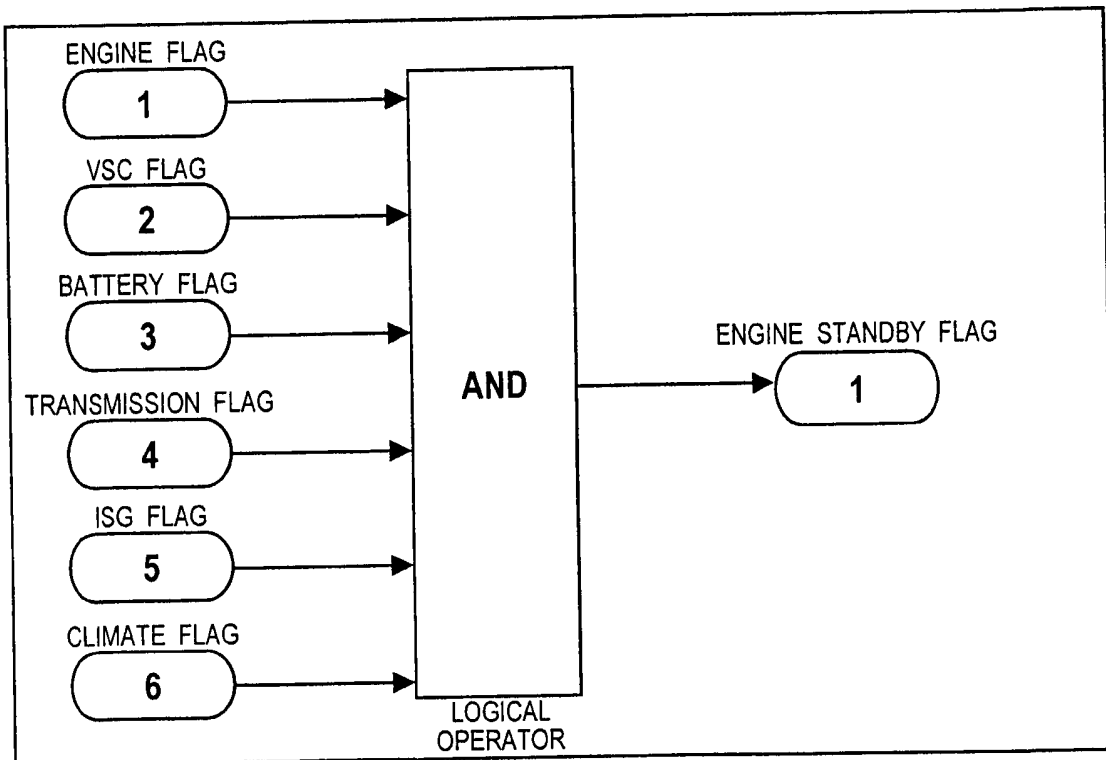


FIGURE 7

**A SYSTEM AND METHOD FOR CONTROLLING STOPPING
AND STARTING OF A VEHICLE ENGINE**

5 The present invention relates to a system and method
for controlling stopping and starting of a vehicle engine.

10 The introduction of new vehicle types--e.g., hybrid
electric vehicles--has enabled a number of systems and
methods for saving fuel and reducing emissions. Hybrid
electric vehicles can save fuel and reduce emissions through
a number of methods, such as downsizing the engine,
collecting regenerative power during braking, and
implementing an engine stop/start function.

15 The engine stop/start function involves controlling the
stopping and starting of the engine while the vehicle is in
operation. In a conventional vehicle, the engine runs
continuously once it is started by the driver. The engine
provides torque to drive the vehicle and a number of onboard
20 devices, such as compressors and pumps. The engine also
provides torque to drive the alternator, which generates
electricity to charge the battery and to run various
electrical subsystems within the vehicle. Depending on
different driving conditions, the engine may run at high
25 speeds such as 3,000-7,000 revolutions per minute (rpm) or
at very low speeds, perhaps as low as a few hundred rpm.

30 Unless the driver specifically shuts the engine off,
the engine in a conventional vehicle will continue to run
even when the vehicle is completely stopped. While the
vehicle is stopped, the engine continues to run, or idle,
partly because certain vehicle subsystems continue to
require power. For example, the transmission oil pump and
power steering fluid pump require power even when the
35 vehicle has stopped. In addition, certain driver-controlled
subsystems, such as air conditioning and personal
electronics, require power. The primary reason for keeping

the engine running, even when the vehicle is stopped, is so that the vehicle is ready to move when the driver commands it to do so.

5 Even though the engine runs at low speeds when it idles, it nonetheless continues to burn fuel and exhaust emissions. Typically, the engine idle speed is kept as low as possible because the engine consumes less fuel at a lower speed. Thus, it would be desirable to shut the engine down
10 if all of the vehicle and driver needs can still be met. Of course, when there are driver or vehicle requests, the engine would need to be able to start without any noticeable disturbance to the driver or the vehicle. This function may generally be called the stop/start function of the engine.

15

 In a conventional vehicle the engine is started by a relatively small motor, called the starter, which is often powered by a battery. In such a vehicle, it may be hard to implement an engine stop/start function because the capacity
20 of the battery may not be large enough to supply sustained power to all of the vehicle subsystems when the engine is shut down. Moreover, a typical starter may not be able to start the engine quickly enough to respond to a driver's demand to move the vehicle.

25

 New developments in battery technology have increased the battery capacity while reducing the battery size and weight, thereby making it possible to meet the entire driver and vehicle system needs with electric power for a limited
30 amount of time. In addition, the advances in motor technology and power electronics make it practical for the vehicle to use more powerful motors and use them more efficiently. Depending on the configurations, a battery and motor system in a vehicle with today's technology can start
35 the engine almost instantaneously, or even drive the vehicle independently. All these advances make it viable to develop the engine stop/start function.

There are many possible configurations, and thus, many classifications for hybrid electric vehicles. Two broad classifications are mild hybrids and full hybrids. The
5 distinction is whether the motor alone can drive the vehicle. In a mild hybrid electric vehicle, the motor is not powerful enough to drive the vehicle. The engine, once stopped, has to be started if the driver wants to launch the vehicle. By contrast, the motor in a full hybrid electric
10 vehicle can drive the vehicle, though there may be limits on the vehicle speed that can be achieved. An engine stop/start function can be a major contributor for saving fuel and reducing emissions, whether the vehicle is a mild hybrid, a full hybrid, or a non-hybrid vehicle that has an
15 engine and a second power source. Thus it is desirable to have a systematic approach for controlling the engine stopping and starting for various vehicle configurations.

One attempt to provide a drive control system for a
20 hybrid vehicle is found in U.S. Patent No. 6,201,312 which describes a control system for improving the fuel economy of a hybrid vehicle. Specifically, the control system provides for running the vehicle either with an electric motor or an internal combustion engine, where the selection between the
25 two is made on the basis of a comparison of the two fuel economies. The control system calculates an overall vehicle power demand, and uses this calculation to determine whether it is more efficient to run the vehicle with the motor or the engine. When it is determined that it is more fuel
30 efficient to run the vehicle with the motor, the engine is stopped and the motor is used to run the vehicle. This is only done, however, if the battery state of charge is at least at a predetermined minimum level.

35 What this disclosure does not consider is that there may be times when it is undesirable to stop the engine, even if it is more fuel efficient to run the vehicle with the

motor. For example, it may be undesirable to have the engine cycle on and off too frequently. Thus, an improved control system would provide a mechanism for minimizing the possibility of a short engine on/off cycle. Moreover, if an
5 electrical fault is detected in the motor, it may not be available to run the vehicle after the engine is stopped. Similarly, it may be desirable to consider driver inputs, such as a brake pedal position or gear shift position, when deciding whether to stop the engine. It may also be useful
10 to examine other vehicle subsystems not only for their power consumption, but also for other operating conditions.

Another attempt to provide a controller for a hybrid electric vehicle is described in U.S. Patent App. Pub. No.
15 20020019687, in which a vehicle controller and vehicle control method for a hybrid electric vehicle are disclosed. A number of conditions are examined to determine when to start and stop the vehicle engine. For example, if the "startability" of the engine is degraded, a flag may be set
20 inhibiting the stopping of the engine in an idle state. The determination of whether the engine startability is degraded is based on systems external to the engine, rather than the engine itself. For example, the state of the battery charge may be examined, or whether an engine starting system such
25 as an electric motor has failed.

Accordingly, there exists a need for a system and method for controlling a vehicle such that it is possible to examine a number of different operating conditions,
30 including conditions of the vehicle engine, and compare these conditions to corresponding predetermined conditions, and to stop the engine only if one or more of the operating conditions matches its corresponding predetermined condition.

35

It is an object of this invention to provide an improved method and system for starting and stopping an

engine so as to overcome at least some of the disadvantages of the prior art.

5 According to a first aspect of the invention there is provided a method for enabling engine standby in a vehicle having an engine and a second power source the method comprising determining whether at least one engine condition matches a corresponding predetermined engine condition,
10 determining whether at least one vehicle system controller condition matches a corresponding predetermined vehicle system controller condition, determining whether at least one second power source condition matches a corresponding predetermined second power source condition and enabling
15 engine standby when at least one of the determined conditions matches a corresponding predetermined condition.

 The second power source may comprise an electric motor and a battery.

20 Determining whether at least one engine condition matches a corresponding predetermined engine condition may comprise comparing at least one engine condition to a corresponding predetermined engine condition and generating
25 a first flag based upon the result of the comparison, determining whether at least one vehicle system controller condition matches a corresponding predetermined vehicle system controller condition may comprise comparing at least one vehicle system controller condition to a corresponding
30 predetermined vehicle system controller condition and generating a second flag based upon the result of the comparison, determining whether at least one second power source condition matches a corresponding predetermined second power source condition may comprise comparing at
35 least one second power source condition to a corresponding predetermined second power source condition, thereby generating a third flag and generating a third flag based

upon the result of the comparison and enabling engine
standby when at least one of the determined conditions
matches a corresponding predetermined condition may comprise
stopping the engine when at least one of the first, second
5 and third flags indicates an engine stop condition.

The first flag may indicate an engine stop condition
when each of the at least one engine conditions matches a
corresponding predetermined engine condition, the second
10 flag may indicate an engine stop condition when each of the
at least one vehicle system controller conditions matches a
corresponding predetermined vehicle system controller
condition and the third flag may indicate an engine stop
condition when each of the at least one second power source
15 conditions matches a corresponding predetermined second
power source condition.

The at least one vehicle system controller condition
may include at least one driver-controlled condition chosen
20 from a set of driver-controlled conditions, the set
including a driver actuated switch position, an accelerator
pedal position, a brake pedal position and a gear lever
position.

25 The predetermined vehicle system controller conditions
may include predetermined driver-controlled conditions
including the driver actuated switch in an enable position,
the accelerator pedal in a completely released position, the
brake pedal in a depressed position, and the gear lever not
30 in a reverse position.

The at least one vehicle system controller condition
may include at least one vehicle condition chosen from a set
of vehicle conditions, the set including a current vehicle
35 speed, a maximum vehicle speed, and an engine runtime.

The predetermined vehicle system controller conditions may include predetermined vehicle conditions including the current vehicle speed being approximately zero, the maximum vehicle speed being at least a predetermined minimum vehicle speed, and the engine runtime being at least a predetermined minimum engine runtime.

The at least one vehicle system controller condition may include at least one energy management condition chosen from a set of energy management conditions, the set including a second power source state of charge and a required electrical load.

The predetermined vehicle system controller conditions may include predetermined energy management conditions including the state of charge being greater than a predetermined minimum state of charge, and the required electrical load being at or below a predetermined maximum electrical load.

The vehicle may include an electric motor, a battery, a transmission and a climate control system and the method may further comprise determining whether at least one transmission condition matches a corresponding predetermined transmission condition, determining whether at least one motor condition matches a corresponding predetermined motor condition and determining whether at least one climate control condition matches a corresponding predetermined climate control condition.

Determining whether at least one transmission condition matches a corresponding predetermined transmission condition may comprise comparing at least one transmission condition to a corresponding predetermined transmission condition and generating a transmission flag based upon the result of the comparison, determining whether at least one motor condition matches a corresponding predetermined motor condition may

comprise comparing at least one motor condition to a corresponding predetermined motor condition and generating a motor flag based upon the result of the comparison and determining whether at least one climate control condition
5 matches a corresponding predetermined climate control condition may comprise comparing at least one climate control condition to a corresponding predetermined climate control condition and generating a climate flag based upon the result of the comparison.

10

Engine standby may be enabled only when each of the determined conditions matches a corresponding predetermined condition. The engine may be stopped only when each of the flags indicate an engine stop condition.

15

According to a second aspect of the invention there is provided a system for enabling engine standby in a vehicle having an engine and a second power source, the system comprising at least one controller configured to compare at
20 least one condition of a set of conditions to a corresponding predetermined condition to generate a controller flag and to enable engine standby when at least the controller flag indicates an engine standby enable condition.

25

The controller may include an engine controller and the at least one condition may include an engine fault condition.

30

The controller may includes a vehicle system controller and the set of conditions may include a driver actuated switch position, an accelerator pedal position, a brake pedal position, a gear lever position, a current vehicle speed, a maximum vehicle speed, an engine runtime, a second
35 power source state of charge and a required electrical load.

The vehicle may include a plurality of subsystems and the system may further comprise additional controllers for controlling the subsystems, each being configured to send subsystem information to the at least one controller,
5 wherein the at least one controller may be further configured to generate additional flags related to each of the subsystems and to enable engine standby when at least one of the additional flags indicates an engine standby enable condition.

10

The invention will now be described by way of example with reference to the accompanying drawing of which:-

Figure 1 is a schematic representation of a vehicle
15 including a system in accordance with the present invention;

Figure 2 is a schematic diagram showing the logic used to generate an engine standby flag;

20 Figure 3 is a flow chart illustrating the steps of a method performed in accordance with the present invention;

Figure 4 is a schematic diagram showing various driver-controlled conditions to generate a driver flag;

25

Figure 5 is a schematic diagram showing various vehicle conditions used to generate a vehicle flag;

30 Figure 6 is a schematic diagram showing various energy management conditions used to generate an energy management flag; and

35 Figure 7 is a schematic diagram showing the logic used to combine a number of additional flags to generate an engine standby flag.

Figure 1 shows a system 10 for controlling stopping and starting of a vehicle engine in accordance with the present invention. The vehicle, not shown in its entirety, includes an engine 12 and a motor, in this embodiment an integrated starter generator (ISG) 14, connected to the vehicle wheels 16 through a power transfer unit, such as transmission 18.

A transmission control module (TCU) 20 is used to control the operation of the transmission 18. A battery 22 provides power to operate the ISG 14, and the ISG 14 may in turn, act as a generator to charge the battery 22. The battery 22 shown in Figure 1, is a 42 volt battery, though batteries of different voltages and different capacities may be used.

15

At the outset, it is important to note that the vehicle configuration shown in Figure 1 represents only one of many different vehicle configurations on which the system 10 may be used. The system 10 allows an engine, such as the engine 12, to be shut down, or placed in a standby mode, to save fuel and reduce exhaust emissions. In the engine standby mode, the engine must be ready for restart upon driver command, and while the engine is shut down, vehicle subsystems must be powered by another source. Thus, the system 10 can be used with any vehicle that has an engine and a second power source, such as the battery 22.

The system 10 may also be used with other vehicle configurations. For example, the system 10 may be applied to a vehicle with or without a transmission. It may be applied to a vehicle configured with different types of motors, generators or both. It may be applied to a vehicle with different types of power sources, such as a flywheel or an ultra-capacitor. Furthermore, it may also be applied to vehicles having any number of control modules.

35

The vehicle configuration shown in Figure 1 represents a mild hybrid electric vehicle configuration. Both the engine 12 and the ISG 14 are connected to the vehicle wheels 16 to provide torque to drive the vehicle. The transmission 5 18 is used to transfer torque from the engine 12 and the ISG 14 to the vehicle wheels 16. Of course, other types of power transfer units could be used. For example, in some full hybrid electric vehicles the motor and engine could be connected through a planetary gear system having an output 10 connected to the vehicle wheels.

In the embodiment shown in Figure 1, the battery 22 provides electrical power to the ISG 14, a climate control system 24, as well as the other vehicle electrical loads 26. 15 The electrical loads 26 may represent any number of vehicle electrical loads, including such things as the electric water pump, electric fans, the electric transmission oil pump, the vehicle headlights, radio, cigarette lighter, and other electrical devices. Of course, the specific 20 electrical loads will depend on the vehicle configuration, and may vary among different vehicles.

In some alternative vehicle configurations, the ISG 14 may be replaced with a separate generator and a separate 25 motor. In such a configuration, either the motor or the generator, or both, could be used to provide power to the vehicle electrical systems. A battery or other electrical storage device, such as an ultra-capacitor, may be used to provide the power to run the motor and other vehicle 30 electrical devices. Thus, although the system 10 is described herein with reference to the vehicle configuration shown in Figure 1, it may be used with many different types of vehicle configurations.

35 Returning to Figure 1, it is seen that a controller, specifically, a vehicle system controller (VSC) 28, is

connected to an engine control unit (ECU) 30, which is connected to the engine 12.

5 Although the VSC 28 and the ECU 30 are shown in Figure 1 as separate controllers, they may be integrated into a single hardware module.

10 The VSC 28 shown in Figure 1 is directly connected to the battery management module (BMM) 31, the climate control system 24, and the inverter motor controller (IMC) 33. The configuration shown in Figure 1 includes a number of separate control modules, each configured to control one or more devices, and each in communication with the VSC 28.

15 Alternatively, one or more of the control modules may be integrated into the VSC 28, or they may be conveniently included in another control module or modules already within the vehicle.

20 The system 10 provides an engine standby logic that is used to determine whether the engine 12 should be placed in a standby mode that is to say be shut down. When, in the engine standby mode, the engine 12 shuts down, some vehicle systems may remain running. Thus, a second power source, such as the battery 22, should be available to provide power to various vehicle subsystems when the engine 12 is in the standby mode. Moreover, it should be possible to start the engine 12 quickly upon driver demand. There may be times, however, when it is undesirable to allow the engine to pass into standby mode e.g., if a second power source has a low state of charge, or if more power is needed. Therefore, the system 10 provides a way for various subsystems to be checked to determine whether the engine standby mode should be enabled.

35

Specifically, a number of conditions are compared to corresponding predetermined conditions, and flags are

thereby generated. The flags are then used to generate an engine standby flag, which determines whether engine standby should be enabled. For example, as shown in Figure 2, first, second, and third flags, corresponding to an engine flag, a vehicle system controller (VSC) flag, and a second power source, or battery flag, are generated. The block labeled "AND" is the logical operator used to determine whether the engine standby flag should be "true" or "false", where "true" indicates an engine standby enable condition. Of course, other logical operators may be used such that the engine standby enable flag would be "true" when less than all three flags indicate an engine standby enable condition.

To generate the various flags, certain conditions are compared to corresponding predetermined conditions. For example, the temperature of exhaust gases leaving the engine may be checked to determine if it meets or exceeds a predetermined temperature. When the exhaust gases are not warm enough, the engine flag may be "false", indicating an engine standby disable condition. Similarly, the battery may be checked for electrical faults or other problems, and compared to a predetermined condition to generate a battery flag. Of course, other types of engine and battery conditions may be checked, as desired. Each different condition checked can then be compared with a corresponding predetermined condition and used in a determination of whether the generated flag should be "true" or "false".

The various flags are generated by the control module that controls the individual subsystem or device. For example, the ECU 30 is configured to generate the engine flag, and the BMM 31 is configured to generate the battery flag. Similarly, the VSC flag is generated by the VSC 28; however, as explained below, the VSC flag may actually comprise a number of different flags. Each flag generated-- e.g., the engine flag, the battery flag, and the VSC flag-- is used by the VSC 28 to generate the engine standby flag.

Thus, the VSC 28 serves at least two distinct functions:- first, it generates the VSC flag, which is one of a number of different flags used by the system 10 and
5 second, it determines the engine standby flag by receiving inputs from the other control modules and implementing the engine standby logic. Of course, the system 10 is only one embodiment of the present invention, which contemplates that the engine standby logic may be programmed into a different
10 controller, including an integrated controller that also contains the individual subsystem or device control modules.

Figure 3 shows a flow chart 32 indicating the steps used to generate the engine standby flag. First, at step
15 34, the engine standby enable routine is started. This logic is programmed into the VSC 28; of course, the instruction set for this routine may reside in another controller that is in communication with the various vehicle subsystems.

20 Initially, three types of conditions are checked:- an engine condition, a VSC condition and a battery condition, illustrated in Steps 36, 38 and 40, respectively. Each of the various conditions is compared to corresponding
25 predetermined conditions, as illustrated in Steps 42, 44 and 46.

After these comparisons, flags are generated for each of the three different types of conditions and the status of
30 each of the flags is examined. Specifically, where the logical operator is an "AND" operator, such as shown in Figure 2, it is determined whether each flag indicates an engine standby enable condition. This is illustrated in Step 48. If the answer to this query is yes, engine standby
35 is enabled, as illustrated in Step 50. Conversely, if any one of the flags does not indicate an engine standby enable

condition, then engine standby mode is disabled. This is illustrated in Step 52.

5 As noted above, generating the VSC flag is somewhat different from generating the other flags, in that the VSC flag may comprise more than one flag. Thus, the VSC 28 may actually compare a number of different kinds of conditions to corresponding predetermined conditions in order to generate the VSC flag.

10

For example, the VSC 28 may determine whether driver-controlled conditions, vehicle conditions and energy management conditions match corresponding predetermined conditions. The VSC flag may then indicate an engine standby enable condition when one or more of the determined conditions matches its corresponding predetermined condition. Thus, the term "VSC condition" may imply a condition of the subsystem or device controlled by the VSC 28, rather than a condition of the VSC 28 itself.

20

Each flag generated by the VSC 28 that is to say, the driver flag, the vehicle flag and the energy management flag is illustrated in detail in Figures 4-6. For example, in order to generate the driver flag, the vehicle flag, and the energy management flag, various conditions are checked and compared to corresponding predetermined conditions, to determine whether the flag should indicate an engine standby enable condition.

30

Of course, the specific conditions that are checked, as well as the predetermined conditions to which they are compared, may vary. For example, in Figure 4 various driver-controlled conditions are checked and compared to corresponding predetermined driver-controlled conditions, to generate a driver flag. In the example shown in Figure 4, four different driver-controlled conditions are examined. Of course, there may be more or less driver-controlled

35

conditions which are chosen for purposes of generating the driver flag.

5 In Figure 4, the first driver-controlled condition illustrated is the position of a driver actuated switch, represented in Figure 4 as "standby enable". The driver actuated switch may be placed in an instrument panel or other convenient location within the vehicle passenger compartment. This would allow a driver to manually enable or disable the engine standby mode. Thus, the position of
10 the driver actuated switch is checked and compared to the known "on" and "off" positions.

Another driver-controlled condition that may be used in
15 the engine standby enable routine is an accelerator pedal position. In particular, as shown in Figure 4, the percentage that the accelerator pedal is depressed is checked against some predetermined level. In this example, the corresponding predetermined condition is zero, that is
20 to say, the accelerator pedal position is checked to determine whether it is in a completely released position.

The relational operator used for this comparison is "less than or equal to" (\leq). Of course, other relational
25 operators may be used, and other predetermined conditions may be used for comparison, such that the accelerator pedal may be depressed to a certain extent, and still indicate an engine standby enable condition.

30 As shown in Figure 4, a third driver-controlled condition is checked and compared to a corresponding predetermined condition. Specifically, the position of the brake pedal is checked, to ensure that it is depressed. Finally, the position of the gear lever is checked, since it
35 may not be desirable, or even possible, to have engine standby enabled when the vehicle is in a particular gear. In the example shown in Figure 4, the predetermined

condition is a reverse gear, and the relational operator is "not equal to". Thus, the gear lever position will indicate an engine standby enabled condition only when the vehicle is not in a reverse gear. The logical operator used to compare each of the four inputs to determine the driver flag is "AND". Of course, other logical operators may be used, such that the driver flag may still indicate an engine standby enable condition when one or more of the driver-controlled condition inputs do not indicate an engine enable condition.

10

Similar to the evaluation of certain driver-controlled conditions, certain vehicle conditions are also examined when generating the VSC flag. Figure 5 illustrates one set of vehicle conditions used to generate a vehicle flag, which is then subsequently used to generate the VSC flag. First, it is determined whether the vehicle speed is equal to zero, that is to say, whether the vehicle is completely stopped.

In addition, another vehicle condition requires that the vehicle speed has to reach a minimum speed to enable the engine standby condition. This helps to avoid the undesirable situation of stopping and starting the engine too often, such as when the vehicle is maneuvered in a parking lot or the vehicle is stopped in front of a traffic light and creeping.

To implement this condition, an "S-R Flip-Flop" is used. Specifically, once the maximum vehicle speed is greater than or equal to the minimum vehicle speed setting, the Flip-Flop is set, and engine standby is enabled. If the engine does stop, and later starts again, the signal "engine started flag" resets the Flip-Flop and disables the engine standby. The input "engine started flag" has a short pulse when the engine is started, and the vehicle must then reach at least the minimum vehicle speed before the engine standby condition is enabled.

35

As shown in Figure 5, a third vehicle condition is used to generate the vehicle flag. Specifically, the engine must be running for a predetermined time before the engine standby will be enabled. This is implemented by using a triggered timer, for which, the trigger is the engine started flag pulse. The timer will be saturated and reset by another input, the engine stopped flag. Thus, the timer must indicate that the engine has been running for at least a minimum engine run time in order to indicate an engine standby condition. As with the previous examples, the logical operator used to compare each of the three vehicle conditions is an "AND" operator. Other operators may be used such that the vehicle flag may indicate an engine standby enable condition when less than all of the vehicle condition inputs indicate engine standby enable.

In addition to the driver-controlled conditions and vehicle conditions, various energy management conditions may also be examined and used to generate the VSC flag. Figure 6 illustrates a number of the energy management conditions which can be used. In the example shown in Figure 6, the first condition checked is the battery state of charge (SOC). In order to ensure that the battery SOC is above a predetermined level, a relay type logic is implemented.

Engine standby is enabled until the battery SOC is depleted to a level set by "battery SOC low". Below this level, the engine is presumed to be started, and to be charging the battery to a higher level, set by "battery SOC high". The value of "battery SOC low" and "battery SOC high" may be predetermined calibration constants. They could also be variables set by another VSC function to reflect the coordination or optimization of the vehicle status.

The second energy management condition that is checked is the total electrical load on the battery 22. When the

engine 12 is running, and the ISG 14 is in a generator mode, the ISG 14 not only charges the battery 22, but also provides electricity to all other vehicle electrical devices. If the engine 12 is to be put in the standby mode, and shut down, the battery 22 needs to provide power to all the electrical devices, as well as some devices that would otherwise be mechanically powered by the engine 12 such as a water pump and a transmission oil pump.

To determine whether the battery 22 can handle the power demands after the engine is shut down, the VSC 28 calculates an anticipated electrical load that will be present when the engine 12 is in the standby mode. This represents a required electrical load that the battery 22 will need to handle without assistance from the engine 12, the ISG 14, or a combination thereof.

As illustrated in Figure 6, the required electrical load is compared to a predetermined maximum electrical load, indicated by the "maximum auxiliary power" shown in Figure 6. If the required electrical load is too great, it may be desirable to disable the engine standby mode because the battery 22 may be quickly depleted, thereby requiring the engine 12 to be restarted.

The predetermined value of the maximum auxiliary power may vary, depending on the ability of a second power source, such as the battery 22, to handle large electrical loads. Thus, the predetermined maximum auxiliary power may be set to a larger value when the vehicle's second power source is able to handle a relatively large electrical load. As with the driver flag and the vehicle flag, the energy management flag is generated using the "AND" logical operator flag.

Thus, in the example shown in Figure 6, the energy management flag will indicate an engine standby enable condition only when each of the inputs so indicate. Of

course, different energy management conditions may be examined, and a different logical operator used, such that the energy management flag will indicate an engine standby enable condition under different sets of energy management
5 conditions.

As shown in Figure 7, the VSC flag may be used in conjunction with a number of other flags to determine whether an engine standby mode should be enabled. Discussed
10 above are the engine flag and the battery flag, which are generated by comparing engine and battery conditions to respective predetermined engine and battery conditions. Similarly, the temperature of the transmission oil may be checked against a predetermined temperature, and a
15 transmission flag generated based on this comparison. Of course, other transmission conditions may be checked, as desired, and then compared to corresponding predetermined conditions and used to generate the transmission flag.

Also included in the embodiment shown in Figure 7, are additional flags used to determine if engine standby should be enabled. An ISG flag is generated by checking at least one ISG condition and comparing it to a predetermined ISG condition. For example, the ISG may be examined for
20 electrical faults, and if any are found, the ISG flag will indicate an engine standby disable condition.
25

In addition, a climate flag may be generated by examining the climate control system, such as the climate control system 24 shown in Figure 1, to determine whether
30 various conditions match corresponding predetermined conditions. For example, if the ambient air temperature is relatively high, and the climate control system is set to a relatively low temperature, this may indicate a need to
35 continuously run an air conditioning compressor. Such an electrical load may quickly drain a battery, and so a

climate flag may be generated that indicates an engine standby disable condition.

5 As discussed above in conjunction with the other flags, each of the flags shown in Figure 7 may be generated by the control module that controls the individual subsystem, or by the VSC 28. For example, the transmission flag is generated by the TCU 20; whereas, the climate flag is generated by the VSC 28. Regardless of which control module is used to
10 generate a particular flag, signals indicating each flag are sent to the VSC 28, where the logic to implement the engine standby flag resides.

In the example shown in Figure 7, each of the six flags
15 are compared using the "AND" logical operator to generate an engine standby flag. As discussed in conjunction with the VSC flag, different logical operators may be used such that the engine standby flag may indicate an engine standby enable condition when one or more of the input flags do not
20 indicate an engine standby enable condition. In addition, it is important to note that the various conditions that are determined, and the predetermined conditions to which they are compared, may vary from vehicle to vehicle and across vehicle platforms.

25 It will be appreciated by those skilled in the art that although the invention has been described by way of example with reference to a number of specific embodiments it is not limited to these embodiments and that various alternative
30 embodiments or modifications to the disclosed embodiments could be made without departing from the scope of the invention.

CLAIMS

1. A method for enabling engine standby in a vehicle having an engine and a second power source the method
5 comprising determining whether at least one engine condition matches a corresponding predetermined engine condition, determining whether at least one vehicle system controller condition matches a corresponding predetermined vehicle system controller condition, determining whether at least
10 one second power source condition matches a corresponding predetermined second power source condition and enabling engine standby when at least one of the determined conditions matches a corresponding predetermined condition.

15 2. A method as claimed in claim 1 wherein the second power source comprises an electric motor and a battery.

3. A method as claimed in claim 1 or in claim 2 wherein determining whether at least one engine condition
20 matches a corresponding predetermined engine condition comprises comparing at least one engine condition to a corresponding predetermined engine condition and generating a first flag based upon the result of the comparison, determining whether at least one vehicle system controller
25 condition matches a corresponding predetermined vehicle system controller condition comprises comparing at least one vehicle system controller condition to a corresponding predetermined vehicle system controller condition and generating a second flag based upon the result of the
30 comparison, determining whether at least one second power source condition matches a corresponding predetermined second power source condition comprises comparing at least one second power source condition to a corresponding predetermined second power source condition, thereby
35 generating a third flag and generating a third flag based upon the result of the comparison and enabling engine standby when at least one of the determined conditions

matches a corresponding predetermined condition comprises stopping the engine when at least one of the first, second and third flags indicates an engine stop condition.

5 4. A method as claimed in claim 3 wherein the first
flag indicates an engine stop condition when each of the at
least one engine conditions matches a corresponding
predetermined engine condition, the second flag indicates an
engine stop condition when each of the at least one vehicle
10 system controller conditions matches a corresponding
predetermined vehicle system controller condition and the
third flag indicates an engine stop condition when each of
the at least one second power source conditions matches a
corresponding predetermined second power source condition.

15

 5. A method as claimed in any of claims 1 to 4
wherein the at least one vehicle system controller condition
includes at least one driver-controlled condition chosen
from a set of driver-controlled conditions, the set
20 including a driver actuated switch position, an accelerator
pedal position, a brake pedal position, and a gear lever
position.

 6. A method as claimed in any of claims 1 to 5
25 wherein the predetermined vehicle system controller
conditions include predetermined driver-controlled
conditions including the driver actuated switch in an enable
position, the accelerator pedal in a completely released
position, the brake pedal in a depressed position and the
30 gear lever not in a reverse position.

 7. A method as claimed in any of claims 1 to 6
wherein the at least one vehicle system controller condition
includes at least one vehicle condition chosen from a set of
35 vehicle conditions, the set including a current vehicle
speed, a maximum vehicle speed, and an engine runtime.

8. A method as claimed in claim 5, wherein the predetermined vehicle system controller conditions include predetermined vehicle conditions including the current vehicle speed being approximately zero, the maximum vehicle speed being at least a predetermined minimum vehicle speed, and the engine runtime being at least a predetermined minimum engine runtime.

9. A method as claimed in any of claims 1 to 8 wherein the at least one vehicle system controller condition includes at least one energy management condition chosen from a set of energy management conditions, the set including a second power source state of charge and a required electrical load.

10. A method as claimed in any of claims 1 to 9 wherein the predetermined vehicle system controller conditions include predetermined energy management conditions including the state of charge being greater than a predetermined minimum state of charge, and the required electrical load being at or below a predetermined maximum electrical load.

11. A method as claimed in any of claims 1 to 10 wherein the vehicle includes an electric motor, a battery, a transmission and a climate control system and the method further comprises determining whether at least one transmission condition matches a corresponding predetermined transmission condition, determining whether at least one motor condition matches a corresponding predetermined motor condition and determining whether at least one climate control condition matches a corresponding predetermined climate control condition.

12. A method as claimed in claim 11 wherein determining whether at least one transmission condition matches a corresponding predetermined transmission condition

comprises comparing at least one transmission condition to a corresponding predetermined transmission condition and generating a transmission flag based upon the result of the comparison, determining whether at least one motor condition
5 matches a corresponding predetermined motor condition comprises comparing at least one motor condition to a corresponding predetermined motor condition and generating a motor flag based upon the result of the comparison and determining whether at least one climate control condition
10 matches a corresponding predetermined climate control condition comprises comparing at least one climate control condition to a corresponding predetermined climate control condition and generating a climate flag based upon the result of the comparison.

15

13. A method as claimed in claim 11 or in claim 12 wherein engine standby is enabled only when each of the determined conditions matches a corresponding predetermined condition.

20

14. A method as claimed in claim 13 when dependent upon claim 12 wherein the engine is stopped only when each of the flags indicate an engine stop condition.

25

15. A system for enabling engine standby in a vehicle having an engine and a second power source, the system comprising at least one controller configured to compare at least one condition of a set of conditions to a corresponding predetermined condition to generate a
30 controller flag and to enable engine standby when at least the controller flag indicates an engine standby enable condition.

35

16. A system as claimed in claim 15 wherein the controller includes an engine controller and the at least one condition includes an engine fault condition.

17. A system as claimed in claim 15 or in claim 16 wherein the controller includes a vehicle system controller and the set of conditions includes a driver actuated switch position, an accelerator pedal position, a brake pedal
5 position, a gear lever position, a current vehicle speed, a maximum vehicle speed, an engine runtime, a second power source state of charge and a required electrical load.

18. A system as claimed in any of claims 15 to 17 in
10 which the vehicle includes a plurality of subsystems and the system further comprises additional controllers for controlling the subsystems, each being configured to send subsystem information to the at least one controller, wherein the at least one controller is further configured to
15 generate additional flags related to each of the subsystems and to enable engine standby when at least one of the additional flags indicates an engine standby enable condition.

20 19. A method for enabling engine standby in a vehicle substantially as described herein with reference to the accompanying drawing.

25 20. A system for enabling engine standby in a vehicle substantially as described herein with reference to the accompanying drawing.



INVESTOR IN PEOPLE

Application No: GB0420096.0

27

Examiner: Catherine Allen

Claims searched: 1 to 20

Date of search: 13 January 2005

Patents Act 1977: Search Report under Section 17

Documents considered to be relevant:

| Category | Relevant to claims | Identity of document and passage or figure of particular relevance |
|----------|--------------------|---|
| X | 1, 2, 9 & 15 | EP0570234 A1 MITSUBISHI MOTORS CORP see column 29, lines 7 to 16 |
| X | 1, 2, 9 & 15 | US5785138 A MITSUBISHI MOTORS CORP |
| X | 15 | JP08317506 A AQUEOUS RES KK see WPI Abstract Accession No. 1993-361428 |

Categories:

| | | | |
|---|---|---|--|
| X | Document indicating lack of novelty or inventive step | A | Document indicating technological background and/or state of the art. |
| Y | Document indicating lack of inventive step if combined with one or more other documents of same category. | P | Document published on or after the declared priority date but before the filing date of this invention. |
| & | Member of the same patent family | E | Patent document published on or after, but with priority date earlier than, the filing date of this application. |

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^X :

F1K

Worldwide search of patent documents classified in the following areas of the IPC⁰⁷

B60K

The following online and other databases have been used in the preparation of this search report

EPODOC, JAPIO, WPI