




- (51) International Patent Classification:  
*B24B 3/04* (2006.01)      *B24D 5/02* (2006.01)
- (21) International Application Number:  
PCT/US2015/033312
- (22) International Filing Date:  
29 May 2015 (29.05.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
62/004,275      29 May 2014 (29.05.2014)      US

- (71) Applicants: SAINT-GOBAIN ABRASIVES, INC. [US/US]; One New Bond Street, Worcester, Massachusetts 01615 (US). SAINT-GOBAIN ABRASIFS [FR/FR]; Rue de l'Ambassadeur, 78700 Conflans-Sainte-Honorine (FR).
- (72) Inventors: SEREBRENNIKOV, Boris L.; 4 Broushane Circle, Shrewsbury, Massachusetts 01545 (US). ROY, Debdutta; 84C Park Street, C/O- Rita Guha, West Bengal, Kolkata, 700017 Kolkata (IN). TUNSTALL, John; 114 Timberhill Road, Buffalo Grove, Illinois 60089 (US). KHAUND, Arup K.; 18 Hemlock Drive, Northborough, Massachusetts 01532 (US).
- (74) Agents: VENTER, Katrin et al.; Abel Law Group, LLP, 8911 N. Capital of Texas Hwy, Bldg 4, Suite 4200, Austin, Texas 78759 (US).

[Continued on next page]

(54) Title: ABRASIVE ARTICLE HAVING A CORE INCLUDING A POLYMER MATERIAL

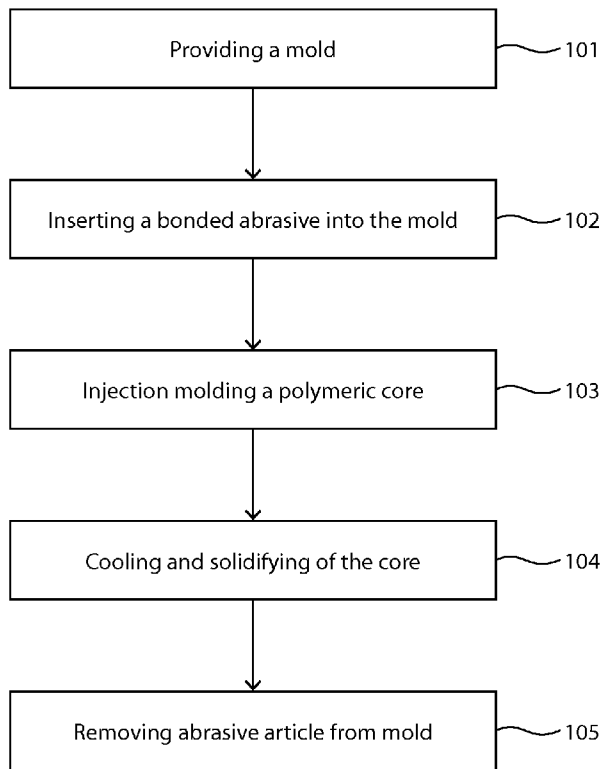

(57) Abstract: An abrasive article in form of an abrasive wheel comprising a core and a bonded abrasive body disposed within an interior recess of a peripheral surface of a core. The core comprises a polymer material and has an HDT at 0.45 MPa of at least about 130°C, and a low shrinkage ratio.

FIG. 1

WO 2015/184344 A1



**(81) Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

**(84) Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,

TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

**Published:**

- with international search report (Art. 21(3))

## ABRASIVE ARTICLE HAVING A CORE INCLUDING A POLYMER MATERIAL

## TECHNICAL FIELD

The present disclosure relates to an abrasive article and in particular to an abrasive  
5 article having a core including a polymer material.

The use of abrasive wheels to contour and/or chamfer the edge of a flat material, e.g.,  
a sheet material made from glass or metal, is typically carried out for both safety and  
cosmetic reasons. Such abrasive wheels may include diamond-containing abrasive wheels  
and may be used to shape the edges of materials for various industries, including but not  
10 limited to automotive, architectural, furniture, and appliance industries. Certain prior art  
abrasive wheels are described in U.S. Patent Nos. 3,830,020; 4,457,113; 6,769,964 and U.S.  
Publ. No. 20090017736. Commercial edge grinding wheels typically include a heavy metal  
core part and a profiled bonded abrasive disposed at the periphery of the metal core.

There are a number of unresolved issues associated with edge grinding tools and a  
15 need continues to exist for improved products.

## SUMMARY

According to one aspect, an abrasive article comprises a bonded abrasive body  
disposed within an interior recess of a peripheral surface of a core, wherein the core  
comprises a polymer material and reinforcing fibers, and wherein the core has a heat  
20 deflection temperature (HDT) at 0.45 MPa of at least about 130°C and a shrinkage ratio of  
not greater than 3%.

According to another aspect, an abrasive article comprises a bonded abrasive body  
disposed within an interior recess of a peripheral surface of a core, wherein the core  
comprises a polymer material and reinforcing fibers, the reinforcing fibers having an average  
25 aspect ratio of length to width ranging from at least 10 to not greater than 5000.

In yet another aspect, an abrasive article comprises a bonded abrasive body disposed  
within an interior recess of a peripheral surface of a core, wherein the core comprises a  
polymer material and further comprises an inner portion and an outer radial portion disposed  
circumferentially around the periphery of the inner portion, wherein the outer radial portion  
30 comprises a thickness ( $T_{or}$ ) different than a thickness of the inner portion ( $T_{ir}$ ).

In another aspect, a method of making an abrasive wheel comprises inserting a  
bonded abrasive body into a mold and injection molding a core around at least a portion of  
the bonded abrasive body to form an integrally bonded abrasive article, wherein the core  
comprises a polymer material and has an HDT at 0.45 MPa of at least 130°C and a shrinkage

ratio of not greater than 3%, and wherein the bonded abrasive body is disposed within an interior recess of a peripheral surface of the core.

#### BRIEF DESCRIPTION OF THE DRAWINGS

5 The present disclosure may be better understood, and its numerous features and advantages made apparent to those skilled in the art by referencing the accompanying drawings.

FIG. 1 includes a flow chart illustrating a method of making an abrasive article according to one embodiment.

10 FIG. 2A includes a cross-sectional representation of an abrasive wheel according to one embodiment.

FIG. 2B includes a cross-sectional representation of an abrasive wheel according to one embodiment.

FIG. 3A includes a cross-sectional representation of an abrasive wheel including a vibration damping layer according to one embodiment.

15 FIG. 3B includes a cross-sectional representation of an abrasive wheel including a vibration damping layer according to another embodiment.

FIG. 3C includes a cross-sectional representation of an abrasive wheel including a vibration damping layer according to a further embodiment.

20 FIG. 4 includes an illustration of a coupling connection between a core and a bonded abrasive body according to one embodiment.

FIG. 5 includes a cross-sectional representation of an abrasive wheel according to one embodiment illustrating a diameter (D) of the core and a maximum thickness (t) of the core.

25 FIG. 6A includes a cross-sectional representation of a section of an abrasive wheel illustrating a maximum thickness of the bonded abrasive body  $T_{bm}$  and a maximum thickness of the core  $T_{cm}$  according to one embodiment.

FIG. 6B includes a cross-sectional representation of a section of an abrasive wheel illustrating a maximum thickness of the bonded abrasive body  $T_{bm}$  and a maximum thickness of the core  $T_{cm}$  according to one embodiment.

30 FIG. 7 includes a cross-sectional representation of an abrasive wheel illustrating a thickness of the outer radial portion ( $T_{or}$ ) and a thickness of the inner portion ( $T_{ir}$ ) according to one embodiment.

FIG. 8 includes a photo illustrating an injection molded core mounted on a steel test hub according to one embodiment.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

As used herein, the terms “comprises,” “comprising,” “includes,” “including,” “has,” “having” or any other variation thereof, are intended to cover a non-exclusive inclusion. For example, a process, method, article, or apparatus that comprises a list of features is not necessarily limited only to those features but may include other features not expressly listed or inherent to such process, method, article, or apparatus.

As used herein, and unless expressly stated to the contrary, “or” refers to an inclusive-or and not to an exclusive-or. For example, a condition A or B is satisfied by any one of the following: A is true (or present) and B is false (or not present), A is false (or not present) and B is true (or present), and both A and B are true (or present).

Also, the use of “a” or “an” are employed to describe elements and components described herein. This is done merely for convenience and to give a general sense of the scope of the invention. This description should be read to include one or at least one and the singular also includes the plural unless it is obvious that it is meant otherwise.

Various embodiments of the present disclosure will now be described, by way of example only, with reference to the accompanying drawings.

According to one embodiment, as also shown in **FIG. 1**, the method of making an abrasive article of the present disclosure may include the following steps: 1) providing a mold **101**; 2) inserting a bonded abrasive into the mold **102**; 3) injection molding a core **103**; 4) cooling and solidifying the core **104**; and 5) removing the abrasive article from the mold **105**.

The mold may be designed having an inner volume corresponding to the outer shape of the core for an abrasive wheel. The bonded abrasive body can be inserted into the mold, for example, near or at the periphery of the mold, such that during injection molding, the bonded abrasive body can be overmolded with the injected polymer material.

The injection molding temperature depends of the type of polymer material used for forming the core. Generally, the injection molding temperature can be at least about 25°C to about 50°C higher than the minimum temperature required to fill up the mold with melted polymer material. In an embodiment, the injection molding temperature can be at least 230°C, such as at least 250°C, or at least 280°C. In another embodiment, the injection molding temperature can be not greater than 400°C, such as not greater than 350°C or not greater than 300°C. It will be appreciated that the injection molding temperature can be within a range between any of the minimum and maximum values noted above, such as from

about 230°C to about 380°C, from about 250°C to about 350°C or from about 280°C to about 330°C .

After cooling and solidifying of the core, the bonded abrasive body may be disposed within an interior recess of a peripheral surface of the core.

5 In a further embodiment, the method of making an abrasive article may include adding a vibration damping layer between at least a portion of the core and at least a portion of the bonded abrasive body. The inclusion of the vibration damping layer may be completed before injection molding of the core to the bonded abrasive body. For example, a vibration damping layer may be partially or temporarily affixed to at least a portion of the bonded  
10 abrasive body. The bonded abrasive body and the vibration damping layer may be disposed in the mold. Thereafter, material may be injected into the mold to form the core and bond the core to the vibration damping layer and the bonded abrasive body.

As demonstrated in the embodiments shown in **FIG. 2A** and **2B**, the abrasive article **20** formed by the above-described method comprises a core **21** comprising a polymer  
15 material and a bonded abrasive body **23**. In one particular instance, the bonded abrasive body may be disposed within an interior recess of a peripheral surface of the core.

The core **21** may include a particular polymer material that facilitates improved performance of the bonded abrasive body, including but not limited to, aspects of strength, wearability, vibration damping, and manufacturability.

20 In one embodiment, the core of the abrasive article of the present disclosure may have a particular heat deflection temperature (HDT) at 0.45 MPa of at least about 130°C, such as at least about 140°C, at least about 150°C, at least about 160°C, at least about 180°C, at least about 200°C; at least about 230°C, at least about 250°C, or at least about 260°C. In another non-limiting embodiment, the HDT of the core at 0.45 MPa may not be not greater than  
25 400°C, such as not greater than 380°C, or not greater than 360°C. It will be appreciated that the HDT at 0.45 MPa of the core can be within a range between any of the minimum and maximum values noted above, such as from about 130°C to about 400°C, from about 200°C to about 350°C, or from about 250°C to about 330°C.

In another embodiment, the core **21** of the abrasive article may have a shrinkage ratio  
30 of not greater than 3%, such as not greater than 2%, not greater than 1.5%, not 1.0%, not greater than 0.8%, not greater than 0.5%, not greater than 0.3%, not greater than 0.1%, or not greater than 0.05% . In a particular embodiment, the shrinkage ratio may be not greater than 0.1%.

In another embodiment, the shrinkage ratio of the core is at least 0.001% or at least 0.005%. It will be appreciated that the shrinkage ratio of the core can be within any of the minimum and maximum values noted above, such as from 0.001% to 3%, from 0.005% to 1%, or from 0.001% to 0.1%.

5 In a further embodiment, the core **21** of the abrasive article can have a Charpy impact of at least 45 kJ/m<sup>2</sup>, such as at least 50 kJ/m<sup>2</sup>, at least 55 KJ/m<sup>2</sup>, at least 60 kJ/m<sup>2</sup>, at least 80 kJ/m<sup>2</sup>, at least 100 kJ/m<sup>2</sup>, or at least 150 kJ/m<sup>2</sup>; in another aspect, the Sharpy impact may be not greater than 300 kJ/m<sup>2</sup> or not greater than 250 kJ/m<sup>2</sup>. It will be appreciated that the Charpy impact can be within a range from any of the minimum and maximum values noted  
10 above, such as from 45 kJ/m<sup>2</sup> to 300 kJ/m<sup>2</sup>, from 50 kJ/m<sup>2</sup> to 250 kJ/m<sup>2</sup>, or from 100 KJ/m<sup>2</sup> to 180 kJ/m<sup>2</sup>.

In one embodiment the core **21** can include a polymer material selected from the group of a polyamide (PA), a polybutylene terephthalate (PBT), a polyphenylene sulfide (PPS), ethylene tetrafluoroethylene (ETFE), a polyetherketone (PEEK), a polyester (PE), a  
15 polyethyleneimine (PEI), a polyethersulfone (PESU), a polyethylene terephthalate (PET), a polyphthalamide (PPA), a poly (p-phenylene sulfide), a polycarbonate (PC), acrylonitrile-butadiene-styrene (ABS), PC-ABS, or any combination thereof. In an aspect, the polymer material may be a nylon, a PBT, a PPS, or a PC-ABS. The nylon may be, for example, nylon 6, nylon 66, nylon 610, nylon 612, nylon 66/6, nylon 410, or nylon 46. In a particular  
20 embodiment, the polymer material of the core may consist essentially of PPS. In another particular embodiment, the polymer material of the core may consist essentially of PC-ABS. In another embodiment, the polymer material of the core may be essentially free of nylon.

In another embodiment, the core **21** may further contain reinforcing fibers and/or a powder distributed within the polymer material. The reinforcing fibers may include, for  
25 example, glass fibers, carbon fibers, ceramic fibers, organic fibers, mineral fibers, or combinations thereof. Suitable powders may be, for example, calcium carbonate, glass powder, mineral powder, or talc.

In a particular embodiment, the reinforcing fibers of the core may consist essentially of carbon fibers. In another particular embodiment, the reinforcing fibers of the core can  
30 consist essentially of glass fibers. Under consisting essentially should be understood only one specific type of fibers containing only unavoidable impurities.

The amount of reinforcing fibers and/or powder contained in the core may be at least about 1wt%, such as at least about 5wt%, at least about 10wt%, at least about 15wt%, at least

about 20wt%, at least about 25wt%, or at least about 30wt%, based on the total weight of the core. In another aspect, the amount of reinforcing fibers and/or powder may be not greater than 60wt%, such as not greater than 55wt%, not greater than 50wt%, not greater than 45wt%, or not greater than 40wt%. It will be appreciated that the amount of reinforcing  
5 fibers and/or powder contained in the core can be within a range between any of the minimum and maximum values noted above, such as from about 5wt to about 50wt%, from about 15wt% to about 40wt%, from about 30wt% to about 50wt%, or from about 20wt% to about 35wt% based on the total weight of the core.

In one embodiment, the reinforcing fibers can have an average aspect ratio of length  
10 to width of at least about 3, such as at least about 5, at least about 10, at least about 30, at least about 50, at least about 100, at least about 500, or at least about 800. In another embodiment the primary aspect ratio of the reinforcing fibers may be not greater than 5000, such as not greater than 3500, not greater than 2000, not greater than 1200, not greater than 1100, or not greater than 1000. It will be appreciated that the average aspect ratio of the  
15 reinforcing fibers can be within a range between any of the minimum and maximum values note above, such as from about 3 to about 5000, from about 3 to about 1300, from about 10 to about 1200, from about 100 to about 1200, from about 500 to about 1200, from about 700 to 1200, or from about 800 to about 1200.

In one embodiment, the core of the abrasive article of the present disclosure may  
20 consist essentially of the polymer material and the reinforcing fibers, the reinforcing fibers being present in an amount of 30 to 50 wt% based on the total weight of the core and having an average aspect ratio of length to width of 500 to 1200.

In a particular embodiment, the core may comprise PPS and carbon fibers, the carbon  
25 fibers having an average aspect ratio from about 800 to about 1200, wherein the core can have a shrinkage ratio of not greater than 0.1% and a tensile modulus of at least about 20.0 GPa.

In another particular embodiment, the core can comprise PC-ABS and glass fibers, the  
30 glass fibers having an average aspect ratio from about 800 to about 1200, wherein the core can have a shrinkage ratio of not greater than 0.1% and a tensile modulus of at least about 20.0 GPa.

According to one embodiment, the core **21** of the abrasive article can represent a majority of the total volume of the abrasive article. For example, in one embodiment, the core can be at least about 60vol% based on the total volume of the abrasive article, such as at



least about 70vol%, at least about 75vol%, at least 80vol% or at least 85vol%. Still, in another non-limiting embodiment, the core may be not greater than about 99vol% of the abrasive article, such as at not greater than about 97vol%, not greater than about 95vol%, or not greater than about 90vol%. It will be appreciated that the volume percentage of the core  
5 of the abrasive article based on the total volume of the abrasive article can be within a range between any of the minimum and maximum values noted above, such as from about 65vol% to about 99 vol%, from about 70°vol% to about 95vol%, or from about 80vol% to about 95vol%.

The bonded abrasive body **22** can be disposed in a recess at the peripheral surface of  
10 the core **21** and can include abrasive particles fixed in a bond material. Suitable abrasive particles can include, for example, oxides, carbides, nitrides, borides, diamond, cubic boron nitride, silicon carbide, boron carbide, alumina, silicon nitride, tungsten carbide, zirconia, or a combination thereof. In a particular aspect, the abrasive particles of the bonded abrasive are diamond particles. In at least one embodiment, the abrasive particles can consist essentially  
15 of diamond.

The abrasive particles contained in the bonded abrasive body can have an average particle size suitable to facilitate particular grinding performance. For example, the abrasive particles can have a size less than about 2000  $\mu\text{m}$ , such as less than about 1000  $\mu\text{m}$ , less than about 500  $\mu\text{m}$ , or less than about 300  $\mu\text{m}$ . In another aspect, the abrasive particles can have a  
20 size of at least 0.01  $\mu\text{m}$ , such as at least 0.1  $\mu\text{m}$ , at least about 1  $\mu\text{m}$ , at least 5  $\mu\text{m}$  or at least 10  $\mu\text{m}$ . It will be appreciated that the size of the abrasive particles contained in the bonded abrasive can be within a range between any of the minimum and maximum values noted above, such as from about 0.01  $\mu\text{m}$  to about 2000  $\mu\text{m}$ , from about 1  $\mu\text{m}$  to about 500  $\mu\text{m}$ , from about 5  $\mu\text{m}$  to about 300  $\mu\text{m}$  or from about 50  $\mu\text{m}$  to about 150  $\mu\text{m}$ .

The bond material of the bonded abrasive body can include an inorganic material, an organic material, and a combination thereof. Suitable inorganic materials for the use as bond material may include metals, glass, glass-ceramics, and a combination thereof. For example, an inorganic bond material can include one or more metal compositions or elements such as Cu, Sn, Fe, W, WC, Co, and a combination thereof. Organic materials may include resins,  
25 for example thermosets, thermoplastics, and a combination thereof. For example, some suitable resins can include phenolic resins, epoxies, polyesters, cyanate esters, shellacs, polyurethanes, rubber, polyimides and a combination thereof.

As also shown in the embodiments of **FIG. 2A** and **2B**, the bonded abrasive body may include a V-shape **22** or U-shape **23** profile ground therein, which will be reproduced on the material to be shaped.

The abrasive article of the present disclosure may be selected from a range of suitable sizes to facilitate efficient grinding depending upon the workpiece. In one embodiment, the  
5 abrasive article can include an abrasive wheel having a diameter of at least about 25 mm, such as at least about 30 mm or at least about 50 mm. In another embodiment, the wheel diameter may be not greater than 500 mm, such as not greater than 450 mm, not greater than 300 mm or not greater than 200 mm. It will be appreciated that the wheel diameter can be  
10 within a range between any of the minimum and maximum values noted above, such as from about 25 mm to about 500 mm, from about 50 mm to about 250 mm, or from about 25 mm to about 150 mm.

In an embodiment, the abrasive article of the present disclosure may include a vibration damping layer disposed between at least a portion of the core and a portion of the  
15 bonded abrasive body.

**FIG. 3A** shows an embodiment, wherein the vibration damping layer **33** is contained on the top surface **35** and on the bottom surface **36** of the bonded abrasive body **32** in the recess of the core **31**, and wherein the vibration damping layer **33** extends over the entire length of the top surface **35** and the bottom surface **36** of the bonded abrasive body.

**FIG. 3B** demonstrates an embodiment wherein the vibration damping layer is  
20 contained behind the bonded abrasive body **32**, on the side surface **37** of the abrasive body in the recess of the core **31**, extending over the entire side surface **37** of the bonded abrasive body.

As further shown in **FIG. 3C**, the vibration damping layer **33** can also be contained  
25 on the side surface **37** as well as on the top and bottom surfaces **35, 36** of the bonded abrasive body in the recess of the core **31**. In the embodiment of **FIG. 3C**, the vibration damping layer extends over the entire top surface **35**, the entire bottom surface **36**, and the entire side surface **37** of the bonded abrasive body.

In one aspect, the vibration damping layer **33** may include a material suitable for  
30 damping vibrations that are generated at the bonded abrasive body **32** during grinding operation of the abrasive article **30**. In at least one embodiment, the vibration damping layer **33** may further facilitate manufacturing of the abrasive article and facilitate joining of the bonded abrasive body **32** to the core **31** during the forming process. In one particular

embodiment, the vibration damping layer **33** may include a polymer material. Some suitable examples of polymer materials can include a thermoplastic rubber or thermoset rubber of a thermoplastic elastomer. For example, the vibration damping layer **33** may include silicone, a polyurethane, a styrene butadiene (SBR), or combinations thereof. In a particular aspect, the  
5 vibration damping layer **33** may consist essentially of silicone.

In another aspect, the vibration damping layer **33** may have a tensile modulus of at least about 50 MPa, such as at least about 60 MPa, at least about 80 MPa, or at least about 100 MPa. In a further aspect, the tensile modulus may be not greater than about 200 MPa, such as not greater than about 180 MPa or not greater than about 150 MPa. It will be  
10 appreciated that the tensile modulus can be within a range between any of the minimum and maximum values noted above, such as from about 50 MPa to about 200 MPa, from about 60 MPa to about 170 MPa, or from about 100 MPa to about 150 MPa.

In a further aspect, the vibration damping layer **33** can have a compressive modulus (CM) of at least 0.2 MPa, such as at least 0.5 MPa or at least 2 MPa. In yet another aspect,  
15 the CM of the vibration damping layer may be not greater than about 10 MPa, such as not greater than about 8MPa, or not greater than about 7 MPa. It will be appreciated that the CM can be within a range between any of the minimum and maximum values noted above, such as from about 0.2 MPa to about 9 MPa or from about 0.3 MPa to about 5 MPa.

In another embodiment, the vibration damping layer can have a suitable thickness to  
20 facilitate improved performance. For example, the thickness of the vibration damping layer may be at least about 0.05 mm, such as at least about 0.2 mm, or at least about 0.3 mm. In yet another embodiment, the thickness of the vibration damping layer may not be greater than 2.0 mm, such as not greater than 1.6 mm, or not greater than 1.3 mm. It will be appreciated that the thickness of the vibration damping layer can be within a range between any of the  
25 minimum and maximum values noted above, such as from about 0.1 mm to about 2.0 mm, from about 0.2 to about 1.5 mm, or from about 0.3 mm to about 1.0 mm.

In yet another aspect, the thickness of the vibration damping layer may be reduced by at least 3% at a pressure of at least about 10 MPa, based on the thickness of the vibration  
damping layer at 0.1 MPa.

30 The core and the bonded abrasive body can be directly or indirectly coupled together. In one embodiment, the core and the bonded abrasive body can be joined together by friction, which may not necessarily include cohesive bonding or mechanical fasteners. In another aspect, the bonded abrasive body may be attached to the core with an adhesive. In a further

embodiment, the bonded abrasive body and the core may comprise a coupling connection, which may be in the form of a mechanical interlock.

Referring to **FIG. 4**, an embodiment is demonstrated showing a cross-section of a coupling connection between the core **41** and the bonded abrasive body **42** in form of a mechanical interlock. The mechanical interlock may be formed, for example, during injection molding of the core by filling tapered channels **43** provided on the surface of the bonded abrasive body **42** with the melted polymer-based material. After solidifying of the core **41**, a dovetail-type fastener structure can be established.

In another embodiment, one or more surfaces of the bonded abrasive body may have surface texture to facilitate improved coupling between the bonded abrasive body and the core. For example, the one or more surfaces of the bonded abrasive body may be roughened by brushing or sandblasting, or a mechanical structuring can be applied, e.g., by embossing of a honey comb structure.

In one embodiment, as demonstrated in the cross-sectional view of **FIG. 5**, the abrasive article **50** may have a particular ratio of outer diameter (**D**) of the core **51** to the maximum thickness (**t**) of the core **51** that may facilitate manufacturing and performance of the abrasive article **50**. For example, in one aspect, the abrasive article may have a ratio (**D:t**) of at least about 10:1, such as at least about 12:1 or at least about 15:1. In another aspect, the ratio (**D:t**) may be not greater than about 30:1, such as not greater than about 25:1, or not greater than about 20:1. It will be appreciated that the ratio of core diameter (**D**) to maximum core thickness (**t**) may be within a range between any of the minimum and maximum values noted above, such as from about 35:1 to about 10:1, from about 20:1 to about 10:1, or from about 15:1 to about 10:1.

In another embodiment, as demonstrated in **FIG. 6A** and **6B**, the abrasive article may have a particular ratio of a maximum thickness (**t<sub>bm</sub>**) of the bonded abrasive body **62** to a maximum thickness (**t<sub>cm</sub>**) of the core **61** next to top and bottom surface of the bonded abrasive body. In one aspect, the ratio (**t<sub>bm</sub> : t<sub>cm</sub>**) is at least about 1:2, such as at least about 1:1.5 or at least about 1:1. In another aspect, the ratio (**t<sub>bm</sub> : t<sub>cl</sub>**) may be not greater than about 5:1, such as not greater than about 3:1, or not greater than about 2:1. It will be appreciated that the ratio of maximum thickness of the bonded abrasive body to the lowest thickness of the core may be within a range between any of the minimum and maximum values noted above, such as from about 1:2 to about 5:1, from about 1:1 to about 3:1, or from about 1:1 to about 2:1.

In a further embodiment, as demonstrated in **FIG. 7**, the abrasive article of the present disclosure may comprise a core **71** having an inner portion and an outer radial portion disposed circumferentially around the periphery of the inner portion, wherein the outer radial portion comprises a thickness ( $T_{or}$ ) different than a thickness of the inner portion ( $T_{ir}$ ). In one embodiment, a ratio ( $T_{or}:T_{ir}$ ) of the thickness of the outer radial portion ( $T_{or}$ ) to a thickness of the inner portion ( $T_{ir}$ ) may be at least about 1.5:1, such as at least about 2:1 or at least about 3:1. In another embodiment, the ratio  $T_{or}:T_{ir}$  may be not greater than about 10:1, such as not greater than about 8:1 or not greater than about 6:1. It will be appreciated that the ratio of  $T_{or}:T_{ir}$  may be within a range between any of the minimum and maximum values noted above, such as from about 1.5:1 to about 10:1, from about 2:1 to about 8:1, or from about 6:1 to about 2:1.

**FIG. 8** shows a photo of an injection molded grinding wheel mounted on a steel test hub according to one embodiment.

The abrasive article of the present disclosure can be designed for shaping the edges of a workpiece. The workpiece can be an inorganic or organic material, such as, for example, glass, plastic, ceramic, or metal. In a particular embodiment, the workpiece can include glass, including but not limited to automotive glass, architectural glass, furniture glass, optical glass, and glass used in displays and/or to cover electronic devices (e.g., a phone). The workpiece can further be crystalline, such as monocrystalline or polycrystalline, including but not limited to sapphire.

In a particular embodiment, the abrasive article of the present disclosure can be an abrasive wheel. In one aspect, the burst strength of the abrasive wheel may be at least 135 m/s, such as at least 150 m/s, at least 160 m/s or at least 180 m/s. In another embodiment, the burst strength may be not larger than 300 m/s, such as not larger than 280 m/s, or not larger than 250 m/s.

In another aspect, the abrasive wheel may be designed that it can be mechanically fastened to an arbor. In a aspect, the arbor may be an integral part of the core and being formed together with the core during injection molding.

It has been surprisingly found that certain polymer-based materials are suitable for use as a core according to the embodiments herein. Accordingly, a light weight abrasive wheel suitable for edge grinding can be formed having high mechanical strength and wearability. Moreover, the process of making the abrasive articles of the embodiments herein has proven benefits in terms of manufacturing efficiency.

Many different aspects and embodiments are possible. Some of those aspects and embodiments are described herein. After reading this specification, skilled artisans will appreciate that those aspects and embodiments are only illustrative and do not limit the scope of the present invention. Embodiments may be in accordance with any one or more of the items as listed below.

#### ITEMS

Item 1. An abrasive article, comprising a bonded abrasive body disposed within an interior recess of a peripheral surface of a core, wherein the core comprises a polymer material and the core has an HDT at 0.45 MPa of at least about 130°C.

Item 2. An abrasive article, comprising a bonded abrasive body disposed within an interior recess of a peripheral surface of a core, wherein the core comprises a polymer material and the core has a shrinkage ratio of not greater than about 3%.

Item 3. An abrasive article, comprising a bonded abrasive body disposed within an interior recess of a peripheral surface of a core, wherein the core comprises a polymer material and further comprises an inner portion and an outer radial portion disposed circumferentially around the periphery of the inner portion, wherein the outer radial portion comprises a thickness ( $T_{or}$ ) different than a thickness of the inner portion ( $T_{ir}$ ).

Item 4. An abrasive article, comprising a bonded abrasive body disposed within an interior recess of a peripheral surface of a core, wherein the core comprises a polymer material and the core has a tensile modulus of at least about 4 GPa.

Item 5. The abrasive article of item 4, wherein the tensile modulus of the core is at least about 5 GPa, such as at least about 10 GPa, at least about 15 GPa, at least about 18 GPa, or at least about 20 GPa.

Item 6. The abrasive article of item 1, wherein the core has an HDT at 0.45 MPa of at least about 140°C, such as at least about 150°C, at least about 160°C, at least about 170°C, at least about 180°C, at least about 190°C, at least about 200°C, at least 250°C or at least 260°C.

Item 7. The abrasive article of item 2, wherein the core has a shrinkage ratio of not greater than 2.5%, such as not greater than about 2.0%, not greater than about 1.5%, not greater than about 1.0%, not greater than about 0.8%, not greater than about 0.5%, not greater than about 0.3%, not greater than 0.1% or not greater than 0.05%.

Item 8: The abrasive article of any of the preceding items, wherein the core has a Sharpy impact of at least 45 kJ/m<sup>2</sup>, at least 50 kJ/m<sup>2</sup>, at least 60 kJ/m<sup>2</sup>, at least 80 kJ/m<sup>2</sup>, or at least 100 kJ/m<sup>2</sup>, or at least 150 kJ/m<sup>2</sup>.

5 Item 9. The abrasive article of any of items 1 to 8, wherein the Sharpy impact is not greater than 300 kJ/m<sup>2</sup>, or not greater than 250 kJ/m<sup>2</sup>.

Item 10. The abrasive article of item 3, wherein a ratio of the thickness of the outer radial portion ( $T_{or}$ ) to a thickness of the inner portion ( $T_{ir}$ ) is from about 1:1 to about 10:1, such as from about 1:1 to about 8:1, or from about 1:1 to about 5:1.

10 Item 11. The abrasive article of any one of the preceding items, wherein the polymer material includes at least one of a polyamide (PA), a polybutylene terephthalate (PBT), a polyphenylene sulfide (PPS), ethylene tetrafluoroethylene (ETFE), a polyetherketone (PEEK), a polyester (PE), a polyethyleneimine (PEI), a polyethersulfone (PESU), a polyethylene terephthalate (PET), a polyphthalamide (PPA), a poly (p-phenylene sulfide), polycarbonate (PC), acrylonitrile-butadiene-styrene (ABS), PC-ABS, or any combination  
15 thereof.

Item 12. The abrasive article of item 11, wherein the polymer material includes PPS or PC-ABS.

Item 13. The abrasive article of any one of the preceding items, wherein the core further comprises reinforcing fibers and/or a powder.

20 Item 14. The abrasive article of item 13, wherein the amount of reinforcing fibers and/or powder ranges from about 5 wt% to about 50 wt% based on the total weight of the core.

Item 15. The abrasive article of items 13 or 14, wherein the reinforcing fibers include glass fibers, carbon fibers, ceramic fibers, organic fibers, mineral fibers, or combinations  
25 thereof.

Item 16: The abrasive article of items 13 to 15, wherein the reinforcing fibers have an average aspect ratio of at least 3, such as at least 6, at least 10, at least 100, at least 500, at least 700, at least 800, at least 1000, at least 1200, or at least 1500.

Item 17. The abrasive article of items 13 to 15, wherein the reinforcing fibers have an  
30 average aspect ratio of not greater than 5000, such as not greater than 3000, or not greater than 1500.

Item 18. The abrasive article of any of item 13, wherein the powder includes at least one of calcium carbonate, talc, or a mineral powder.

Item 19. The abrasive article of any one of items 13 to 17, wherein the core consists essentially of polyphenylene sulfide (PPS) and carbon fibers.

Item 20. The abrasive article of any of items 13 to 17, wherein the core consists essentially of PC-ABS and glass fibers.

5 Item 21. The abrasive article of any of the preceding items wherein the bonded abrasive body comprises abrasive particles including diamond, cubic boron nitride, silicon carbide, boron carbide, alumina, silicon nitride, tungsten carbide, zirconia, or a combination thereof.

10 Item 22. The abrasive article of item 21, wherein the abrasive particles comprise diamond.

Item 23. The abrasive article of any of the preceding items, wherein a bond material of the bonded abrasive body includes Cu, Sn, Fe, W, WC, Co, Ti or any combination thereof.

15 Item 24. The abrasive article of any of the preceding items, wherein the core provides a volume amount of at least about 60 vol% and not greater than about 99 vol%, such as at least about 70 vol% and not greater than about 95 wt%, or at least about 80 vol% and not greater than 95 wt% based on the total volume amount of the core and the bonded abrasive body.

20 Item 25. The abrasive article of any one of the preceding items, wherein a ratio of a maximum diameter of the core to a maximum thickness of the core is between about 30:1 to about 10:1.

Item 26. The abrasive article of any one of the preceding items, wherein a ratio of a maximum thickness of the bonded abrasive body to a maximum thickness of the core is between about 5:1 to about 1:5.

25 Item 27. The abrasive article of any one of the preceding items, wherein the core is in direct contact with the bonded abrasive body.

Item 28. The abrasive article of any one of the preceding items, further comprising a vibration damping layer disposed between at least a portion of the core and a portion of the bonded abrasive body.

30 Item 29. The abrasive article of item 28, wherein the vibration damping layer comprises a polymer material.

Item 30. The abrasive article of item 29, wherein the polymer material of the vibration damping layer includes silicone, a thermoplastic or a thermoset rubber, a thermoplastic elastomer, a polyurethane, or a combination thereof.



Item 31. The abrasive article of item 30, wherein the polymer material comprises silicone.

Item 32. The abrasive article of item 31, wherein the vibration damping layer consists essentially of silicone.

5 Item 33. The abrasive article of any of items 28 to 32, wherein the vibration damping layer has a tensile modulus of at least 50.

Item 34. The abrasive article of any of items 28 to 33, wherein the vibration damping layer has a compressive modulus of at least 0.2 MPa.

10 Item 35. The abrasive article of any one of items 28 to 34, wherein a thickness of the vibration damping layer is reduced by at least 3% at a pressure of at least 10 MPa, based on a thickness of the vibration damping layer at 0.1 MPa.

Item 36. The abrasive article of any one of items 1 to 35, further comprising a coupling connection between the core and the bonded abrasive body.

15 Item 37. The abrasive article of item 36, wherein the coupling connection is a mechanical interlock having a dovetail structure.

Item 38. The abrasive article of any one of the preceding items, wherein the article is an abrasive wheel.

20 Item 39. The abrasive wheel of item 38, wherein the abrasive wheel has a burst strength of at least 140 m/s, such as at least 145 m/s, at least 150 m/s, 160 m/s, or at least 180 m/s.

Item 40. The abrasive wheel of items 38 or 39, wherein the abrasive wheel is configured for shaping a workpiece comprising glass, such as a glass display or a cover for an electronic device, architectural glass, furniture glass, optical glass, or automotive glass..

25 Item 41. A method of making an abrasive wheel, comprising inserting a bonded abrasive body into a mold; and injection molding a core around at least a portion of the bonded abrasive body to form an integrally bonded abrasive article, wherein the core comprises a polymer material and has an HDT at 0.45 MPa of at least 130°C and a shrinkage ratio of at least 3%; and the bonded abrasive body is disposed within an interior recess of a peripheral surface of the core.

30 Item 42. The method of item 41, wherein the polymer material includes at least one a polyamide (PA), a polybutylene terephthalate (PBT), a polyphenylene sulfide (PPS), ethylene tetrafluoroethylene (ETFE), a polyetherketone (PEEK), a polyester (PE), a polyethyleneimine (PEI), a polyethersulfone (PESU), a polyethylene terephthalate (PET), a polyphthalamide

(PPA), a poly (p-phenylene sulfide), polycarbonate (PC), acrylonitrile-butadiene-styrene (ABS), PC-ABS, or any combination thereof.

Item 43. The method of item 42, wherein the polymer material includes PPS or PC-ABS.

5 Item 44. The method of any of items 41, 42, or 43, wherein the polymer material comprises reinforcing fibers or a powder.

Item 45. The method of item 44, wherein the amount of the reinforcing fibers ranges from about 5 wt% to about 50 wt% based on the total weight of the polymer material.

10 Item 46. The method of items 44 or 45, wherein the reinforcing fibers include glass fibers, carbon fibers, ceramic fibers, organic fibers, mineral fibers or any combination thereof.

Item 47. The method of any one of items 41 to 46, wherein the bonded abrasive body comprises abrasive particles selected from the group consisting of diamond, cubic boron nitride, silicon carbide, boron carbide, alumina, silicon nitride, tungsten carbide, zirconia, and  
15 combinations thereof.

Item 48. The method of item 47, wherein the abrasive particles comprise diamond particles.

Item 49. The method of any one of items 41 to 48, wherein the core is in direct contact with the bonded abrasive body.

20 Item 50. The method of any one of items 41 to 49, further comprising adding a vibration damping layer disposed between at least a portion of the bonded abrasive body and at least a portion of the core before the injection molding.

Item 51. The method of item 50, wherein the vibration damping layer includes a thermoplastic rubber, a thermoset rubber, a thermoplastic elastomer, a polyurethane or a  
25 combination thereof

Item 52. The method of item 51, wherein the vibration damping layer consists essentially of silicone.

Item 53. The method of any one of items 50 to 52, wherein the vibration damping layer has a modulus of tensile modulus of at least 50 MPa.

30 Item 54. The method of any one of items 50 to 53, wherein the vibration damping layer has a compressive modulus (CM) of at least 0.2 MPa.

Item 55. An abrasive article, comprising:

a bonded abrasive body disposed within an interior recess of a peripheral surface of a core, wherein the core comprises a polymer material and reinforcing fibers, the reinforcing fibers having an aspect ratio of length to width ranging from at least 10 to not greater than 5000.

5 Item 56. The abrasive article of item 55, wherein the aspect ratio of the reinforcing fibers ranges from 100 to 1200.

Item 57. The abrasive article of items 55 or 56, wherein the core has an HDT at 0.45 MPa of at least 130°C.

10 Item 58. The abrasive article of item 57, wherein the HDT of the core at 0.45 MPa is at least 260°C.

Item 59. The abrasive article of any of items 55-57, wherein the core has a shrinkage ratio of not greater than about 3%.

Item 60. The abrasive article of item 59, wherein the shrinkage ratio of the core is not greater than about 0.1%.

15 Item 61. The abrasive article of any of items 55-60, wherein the core has a tensile modulus of at least about 4.0 GPa.

Item 62. The abrasive article of item 61, wherein the tensile modulus of the core is at least about 20 GPa.

20 Item 63. The abrasive article of any of items 55-62, wherein a ratio of the thickness of the outer radial portion ( $T_{or}$ ) to a thickness of the inner portion ( $T_{ir}$ ) is from about 1:1 to about 10:1, such as from about 1:1 to about 8:1, or from about 1:1 to about 5:1.

25 Item 64. The abrasive article of any of items 55-63, wherein the polymer material includes at least one of a polyamide (PA), a polybutylene terephthalate (PBT), a polyphenylene sulfide (PPS), ethylene tetrafluoroethylene (ETFE), a polyetherketone (PEEK), a polyester (PE), a polyethyleneimine (PEI), a polyethersulfone (PESU), a polyethylene terephthalate (PET), a polyphthalamide (PPA), a poly (p-phenylene sulfide), polycarbonate (PC), acrylonitrile-butadiene-styrene (ABS), PC-ABS, or a combination thereof.

30 Item 65. The abrasive article of any of items 55-64, wherein the reinforcing fibers include glass fibers, carbon fibers, ceramic fibers, organic fibers, mineral fibers, or combinations thereof.

Item 66. The abrasive article of item 65, wherein the reinforcing fibers comprise glass fibers.

Item 67. The abrasive article of item 65, wherein the reinforcing fibers comprise carbon fibers.

Item 68. The abrasive article of any of items 55-67, wherein the amount of reinforcing fibers ranges from about 5 wt% to about 50 wt% based on the total weight of the core.

Item 69. The abrasive article of item 55, wherein the core comprises PPS and carbon fibers and a shrinkage ratio of the core is not greater than 0.1%.

Item 70. The abrasive article of item 55, wherein the core comprises PC-ABS and glass fibers and a shrinkage ratio of the core is not greater than 0.1%.

Item 71. The abrasive article of any of items 55-70, wherein the bonded abrasive body comprises abrasive particles selected from the group consisting of diamond, cubic boron nitride, silicon carbide, boron carbide, alumina, silicon nitride, tungsten carbide, zirconia, or a combination thereof.

Item 72. The abrasive article of item 71, wherein the abrasive particles comprise diamond.

Item 73. The abrasive article of any of items 55-72, wherein a bond material of the bonded abrasive body includes Cu, Sn, Fe, W, WC, Co, Ti or any combination thereof.

Item 74. The abrasive article of any of items 55-73, wherein the core provides a volume amount of at least about 60 vol% and not greater than about 99 vol%, such as at least about 70 vol% and not greater than about 95 wt%, or at least about 80 vol% and not greater than 95 wt% based on the total volume amount of the core and the bonded abrasive body.

Item 75. The abrasive article of any of items 55-74, wherein a ratio of a maximum diameter of the core to a maximum thickness of the core is between about 30:1 to about 10:1.

Item 76. The abrasive article of any of items 55-75, wherein a ratio of a maximum thickness of the bonded abrasive body to a maximum thickness of the core is between about 5:1 to about 1:5.

Item 77. The abrasive article of any of items 55-76, wherein the core is in direct contact with the bonded abrasive body.

Item 78. The abrasive article of any of items 55-77, further comprising a vibration damping layer disposed between at least a portion of the core and a portion of the bonded abrasive body.

Item 79. The abrasive article of item 78, wherein the vibration damping layer comprises a polymer material.

Item 80. The abrasive article of item 79, wherein the polymer material of the vibration damping layer includes silicone, a thermoplastic or a thermoset rubber, a thermoplastic elastomer, a polyurethane, or a combination thereof.

5 Item 81. The abrasive article of item 80, wherein the polymer material comprises silicone.

Item 82. The abrasive article of item 81, wherein the vibration damping layer consists essentially of silicone.

Item 83. The abrasive article of any of items 78-82, wherein the vibration damping layer has a tensile modulus of at least 50.

10 Item 84. The abrasive article of any of items 78-83, wherein the vibration damping layer has a compressive modulus of at least 0.2 MPa.

Item 85. The abrasive article of any one of items 78-84, wherein a thickness of the vibration damping layer is reduced by at least 3% at a pressure of at least 10 MPa, based on a thickness of the vibration damping layer at 0.1 MPa.

15 Item 86. The abrasive article of any one of items 78-85, further comprising a coupling connection between the core and the bonded abrasive body.

Item 87. The abrasive article of item 86, wherein the coupling connection is a mechanical interlock having a dovetail structure.

20 Item 88. The abrasive article of any of items 55-87, wherein the abrasive article is an abrasive wheel.

Item 89. The abrasive wheel of item 88, wherein the abrasive wheel has a burst strength of at least 150 m/s.

Item 90. The abrasive wheel of items 88 or 89, wherein the abrasive wheel is configured for shaping a workpiece comprising glass.

## 25 Examples

The following non-limiting examples illustrate the present invention.

### Selection of the core material

30 Six thermoplastic resin materials were evaluated regarding material properties that may be relevant to form strong cores of abrasive articles. The material properties of six exemplary resin materials are shown in Table 1.

Table 1.

		E1	E2	E3	E4	E5	E6
Polymer		PBT	Nylon 66	PPS	Nylon 66	PPS	PC-ABS
Fiber Filler		45% glass	35% glass	40% glass	33% glass	40% carbon	40% glass
Trade Name / Grade		Crastin SK608	Zytel 70G35HSL	Ryton R-4-220	Zytel 70G33L1	Celstran CF-40	Verton NV008E
Tensile Modulus	GPa	14.1	11.2	>14	10.5	37.3	20.3
Flexural Modulus	GPa	13.3	12.50	14.0	9.3	34.9	11.0
Charpy Impact	kJ/m <sup>2</sup>	55	90	53	85	165	50
Shrinkage Ratio	%	0.3	0.3-0.4	0.4	0.3	<0.1	0.05
HDT @0.45 MPA	°C	222	261	254	261	260	143
Average Fiber Aspect Ratio (length to width)		<10	<10	<10	<10	800- 1000	1000- 1200

### Injection molding of grinding wheel

A disk injection mold with cavity dimensions of 102.25 mm outer diameter and 10.00 mm depth was prepared and an abrasive diamond ring was placed into the mold cavity. The diamond ring had an outer diameter of 102.2 mm, an inner diameter of 88.3 mm and a thickness of 6 mm. The diamond particles of the abrasive ring had an average particle size of 91  $\mu\text{m}$ , and the bond matrix was made from a mixture of Cu, Sn, Fe, and Ti.

The molding trials were conducted in a Van Dorn hydraulic, 120 ton injection molding machine with 38 mm, 21 L/D, 2.4 CR general purpose screw. For the injection molding experiments, the materials E2, E5, and E6 of Table 1 have been selected. Prior to the molding, the polymer materials selected for injection molding were dried for 4 hours at 80°C in a dehumidifying dryer. The injection molding parameters are listed in the Table 2 below.

Table 2. Injection molding process parameters.

Parameter	Unit	E2	E5	E6
Shot size	[mm]	160.0	160.0	160
1-st injection velocity	[mm/sec]	76.2	165.1	90.5
2-nd injection velocity	[mm/sec]	12.7	-	25.4
V1-V2 switchover position	[mm]	25.4	-	25.4
V-P switchover	[mm]	12.7	12.7	12.7
Cushion	[mm]	5.8	5.8	5.6
Injection Pressure (actual)	[MPa]	6.9	13.8	10.3
Packing Pressure	[MPa]	6.9	13.8	10.3
Holding Pressure	[MPa]	5.2	6.9	8.3
Holding time	[sec]	10	15	10
Cooling time	[sec]	30	75	60
Zone 1 Temperature	[°C]	282	321	280
Zone 2 Temperature	[°C]	288	321	285
Zone 3 Temperature	[°C]	293	327	290
Nozzle Temperature	[°C]	296	338	290
Mold Temperature	[°C]	27	116	85
Screw Speed	[rpm]	200	100	100
Back Pressure	[MPa]	1.4	1.4	1.4
Decompression	[mm]	2.5	0	2

A comparison of the grinding performance and related product properties of the injection molded grinding wheels made with materials E2, E5, and E6 can be seen in Table 3:

Table 3:

		<b>E2</b>	<b>E5</b>	<b>E6</b>
Core polymer		Nylon 66	PPS	PC-ABS
Core filler		35% glass	40% carbon fiber	40% glass fiber
Average Fiber aspect ratio		<10	800-1000	1000-1200
Out of Balance	[g]	40	13	18
Specific Grinding Energy	[J/cc]	5937	1500-2000	
Adhesion between ring and core		Presence of gap, indicating too much shrinkage	No visible gap between core and diamond ring	No visible gap between core and diamond ring
Actual Shrinkage	[%]	0.76	0.02	0.01
G ratio		13,000	71,101	
Burst test (average of 3 tests)	[m/s]	-	177	158

Based upon the foregoing data it is noted that controlling the core material with regard to HDT at 0.45 MPa, shrinkage ratio, tensile modulus, and type and average aspect ratio of included reinforcing fibers may facilitate improved performance of the grinding wheels.

#### Determination of Shrinkage Ratio

For the determination of the shrinkage ratio a specifically designed test mold was used with an inner diameter of 150 mm and a total volume of 238 cm<sup>3</sup>. The “shrinkage ratio” was calculated according the equation  $(1-(L_2-L_1)/L_2)$ , wherein  $L_2$  represents the dimension of the test mold cavity, and  $L_1$  represents the dimension of the material formed in the test mold at room temperature (20°C). For the shrinkage ratio, the linear shrinkage ratio was calculated, which is the ratio of the linear dimensional change in relation to the original dimension.



Measurement of the HDT @ 0.45 MPa

The HDT @ 0.45 MPa was measured according to standardized test ASTM D 648-07, which is expressly incorporated by reference herewith.

Measurement of the Tensile Modulus

- 5 The MOE was measured according to standardized test ASTM D 638-08, which is expressly incorporated by reference herewith.

Measurement of the Compressive Modulus (CM)

The CM was measured according to standardized test ASTM D 695-10, which is expressly incorporated by reference herewith.

10 Measurement of Flexural Modulus

The Flexural Modulus was measured according to standardized tests ASTM D 790-10 and D 6272-10, which are expressly incorporated by reference herewith.

Measurement of Charpy Impact

- 15 The Charpy Impact was measured according to standardized test ASTM D 6110-10, which is expressly incorporated by reference herewith.

Measurement of Out of Balance


The "Out of Balance" parameter was measured with a Hines balancer HVR-50 at a measuring speed of 630 rpm.

- 20 In the foregoing specification, the concepts have been described with reference to specific embodiments. However, one of ordinary skill in the art appreciates that various modifications and changes can be made without departing from the scope of the invention as set forth in the claims below. Accordingly, the specification and figures are to be regarded in an illustrative rather than a restrictive sense, and all such modifications are intended to be included within the scope of the invention.

## WHAT IS CLAIMED IS:

1. An abrasive article, comprising:
  - a bonded abrasive body disposed within an interior recess of a peripheral surface of a core, wherein the core comprises a polymer material and reinforcing fibers, and wherein the core has an HDT at 0.45 MPa of at least about 130°C and a shrinkage ratio of not greater than 3%.
2. An abrasive article, comprising:
  - a bonded abrasive body disposed within an interior recess of a peripheral surface of a core, wherein the core comprises a polymer material and reinforcing fibers, the reinforcing fibers having an average aspect ratio of length to width ranging from at least 10 to not greater than 5000.
3. The abrasive article of claims 1 or 2, wherein the core has a shrinkage ratio of not greater than 0.1.
4. The abrasive article of claims 1 or 2, wherein the core has a tensile modulus of at least about 20.0 GPa.
5. The abrasive article of claims 1 or 2, wherein the polymer material includes at least one of a polyamide (PA), a polybutylene terephthalate (PBT), a polyphenylene sulfide (PPS), ethylene tetrafluoroethylene (ETFE), a polyetherketone (PEEK), a polyester (PE), a polyethyleneimine (PEI), a polyethersulfone (PESU), a polyethylene terephthalate (PET), a polyphthalamide (PPA), a poly (p-phenylene sulfide), a polycarbonate (PC), an acrylonitrile-butadiene-styrene (ABS), a PC-ABS, or any combination thereof.
6. The abrasive article of claims 1 or 2, wherein the reinforcing fibers including glass fibers, carbon fibers, ceramic fibers, organic fibers, mineral fibers, and combinations thereof.
7. The abrasive article of claim 6, wherein the reinforcing fibers include glass fibers or carbon fibers.
8. The abrasive article of claims 1 or 2, wherein the core consists essentially of the polymer material and the reinforcing fibers, the reinforcing fibers being present in an amount of 30 to 50 wt% based on the total weight of the core and having an average aspect ratio of length to width of 500 to 1200.
9. The abrasive article of claim 8, wherein the polymer material includes PPS or PC-ABS.
10. The abrasive article of claims 1 or 2, further comprising a vibration damping layer disposed between at least a portion of the core and a portion of the bonded abrasive body, wherein the the vibration damping layer has a tensile modulus of at least 50.

11. The abrasive article of claims 1 or 2, wherein the abrasive article is an abrasive wheel configured for shaping a workpiece comprising glass.
12. The abrasive wheel of claim 11, wherein the abrasive wheel has a burst strength of at least 150 m/s.
13. The abrasive article of claims 1 or 2, wherein the core further comprises an inner portion and an outer radial portion disposed circumferentially around the periphery of the inner portion, wherein the outer radial portion comprises a thickness ( $T_{or}$ ) different than a thickness of the inner portion ( $T_{ir}$ ).
14. A method of making an abrasive wheel, comprising:
  - inserting a bonded abrasive body into a mold; and
  - injection molding a core around at least a portion of the bonded abrasive body to form an integrally bonded abrasive article, wherein
    - the core comprises a polymer material and has an HDT at 0.45 MPa of at least 130°C and a shrinkage ratio of not greater than 3%; and
    - the bonded abrasive body is disposed within an interior recess of a peripheral surface of the core.
15. The method of claim 14, wherein the core comprises a shrinkage ratio of not greater than 0.1% and a tensile modulus of at least about 20 GPa.

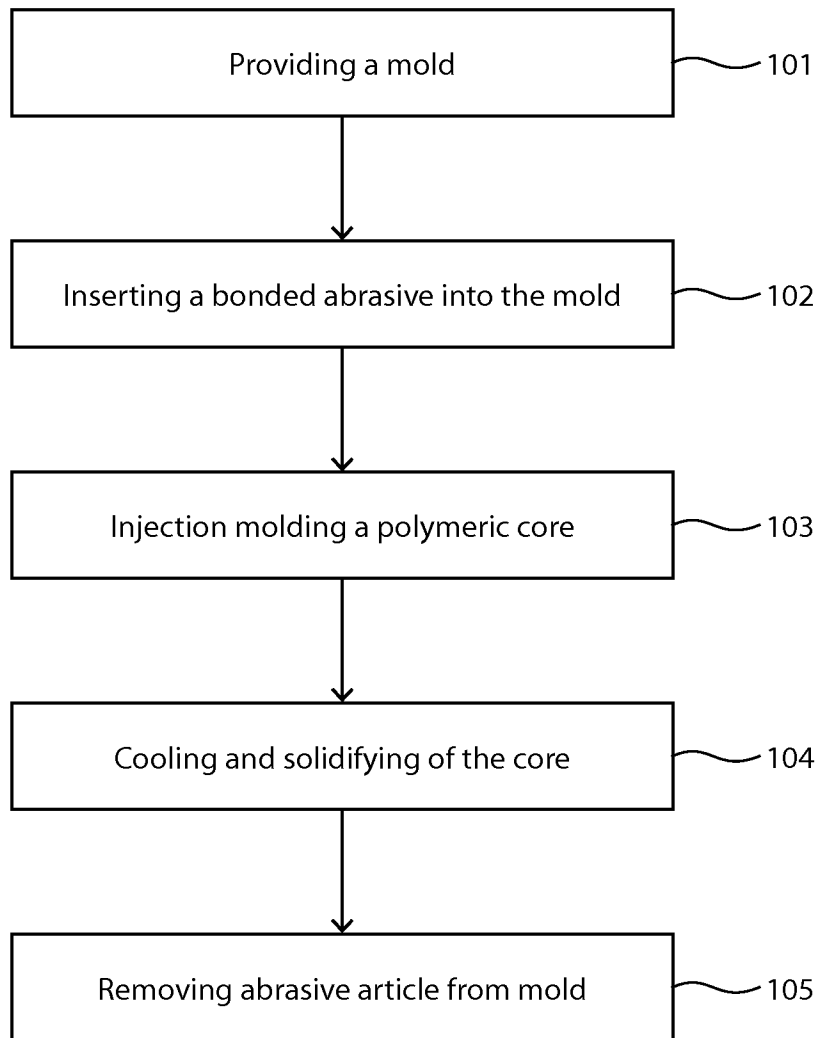

**FIG. 1**

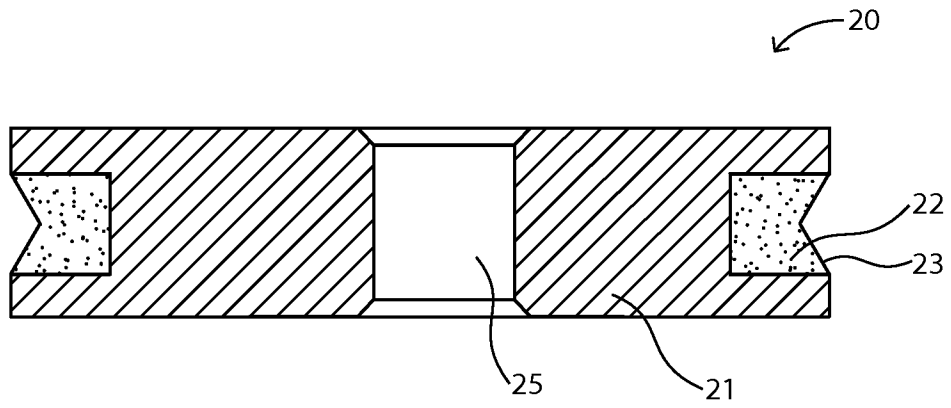


FIG. 2A

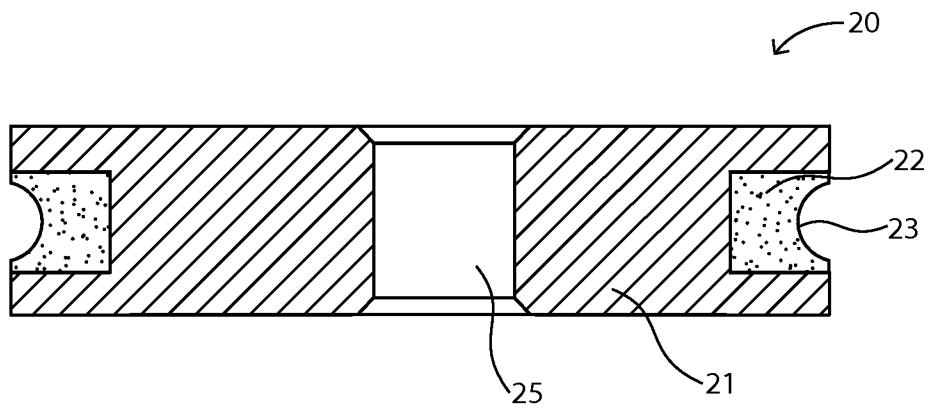


FIG. 2B

3 / 7

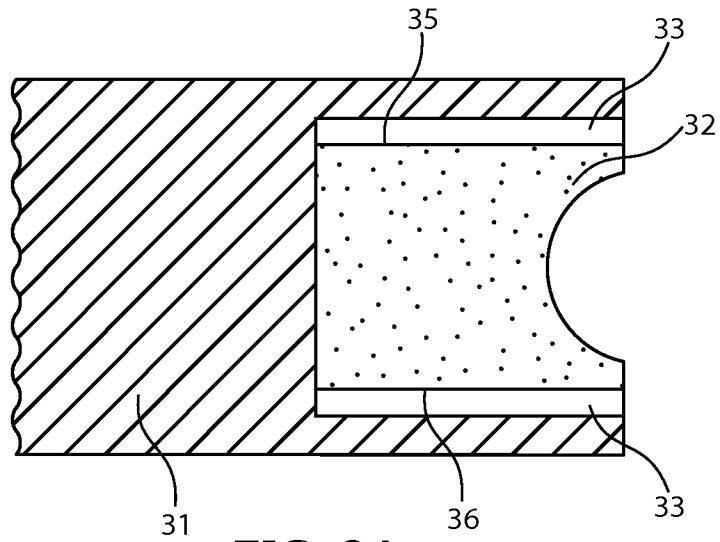


FIG. 3A

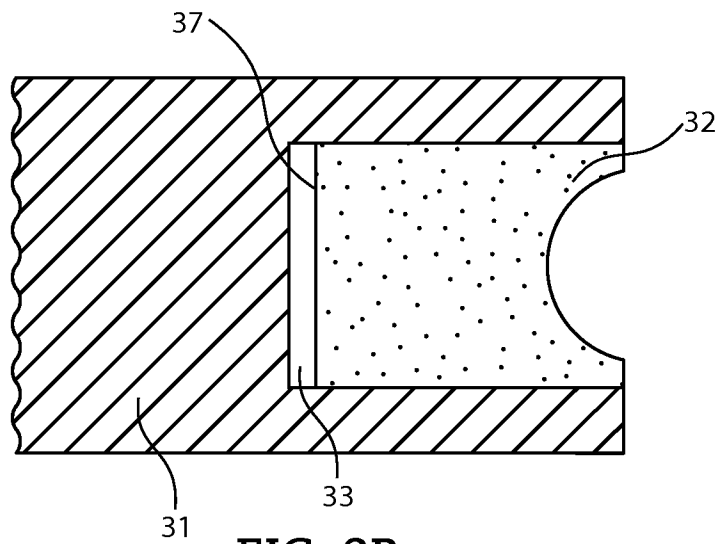


FIG. 3B

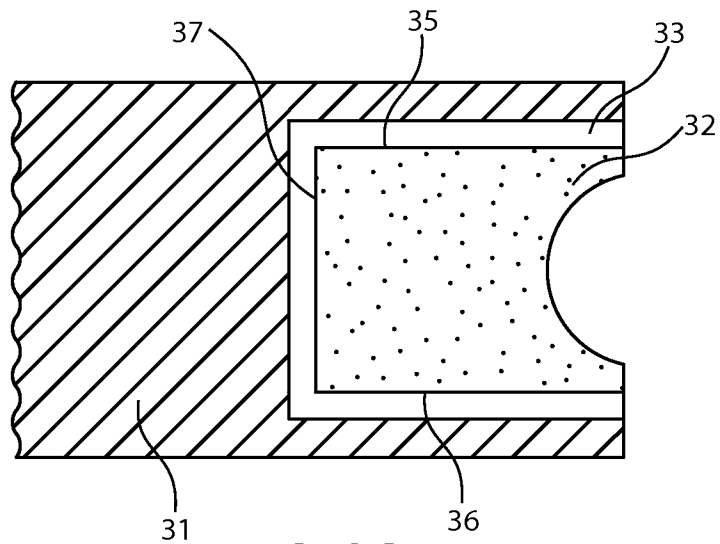


FIG. 3C

4 / 7

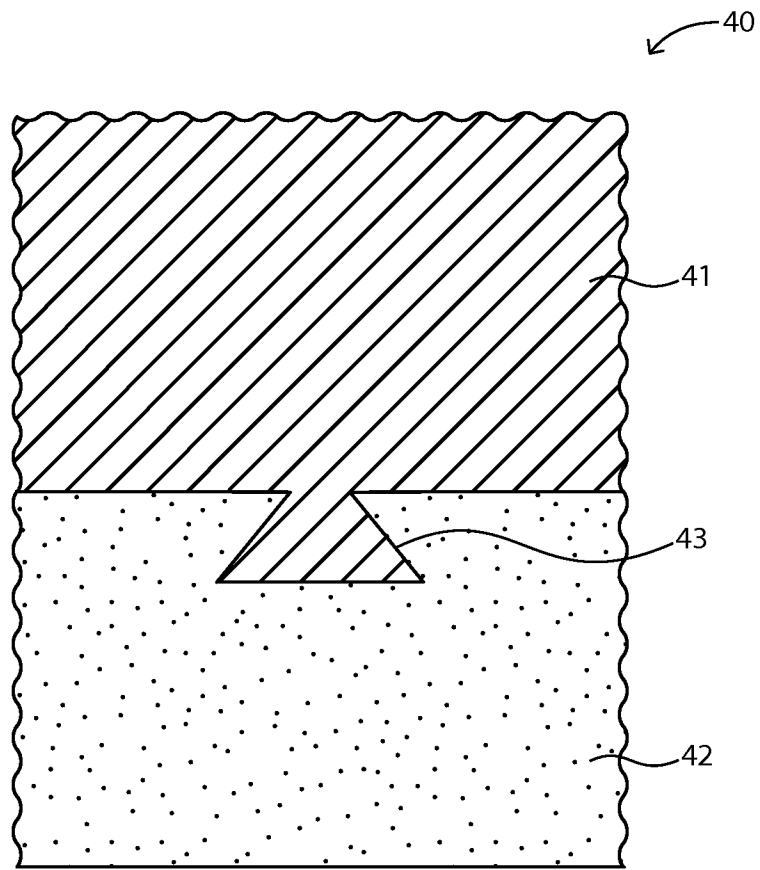


FIG. 4

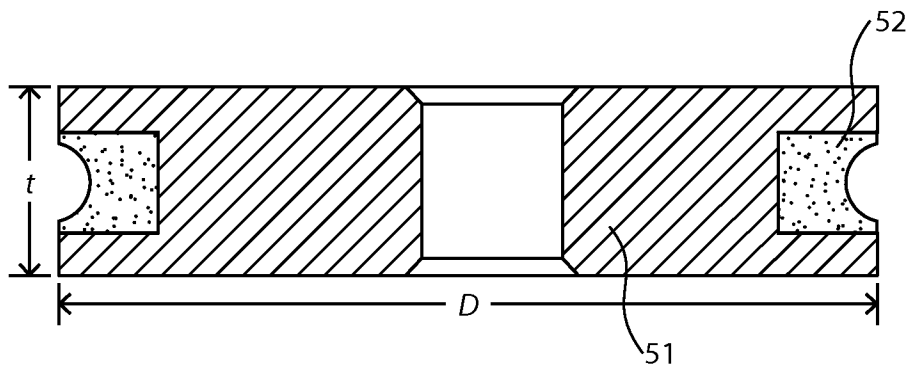


FIG. 5

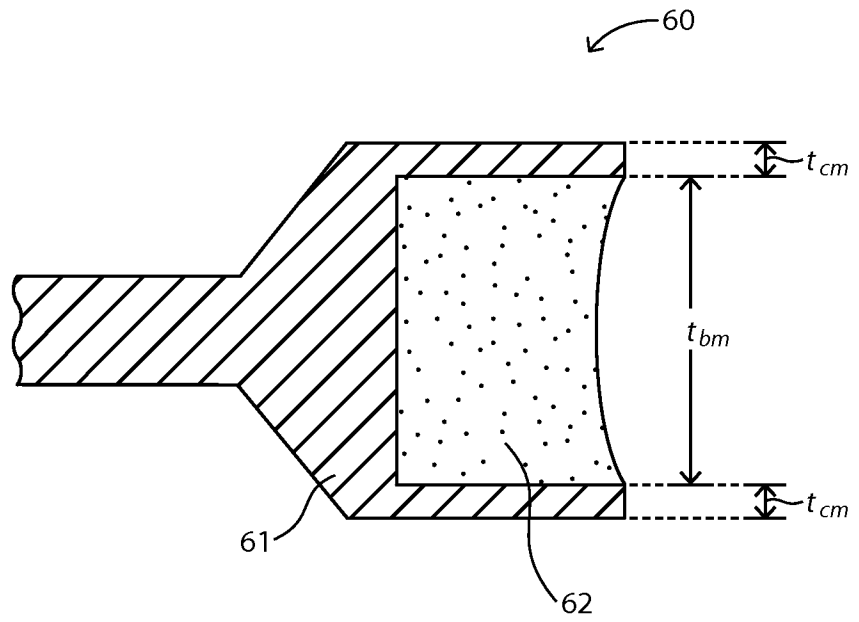


FIG. 6A

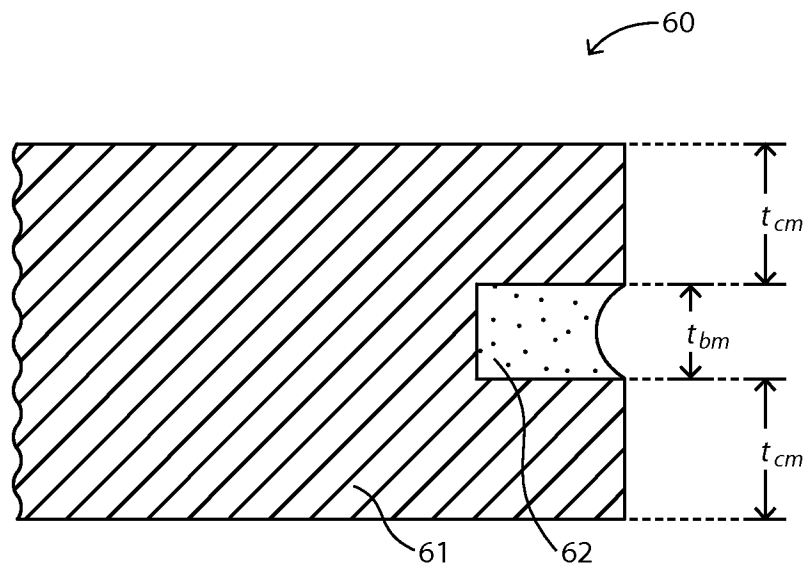


FIG. 6B



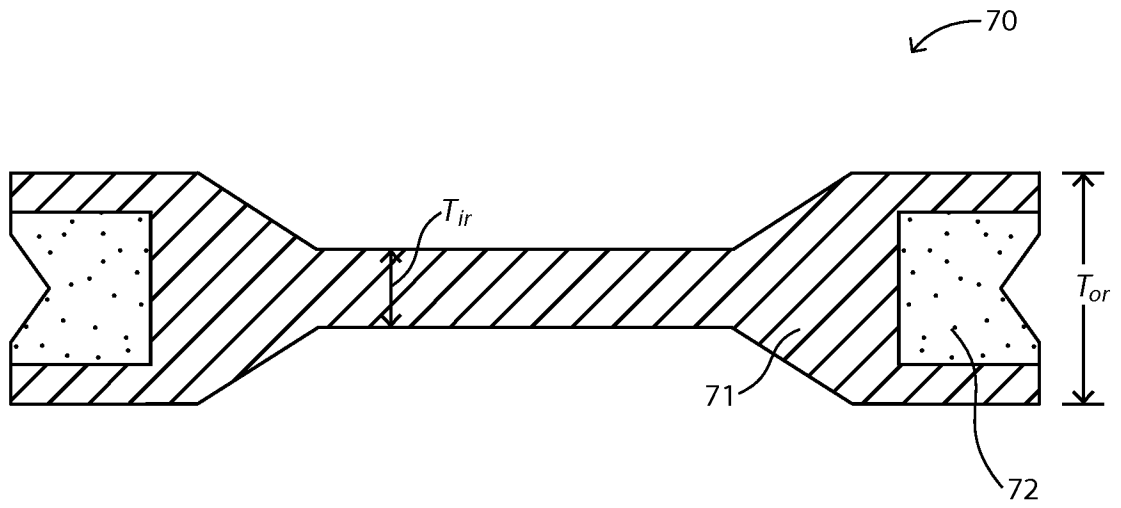


FIG. 7

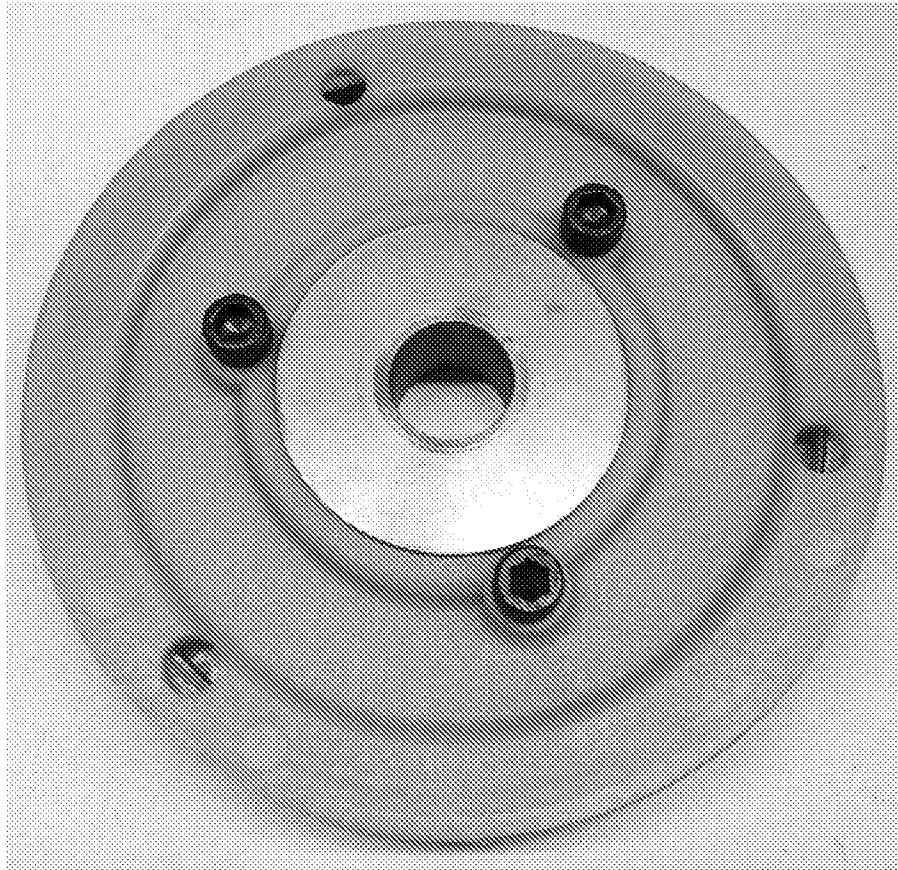


FIG. 8

## INTERNATIONAL SEARCH REPORT

International application No.  
**PCT/US2015/033312****A. CLASSIFICATION OF SUBJECT MATTER****B24B 3/04(2006.01)i, B24D 5/02(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**Minimum documentation searched (classification system followed by classification symbols)  
B24B 3/04; B24B 27/00; B24D 5/00; B24D 5/12; B24B 55/02; B24D 3/00; B23F 21/03; B24D 5/02Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
Korean utility models and applications for utility models  
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
eKOMPASS(KIPO internal) & Keywords: abrasive article, bond, wheel, core, mold, HDT, shrinkage, polymer and reinforced fiber**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 7351133 B1 (LEMBERGER et al.) 01 April 2008 See column 2, line 51-column 5, line 61; claims 24-26; and figure 3.	1-9, 11-15
Y		10
Y	US 2007-0037501 A1 (BULJAN et al.) 15 February 2007 See paragraph [0024] and figure 1.	10
A	US 2010-0190424 A1 (FRANCOIS et al.) 29 July 2010 See paragraphs [0029]-[0037] and figures 1A-2B.	1-15
A	US 2013-0203328 A1 (GIVOT et al.) 08 August 2013 See paragraphs [0020]-[0086] and figure 4.	1-15
A	US 6358133 B1 (CESENA et al.) 19 March 2002 See claims 26-35 and figures 1-2.	1-15

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search  
07 September 2015 (07.09.2015)Date of mailing of the international search report  
**08 September 2015 (08.09.2015)**Name and mailing address of the ISA/KR  
International Application Division  
Korean Intellectual Property Office  
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 35208,  
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer  
LEE, Jong Kyung

Telephone No. +82-42-481-3360



## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

**PCT/US2015/033312**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date		
US 7351133 B1	01/04/2008	BR PI0721091 A2	11/02/2014		
		CA 2672104 A1	19/06/2008		
		CA 2672104 C	17/01/2012		
		CA 2757364 A1	19/06/2008		
		CN 101594967 A	02/12/2009		
		CN 101594967 B	28/11/2012		
		CN 102935620 A	20/02/2013		
		EP 2106328 A1	07/10/2009		
		EP 2106328 B1	16/05/2012		
		EP 2479004 A2	25/07/2012		
		EP 2479004 A3	12/09/2012		
		ES 2388313 T3	11/10/2012		
		MX 2009006461 A	12/08/2009		
		PT 2106328 E	20/08/2012		
		WO 2008-073698 A1	19/06/2008		
		US 2007-0037501 A1	15/02/2007	US 7883398 B2	08/02/2011
				WO 2007-022016 A2	22/02/2007
WO 2007-022016 A3	28/06/2007				
US 2010-0190424 A1	29/07/2010	AR 074929 A1	23/02/2011		
		AU 2009-332973 A1	04/08/2011		
		AU 2009-332973 B2	24/10/2013		
		CA 2748353 A1	08/07/2010		
		CA 2748353 C	08/04/2014		
		CN 102256746 A	23/11/2011		
		CN 102256746 B	16/04/2014		
		CN 103878706 A	25/06/2014		
		EP 2384260 A2	09/11/2011		
		EP 2384260 A4	17/12/2014		
		TW 201024035 A	01/07/2010		
		TW 201402280 A	16/01/2014		
		TW 1415716 B	21/11/2013		
		US 8641481 B2	04/02/2014		
		WO 2010-078191 A2	08/07/2010		
WO 2010-078191 A3	28/10/2010				
US 2013-0203328 A1	08/08/2013	CA 2791475 A1	09/09/2011		
		CN 102762341 A	31/10/2012		
		CN 102762341 B	26/11/2014		
		EP 2542386 A2	09/01/2013		
		EP 2542386 A4	19/11/2014		
		JP 2013-521144 A	10/06/2013		
		KR 10-2013-0006636 A	17/01/2013		
		RU 2510323 C1	27/03/2014		
		WO 2011-109188 A2	09/09/2011		
		WO 2011-109188 A3	01/12/2011		
US 6358133 B1	19/03/2002	AT 229868 T	15/01/2003		

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2015/033312**

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		AU 1999-20199 A1	23/08/1999
		AU 2000-36035 A1	14/09/2000
		AU 3603500 A	14/09/2000
		CA 2366868 A1	31/08/2000
		CA 2366868 C	16/09/2008
		DE 60001060 T2	30/04/2003
		EP 1053078 A1	22/11/2000
		EP 1053078 B1	15/09/2004
		EP 1053078 B2	02/01/2008
		EP 1163085 A1	19/12/2001
		EP 1163085 B1	18/12/2002
		JP 2002-502714 A	29/01/2002
		JP 2002-537136 A	05/11/2002
		KR 10-0542160 B1	16/01/2006
		KR 10-0583717 B1	07/06/2006
		US 2002-0068518 A1	06/06/2002
		WO 00-50202 A1	31/08/2000
		WO 99-39876 A1	12/08/1999