

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 July 2006 (13.07.2006)

PCT

(10) International Publication Number
WO 2006/074311 A1

- (51) International Patent Classification:
A01K 97/02 (2006.01)
- (21) International Application Number:
PCT/US2006/000349
- (22) International Filing Date: 6 January 2006 (06.01.2006)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/641,680 6 January 2005 (06.01.2005) US
- (71) Applicant (for all designated States except US): **PSI SALES, INC.** [US/US]; P.o. Box 488, Theodore, AL 36590 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **WOODHAM, Donald, Van** [US/US]; 706 Oak Bluff Drive, Daphne, AL 36526 (US). **LYN, Kevin, R.** [US/US]; 9620 Heathermill Lane, Raleigh, North Carolina (US).
- (74) Agents: **LYN, Kevin, R.** et al.; ALSTON & BIRD LLP, Bank of America Plaza, 101 South Tryon Street, Suite 4000, Charlotte, NC 28280-4000 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,


AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CHUMMING DEVICE AND ASSOCIATED SYSTEM AND METHOD

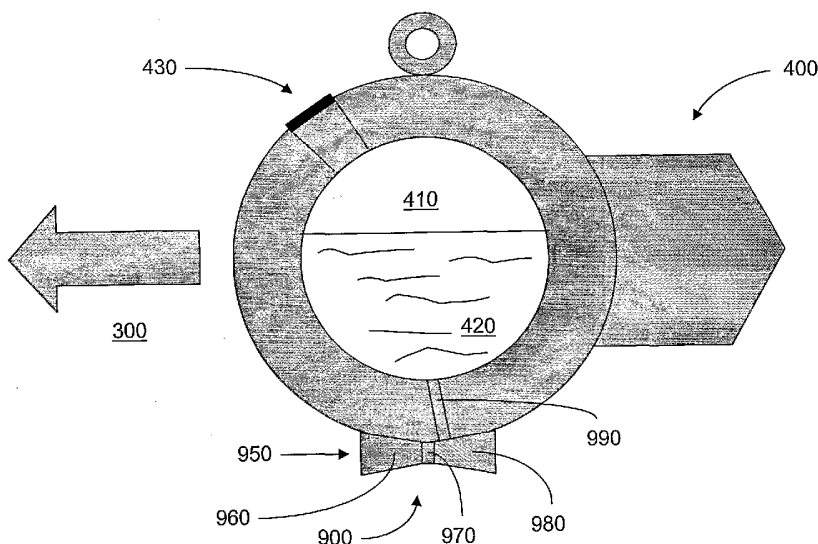

(57) Abstract: A chumming device is provided, comprising a container member defining an interior chamber adapted to contain a chum substance, and a dispersion mechanism operably engaged with the container member and configured cooperate with the container member to receive a flow of water thereby. The water flow provides an associated hydrodynamic force at least about the dispersion mechanism. The dispersion mechanism is further configured to cooperate with the container member such that the chum substance is extracted from the interior chamber of the container member and introduced directly into the water flow via the dispersion mechanism in response only to the hydrodynamic force. Associated systems, devices, and methods are also provided.

WO 2006/074311 A1

CHUMMING DEVICE AND ASSOCIATED SYSTEM AND METHOD

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to chumming device for fish and, more particularly, to a device, system, and method for chumming for fish whereby a chum substance is released to, and in some instances at a depth under, the water in response to a hydrodynamic force generated by motion in relation to the water.

Description of Related Art

Fishermen sometimes troll baited hooks or lures in order to target certain fish. Often, the baited hooks or lures are attached to a fishing line extending from a rod and reel combination or outfit secured on a moving boat or vessel, such that the baited hook or lure skips or swims across a surface layer of the water behind the boat as the boat is moving. This technique is known as trolling. Trolling may also involve pulling hookless baits and/or lures in conjunction with the baited hooks and/or lures, wherein the hookless baits/lures are known as "teasers" used for attracting fish to the baited hooks and/or lures. In some instances, however, the fish targeted by the fisherman may be at a certain depth under the water surface, and the fisherman must get the baited hook under the surface of the water, as the boat is moving, in order to present the baited hook to the fish at that depth. This technique is known as controlled-depth fishing or controlled-depth trolling.

In order to fish by trolling at a controlled depth, a device referred to as a downrigger may be implemented or, in some instances, the baited hook or lure itself can be configured to dive to a certain depth in the water. The downrigger, when used for such a purpose, is mounted to the boat and has a length of cable or other line secured thereto and extending therefrom. At the end of the cable, opposite the downrigger, a depth-attaining element is attached. Such a depth-attaining element may comprise, for example, a lead ball, a weighted planer, or other appropriate device. The cable immediately above the depth-attaining element often carries a releasable clip, wherein the fishing line between the rod and reel outfit and the baited

hook can be secured in the clip so as to travel with the clip as the depth-achieving element is lowered to the desired depth by the downrigger. In this manner, if a fish bites the baited hook, the clip will release the fishing line and the fisherman is free to fight the fish to the boat using the rod and reel outfit without interference from the cable and depth-attaining element.

Such controlled-depth fishing may also be accomplished in different manners. For example, the cable may be secured directly to the boat, for example to a stern cleat, eliminating the need for the downrigger device. In such instances, a releasable clip may be slidably attached to the cable and capable of gripping the fishing line. That is, the depth-attaining element, when deployed, tautly maintains the cable between the boat and the depth-attaining element. When the releasable clip is attached to the cable and fishing line, the force of the boat moving through the water provides a force on the baited hook and/or the clip that causes the clip to slide down the cable and under the water, at any distance along the cable up until the clip is stopped by the depth-attaining element. In other instances, for example, one or more trolling weights or a weighted planer may be attached to the fishing line between the baited hook and the rod and reel.

In any instance, while fishing by trolling, the fisherman may wish to chum the water in order to attract fish. Such chumming may be accomplished, for example, by cutting chunks of bait or grinding bait and dropping those bait portions into the water behind the boat, in hopes that the bait morsels will attract the fish to bite the baited hooks being trolled behind the boat. In some instances, certain bait may have an oil associated therewith after being ground or otherwise processed. Such fish oil or other oil can also be released from the boat, wherein the scent of the oil chum may disperse through the water and attract fish to bite the baited hooks being trolled behind the boat. However, such chumming is often accomplished at or about the water surface, and the bait portions or oil are generally not presented under the surface of the water until long after the trolling or moving boat has moved away from the position at which the chum is released into the water. In addition, since the boat is moving, the chum and the baited hooks/lures will generally coincide at the same position in the water for only a short time before the boat moves away. Both of these factors may also be additionally adversely affected by environmental factors such as wind, waves,

and current. As such, any chum released into the water while trolling may not effectively serve to lure or attract fish to the baited hooks/lures pulled behind the boat.

Thus, there exists a need for a fish chumming device capable of releasing a chum substance into the water surface while the boat or vessel is moving through the water. Such a chumming device should desirably be capable of releasing the chum substance into the water in a controlled, selective, or otherwise restricted or limited manner, at a controlled-depth or on the surface of the water, such that the chum substance is released over an extended period of time and in efficient coincidence with the baited hook/lure or teaser. Such a chumming device should also be applicable to different methods of fishing with minimal or no modifications.

BRIEF SUMMARY OF THE INVENTION

The above and other needs are met by the present invention which, in one embodiment, provides a chumming device, comprising a container member defining an interior chamber adapted to contain a chum substance, and a dispersion mechanism operably engaged with the container member and configured cooperate with the container member to receive a flow of water thereby. The water flow provides an associated hydrodynamic force at least about the dispersion mechanism. The dispersion mechanism is further configured to cooperate with the container member such that the chum substance is extracted from the interior chamber of the container member and introduced directly into the water flow via the dispersion mechanism in response only to the hydrodynamic force.

Another aspect of the present invention comprises a controlled-depth chumming device adapted to be used with a vessel moving through water. Such a device includes a container member defining an interior chamber adapted to contain a chum substance and configured to be lowerable to a depth under a surface of the water as the vessel is moving. A dispersion mechanism is operably engaged with the container member and is configured to cooperate with the container member to receive a flow of the water thereby. The water flow provides an associated hydrodynamic force at least about the dispersion mechanism. The dispersion mechanism is further configured to cooperate with the container member such that the chum substance is extracted from the interior chamber of the container member and

introduced directly into the water flow under the water surface via the dispersion mechanism in response only to the hydrodynamic force.

Another aspect of the present invention comprises a controlled-depth chumming system adapted to be used with a vessel moving through water. Such a system includes a downrigger device operably engaged with the vessel and having a first end of a line attached thereto, wherein the line having an opposed second end capable of extending from the downrigger. A container member, defining an interior chamber adapted to contain a chum substance, is configured to be attached to the second end of the line so as to be lowerable to a depth under a surface of the water by the downrigger as the vessel is moving. A dispersion mechanism is operably engaged with the container member and is configured to cooperate with the container member to receive a flow of the water thereby. The water flow provides an associated hydrodynamic force at least about the dispersion mechanism. The dispersion mechanism is further configured to cooperate with the container member such that the chum substance is extracted from the interior chamber of the container member and introduced directly into the water flow under the water surface via the dispersion mechanism in response only to the hydrodynamic force.

Yet another aspect of the present invention comprises a controlled-depth chumming system adapted to be used with a vessel moving through water. Such a system includes a line having a first end operably engaged with the vessel and an opposed second end extending therefrom. A depth-attaining device is attached to the second end of the line and is configured to reach a depth under a surface of the water as the vessel is moving such that the line tautly extends between the vessel and the depth-attaining device. A container member, defining an interior chamber adapted to contain a chum substance, is configured to be slidably engaged with the line so as to be lowerable along the line and under the water surface up to the depth of the depth-attaining device. A dispersion mechanism is operably engaged with the container member and is configured to cooperate with the container member to receive a flow of the water thereby. The water flow provides an associated hydrodynamic force at least about the dispersion mechanism. The dispersion mechanism is further configured to cooperate with the container member such that the chum substance is extracted from the interior chamber of the container member and introduced directly

into the water flow under the water surface via the dispersion mechanism in response only to the hydrodynamic force.

Still another aspect of the present invention comprises a controlled-depth chumming system adapted to be used with a vessel moving through water. Such a system includes a fishing device associated with the vessel and having a first end of a line attached thereto, wherein the line has an opposed second end capable of extending from the fishing device. An elongate leader member has opposed first and second ends, wherein the second end of the leader member has a hook device attached thereto and is adapted to interact with the water as the vessel is moving. A container member, defining an interior chamber adapted to contain a chum substance, is configured to be attached between the second end of the line and the first end of the leader member. The container member is further configured as a depth-attaining mechanism lowerable to a depth under a surface of the water by the fishing device, as the vessel is moving, such that the hook device attached to the second end of the leader member is also under the water surface. A dispersion mechanism is operably engaged with the container member and is configured to cooperate with the container member to receive a flow of the water thereby. The water flow provides an associated hydrodynamic force at least about the dispersion mechanism. The dispersion mechanism is further configured to cooperate with the container member such that the chum substance is extracted from the interior chamber of the container member and introduced directly into the water flow under the water surface in response only to the hydrodynamic force.

Another aspect of the present invention comprises a method of method of chumming, comprising receiving a flow of water about a dispersion mechanism operably engaged with a container member defining an interior chamber adapted to contain a chum substance. The water flow provides an associated hydrodynamic force at least about the dispersion mechanism, such that only the hydrodynamic force extracts the chum substance from the interior chamber of the container member via the dispersion mechanism and introduces the chum substance directly into the water flow.

Still another aspect of the present invention comprises a method of controlled-depth chumming from a vessel moving through water. First, a container member

defining an interior chamber adapted to contain a chum substance is lowered to a depth under a surface of the water as the vessel is moving. A flow of the water is then received at least about a dispersion mechanism operably engaged with the container member. The water flow provides an associated hydrodynamic force about the dispersion mechanism, such that only the hydrodynamic force extracts the chum substance from the interior chamber of the container member via the dispersion mechanism and introduces the chum substance directly into the water flow under the water surface.

The container member can be lowered to the depth under the surface of the water with a downrigger device operably engaged with the vessel via a line extending therebetween. Alternatively, a depth-attaining device can be lowered to the depth under the surface of the water as the vessel is moving, wherein the depth-attaining device is operably engaged with the vessel via a line extending tautly therebetween, and the container member then made to slide along the line to a depth under the water surface up to the depth of the depth-attaining device. As a further alternative, the container member configured as a depth-attaining device can be lowered to the depth under the surface of the water as the vessel is moving, wherein the container member is operably engaged with a fishing device associated with the vessel via a line extending therebetween and also includes an elongate leader member attached thereto and extending away from the vessel to a hook device adapted to interact with the water as the vessel is moving, such that the hook device is also under the water surface.

Embodiments of the present invention thus provide significant advantages as disclosed herein.

25

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING(S)

Having thus described the invention in general terms, reference will now be made to the accompanying drawings, which are not necessarily drawn to scale, and wherein:

30

FIGS. 1A and 1B are schematics illustrating controlled-depth fishing techniques utilizing a depth-attaining device serially disposed between a fishing device and a hook member according to one embodiment of the present invention;

FIGS. 2A, 2B, and 2C are schematics illustrating controlled-depth fishing techniques utilizing a depth-attaining device operably engaged with the vessel independently of the fishing device and the hook member according to an alternate embodiment of the present invention;

5 **FIG. 3** is a schematic illustrating a controlled-depth fish chumming system, according to one embodiment of the present invention, implemented in a depth-attaining device;

FIG. 4 is a schematic illustrating a controlled-depth fish chumming system, according to an alternate embodiment of the present invention, implemented in a
10 depth-attaining device;

FIG. 5 is a schematic illustrating an alternative embodiment of a chumming system according to the present invention embodied in a lure device having one or more hook members operably engaged therewith;

FIGS. 6A and 6B are schematics illustrating lure devices (teasers) having no
15 hook members operably engaged therewith with which a chumming system according to the present invention may be implemented.

DETAILED DESCRIPTION OF THE INVENTION

The present inventions now will be described more fully hereinafter with
20 reference to the accompanying drawings, in which some, but not all embodiments of the invention are shown. Indeed, these inventions may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will satisfy applicable legal requirements. Like numbers refer to like elements throughout.

25 **FIGS. 1A, 1B, 2A, 2B, and 2C** illustrate various embodiments of a system for chumming for fish, the system being indicated generally by the numeral **100**, wherein such a system **100** allows a fisherman trolling fishing baits to also chum for fish. In some instances, the system **100** is configured for controlled-depth chumming for fish, wherein such a system **100** allows a fisherman trolling fishing baits at a certain depth
30 under the water surface to also chum for fish at a depth under the water surface, generally corresponding to the depth at which the bait is being trolled.

As previously discussed, fishing by trolling generally occurs in relation to a boat or other vessel **200** moving through a body of water **300**. However, in some instances, wind, wave, and/or current action, for example, may cause the boat **200** to be stationary (i.e., no relative motion of the boat **200** with respect a course over
5 ground), and the motion of the body of water **300** due to such factors as wind, wave, and current will still result in a flow of water past the boat **200** wherein, in such instances, fishing by trolling may still be possible. Accordingly, embodiments of the present invention consider such instances to be included within the scope of the disclosure presented herein. That is, it will be understood that any reference to the
10 boat **200** moving through the water **300** will also include instances where the boat **200** is stationary, but has a flow of water thereby due to, for example, wind, wave, and/or current action, and thus may still allow the boat **200** to be trolling.

For controlled-depth fishing, a depth-attaining device **400**, such as a weight (FIG. 1B), planer (FIG. 1A), downrigger ball, or other device, is tethered to the stern
15 of the vessel **200** via a line member **500**, wherein the line member **500** may be, for example, monofilament, braided filaments, or Dacron™ type fishing line, or single or multi-stranded metallic cable. The depth-attaining device **400** is configured to sink below the surface **350** of the water **300**, when lowered from the vessel **200**, to a depth under the water surface **350** determined by the length of the line member **500**. Due to,
20 for example, the drag force imparted on the depth-attaining device **400** and the line member **500** by the water **300** as the vessel **200** is moving (“blowback”), however, the depth-attaining device **400** is often diagonally-disposed behind the vessel **200** under the water surface **350** when trolling. In any instance, the line member **500** tethering the depth-attaining device **400** to the vessel **200** will remain taut, particularly when
25 the vessel **200** is moving through the water **300**.

In order to fish at this controlled depth, a hook member **600**, which may or may not be associated with, for example, a lure device or bait (not shown), is operably engaged with the depth-attaining device **400** and/or the line member **500** such that the hook member **600** is pulled behind the trolling vessel **200** at or up to the depth under
30 the water surface **350** of the depth-attaining device **400**, as determined by the length of the line member **500**. For example, in embodiments as shown in FIGS. 1A and 1B, the line member **500** may comprise a fishing line (which otherwise may be

indicated as element **550** herein) attached at the vessel end thereof to a fishing device **700** such as, for example, a rod and reel outfit, associated with the vessel **200**, and at the opposing end of the line member **500** to the depth-attaining device **400**, wherein the nature of such a rod and reel outfit will be appreciated by one skilled in the art.

5 An elongate leader member **750** may then be attached between the depth-attaining device **400** and the hook member **600**. Once the depth-attaining device **400** is lowered by the fishing device **700** from the trolling vessel **200**, the depth-attaining device **400** causes the leader member **750** and the hook member **600** to be pulled behind the vessel **200** at a depth under the water surface **350** determined by the depth
10 reached by the depth-attaining device **400**.

In another embodiment as shown in **FIG 2A**, the line member **500** may be attached at the vessel end thereof to a downrigger device **800**, wherein the downrigger device **800** is operably engaged with the vessel **200**. Such a downrigger device **800** may comprise, for example, a reel mechanism (not shown) on which the line member
15 **500** may be wound, wherein the reel mechanism may also be used to extend and retrieve the line member **500** with respect to the vessel **200**. In such instances, the depth-attaining device **400** may be attached to the free end of the line member **500**, (the end of the line member **500** not attached to the downrigger device **800**) so as to be lowerable (and retrievable) by the downrigger device **800** to a selected depth under
20 the water surface **350**. In this configuration, a fishing device **700** such as, for example, a rod and reel outfit, may be separately (from the downrigger device **800**) associated with the vessel **200**, with a fishing line **550** extending therefrom. The hook member **600** may then be attached to the free end of the fishing line **550** (opposite the end attached to the fishing device **700**). The fishing line **550**, between the fishing
25 device **700** and the hook member **600**, may be removably attached to a clip **850** secured to the line member **500** at or near the depth-attaining device **400** (shown in phantom in **FIGS. 2A and 2B**) or to the depth-attaining device **400** itself. In this manner, the fishing line **550**, and thus the hook member **600**, can be lowered to the same depth under the water surface **350** as the depth-attaining device **400**. Should a
30 fish bite the hook member **600**, the clip **850** is configured to release the fishing line **550** such that the fish can be fought and brought to the vessel **200**, with the fishing device **700**, independently of the line member **500** and the depth-attaining device **400**.

In a similar embodiment as shown in **FIG. 2B**, the downrigger device **800** may be eliminated and the line member **500** attached directly to the vessel **200**, wherein lowering and retrieval of the line member **500** with respect to the vessel **200** is accomplished manually.

5 Thus, the depth-attaining device **400** may be attached directly to the vessel **200** via the line member **500** (**FIG. 2B**) or indirectly via the line member **500** and the downrigger device **800** (**FIG. 2A**). In either instance, the line member **500** will be taut when the depth-attaining device **400** is lowered below the water surface **350** and the vessel **200** is moving. In such embodiments, a supplemental depth-attaining
10 device **450** may be removably and slidably attached to the line member **500**, as shown in **FIG. 2C**. Such a supplemental depth-attaining device **450** may further be configured to have a fishing line **550** releasably secured thereto, the fishing line **550** extending from a fishing device **700**, such as a rod and reel outfit, and having a hook member **600** attached to the free end thereof (opposite the end attached to the fishing
15 device **700**). As such, with the fishing line **550**, between the fishing device **700** and the hook member **600**, releasably secured to the supplemental depth-attaining device **450**, the supplemental depth-attaining device **450** may be released to slide along the line member **500**. In this manner, as the supplemental depth-attaining member **450** contacts the water **300** from the moving vessel **200**, the force of the water **300** will
20 cause the supplemental depth-attaining device **450** to slide down the line member **500** to any depth under the water surface **350** up to the depth of the depth-attaining member **400**. The fishing line **550**, and thus the hook member **600**, can thereby be lowered to a depth under the water surface **350**. Again, should a fish bite the hook member **600**, the supplemental depth-attaining member **450** will release the fishing
25 line **550** such that the fish can be fought and brought to the vessel **200**, with the fishing device **700**, independently of the line member **500** and the depth-attaining device **400**. In such an embodiment, the supplemental depth-attaining device **450** separately connected to the vessel **200** via a tether (not shown), whereby the tether can be used to retrieve the supplemental depth-attaining device **450** to the vessel **200**,
30 independently of the line member **500** and the depth-attaining device **400**. In other instances, the supplemental depth-attaining member **450** may be configured to be somewhat buoyant, even when filled with the chum substance **420**, such that, when

the vessel **200** is stopped or otherwise stationary, the buoyancy of the supplemental depth-attaining mechanism **450** cause the supplemental depth-attaining mechanism **450** to slide back up the line member **500** to the water surface **350** to facilitate retrieval from the vessel **200**.

5 With the described embodiments heretofore, one purpose is to keep the hook member **600** at a depth below the water surface **350** as the vessel **200** is moving so as to fish by trolling. In such instances, it may be advantageous to the fishing party to also concurrently chum for fish at that depth so as to hopefully attract fish to the hook member **600**. As such, the system **100** for controlled-depth chumming for fish may be
10 configured to controllably release chum contained therein below the water surface **350** as the vessel **200** is moving (trolling). In such embodiments as shown in **FIGS. 3 and 4**, the system **100** may include an interior chamber **410** defined by a container member such as the depth-attaining device **400, 450** for receiving a chum substance **420** therein such as, for example, fish oil, through a sealable opening **430** in the depth-
15 attaining device **400, 450**. One purpose of such a system **100** is thus to release the chum substance **420** to the water **300** such that the chum substance **420** lures or attracts fish to the hook member **600**. However, since the depth-attaining device **400, 450** and the chamber **410** defined thereby are generally of limited size, and since
20 trolling is often a time-intensive fishing method (on the order of consecutive hours), it may be advantageous to limit or otherwise selectively release the chum substance **420** from the chamber **410** so as to avoid or minimize the need for frequent retrieval and redeployment of the depth-attaining device **400, 450** in order to refill the chamber **410**.

 According to embodiments of the present invention, the depth-attaining device
25 **400, 450** is configured to controllably and/or selectively and/or limitedly release or meter the chum substance **420** from the chamber **410** into the water **300**. In some particular instances, the chum substance **420** is released from the chamber **410** only in response to a force (hydrodynamic) generated by the water **300** moving thereby or thereabout. Such hydrodynamic force may be created by the vessel **200** moving
30 through the water **300** or a water current acting on the vessel **200** and/or depth-attaining device **400, 450**. In order to accomplish such a controlled release, the depth-attaining mechanism **400, 450** may have a dispersion mechanism **900** associated

therewith and operably engaged with the chamber 410 holding the chum substance 420. The dispersion mechanism 900 may be configured, for example, to be responsive only to the hydrodynamic force thereabout to release the chum substance 420 only when the vessel 200 / depth-attaining mechanism 400, 450 is moving
5 through the water 300 or otherwise has a water current flowing thereby

For instance, as shown in FIG. 3, the dispersion mechanism 900 may comprise a flexible diaphragm 910 having at least one perforation 920, the at least one perforation 920 being sealed or substantially sealed at ambient pressure or above, either mechanically or due to the material characteristics of the diaphragm 910 itself.
10 That is, once the chamber 410 is filled at ambient atmospheric pressure, the diaphragm 910 will not allow the chum substance 420 to pass from the chamber 410 through the at least one perforation 920. When lowered under the water surface 350, the positive underwater pressure will likewise not allow the chum substance 420 to pass from the chamber 410. However, the depth-attaining mechanism 400, 450 is
15 further configured such that a pressure differential about the depth-attaining mechanism 400, 450 and/or the dispersion mechanism 900, caused by hydrodynamic force as the depth-attaining mechanism 400, 450 is moved through the water 300 by the vessel 200 (i.e. by trolling or by water current), causes deformation of the diaphragm 910 which, in turn, causes the at least one perforation 920 to dilate such
20 that the chum substance 420 is able to pass through (or, in some instances, be forcibly extracted through) the at least one perforation 920. That is, the depth-attaining mechanism 400, 450 maybe configured, for example, to have a pressure differential thereabout when moved through the water 300, with one portion thereof experiencing a high hydrodynamic pressure 400a and another portion thereof experiencing a low
25 hydrodynamic pressure 400b. As such, the dispersion mechanism 900 may be disposed along the low pressure area 400b such that the low pressure tends to suction or forcibly withdraw or extract the chum substance 420 from the chamber 410 through the at least one perforation 920 in the diaphragm 910 and, as a result, introduce the chum substance 420 directly into the water 300. One skilled in the art,
30 however, will appreciate that the dispersion mechanism 900, as described, may take many different forms such as, for example, an appropriate valve mechanism, porous material, restricted capillary, or suitable controlled-release mechanism.

One skilled in the art will further appreciate that the dispersion mechanism 900 may take many different forms based upon the described pressure differential principle. For example, the depth-attaining mechanism 400, 450 may be additionally configured with a flexible secondary diaphragm 930 disposed about a high pressure portion 400a of the depth-attaining mechanism 400, 450. Such a secondary diaphragm 930 may be deformed inwardly with respect to the chamber 410, in response to being exposed to the hydrodynamic force of the moving water 300, such that the positive pressure created within the chamber 410 causes the chum substance 420 to be expelled from the chamber through the at least one perforation 920 in the diaphragm 910, which may not necessarily have to be disposed about a low pressure portion 400b of the depth-attaining mechanism 400, 450 (i.e. as shown in phantom in FIG. 3).

In another instance, as shown in FIG. 4, the dispersion mechanism 900 may be configured as a venturi 950 configured to have a tapering inlet 960 extending in a direction parallel to the water flow as the depth-attaining device 400, 450 is moved through the water 300. The tapering inlet 960 of the venturi 950 leads to a constriction 970 and then an expanding outlet 980. When water 300 flows through the venturi 950, a low pressure area, suction, or vacuum is created in the expanding outlet 980 following (downstream of) the constriction 970. As such, the venturi 950 may include a supply port 990 connecting the chamber 410 to the expanding outlet 980 for feeding the chum substance 420 into the water flow, wherein the supply port 990 may include an appropriate mechanism for limiting the release of the chum substance 420. Such a mechanism may comprise, for example, a perforated diaphragm as previously discussed, a valve mechanism, porous material, restricted capillary, or any other suitable controlled-release mechanism for metering the release of the chum substance 420 so as to avoid or minimize required refilling of the chamber 410 with additional chum substance 420 during a trolling period. One skilled in the art will also appreciate that the venturi 950 may be operably engaged with the depth-attaining device 400 about the periphery thereof, or may be defined by the depth-attaining device 400 itself, though many other venturi-type configurations may be possible. Such controlled release of the chum substance 420 may thus provide for chumming the water 300 in depthwise relation to the hook member 600

(more particularly, the chumming is performed at a depth below the water surface 350 corresponding to the depth under the water surface 350 at which the hook member 600 is being trolled from the moving vessel 200) as the vessel 200 is moving, but may conserve the remaining chum substance 420 in the chamber 410 when the vessel 200 is not moving through the water 300 (i.e. wherein fishing by trolling is not being performed from the vessel 200).

Many modifications and other embodiments of the inventions set forth herein will come to mind to one skilled in the art to which these inventions pertain having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. For example, one skilled in the art will appreciate that a system 100 as described herein may otherwise have variations generally directed to any suitable or otherwise appropriate mechanism for controllably releasing a chum substance 420 under the water surface 350 in a metered manner using a dispersion mechanism 900 in communication with the chamber 410 containing the chum substance 420, wherein release of the chum substance 420 occurs in response to hydrodynamic force imparted to the system 100 by the depth-attaining mechanism 400, 450 being trolled through the water 300 by the vessel 200 at a controlled depth below the water surface 350.

As a further example, one skilled in the art will also appreciate that a system 100 as described herein may otherwise have variations generally directed to any suitable or otherwise appropriate mechanism for controllably releasing a chum substance 420 at the water surface 350 in a metered manner using a dispersion mechanism 900 in communication with the chamber 410 containing the chum substance 420, wherein release of the chum substance 420 occurs in response to hydrodynamic force imparted to the system 100 being trolled by the vessel 200 at the water surface 350. That is, the system 100 may also be configured such that the container member / chamber 410 and the dispersion mechanism 900 are operably engaged with a lure device 1000, as shown in FIG. 5. The lure device 1000 may include one or more hook members 600 and may, in some instances, be configured to accept or receive natural bait, whether alive or dead, in portions or as a whole. In other embodiments, the lure device 1000 may be configured without hook members 600 wherein, in such instances, the lure device 1000 functions as a teaser device (see, e.g., FIGS. 6A and 6B) for luring a fish into a trolling spread such that the fish can

then be directed to a separate hook member **600** attached to another lure device **1000** or to a "pitch bait" deployed from the vessel **200**. One skilled in the art will further appreciate that such a lure device **1000** may be configured to vacillate so as to, for example, emulate a swimming fish, in response to being trolled through the water **300** or having a current flow of the water **300** thereby. In such instances, the lure device **1000**, with or without the hook member(s) **600**, may be configured as a depth-attaining device, such that the lure device **1000** runs under the water surface **350** while being trolled by the vessel **200**. Alternatively, the lure device **1000**, with or without the hook member(s) **600**, may be configured to stay at or about the water surface **350** while being trolled by the vessel **200**.

Therefore, it is to be understood that the inventions are not to be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

THAT WHICH IS CLAIMED:

1. A chumming device, comprising:
a container member defining an interior chamber adapted to contain a chum
substance; and
a dispersion mechanism operably engaged with the container member and
5 configured cooperate with the container member to receive a flow of
water thereby, the water flow providing an associated hydrodynamic
force at least about the dispersion mechanism, the dispersion
mechanism being further configured to cooperate with the container
member such that the chum substance is extracted from the interior
10 chamber of the container member and introduced directly into the
water flow via the dispersion mechanism in response only to the
hydrodynamic force.
2. A device according to Claim 1 further comprising a hook device
15 operably engaged with the container member.
3. A device according to Claim 1 wherein the container member is
configured to vacillate in response to the hydrodynamic force.
- 20 4. A device according to Claim 1 wherein the dispersion mechanism
comprises a diaphragm defining at least one perforation, the diaphragm being
operably engaged with the container member so as to separate the interior chamber
thereof from the water flow, the diaphragm being further configured to release the
chum substance through the at least one perforation in response only to the
25 hydrodynamic force.
5. A device according to Claim 1 wherein the dispersion mechanism
comprises a venturi extending parallel to the water flow and having a tapering inlet,
an expanding outlet, and a supply port operably engaged between the interior chamber
30 and the expanding outlet, whereby the water flow through the expanding outlet of the

venturi produces a hydrodynamic force for extracting the chum substance from the interior chamber and into the water flow via the supply port.

5 6. A device according to Claim 1 wherein the dispersion mechanism is further configured to selectively limit extraction of the chum substance from the interior chamber such that the chum substance is selectively metered into the water flow.

10 7. A device according to Claim 1 wherein the container member and the dispersion mechanism are operably engaged with at least one of a fishing lure element having a hook device, and a fishing lure element without a hook device.

15 8. A controlled-depth chumming device adapted to be used with a vessel moving through water, said device comprising:
a container member defining an interior chamber adapted to contain a chum substance and configured to be lowerable to a depth under a surface of the water as the vessel is moving; and
a dispersion mechanism operably engaged with the container member and configured to cooperate with the container member to receive a flow of
20 the water thereby, the water flow providing an associated hydrodynamic force at least about the dispersion mechanism, the dispersion mechanism being further configured to cooperate with the container member such that the chum substance is extracted from the interior chamber of the container member and introduced directly into
25 the water flow under the water surface via the dispersion mechanism in response only to the hydrodynamic force.

30 9. A device according to Claim 8 further comprising a hook device operably engaged with the container member.

10. A device according to Claim 8 wherein the dispersion mechanism comprises a diaphragm defining at least one perforation, the diaphragm being

operably engaged with the container member so as to separate the interior chamber thereof from the water flow, the diaphragm being further configured to release the chum substance through the at least one perforation in response only to the hydrodynamic force.

5

11. A device according to Claim 8 wherein the dispersion mechanism comprises a venturi extending parallel to the water flow and having a tapering inlet, an expanding outlet, and a supply port operably engaged between the interior chamber and the expanding outlet, whereby the water flow through the expanding outlet of the venturi produces a hydrodynamic force for extracting the chum substance from the interior chamber and into the water flow via the supply port.

10

12. A device according to Claim 8 wherein the dispersion mechanism is further configured to selectively limit extraction of the chum substance from the interior chamber such that the chum substance is selectively metered into the water flow.

15

13. A device according to Claim 8 wherein the container member and the dispersion mechanism are operably engaged with at least one of a fishing lure element having a hook device, and a fishing lure element without a hook device.

20

14. A controlled-depth chumming system adapted to be used with a vessel moving through water, said system comprising:

25

a downrigger device operably engaged with the vessel and having a first end of a line attached thereto, the line having an opposed second end capable of extending from the downrigger;

30

a container member defining an interior chamber adapted to contain a chum substance and configured to be attached to the second end of the line so as to be lowerable to a depth under a surface of the water by the downrigger as the vessel is moving; and

a dispersion mechanism operably engaged with the container member and configured to cooperate with the container member to receive a flow of

the water thereby, the water flow providing an associated hydrodynamic force at least about the dispersion mechanism, the dispersion mechanism being further configured to cooperate with the container member such that the chum substance is extracted from the interior chamber of the container member and introduced directly into the water flow under the water surface via the dispersion mechanism in response only to the hydrodynamic force.

5
10 15. A system according to Claim 14 further comprising a hook device operably engaged with the container member.

15 16. A system according to Claim 14 wherein the dispersion mechanism comprises a diaphragm defining at least one perforation, the diaphragm being operably engaged with the container member so as to separate the interior chamber thereof from the water flow, the diaphragm being further configured to release the chum substance through the at least one perforation in response only to the hydrodynamic force.

20 17. A system according to Claim 14 wherein the dispersion mechanism comprises a venturi extending parallel to the water flow and having a tapering inlet, an expanding outlet, and a supply port operably engaged between the interior chamber and the expanding outlet, whereby the water flow through the expanding outlet of the venturi produces a hydrodynamic force for extracting the chum substance from the interior chamber and into the water flow via the supply port.

25 18. A system according to Claim 14 wherein the dispersion mechanism is further configured to selectively limit extraction of the chum substance from the interior chamber such that the chum substance is selectively metered into the water flow.

30 19. A controlled-depth chumming system adapted to be used with a vessel moving through water, said system comprising:

a line having a first end operably engaged with the vessel and an opposed second end extending therefrom;

a depth-attaining device attached to the second end of the line and being configured to reach a depth under a surface of the water as the vessel is moving such that the line tautly extends between the vessel and the depth-attaining device;

a container member defining an interior chamber adapted to contain a chum substance and configured to be slidably engaged with the line so as to be lowerable along the line and under the water surface up to the depth of the depth-attaining device; and

a dispersion mechanism operably engaged with the container member and configured to cooperate with the container member to receive a flow of the water thereby, the water flow providing an associated hydrodynamic force at least about the dispersion mechanism, the dispersion mechanism being further configured to cooperate with the container member such that the chum substance is extracted from the interior chamber of the container member and introduced directly into the water flow under the water surface via the dispersion mechanism in response only to the hydrodynamic force.

20. A system according to Claim 19 further comprising a hook device operably engaged with the container member.

21. A system according to Claim 19 wherein at least one of the container member and the dispersion mechanism are operably engaged with a fishing line extending therefrom to the vessel.

22. A system according to Claim 21 wherein the container member and the dispersion mechanism are configured to be releasable from the line so as to be operably engaged with the vessel only via the fishing line.

23. A system according to Claim 19 wherein the dispersion mechanism comprises a diaphragm defining at least one perforation, the diaphragm being operably engaged with the container member so as to separate the interior chamber thereof from the water flow, the diaphragm being further configured to release the chum substance through the at least one perforation in response only to the hydrodynamic force.

24. A system according to Claim 19 wherein the dispersion mechanism comprises a venturi extending parallel to the water flow and having a tapering inlet, an expanding outlet, and a supply port operably engaged between the interior chamber and the expanding outlet, whereby the water flow through the expanding outlet of the venturi produces a hydrodynamic force for extracting the chum substance from the interior chamber and into the water flow via the supply port.

25. A system according to Claim 19 wherein the dispersion mechanism is further configured to selectively limit extraction of the chum substance from the interior chamber such that the chum substance is selectively metered into the water flow.

26. A system according to Claim 19 wherein the container member and the dispersion mechanism are operably engaged with at least one of a fishing lure element having a hook device, and a fishing lure element without a hook device.

27. A controlled-depth chumming system adapted to be used with a vessel moving through water, said system comprising:

a fishing device associated with the vessel and having a first end of a line attached thereto, the line having an opposed second end capable of extending from the fishing device;

an elongate leader member having opposed first and second ends, the second end of the leader member having a hook device attached thereto and adapted to interact with the water as the vessel is moving;

5 a container member defining an interior chamber adapted to contain a chum substance and configured to be attached between the second end of the line and the first end of the leader member, the container member being further configured as a depth-attaining mechanism lowerable to a depth under a surface of the water by the fishing device, as the vessel is moving, such that the hook device attached to the second end of the leader member is also under the water surface; and

10 a dispersion mechanism operably engaged with the container member and configured to cooperate with the container member to receive a flow of the water thereby, the water flow providing an associated hydrodynamic force at least about the dispersion mechanism, the dispersion mechanism being further configured to cooperate with the container member such that the chum substance is extracted from the interior chamber of the container member and introduced directly into

15 the water flow under the water surface in response only to the hydrodynamic force.

28. A system according to Claim 27 wherein the dispersion mechanism comprises a diaphragm defining at least one perforation, the diaphragm being

20 operably engaged with the container member so as to separate the interior chamber thereof from the water flow, the diaphragm being further configured to release the chum substance through the at least one perforation in response only to the hydrodynamic force.

25 29. A system according to Claim 27 wherein the dispersion mechanism comprises a venturi extending parallel to the water flow and having a tapering inlet, an expanding outlet, and a supply port operably engaged between the interior chamber and the expanding outlet, whereby the water flow through the expanding outlet of the venturi produces a hydrodynamic force for extracting the chum substance from the

30 interior chamber and into the water flow via the supply port.

30. A system according to Claim 27 wherein the dispersion mechanism is further configured to selectively limit extraction of the chum substance from the interior chamber such that the chum substance is selectively metered into the water flow.

5

31. A method of chumming, comprising:

receiving a flow of water about a dispersion mechanism operably engaged with a container member defining an interior chamber adapted to contain a chum substance, the water flow providing an associated hydrodynamic force at least about the dispersion mechanism, such that only the hydrodynamic force extracts the chum substance from the interior chamber of the container member via the dispersion mechanism and introduces the chum substance directly into the water flow.

10

15

32. A method according to Claim 31 wherein the dispersion mechanism comprises a diaphragm defining at least one perforation, the diaphragm being operably engaged with the container member so as to separate the interior chamber thereof from the water flow, and receiving a flow of water further comprises receiving a flow of water about the dispersion mechanism such that the hydrodynamic force dilates the at least one perforation and causes the chum substance to be released therethrough directly into the water flow.

20

33. A method according to Claim 31 wherein the dispersion mechanism comprises a venturi extending parallel to the water flow and having a tapering inlet, an expanding outlet, and a supply port operably engaged between the interior chamber and the expanding outlet, and receiving a flow of water further comprises receiving a flow of water through the venturi such that the hydrodynamic force produces a suction through the expanding outlet and causes the chum substance to be extracted from the interior chamber and directly into the water flow via the supply port.

25

30

34. A method according to Claim 31 further comprising selectively limiting extraction of the chum substance from the interior chamber with the dispersion mechanism such that the chum substance is selectively metered into the water flow.

5

35. A method of controlled-depth chumming from a vessel moving through water, said method comprising:

10 lowering a container member defining an interior chamber adapted to contain a chum substance to a depth under a surface of the water as the vessel is moving; and
receiving a flow of the water at least about a dispersion mechanism operably engaged with the container member, the water flow providing an associated hydrodynamic force about the dispersion mechanism, such that only the hydrodynamic force extracts the chum substance from the interior chamber of the container member via the dispersion
15 mechanism and introduces the chum substance directly into the water flow under the water surface.

20 36. A method according to Claim 35 wherein the dispersion mechanism comprises a diaphragm defining at least one perforation, the diaphragm being operably engaged with the container member so as to separate the interior chamber thereof from the water flow, and receiving a flow of water further comprises receiving a flow of water about the dispersion mechanism such that the hydrodynamic force dilates the at least one perforation and causes the chum substance to be released
25 therethrough directly into the water flow.

30 37. A method according to Claim 35 wherein the dispersion mechanism comprises a venturi extending parallel to the water flow and having a tapering inlet, an expanding outlet, and a supply port operably engaged between the interior chamber and the expanding outlet, and receiving a flow of water further comprises receiving a flow of water through the venturi such that the hydrodynamic force produces a

suction through the expanding outlet and causes the chum substance to be extracted from the interior chamber and directly into the water flow via the supply port.

38. A method according to Claim 35 further comprising selectively
5 limiting extraction of the chum substance from the interior chamber with the dispersion mechanism such that the chum substance is selectively metered into the water flow.

39. A method according to Claim 35 wherein lowering a container member
10 further comprises lowering a container member to a depth under a surface of the water with a downrigger device operably engaged with the vessel via a line extending therebetween.

40. A method according to Claim 35 wherein lowering a container member
15 further comprises:
lowering a depth-attaining device to the depth under the surface of the water as the vessel is moving, the depth-attaining device being operably engaged with the vessel via a line extending tautly therebetween; and sliding the container member along the line to a depth under the water surface
20 up to the depth of the depth-attaining device.

41. A method according to Claim 35 wherein lowering a container member further comprises lowering a container member configured as a depth-attaining mechanism to the depth under the surface of the water, the container member being
25 operably engaged with a fishing device associated with the vessel via a line extending therebetween and including an elongate leader member attached thereto and extending away from the vessel to a hook device adapted to interact with the water, such that the hook device is also under the water surface as the vessel is moving.

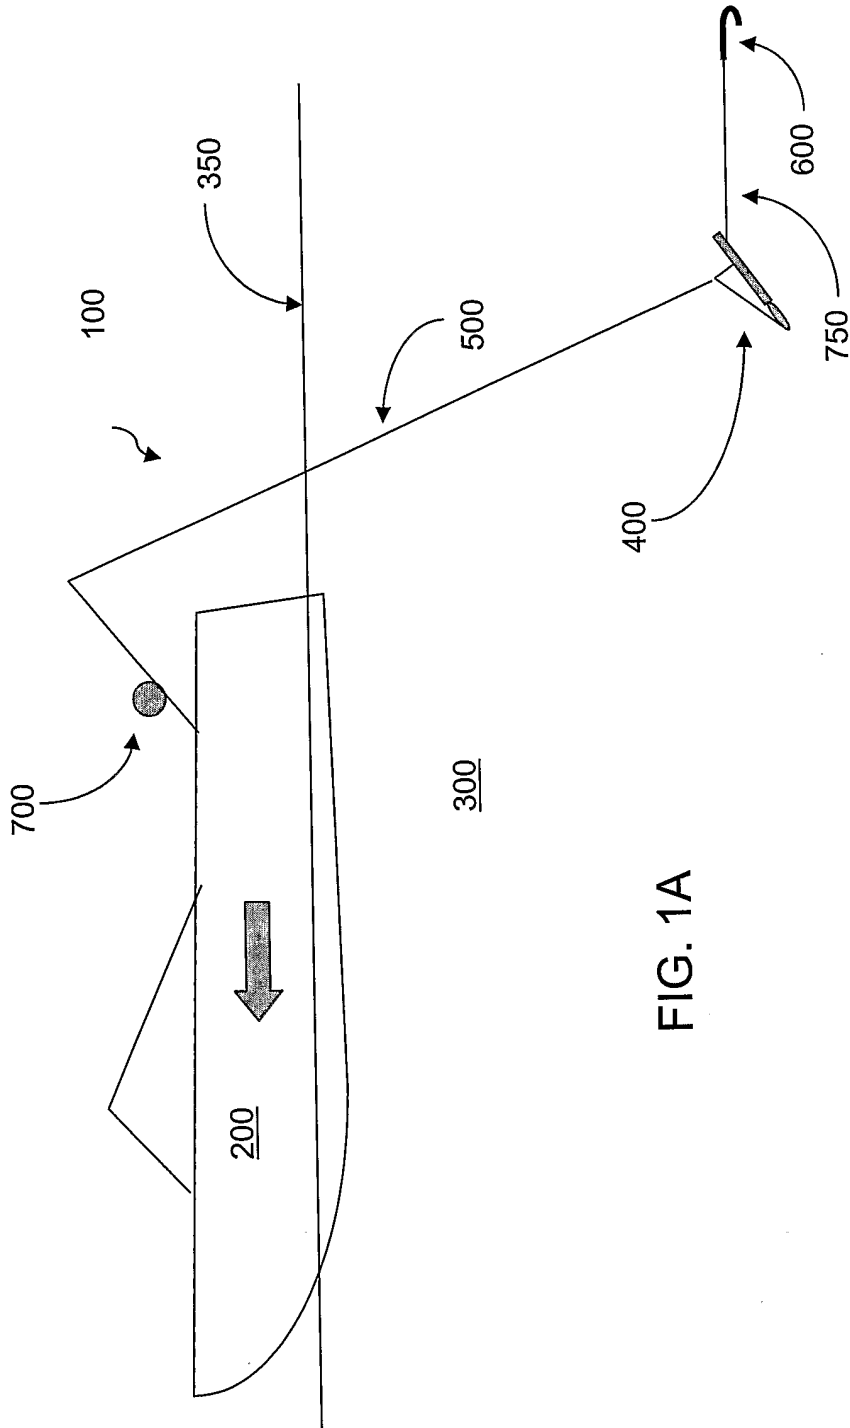


FIG. 1A

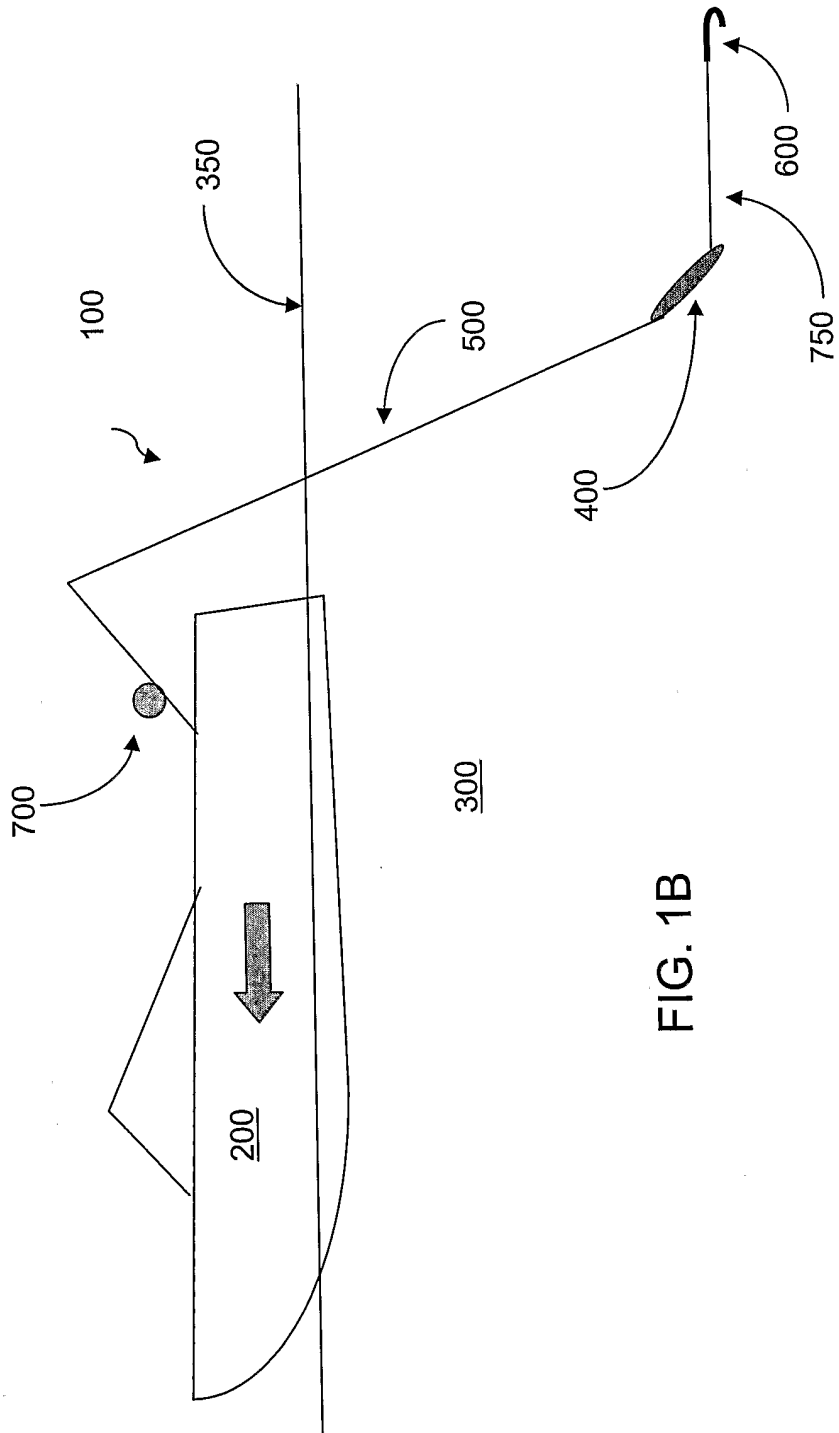


FIG. 1B

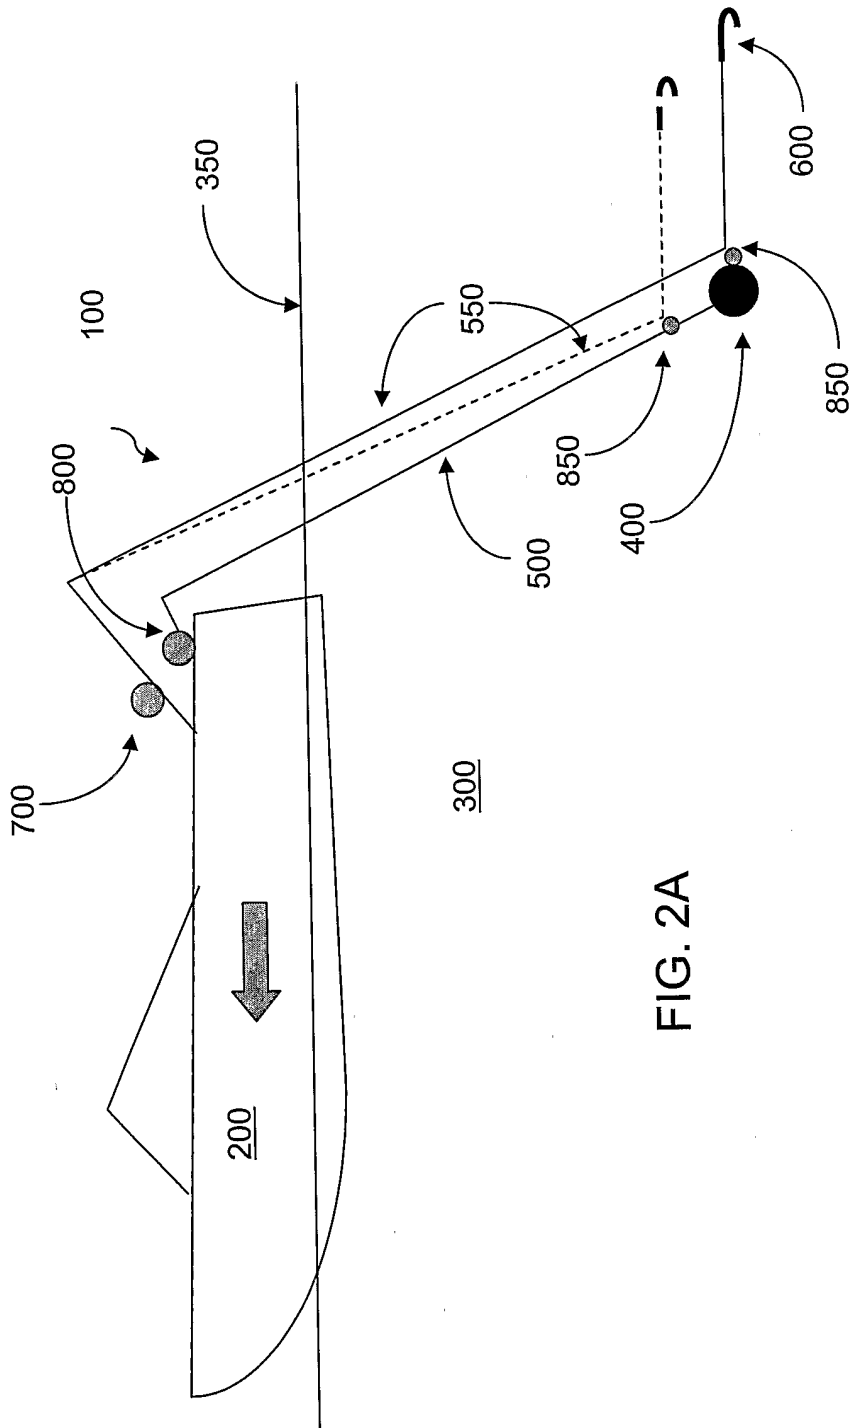


FIG. 2A

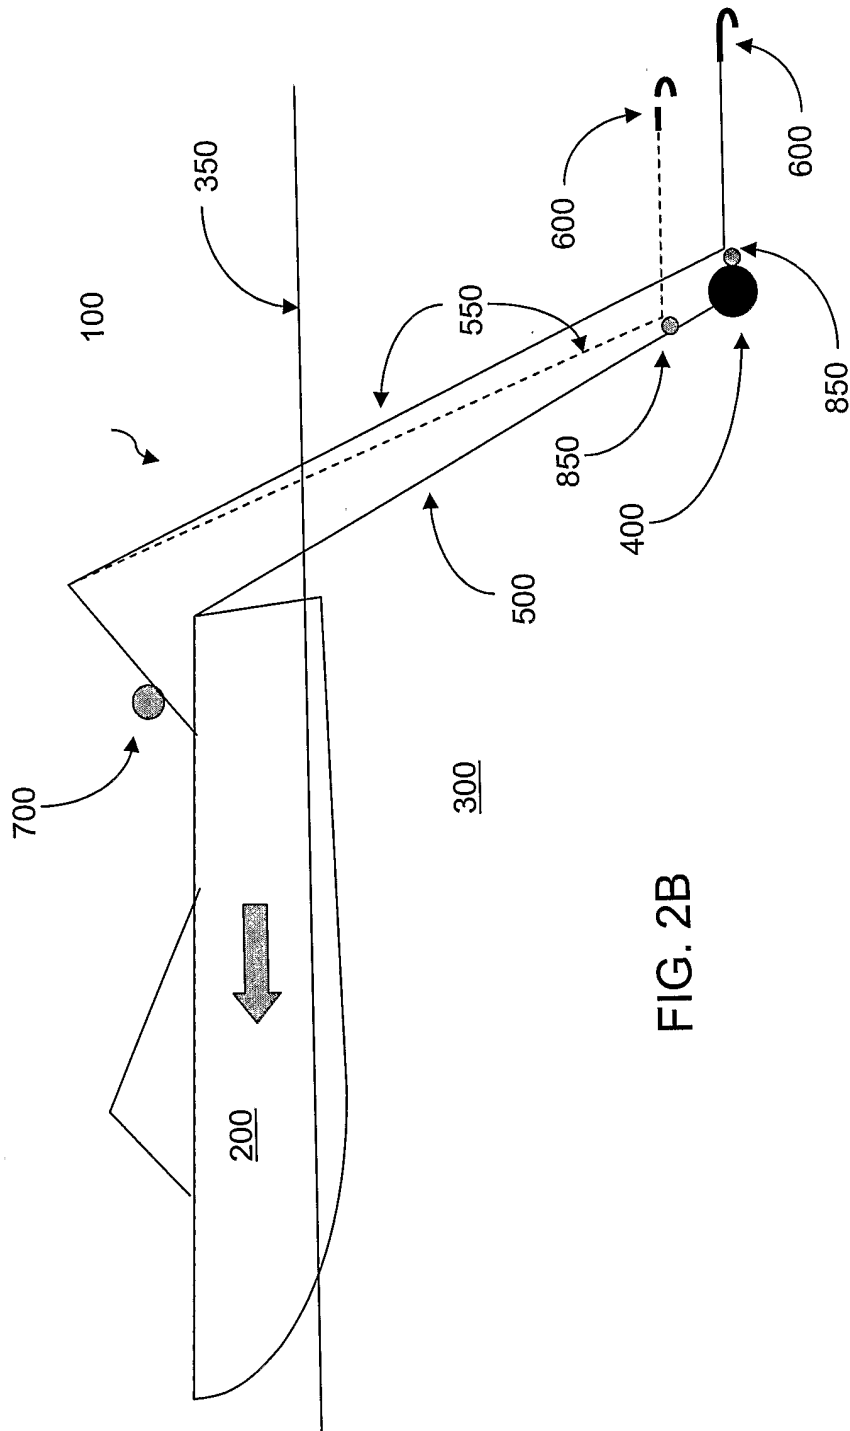


FIG. 2B

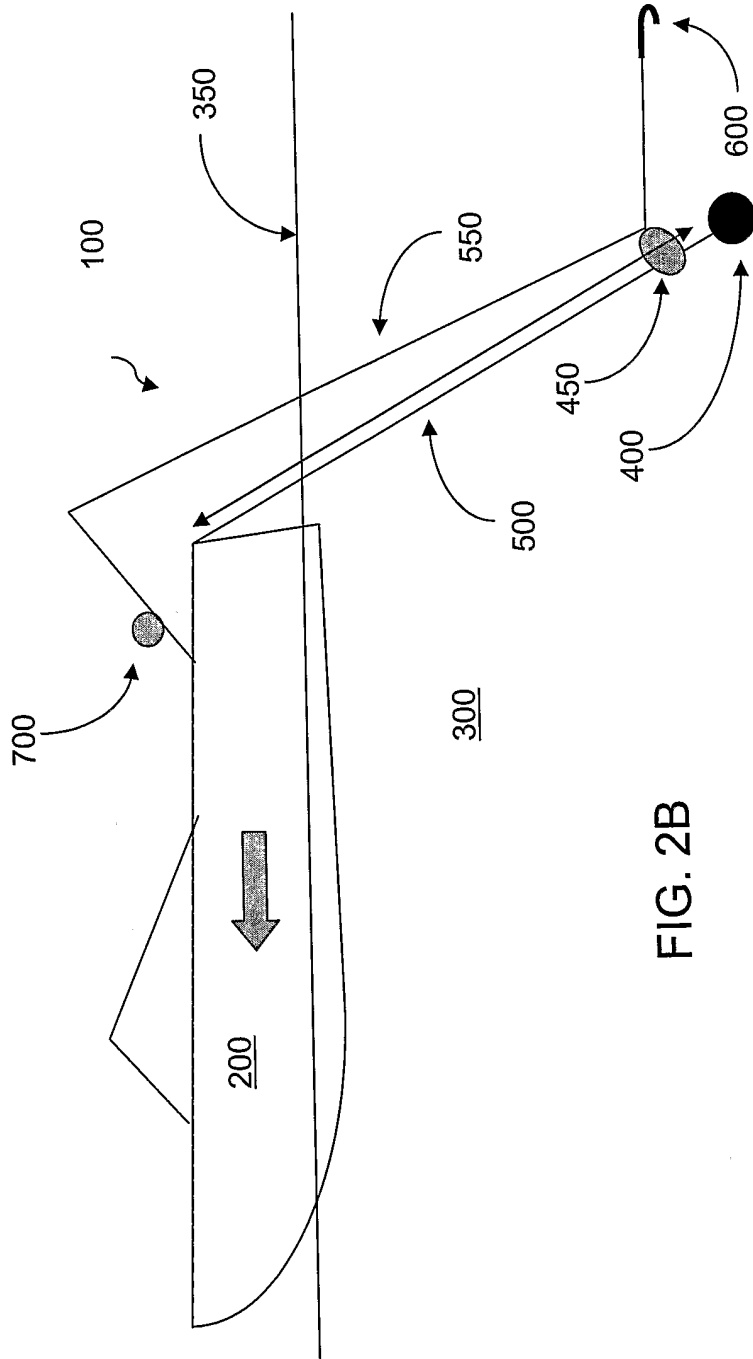


FIG. 2B

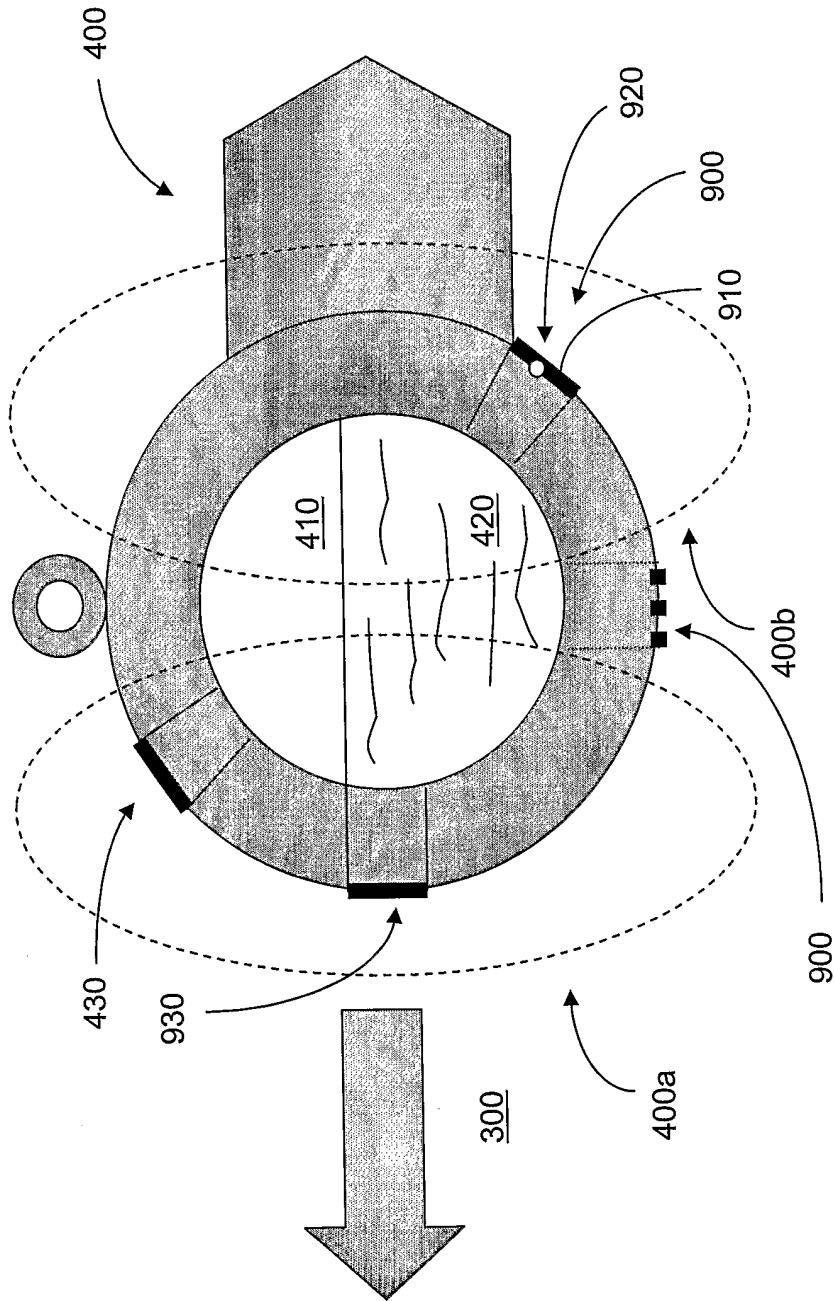


FIG. 3

7/9

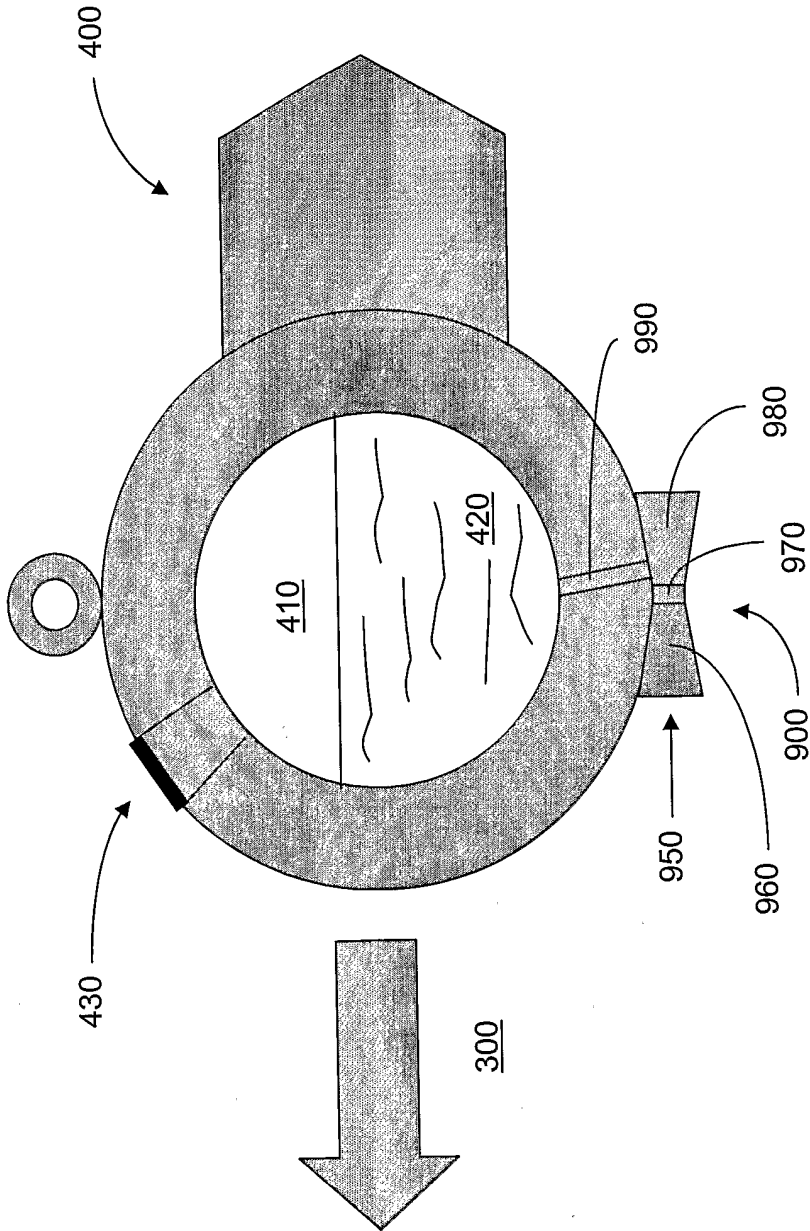


FIG. 4

8/9



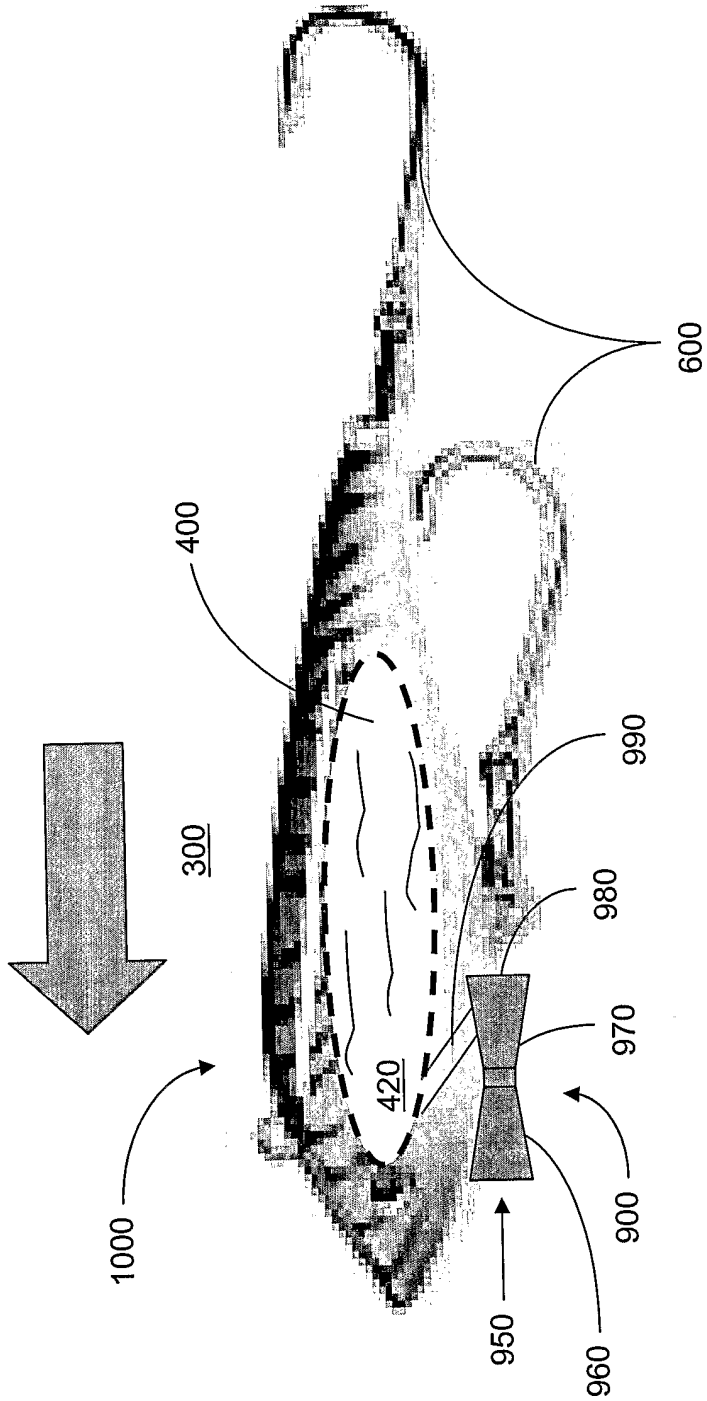


FIG. 5

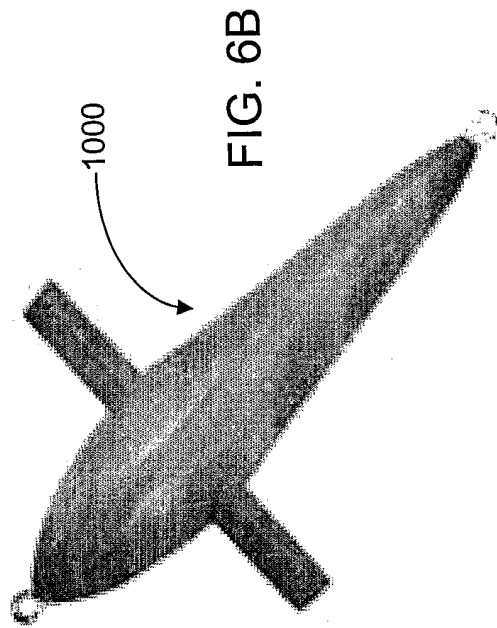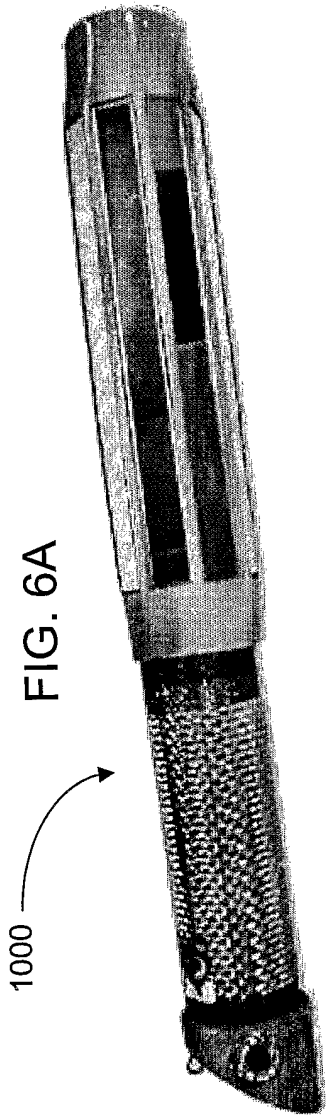

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference 46490/306275	FOR FURTHER ACTION see Form PCT/ISA/220 as well as, where applicable, item 5 below.	
International application No. PCT/US2006/000349	International filing date (day/month/year) 06/01/2006	(Earliest) Priority Date (day/month/year) 06/01/2005
Applicant PSI SALES, INC.		

This international search report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This international search report consists of a total of 4 sheets.

It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

a. With regard to the **language**, the international search was carried out on the basis of:

- the international application in the language in which it was filed
 a translation of the international application into _____, which is the language of a translation furnished for the purposes of international search (Rules 12.3(a) and 23.1(b))

b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, see Box No. I.

2. **Certain claims were found unsearchable** (See Box No. II)

3. **Unity of invention is lacking** (see Box No. III)

4. With regard to the **title**,

- the text is approved as submitted by the applicant
 the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

- the text is approved as submitted by the applicant
 the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box No. IV. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority

6. With regard to the **drawings**,

a. the figure of the **drawings** to be published with the abstract is Figure No. 4

- as suggested by the applicant
 as selected by this Authority, because the applicant failed to suggest a figure
 as selected by this Authority, because this figure better characterizes the invention

b. none of the figures is to be published with the abstract

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2006/000349

A. CLASSIFICATION OF SUBJECT MATTER
INV. A01K97/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 915 945 A (MALONE ET AL) 29 June 1999 (1999-06-29)	1-3, 5, 8, 9, 11, 13-15, 17, 19-22, 24, 27, 29, 31, 33, 35, 37, 39-41
Y	column 2, lines 14-64; figures 1-3 ----- -/--	4, 10, 16, 23, 28, 32, 36

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

16 May 2006

Date of mailing of the international search report

24/05/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lucchesi-Palli, C

1

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2006/000349

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>US 2003/126785 A1 (POINSKI MICHAEL M) 10 July 2003 (2003-07-10)</p> <p>paragraphs [0016], [0029] - [0035]; figures 1-3</p>	<p>1-3,6-9, 12-15, 18-22, 25-27, 30,31, 34,35, 38-41</p>
Y	<p>US 6 393 756 B1 (FORNEY RALPH E ET AL) 28 May 2002 (2002-05-28)</p> <p>column 4, line 44 - column 5, line 10; figures 5-8</p>	<p>4,10,16, 23,28, 32,36</p>
A	<p>US 5 097 620 A (NIETUPSKI ET AL) 24 March 1992 (1992-03-24)</p> <p>column 2, line 55 - column 3, line 9; figures 2,5</p>	<p>1-3,5-9, 11-15, 17-22, 24-31, 33-35, 37-41</p>
A	<p>US 3 083 492 A (KLING HERMAN) 2 April 1963 (1963-04-02) column 2, lines 42-59; figures 1,2</p>	<p>1-41</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2006/000349

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5915945	A	29-06-1999	NONE
US 2003126785	A1	10-07-2003	US 2005028424 A1 10-02-2005
US 6393756	B1	28-05-2002	NONE
US 5097620	A	24-03-1992	NONE
US 3083492	A	02-04-1963	NONE