



US 20070219065A1

(19) **United States**

(12) **Patent Application Publication**
Anderson et al.

(10) **Pub. No.: US 2007/0219065 A1**

(43) **Pub. Date: Sep. 20, 2007**

(54) **CLIMBER APPARATUS**

Related U.S. Application Data

(76) Inventors: **Timothy T. Anderson**, Antioch, IL (US); **Juliette C. Daly**, Arlington Heights, IL (US); **Byron T. DeKnock**, Des Plaines, IL (US); **Joe Immordino**, Hoffman Estates, IL (US); **Marcos Roimicher**, Lombard, IL (US); **Eric White**, Elgin, IL (US)

(60) Provisional application No. 60/781,838, filed on Mar. 13, 2006.

Publication Classification

(51) **Int. Cl.**
A63B 22/04 (2006.01)
(52) **U.S. Cl.** **482/52**

Correspondence Address:
Michael B. McMurry
1210 Astor Street.
Chicago, IL 60610

(57) **ABSTRACT**

An exercise apparatus to simulate climbing is described that includes such features as arm handles that move in synchronism with the motion of foot pedals to provide a total body workout; side handrails; a mounting step; linear foot movement at a simulated climbing angle; a three point support structure using a vertical support column; pedal track covers; a mechanism to provide constant resistance to pedal motion; and pedal impact absorption.

(21) Appl. No.: **11/710,578**

(22) Filed: **Feb. 26, 2007**

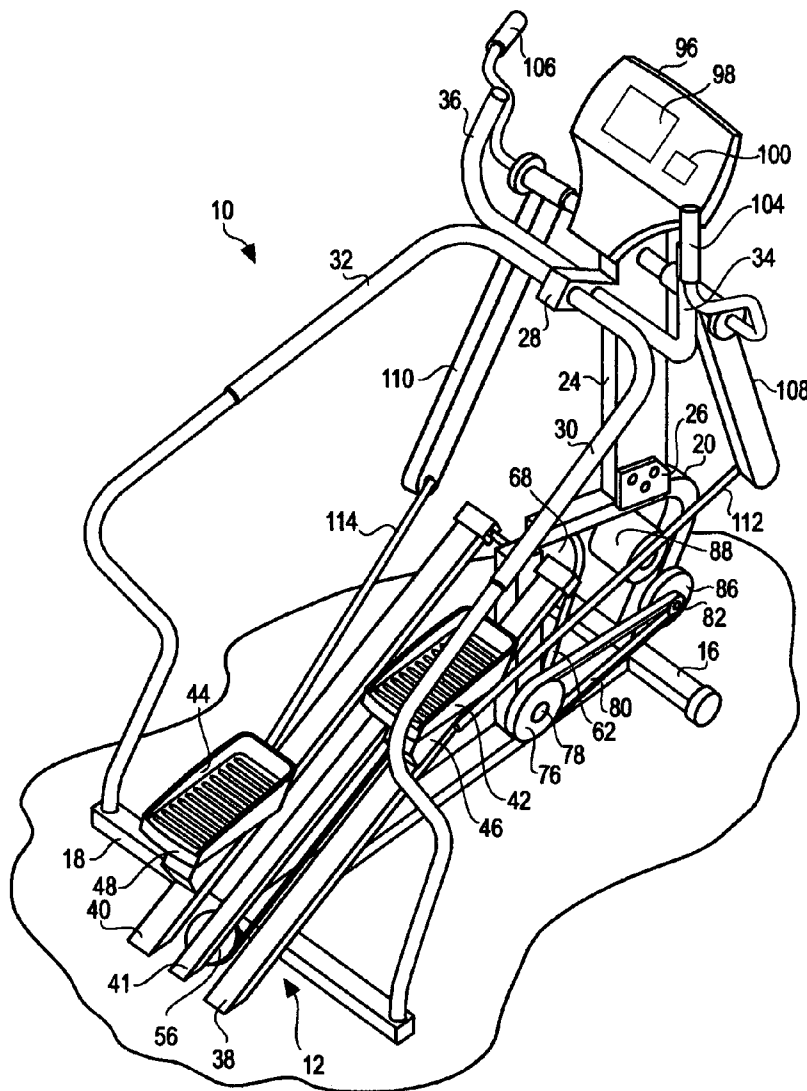


Fig. 1

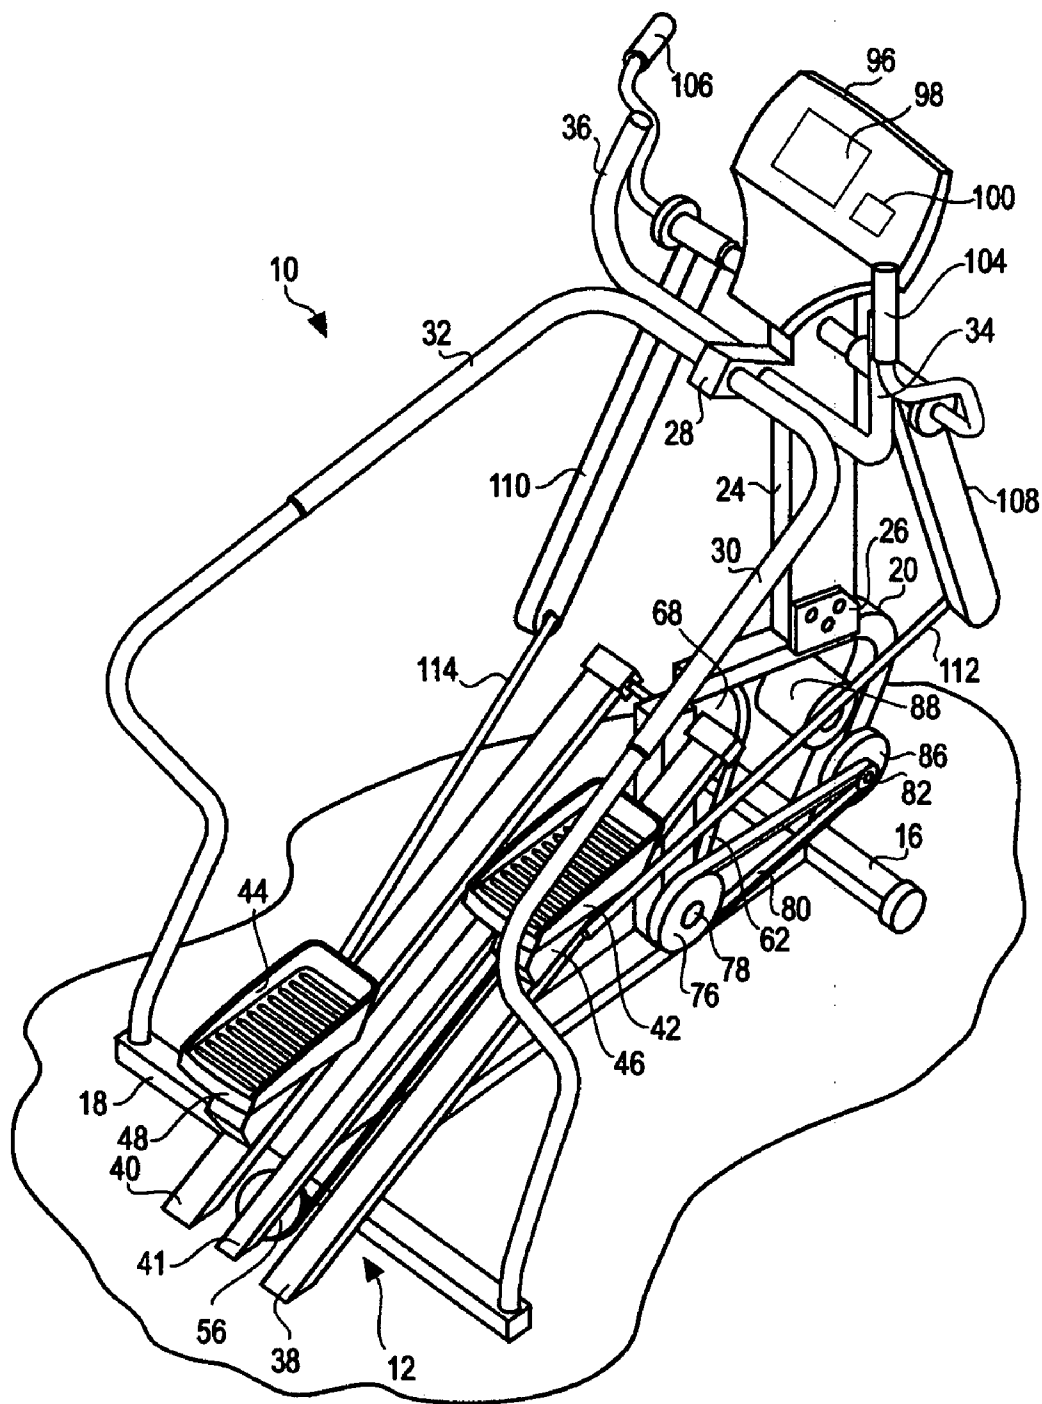


Fig. 2A

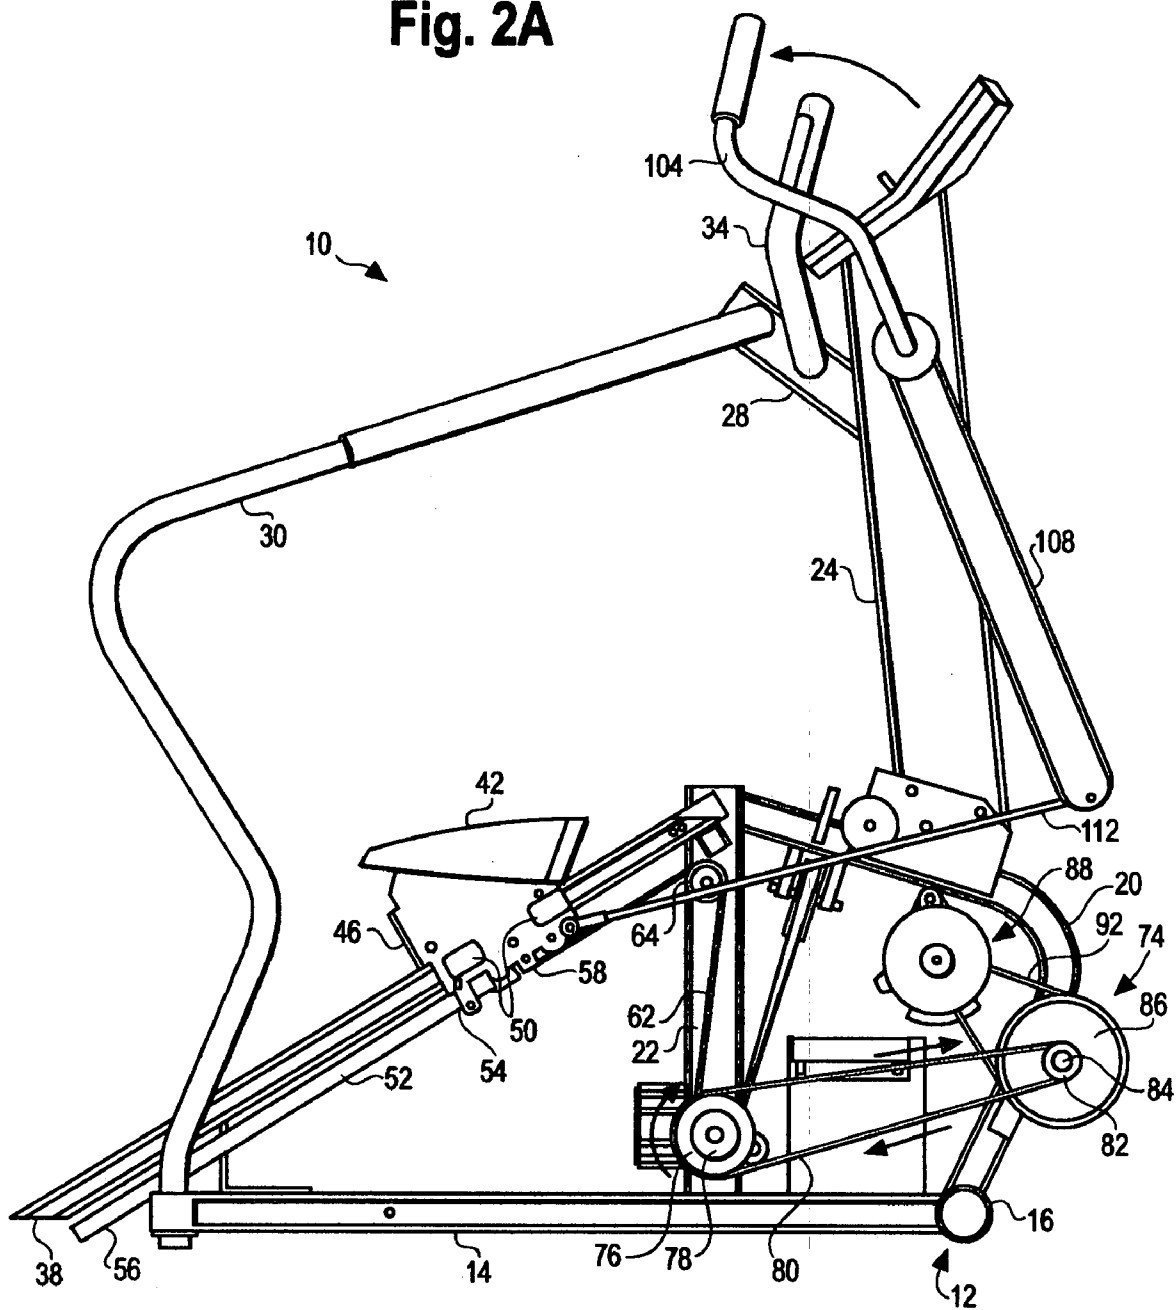


Fig. 2B

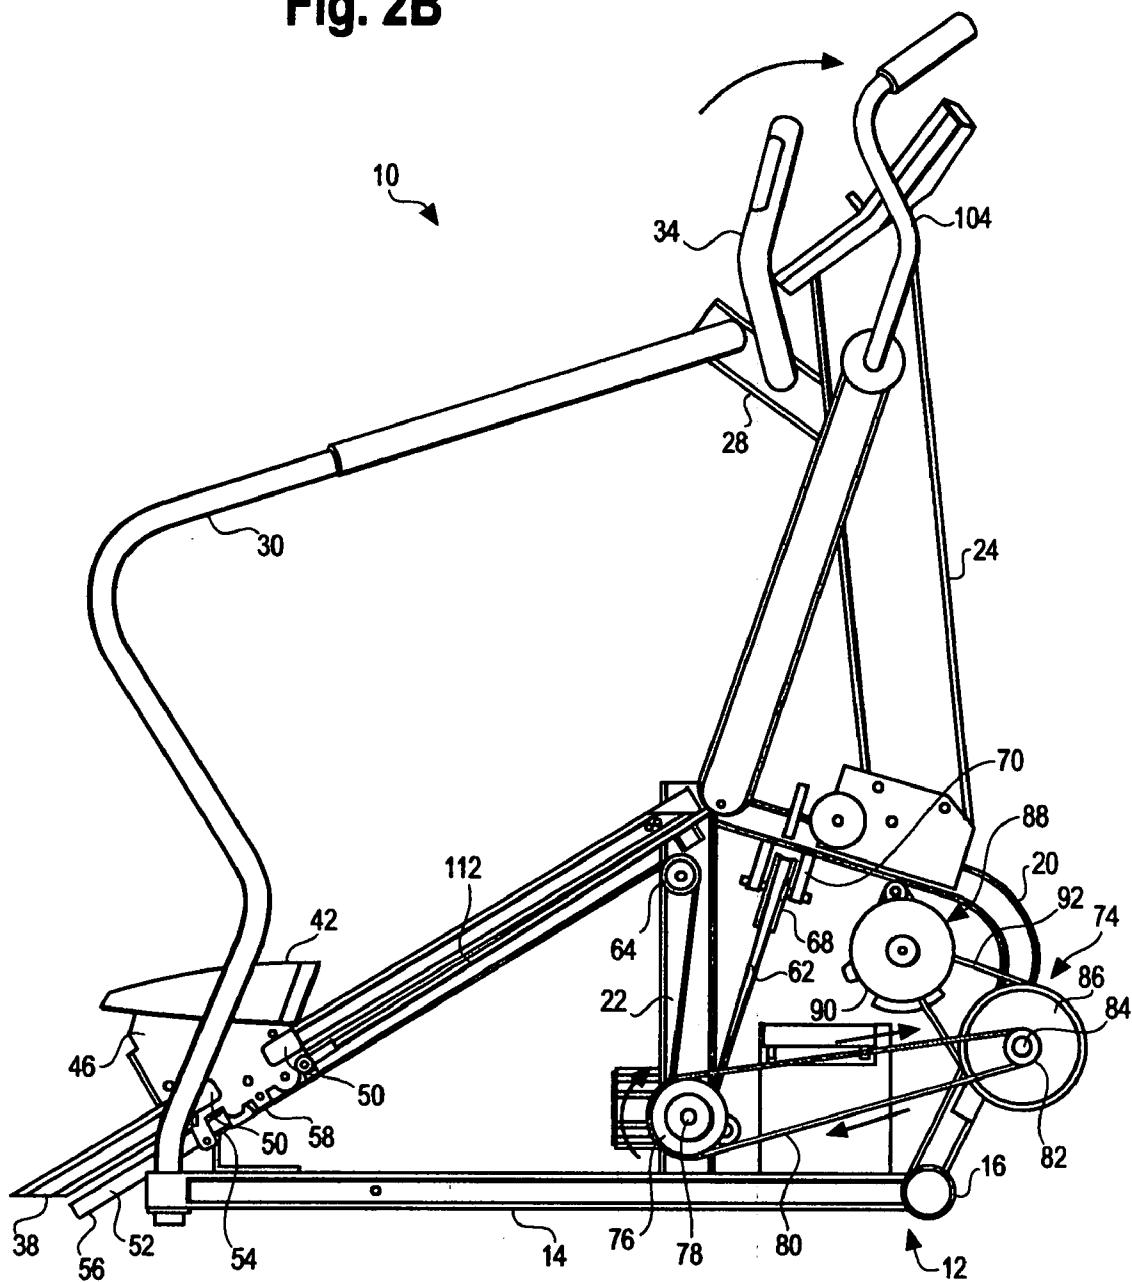


Fig. 3

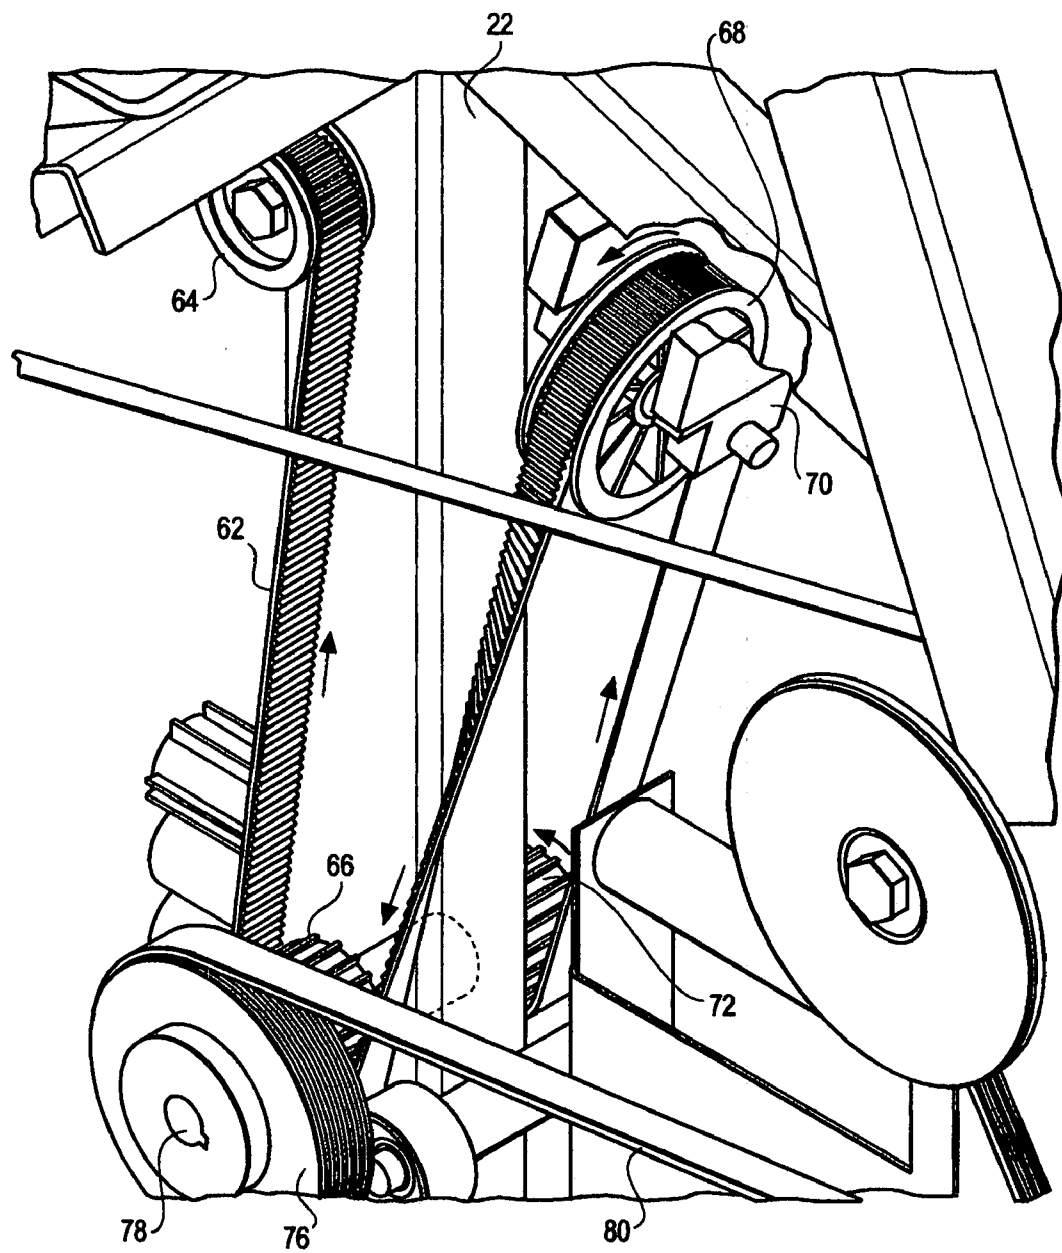


Fig. 4

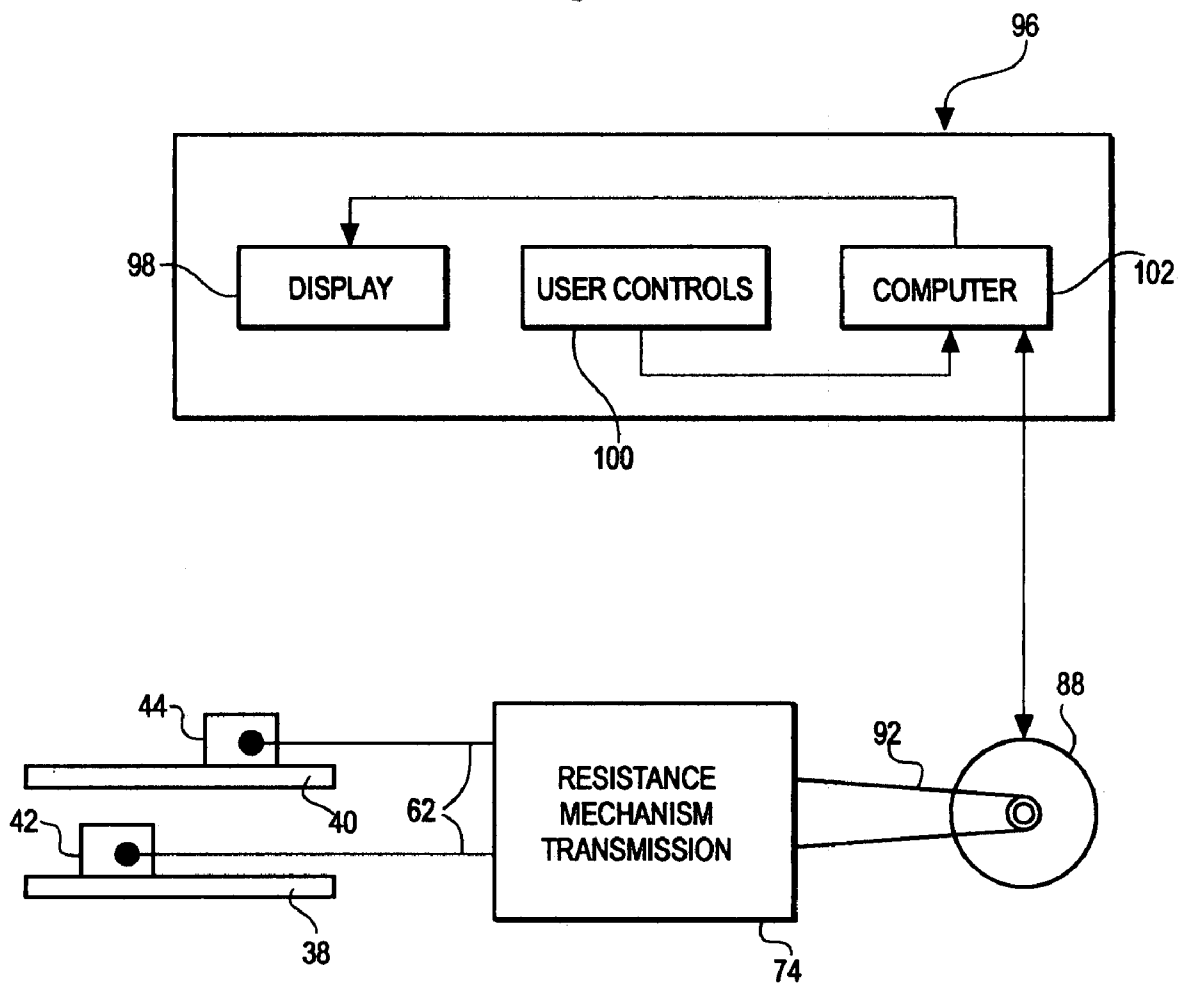


Fig. 6

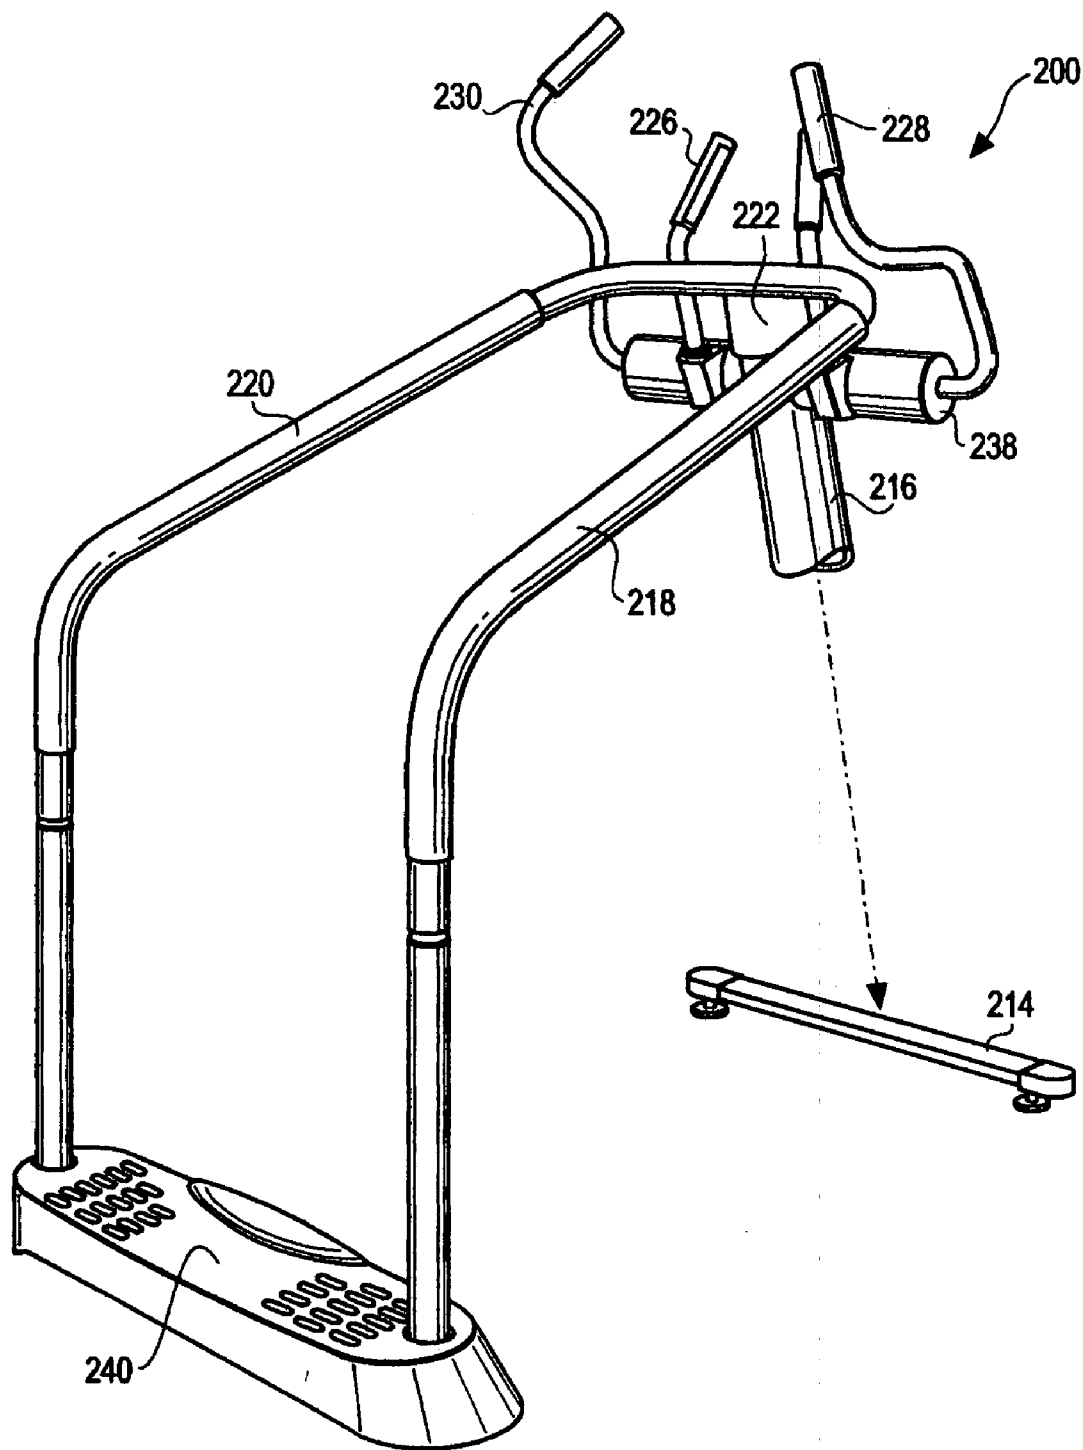


Fig. 7

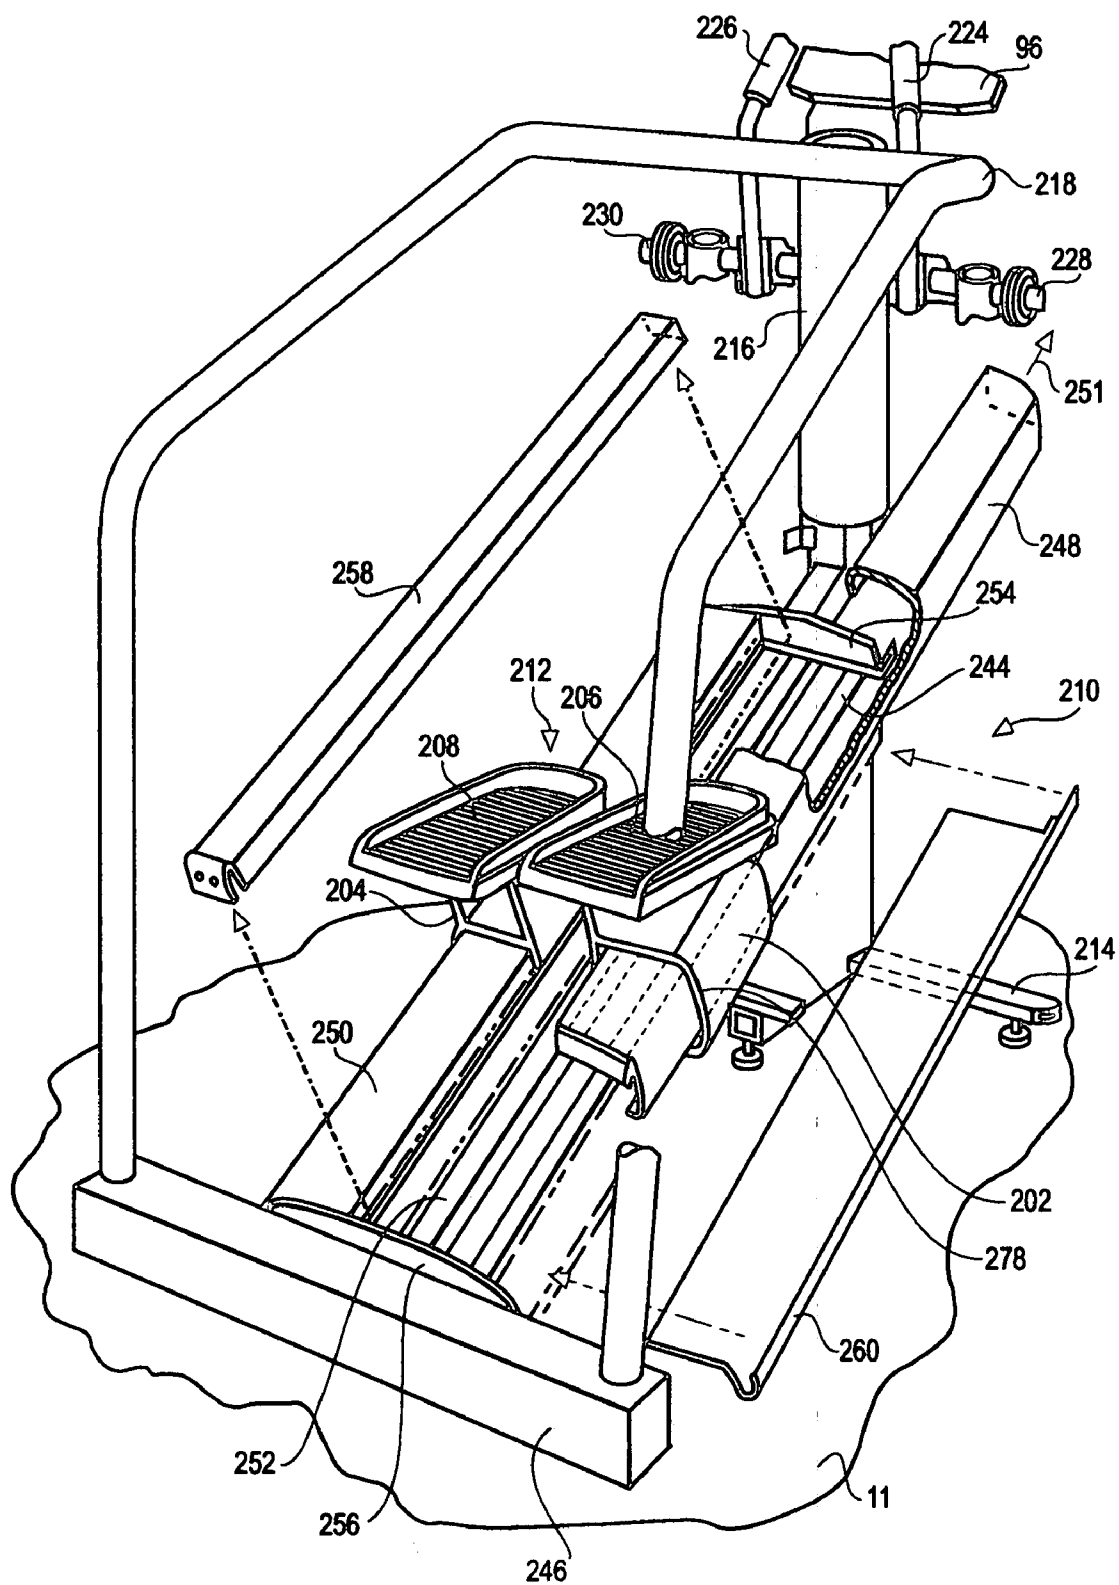


Fig. 8

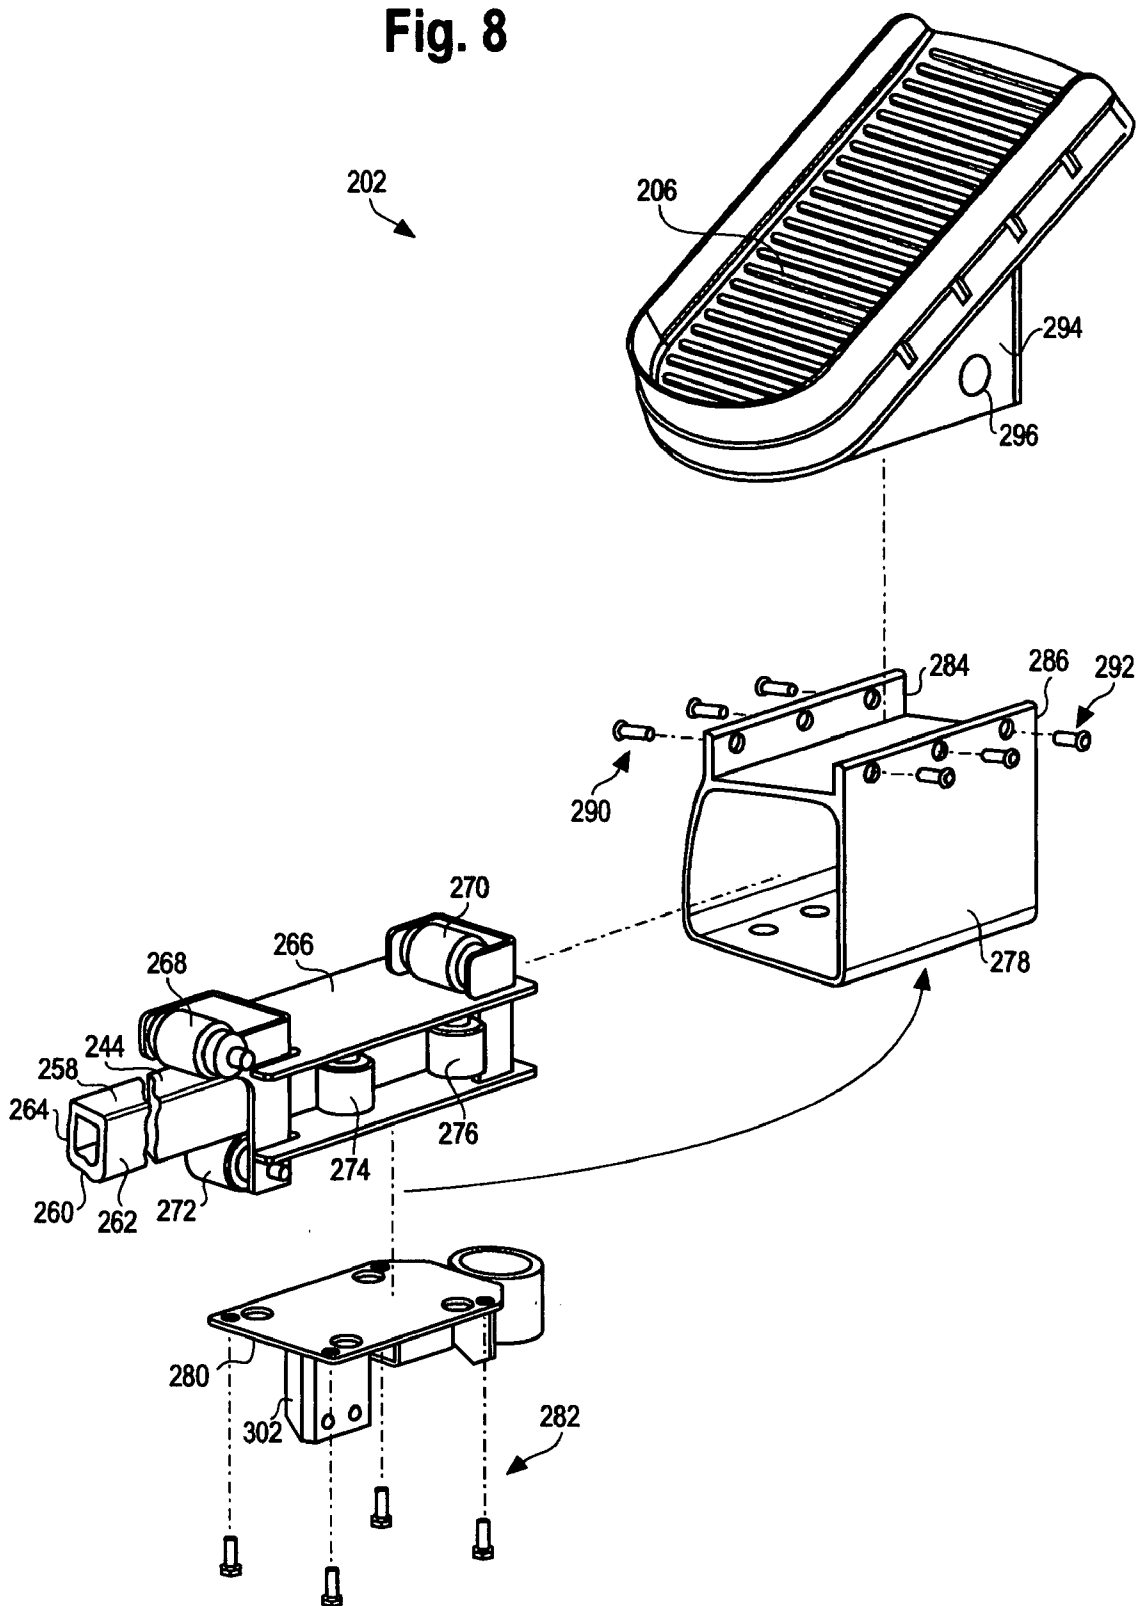
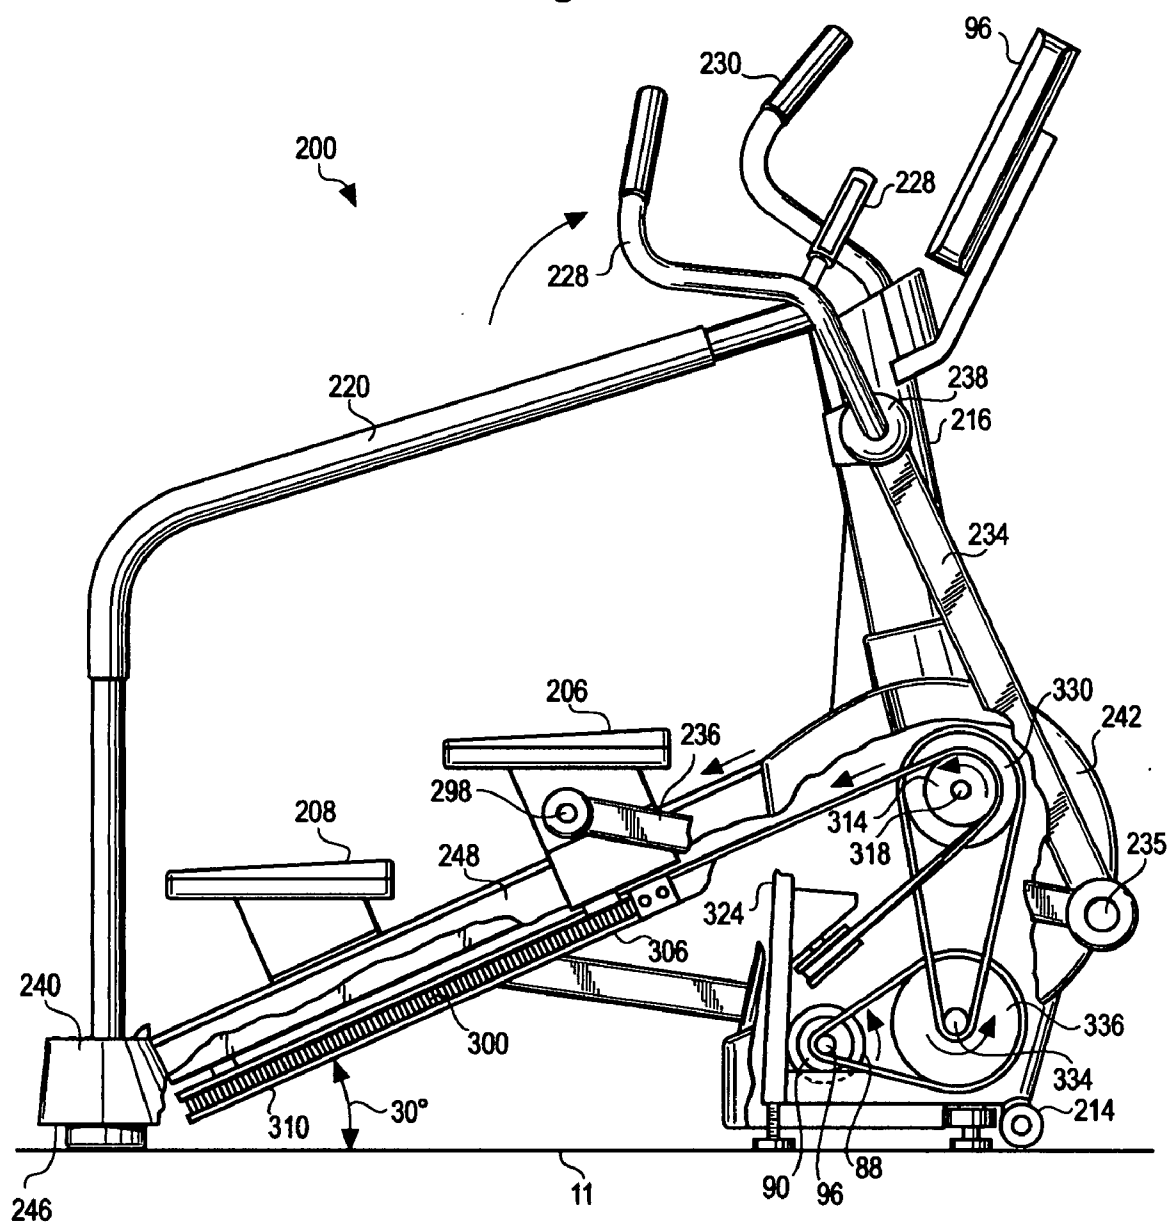


Fig. 9



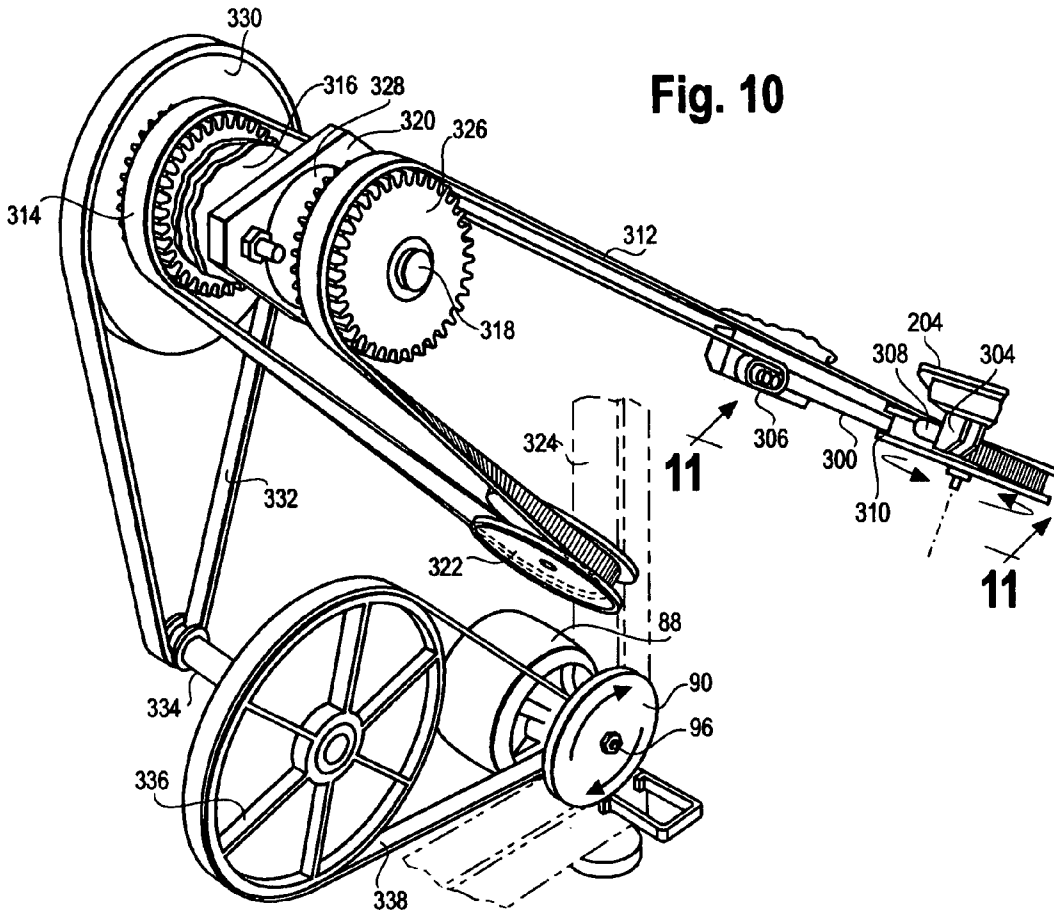


Fig. 10

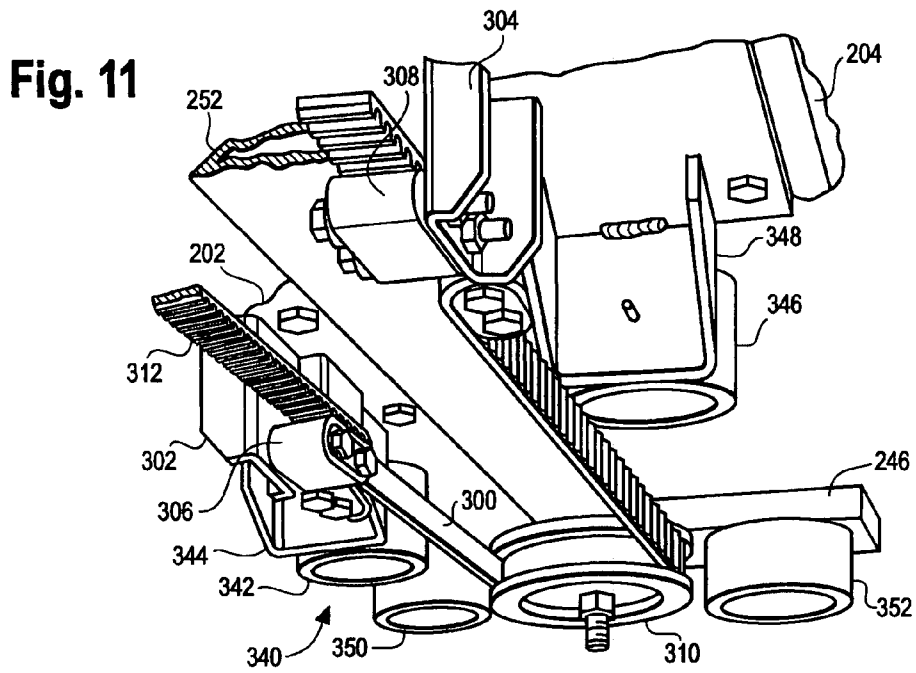


Fig. 11

Fig. 12A

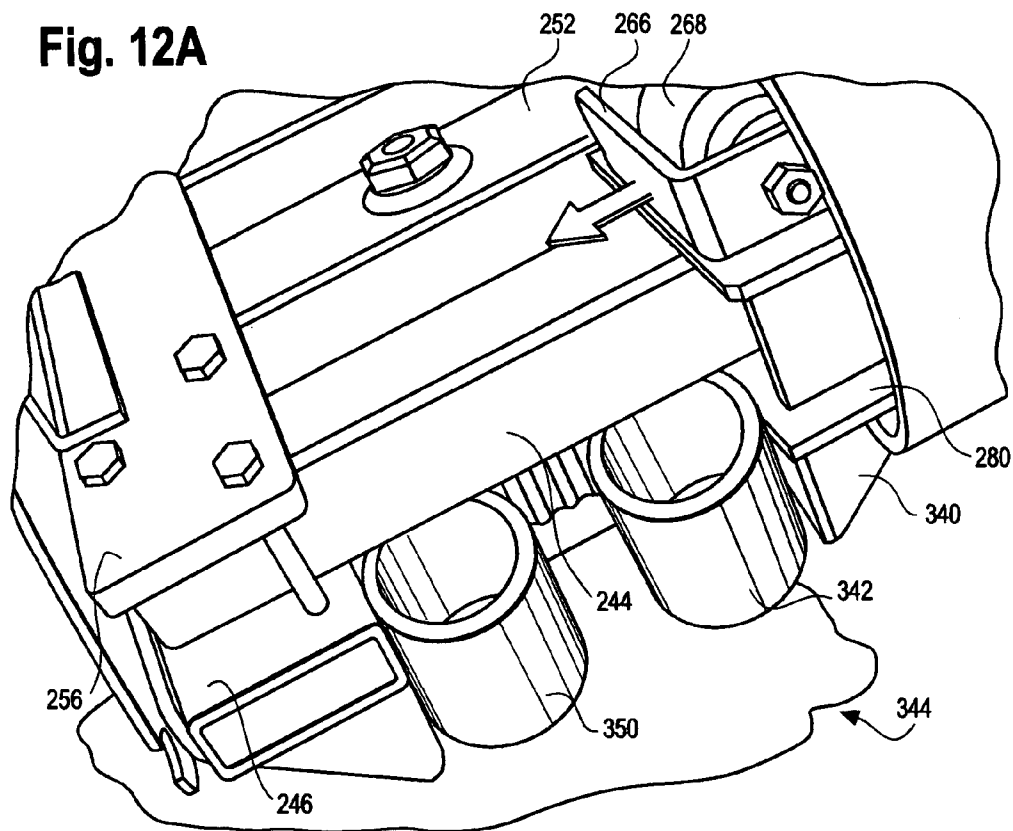


Fig. 12B


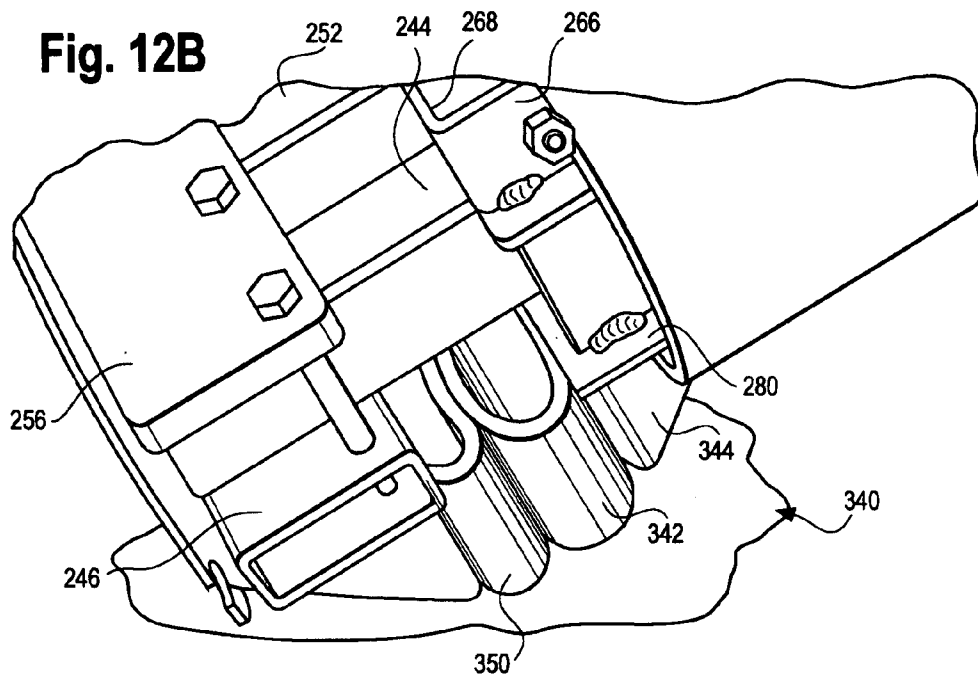


Fig. 13

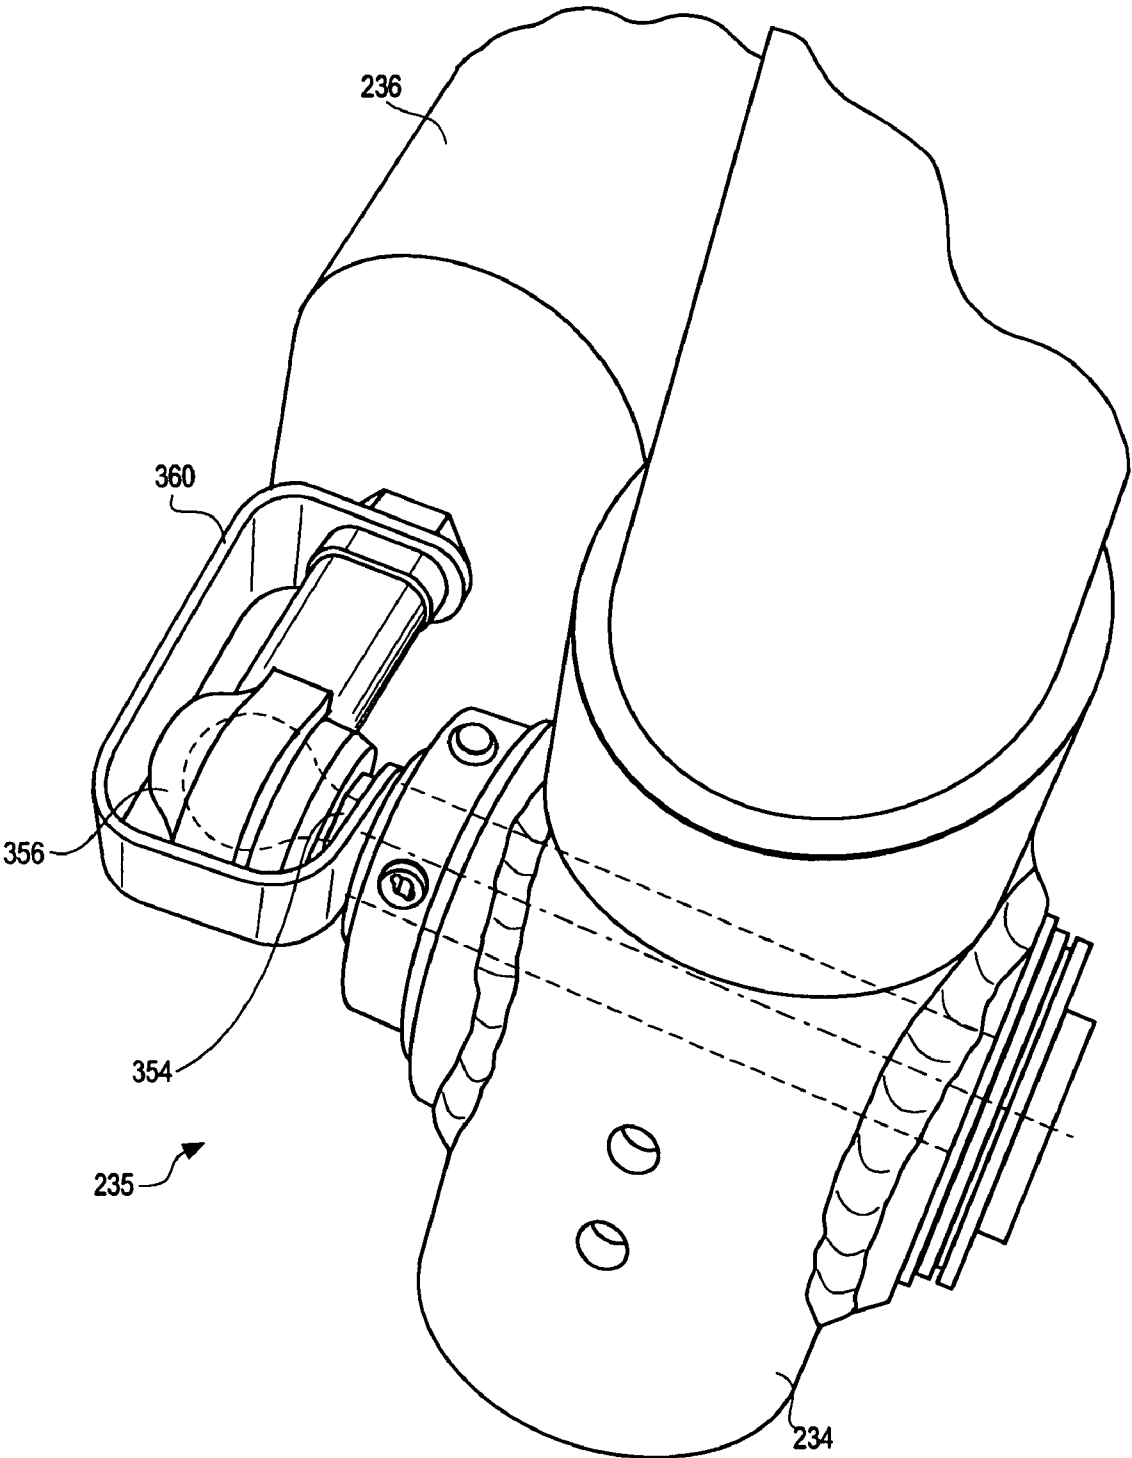

CLIMBER APPARATUS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority on provisional application Ser. No. 60/781,838, filed Mar. 13, 2006.

FIELD OF THE OF THE DESCRIBED APPARATUS

[0002] The described apparatus relates generally to exercise equipment and, more particularly, to exercise equipment that can be used to provide a user with a climbing type exercise.

BACKGROUND

[0003] Climbing is recognized as a particularly effective type of aerobic exercise, and as a result, exercise machines facilitating this type of exercise are popular for both home and health club use. There have been a variety of approaches taken in designing stair climbing apparatus as illustrated in U.S. Pat. Nos. 3,497,215, 4,687,195, 5,135,447, 5,180,351, 5,195,935, 5,222,928, 5,238,462, 5,318,487, 5,403,252, 6,855,093, 7,153,238 and Re. 34,959 as well as PCT application WO/94/02214. Typically these machines utilize a pair of pedals which are adapted for vertical reciprocating motion to provide a user who is standing on the pedals with a simulated climbing exercise. The vertical reciprocating motion is generally translated into a rotary motion by a suitable system of belts, gears and clutches, for example. The rotary motion that is imparted to a shaft, flywheel or the like is usually opposed by a variable source of resistance force, typically an alternator, eddy current break or the like that is responsive to a control signal for selectively varying the level of resistance. Also, it is not unusual to include features such as controlling and monitoring the speed of the pedals by the operator or by computer programs. Other approaches additionally provide for an upper body workout. For example, many health clubs have climbing walls. Another example is the Versa Climber apparatus sold by Heart Rate, Inc. of Costa Mesa, Calif. which is a mechanical hydraulic device that along with pedals provides a set of moveable handholds for an upper body workout.

SUMMARY OF THE DESCRIPTION

[0004] Therefore, given the increasing popularity of climbing as an exercise, one object of the described apparatus is to provide an improved climbing exercise apparatus as well as an apparatus that can provide for an improved climbing experience.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIG. 1 is a right perspective side view of a climber mechanism illustrating a first embodiment of certain aspects of a climber mechanism;

[0006] FIGS. 2A and 2B provide a right side view of the mechanism of FIG. 1 with pedals, a handrail and arm handles in a first and in a second position respectively;

[0007] FIG. 3 is an enlarged perspective side view of a portion of the belt and pulley arrangement of the mechanism of FIG. 2B; and

[0008] FIG. 4 is a schematic and block diagram of a control system for the mechanism of FIGS. 1 and 5.

[0009] FIG. 5 is a right perspective side view illustrating certain aspects of a second embodiment of a climber mechanism;

[0010] FIG. 6 is a right perspective side view of a portion of the climber mechanism of FIG. 5 illustrating certain aspects of the handle bar arrangement and support frame;

[0011] FIG. 7 is a sectioned right perspective side view of a portion of the climber mechanism of FIG. 5 illustrating certain aspects of the track and pedal assemblies;

[0012] FIG. 8 is an exploded view of the pedal assembly of FIG. 8;

[0013] FIG. 9 is a right sectioned view of the climber of FIG. 5 illustrating a load and pedal connection assembly that can be used with the climber of FIG. 5;

[0014] FIG. 10 is an enlarged sectioned perspective view of the load and pedal connection assembly of FIG. 9;

[0015] FIG. 11 is an enlarged sectioned bottom perspective view taken along lines 11-11 of FIG. 10 illustrating a portion of the pedal connection assembly and a pedal impact absorption arrangement;

[0016] FIG. 12A and FIG. 12B provide enlarged side perspective views of the pedal connection assembly of FIG. 11 in a first and in a second position respectively;

[0017] FIG. 13 is a sectioned enlarged top perspective view of a pedal link to rocker connection assembly that can be used with the climber of FIG. 5.

DETAILED DESCRIPTION

[0018] FIGS. 1, 2A-B and 3 provide views of an example of a first embodiment of a climber mechanism 10 that provides an illustrative environment for describing certain aspects a climber mechanism 10. For simplicity, only the right pedal, handrails and arm handles of the climber mechanism 10 are shown in FIGS. 2A-B. Support for the mechanism 10 on a horizontal support surface 11 such as a floor is provided by a frame 12 that includes: a horizontal frame member 14, a forward floor support 16, a rear floor support 18, a curved center support 20 secured to the horizontal support member 14 and forward floor support 16, a central vertical frame member 22 secured between the horizontal frame member 14 and the curved center support 20, and a vertical support member 24 secured to the curved center support 20 by a pair of brackets 26 and to the horizontal support member 14. In addition, extending from a handrail support 28 that is attached to the vertical support member 24 is a pair of side handrails 30 and 32 and a pair of generally upwardly extending fixed hand supports 34 and 36. In the embodiment shown in FIGS. 1-3 a pair of tracks 38 and 40 are connected to the vertical frame member 22 and the horizontal frame member 14 at an angle of preferably about 30 degrees to the floor. It has been found that an angle of 30 degrees provides the preferred angle to simulate the climbing of terrain such as hills, although variations of 10 to 15 degrees from the preferred 30 degrees can in some circumstances be desirable. A rear frame member 41 is located between the tracks 38 and 40 and likewise connected to the vertical frame member 22 and the horizontal frame member 14 such that the member 41 is parallel to the tracks 38 and 40.

[0019] The climbing mechanism includes a pair of pedals 42 and 44 that are mounted for movement along the tracks 38 and 40 respectively. Although the pedals 42 and 44 can be mounted on the tracks 38 and 40 by a number of different mechanisms, preferably a pair of pedal support mechanisms

46 and **48** of the type as shown in FIGS. 6 and 7 of U.S. Pat. No. 6,905,441 are used for this purpose and in this case would include a set of guide rollers **50**. By the same token, the tracks **38** and **40** are substantially linear although there may be some implementations of the climbing mechanism **10** where nonlinear or curved tracks might be desirable. In this particular implementation of the climber **10**, a belt **52** is attached to a lower rear portion of each of the pedal support mechanisms **46** and **48** at a point **54** and lead around a pulley **56** that in turn is rotatably attached to the rear frame member **41**. Also attached at a point **58** of the right pedal mechanism **46** and to a point **60** of the second pedal mechanism **48** is a drive belt **62**. Preferably, the belt **52** is a ribbed rubber belt but other flexible members can be used such a linked chain. In the embodiment of the climber mechanism shown in FIGS. 1-4, the drive belt **62** extends from the first pedal mechanism **46** to an idler pulley **64** mounted for rotation on frame member **22** then extends to downwardly over the pulley **64** to a first one way clutch **66**. The drive belt **62** is engaged with a grooved pulley on the first one way clutch **66**, twisted 90 degrees and extends up and over a central idler pulley **68**. The central idler pulley **68** is mounted for rotation on the frame member **20** utilizing a pulley support structure **70** as shown in the figures. Twisted back 90 degrees, the control belt **62** is engaged with a second one-way clutch **72** mounted for rotation on frame member **22** then extends to the attachment point **60** on the second pedal mechanism **44**.

[0020] In operation, the pedal connection mechanism including belt **52**, although not necessary for the basic operation of the climber **10**, will act to cause one of the pedals, for example pedal **42** to move downwardly along track **38** when the other pedal, for example pedal **44** moves upwardly along the track **40**. By the same token, the pedal connection mechanism including the drive belt **62** will act to cause one of the pedals, for example pedal **42** to move upwardly along track **38** when the other pedal, for example pedal **44** moves downwardly along the track **40**. These connection mechanisms result in what can be termed a dependent pedal operation where the motion of the pedals **42** and **44** are dependent on the motion of the other pedal. This represents the preferred operation of the climber **10**, but it should be understood that under certain circumstances independent operation of pedals might be considered desirable for a climber mechanism.

[0021] FIGS. 2A, 2B and 3 illustrate one type of mechanism that can be used for providing a load or resistance to movement of the pedals **42** and **44** in a downward direction. Included in the resistance mechanism, indicated generally at **74**, is a drive pulley **76** secured to a shaft **78**. The shaft **78** is mounted for rotation in the vertical frame member **22** and in this embodiment **10** both of the one way clutches **66** and **72** are also secured to the shaft **78** for rotation with the shaft **78**. A first belt **80** is engaged with the drive pulley **76** and a first intermediate pulley **82** that is secured for rotation on a shaft **84** that in turn is mounted for rotation on the curved frame member **20**. Also secured for rotation with the shaft **84** is a second intermediate pulley **86**. To provide a resistance force, an alternator **88** that includes a flywheel **90** is secured to the curved frame member **20** and is connected to the second intermediate pulley **86** by a second drive belt **92** engaged with an alternator pulley **94** secured on an alternator shaft **96** as is the flywheel **90**. In this embodiment of the resistance mechanism **74**, the pulleys **76**, **86** and **94** along

with the intermediate belts **80** and **92** form a speed increasing transmission so that the alternator shaft will rotate at a significantly greater speed than the shaft **78**. It will be appreciated that the transmission has been described in terms of the preferred embodiment, but there are many different arrangements that can be used for providing a resistance force to the pedals **42** and **44** including different types of transmission mechanisms such as geared arrangements and hydraulic mechanisms along with different sources of a resistance force including eddy current brakes and friction mechanisms.

[0022] As illustrated in FIG. 4, this embodiment **10** of the climber mechanism, also has, as is conventional in exercise equipment of this type, a control panel **96** that includes an information display **98** and a set of user controls **100**. In this embodiment **10**, the control panel **96** is secured to the vertical support member **24** and includes a microprocessor **102** for controlling the climbing mechanism **10**. It should be noted that the microprocessor **102** or a similar control circuitry can be located elsewhere on the climber mechanism **10**. One of the advantages of the type of apparatus described herein, especially the use of linear tracks **38** and **40** for the foot pedals **42** and **44** where the pedals **42** and **44** are connected for dependent operation, as for example by the single belt **62**, is that it is possible for the apparatus **10** to maintain a constant torque on the one way clutches **66** and **72**. This characteristic facilitates the implementation of exercise programs where either the pedals **42** and **44** are maintained at a constant speed by varying the resistance generated by the alternator **88** or the alternator **88** can be programmed to provide a constant resistance where the pedals **42** and **44** vary in speed.

[0023] The climber mechanism **10** as described above can be modified to also provide a total body exercise program. As shown in FIGS. 1-3, this embodiment of the upper body mechanism can include a pair of moveable arm handles **104** and **106**. Here, the moveable arm handles **104** and **106** are pivotally attached to the vertical frame member **24** along with a pair of corresponding arm extensions or rocker members **108** and **110**. The arm rockers **108** and **110** are in turn connected to the pedal support mechanisms **46** and **48** by a pair of links **112** and **114** that can be comprised of rods or metal tubes for example. It should be noted that the links **112** and **114** are preferably composed of a rigid material but, under certain circumstances, a flexible material such as a wire cable could be used where, for example, some independence between the movement of the pedals **42** and **44** and the arm handles **104** and **106** is desired. As a result of the arm handle assemblies that include the rockers **108** and **110** along with the links **112** and **114**, the moveable arm handles **104** and **106** will move in synchronism with the corresponding foot pedals **42** and **44** thereby providing the user with exercise that involves his arms and upper body as well as his legs and lower body. As noted above, other arrangements can be used to connect the arm handles **106** and **108** to the pedals **44**. For example, flexible members such as cables can be used instead of the rods **112** and **114** especially in the type of apparatus where the belt **52** is used to connect the pedal support mechanisms **46** and **48**.

[0024] FIGS. 5-13 depict various aspects of a second and preferred embodiment **200** of a climber mechanism. As with the embodiment **10** shown in FIGS. 1-3, the climber **200** includes a control panel **96** having a display **98** and user

controls 100. In general, the climber 200 can operate in the same manner as the embodiment 10 described above.

[0025] FIGS. 5 and 6 provide perspective external views of the climber 200 that includes a pair of foot pedal assemblies indicated at 202 and 204, each having a foot pedal 206 and 208. To provide a climbing motion, the foot pedal assemblies 202 and 204 move or reciprocate along a pair of track assemblies 210 and 212 that is shown in detail in FIG. 7. Various frame elements such as a front forward floor support 214 and a vertical frame member 216 provide support for the climber 200 on the horizontal surface 11. In the preferred embodiment, the vertical support 216 is a monocolumn formed out of a generally cylindrical metal tube. A pair of side handrails 218 formed out of a cylindrical and 220 can be added to the climber 200. In the preferred embodiment, the handrails 218 and 220 are formed out of a single tubular material and are secured to the vertical member 216 by a bracket 222 or other suitable connection means. In addition to providing support for a user on the climber 200 the handrails 218 and 220, although not necessary to the operation an apparatus of the type 200, can provide additional structural support or act as part of the frame structure for the climber 200. In addition to the handrails 218 and 220, the preferred embodiment of the climber 200 includes a pair of fixed arm handles 224 and 226 that are secured to the frame and in this case the vertical frame member 216.

[0026] In the preferred embodiment, the climber 200 also provides a total body exercise capability by, in this embodiment, including a pair of movable arm handles 228 and 230 that are connected to the foot pedal assemblies 202 and 204 for movement in unison therewith. In this case, the movable arm handles 228 and 230 are included in a pair of an arm handle assemblies where the right arm handle assembly is indicated generally by 232. Although various arrangements of levers, gears, cables, hydraulics and the like can be used, the preferred embodiment of the arm handle assembly 232 includes a rocker member 234 pivotally connected at a point 235 to a link member 236. Here, the rocker 234 is secured to a hub member 238 that in turn is free to rotate about a shaft (not shown) which can be secured to the monocolumn 216 or other parts of the frame. Also, attached to the hub 238 is the arm handle 228. As a result, the arm handle assembly 232 is effective to connect the arm handle 202 to the foot pedal assembly 202 such that the arm handle 202 will rotate back and forth as the foot pedal 206 moves up and down along the track assembly 212. The left arm handle assembly including the arm handle 230 operates in the same manner.

[0027] Another aspect of the climber 200 is the addition of a step 240 secured over the ends of the handrails 218 and 220. The step 240 makes it easier for a user mount the climber 200 by shortening the distance the user needs to reach or step on to the pedals 206 and 208. The climber 200 additionally includes a housing 242 as a protective element.

[0028] FIG. 6 illustrates another feature which is a three point support arrangement for the climber 200 where the climber 200 is essentially supported on the floor 11 by the monocolumn 216 and the handrails 218 and 220. The track assemblies 210 and 212 can also be used to provide this support. This arrangement makes it possible to do away with a longitudinal frame member such as the horizontal frame member 14 shown in FIG. 2A.

[0029] FIG. 7 is a sectioned view depicting details of the track assemblies 210 and 212 of the preferred embodiment of the climber 200. Each of the track assemblies 210 and 212 includes a track, represented by the right track 244, that are secured at their forward end to the monocolumn 216 and their rearward end to a horizontal rear floor support member 246. Covering the tracks including the track 244 are a pair of track covers 248 and 250. The track cover 248 is shown in FIG. 7 in broken away form and slid upwardly and in a forward direction as indicated by an arrow 251. This arrangement allows ready access to the tracks, including track 244, for assembly and maintenance purposes. Also, the preferred structure of the climber 200 includes a central structural member 252 that is directly connected between the monocolumn 216 and the rear support member 246. In this particular implementation of the track assemblies 210 and 212, a bracket arrangement 254 is used to connect the tracks, including track 244, to the central structural member 252 and hence to the monocolumn 216 and a second bracket or clamping arrangement indicated at 256 can be used to connect the tracks including track 244 to the rear support member 246 and the central structural member 252. In this embodiment, a central cover 258, shown in exploded form in FIG. 7, is used to cover the central structural member 252. Also, a pair of lower track housings, represented at 260, can be used to further enclose the track assemblies 210 and 212. The step 240, as shown in FIGS. 5 and 6, also serves to enclose the rear floor support member 246 as well as the bracket arrangement 256. It should be appreciated that by using housings and covers of the type 248, 250, 256, 258 and 260, not only can user safety be enhanced but maintenance activities can be reduced since elements of the pedal assemblies 202 and 204 as well as the track assemblies can be substantially enclosed and largely protected from sweat and other user generated debris.

[0030] FIG. 8 illustrates in exploded form the preferred embodiment of the pedal assembly 204 which is configured to operate on the track 244 that has a rectangular cross-section having an upper 258 and a lower 260 planar surfaces along with a pair of planar side surfaces 262 and 264. A roller carriage 266 having a front top roller 268 and a rear top roller 270 along with a bottom roller 272 is engaged with the track 244. Additionally, the carriage 266 can also include one or more side rollers such as a set of rollers 272 and 274 that abut the lateral surface 262 of the track 244 along with one or more side rollers that abut the other lateral side surface 264 of the track 244 in order to aid in aligning the carriage 266 on the track 244. It will be appreciated, that although a number of roller arrangements can be used with a track of the type 244 such as the configuration shown in U.S. Pat. No. 6,905,441, the arrangement shown in FIG. 8 is preferred since the two top rollers 268 and 270 in combination with a single bottom roller 272 located beneath provides sufficient support for the pedal 206 on the track 244 for a climber type apparatus of the type 200, especially when the tracks are orientated at about a thirty degree angle with the floor 11.

[0031] The carriage 266 in the preferred embodiment of the pedal assembly 202 is then secured within a pedal bracket 278 with a lower attachment plate 280 with a set of fasteners indicated at 282. The pedal 206 is attached to a pair of flanges 284 and 286 configured on the upper portion of the pedal bracket 278 by a set of fasteners indicated at 290 and 292 that are secured through a pair of mounting mem-

bers such as 294 configured in the pedal 206. As shown in FIGS. 5 and 6, the pedal bracket 278 also encompasses the track cover 248 permitting the carriage 266 and hence the pedal 206 to move along the track 264. In this embodiment, the mounting member 294 also includes an aperture 296 for receiving a shaft 298 that is used to pivotally connect the link 236 to the pedal assembly 202 as shown in FIG. 5.

[0032] FIGS. 9, 10 and 11 depict the preferred arrangement, which can be used in the climber 200 to control the operation of the pedals 206 and 208 including providing a load or resistance to the downward movement of the pedals 206 and 208. In this particular implementation of the climber 200, a belt 300 is attached to a bracket 302 and 304 that extends from the lower portion of the pedal assemblies 202 and 204 respectively. The belt 300 is attached to the brackets 302 and 304 by a pair of clamping assemblies 306 and 308 and lead around a pulley 310 that in turn is rotatably attached to the central structural member 252. Also attached by the clamping assembly 306 of the right pedal assembly 202 and to the clamping assembly 306 of the left pedal assembly 308 is a drive belt 312. As with the belt 62, the belt 312 is preferably a ribbed rubber belt but other flexible members can be used such a linked chain. In the embodiment of the climber mechanism 200 the drive belt 312 extends from the first pedal assembly 202 to a grooved pulley 314 secured for rotation with a first one-way clutch 316 that in turn is mounted for rotation on shaft 318 secured to a frame member indicated at 320. The drive belt 312 is twisted 90 degrees and extends down and under an idler pulley 322 that is mounted for rotation on a frame member 324. Twisted back 90 degrees, the drive belt 312 is engaged with a second grooved pulley 326 which is secured to a second one-way clutch 328 that is mounted for rotation on the shaft 318. The drive belt 312 then extends to the attachment point 308 on the pedal assembly 204.

[0033] As represented in FIGS. 9 and 10 in essentially schematic form, resistance is preferably provided by a mechanism that includes a drive pulley 330 secured for rotation with the shaft 318. A first belt 332 is engaged with a shaft 334 or small pulley mounted for rotation on the frame. An intermediate pulley 336 is secured for rotation on the shaft 334. To provide the resistance force, the alternator 88 that includes the flywheel 90 is mounted to the frame 20 and is connected to the intermediate pulley 336 by a second belt 338 engaged with an alternator pulley (not shown) secured on the alternator shaft 96 as is the flywheel 90. In this embodiment, the pulleys 330 and 336 along with the belts 332 and 338 form a speed increasing transmission so that the alternator shaft 96 will rotate at a significantly greater speed than the shaft 318. As with the transmission 74 described above in connection with the embodiment of FIGS. 1-3 it will be appreciated that the transmission has been described in terms of the preferred embodiment, but there are many different arrangements that can be used for providing a resistance force to the pedals 206 and 208 including different types of transmission mechanisms such as geared arrangements and hydraulic mechanisms along with different sources of a resistance force including eddy current brakes and friction mechanisms.

[0034] FIGS. 11, 12A and 12B illustrate the preferred embodiment of an impact absorption assembly 340 that can be used with an exercise apparatus such as the climber 200. One of the objects of the impact absorption assembly 340 is to reduce impact forces on the user's feet as the pedals 206

and 208 reach or hit the bottom of the apparatus 200. In this particular embodiment, a resilient member 342 is secured to a support flange 344 extending downwardly from the plate 280 on the pedal assembly 202 and a corresponding resilient member 346 is secured to a support flange 348 on the other pedal assembly 204. In addition to or alternatively a second set of resilient members 350 and 352 can be attached to the lower end of the climber 200 such as the member 246 and aligned with the resilient members 342 and 346 respectively so that the members 342, 346, 350 and 352 will compress when the downward motion of each of the pedals 206 and 208 terminates at the bottom of the apparatus 200 as depicted in FIGS. 12A and 12B. Although a variety of materials and configurations can be used as resilient members including metal springs, the preferred construction is an elliptically shaped member composed of an elastomeric material. One advantage of an elliptical configuration is that it provides a variable deflection rate which tends to further reduce impact stresses on the user's feet and legs. Also, as shown in FIG. 12B, one of the resilient members, here 350, has a greater deflection rate than the other resilient member 342 which can further reduce impact stresses. TECSPAK® elastomeric bumpers provide a suitable configuration and material for the resilient members 342, 346, 350 and 352.

[0035] FIG. 13 shows a preferred method for pivotally attaching the rocker 234 to the link 236 at point 235. As depicted in the sectioned away view of FIG. 13, a shaft 354 is inserted through the rocker 234 with a ball and socket assembly 356 attaching an end 358 of the link member 236 to the shaft 354. To prevent rotation of the link 236 about its axis, a spring clip 360 is secured at a first end between the rocker 234 and the ball joint 356 on the shaft 354 and at its other end to the end 358 of the link member.

[0036] The above descriptions represent preferred embodiments of a climber mechanism intended for heavy duty health club type usage along with the preferred embodiments of various features and arrangements that can be used in this type exercise machines or related machines such as stairclimbers. The inclusion and implementation of various features such as moving arm handles, pedal mechanisms, resistive load mechanisms and shock absorption arrangements will depend on a number of factors including the purpose and cost of the apparatus. For example, for machines that are intended for health club usage a sophisticated control system is made possible by the use of an alternator whereas in a low cost home machine, a simple friction device might suffice and an impact absorption mechanism might not be considered necessary.

We claim:

1. An exercise apparatus adapted for placement on a horizontal surface comprising:

- a support frame having a substantially vertical support column at the forward end of the apparatus having one end disposed to the horizontal surface, a pair of side handrails secured to an upper portion of said vertical support column and extending rearwardly and downwardly in parallel, and a horizontal support member disposed to the horizontal surface connected to said side handrails such that said support frame forms a three point support structure;
- a first and a second track secured to said horizontal support member and said support column at an angle with respect to the horizontal surface;

a first and a second foot pedal assembly, each including a foot pedal, wherein said foot pedal assemblies are engaged with said first and second tracks respectively for movement along said tracks;

a first arm handle assembly including a first arm handle operatively connected to said frame and said first foot pedal assembly such that said first arm handle will move in unison with said first foot pedal assembly; and

a second arm handle assembly including a second arm handle operatively connected to said frame and said second foot pedal assembly such that said second arm handle will move in unison with said second foot pedal assembly.

2. The apparatus of claim 1 including a shaft secured to said vertical support column and wherein said first and second arm handle assemblies are rotatably secured to said shaft.

3. The apparatus of claim 2 wherein said first and second arm handle assemblies include a first and a second rocker respectively and wherein said first and second rockers are rotatably connected to said shaft and secured to said first and second arm handles respectively for movement therewith.

4. The apparatus of claim 3 wherein said first and second arm handle assemblies include a first and a second link member respectively wherein said link members are pivotally connected to said first and second rockers and said first and second foot pedal assemblies.

5. The apparatus of claim 4 wherein a first and a second spring clip pivotally connect said first and second link members to said first and second pedal assemblies respectively.

6. The apparatus of claim 1 wherein said first and second tracks each include an upper planar surface and a lower planar surface and said pedal assemblies each include a roller carriage and a pair of upper rollers and a lower roller wherein said rollers rotatably secured to said carriage such that said upper rollers abut said upper planar surface and said lower roller abuts said lower planar surface.

7. The apparatus of claim 6 wherein said pedal assemblies each include at least one guide roller rotatably secured to said roller support bracket such that said guide roller abuts a lateral side of said track.

8. The apparatus of claim 6 wherein each of said pedal assemblies include a pedal bracket encompassing said tracks and secured to said roller support bracket and wherein a pedal is secured to said pedal bracket.

9. The apparatus of claim 8 additionally including a first and a second track cover secured respectively to said support frame over said first and second planar surfaces of said tracks.

10. The apparatus of claim 9 wherein said pedal brackets are secured to said support frame over said track covers.

12. The apparatus of claim 10 additionally including a central cover secured to said support frame between said tracks.

13. The apparatus of claim 1 wherein said angle with respect to the horizontal surface is approximately 30 degrees.

14. The apparatus of claim 1 additionally including a step secured to said horizontal support member.

15. An exercise apparatus comprising:
 a frame adapted for placement on a horizontal surface;
 a first substantially linear track secured to said frame and a second substantially linear track secured to said frame in parallel with said first track wherein said first and second tracks are secured to said frame at an incline from said horizontal surface and wherein said first and second tracks each include an upper planar surface and a lower planar surface; and
 a pair of pedal assemblies each one associated with one of said tracks and including a foot pedal, a roller support bracket and a pair of upper rollers and a lower roller wherein said rollers are rotatably secured to said roller support bracket such that said upper rollers abut said upper planar surface and said lower roller abuts said lower planar surface such that said foot pedals can move substantially linearly along said tracks

16. The apparatus of claim 15 wherein each of said pedal assemblies include a pedal bracket encompassing said tracks and secured to said roller support bracket and wherein said pedal is secured to said pedal bracket.

17. The apparatus of claim 15 wherein said angle with respect to the horizontal surface is approximately 30 degrees.

18. An exercise apparatus comprising:
 a frame adapted for placement on a horizontal surface;
 a first track secured to said frame and a second track secured to said frame in parallel with said first track wherein said first and second tracks are secured to said frame at an incline from said horizontal surface and;
 a first and a second track cover secured respectively to said support frame over said first and second said tracks; and
 a pair of pedal assemblies each one including a pedal mechanism having a foot pedal wherein each pedal mechanism is engaged with one of said tracks such that said foot pedals can move along said tracks and wherein each of said pedal mechanisms encompasses its associated track along with its associated track cover.

19. The apparatus of claim 18 additionally including a central cover secured to said frame between said tracks.

20. The apparatus of claim 18 wherein said first and said second tracks are substantially linear and said incline with respect to the horizontal surface is approximately 30 degrees.

* * * * *