



US00D388056S

United States Patent [19]

[11] Patent Number: Des. 388,056

Fago et al.

[45] Date of Patent: **Dec. 23, 1997

[54] ACTUATOR FOR FOOT-OPERATED CONTROL SYSTEM

[75] Inventors: Frank M. Fago, Mason; Brian J. Poland, Fairfield, both of Ohio

[73] Assignee: Liebel-Flarsheim Company, Cincinnati, Ohio

[**] Term: 14 Years

[21] Appl. No.: 44,757

[22] Filed: Sep. 29, 1995

[51] LOC (6) Cl. 13-03

[52] U.S. Cl. D13/167

[58] Field of Search D13/158-178, D13/199; D11/96; 74/512, 560; 200/5 A, 5 R, 61, 865, 89, 293, 294, 303, 308, 309; 340/479, 573

[56] References Cited

U.S. PATENT DOCUMENTS

D. 358,131	5/1995	Lorentzen	D13/162
D. 371,543	7/1996	Van Hout	D13/162
804,595	11/1905	Garhart .	
1,919,968	7/1933	Trabold .	
2,040,672	5/1936	Richter .	
2,199,963	7/1940	Romberger .	
2,293,409	8/1942	Smith .	
2,384,805	9/1945	Arens .	
2,460,494	2/1949	Eisenberg et al. .	
2,482,540	9/1949	Furnas et al. .	
2,707,036	4/1955	Hollub .	
2,762,891	9/1956	Hill et al. .	
3,381,565	5/1968	Haile .	
3,399,287	8/1968	Euler .	
3,536,229	10/1970	Boros .	
3,598,947	8/1971	Osborn .	
3,663,772	5/1972	Grabel et al. .	
3,833,782	9/1974	Bartel .	
3,841,172	10/1974	Pilch .	
3,916,719	11/1975	Zwerenz .	
3,963,890	6/1976	Staihammer .	

3,980,848	9/1976	Schulz et al. .	
3,980,849	9/1976	Straihammer .	
3,983,334	9/1976	Straihammer .	
4,064,769	12/1977	Amdall et al. .	
4,354,838	10/1982	Hoyer et al. .	
4,417,875	11/1983	Matsui .	
4,527,983	7/1985	Booth .	
4,543,569	9/1985	Karlstrom .	
4,558,194	12/1985	Wiblin .	
4,586,398	5/1986	Yindra .	
4,687,200	8/1987	Shirai	200/5 A X
4,779,481	10/1988	Natzke et al. .	
4,983,901	1/1991	Lehmer .	
5,091,656	2/1992	Gahn .	
5,268,624	12/1993	Zanger .	
5,300,296	4/1994	Stoeckl .	
5,422,521	6/1995	Neer et al. .	

Primary Examiner—James Gandy
Assistant Examiner—Cathron B. Matta
Attorney, Agent, or Firm—Wood, Herron & Evans

[57] CLAIM

The ornamental design for an actuator for foot-operated control system, as shown and described.

DESCRIPTION

FIG. 1 is a perspective view of the actuator of the invention in use with a foot-operated control system, shown in dashed lines to define the environment of the actuator, and forming no part of the claimed design;

FIG. 2 is a top view of the actuator of the invention, shown at an enlarged scale


FIG. 3 is a right side view of the actuator of the invention, shown at an enlarged scale with the left side view being a mirror image;

FIG. 4 is a front view of the actuator of the invention, shown at an enlarged scale;

FIG. 5 is a rear view of the actuator of the invention, shown at an enlarged scale; and,

FIG. 6 is a bottom view of the actuator of the invention, shown at an enlarged scale.

1 Claim, 1 Drawing Sheet

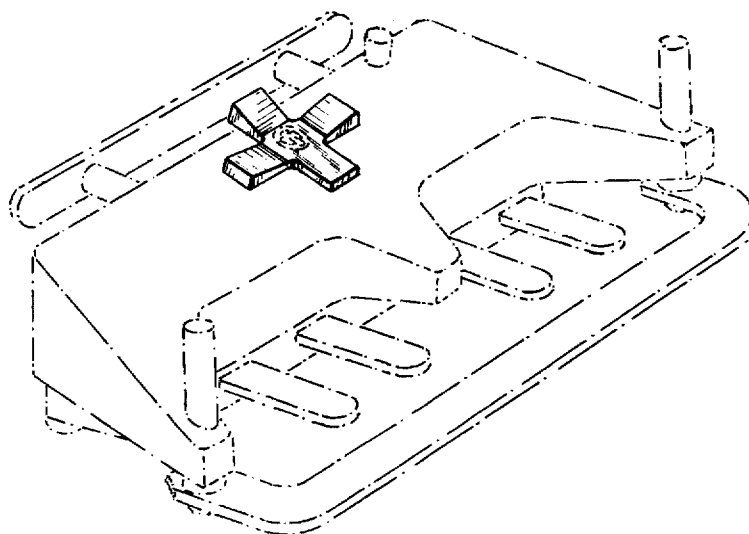

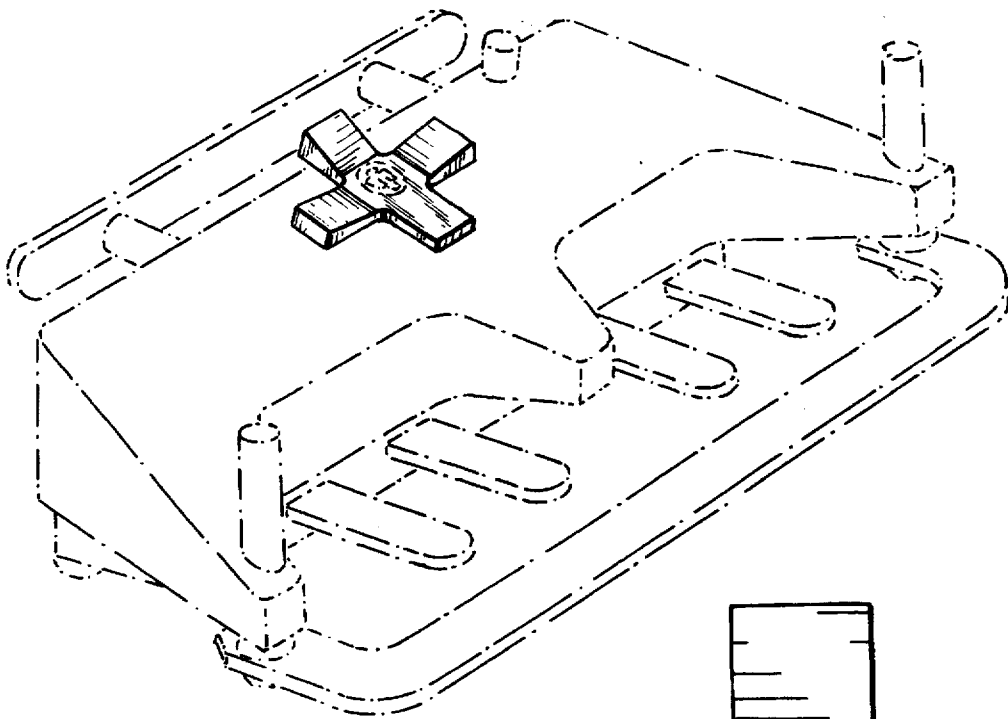


FIG. 1



FIG. 3



FIG. 4



FIG. 5

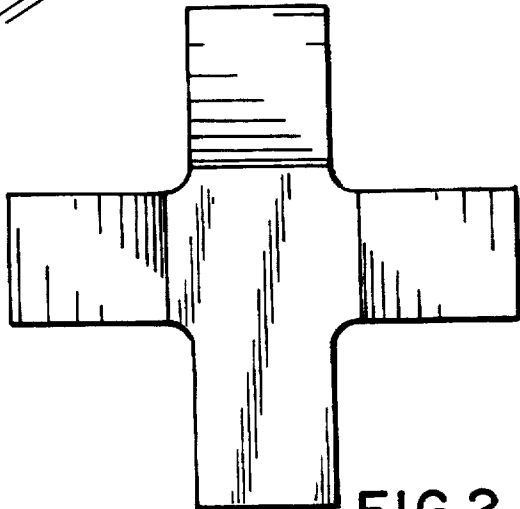


FIG. 2

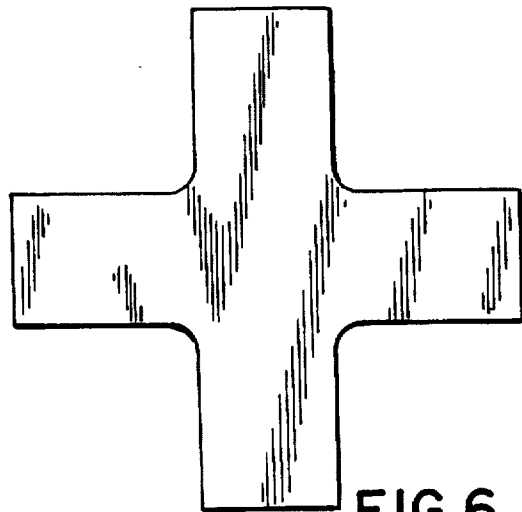


FIG. 6