

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 628 658 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
17.12.1997 Bulletin 1997/51

(51) Int Cl.⁶: **D21H 17/23**, D21H 17/44,
D21H 17/45

(21) Application number: **94303673.1**

(22) Date of filing: **23.05.1994**

(54) **Cellulosic, modified lignin and cationic polymer composition and process for making improved paper or paperboard**

Modifiziertes Lignin und kationisches Polymer enthaltende Zellulosezusammensetzung und Verfahren zur Herstellung von Papier oder Karton

Composition cellulosique à base de lignine modifiée et d'un polymère cationique et procédé amélioré pour fabriquer du papier ou du carton

(84) Designated Contracting States:
BE DE DK ES FR GB IT NL SE

(30) Priority: **28.05.1993 US 69252**
28.05.1993 US 69258

(43) Date of publication of application:
14.12.1994 Bulletin 1994/50

(73) Proprietor: **CALGON CORPORATION**
Pittsburgh, Pennsylvania 15205 (US)

(72) Inventors:
• **Elliott, David L.**
Imperial, Pennsylvania 15126 (US)
• **Falcione, Ronald J.**
Canonsburg, Pennsylvania 15317 (US)
• **Hunter, Wood E.**
Pittsburgh, Pennsylvania 15243 (US)

(74) Representative: **McCormack, Derek James**
Calgon Corporation,
European Patent Department,
ECC International LTD,
c/o John Keay House
St.-Austell, Cornwall PL25 4DJ (GB)

(56) References cited:
US-A- 3 180 787 **US-A- 4 913 775**

- **DATABASE WPI,n 83-02920K,Derwent Publications Ltd,London,GB; & JP-A-57191394(KYORITSU)25-11-1982**
- **DATABASE PAPERCHEM,n 54-05491,Institute of Paper & JP-A-57191394(KYORITSU) 25-11-1982**

EP 0 628 658 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

DescriptionBACKGROUND OF THE INVENTION5 1. Field of the Invention

This invention relates to a composition comprising an aqueous cellulosic furnish, cationic polymer and a modified lignin and methods using the composition for making paper or paperboard having improved properties in the areas of drainage, retention and formation.

10

2. Brief Description of the Background Art

15

20

In the production of paper or paperboard from a dilute aqueous cellulosic furnish improvements in retention and drainage and in the formation properties of the final paper or paperboard sheet are particularly desirable. It is well known by those skilled in the art that these parameters are frequently in conflict with each other. For example, if the cellulosic fibers of the aqueous cellulosic furnish are flocculated effectively to larger flocs, retention of, for example, fiber fines and filler is generally good and can result in a porous structure yielding generally good drainage; however, formation is poor. In this light, conventional practice has resulted in those skilled in the art selecting one or more additives to improve the production of paper or paperboard according to the parameters that are most important to achieve. Alternatively, if the cellulosic fibers are flocculated to a lesser degree, drainage and retention are less satisfactory; however, formation is improved. Further, drainage and retention are often in conflict with each other when, for example, increased production of paper or paperboard is desired over the need for retention of, such as for example, fillers and the like.

25

Retention is believed to be a function of different mechanisms such as filtration by mechanical entrainment, electrostatic attraction and bridging between aqueous cellulosic fibers and filler. Because both cellulose and many common fillers are electronegative, they are mutually repellant and, in the absence of a retention aid, the only factor tending to enhance retention is mechanical entrainment.

30

Drainage relates to the rate at which free water is released from a sheet as it is being formed. Thus, it will be appreciated that drainage aids improve the overall efficiency of dewatering in the production of paper or paperboard.

Formation relates to the formation of the paper or paperboard sheet produced from the papermaking process. Formation is generally evaluated by the variance in light transmission within a paper sheet. A high variance is indicative of poor formation. It is generally well known by those skilled in the art that as the retention level increases, the level of formation generally decreases from good formation to poor formation.

35

A variety of compositions and processes have been proposed to improve retention, drainage, or formation to improve the papermaking process.

40

US-A-4,913,775 (Langley et al) discloses a process of making paper or paper board comprising passing an aqueous cellulosic suspension through one or more shear stages, draining the suspension to form a sheet and drying the sheet wherein an improved combination of retention, drainage, drying and formation is achieved by adding to the suspension an excess of high molecular weight linear synthetic cationic polymer before shearing the suspension and adding bentonite after shearing.

45

US-A-4,643,801 (Johnson) discloses a paper making process in which paper making stock containing a sufficient amount of cellulosic pulp is formed into a sheet and dried and to which is added prior to formation of the sheet a coacervate binder comprising a cationic starch, a high molecular weight anionic polymer and a dispersed silica.

50

US-A-4,388,150 (Sunden et al) discloses a paper making process and an improved cellulosic paper product. This patent states that a paper making process is provided in which an aqueous papermaking stock containing a sufficient amount of cellulosic pulp is formed and dried, wherein the improvement comprises providing in the stock prior to the formation of the sheet a binder comprising colloidal silica acid having an average particle size less than 20 nanometers and cationic starch. This patent states that the cationic starch and the colloidal silica acid are admixed with each other in the presence of cellulosic fiber to form a complex of cationic starch and colloidal silica acid which serves as a binder for the cellulosic fibers.

55

US-A-5,098,520 (Begala) discloses a process in which paper or paperboard is made and wherein drainage and/or retention is improved including forming an aqueous cellulosic papermaking slurry that is subject to one or more shear stages, adding sequentially to the slurry a mineral filler, a high molecular weight cationic polymer that is a (meth)acrylamide polymer, and a medium molecular weight anionic polymer.

US-A-5,185,062 (Begala) discloses a process in which paper or paperboard is made and wherein drainage and/or retention is improved including forming an aqueous cellulosic papermaking slurry that is subject to one or more shear stages, adding sequentially to the slurry a (meth)acrylamide polymer and a medium molecular weight anionic polymer having at least 20 mole percent ionizable mer units including at least 10 mole percent sulfonate-containing

mer units.

US-A-4,313,790 (Pelton et al) discloses a papermaking process for simultaneously increasing the retention of fines, fillers and pigments and decreasing the deposition of pitch on the papermaking apparatus comprising adding to an aqueous wood slurry a poly(oxyethylene) and a kraft lignin product.

US-A-4,347,100 (Brucato) discloses a method of producing paper having improved bursting strength from mechanical or thermomechanical pulp comprising defibering wet wood by mechanical attrition to form mechanical or thermomechanical pulp, processing the pulp to form a furnish, incorporating into the pulp at an elevated temperature and pressure an anionic organic polyelectrolyte or polymer to improve bursting strength, and adding to the furnish a cationic organic polyelectrolyte or polymer. The patent states that the anionic organic polyelectrolyte or polymer causes dispersion of lignin and retards deposition of lignin to improve the bursting strength. This patent discloses that the anionic polyelectrolyte or polymer must be incorporated into the pulp by cooking at elevated temperature and pressure before or during the refining or defibering stage to achieve the desired end result of paper having improved bursting strength. This patent states that the anionic organic polyelectrolyte or polymer is a polymeric sulfonate.

US-A-4,606,790 (Youngs et al) discloses a method of preparing an electrically conductive multi-ply structure for intercepting and dissipating electrostatic charges and discharges comprising forming in a mixing vessel an aqueous slurry consisting essentially of a fibrous material, particles of an inorganic electrically conductive substance and an electroconductive polymer dispersant, dispersing the particles in the mixing vessel in the presence of the fibrous material and the polymer dispersant, forming a plurality of separate aqueous slurries consisting essentially of a non-conductive fibrous material, transporting the slurry containing the particles of the conductive substance from the mixing vessel to a paper forming machine, and adding a retention aid polymer to the slurry. This patent states that the electroconductive polymer dispersant is a cationic amine-substituted polymethacrylate or an anionic alkali metal polyacrylate or lignosulfonate.

US-A-4,145,246 (Goheen et al) discloses a linerboard composition and a process for producing the linerboard composition having a percent mullen of at least 80%, including a replacement quantity of sulfite-modified thermomechanical pulp. This patent states that the process for producing a linerboard composition comprises imparting mechanical attrition forces to undefibered lignocellulose which has been subjected to elevated temperature and pressure, adding a sulfite chemical to the lignocellulose prior to, during, or subsequent to the initial mechanical attrition, subjecting the sulfite-treated lignocellulose to a second mechanical attrition step, forming an aqueous linerboard furnish including at least 25% by weight of the sulfite-modified thermomechanical pulp, depositing the furnish on a foraminous surface to produce a wet linerboard web, and drying the linerboard web.

US-A-3,180,787 (Adams) discloses a method for increasing the flexural strength of paper comprising adding a water soluble lignosulfonate salt to a water slurry of cellulose pulp, adding a polyethylene polyamine thereby precipitating insoluble polyethylene polyamine lignosulfonate, and forming the pulp fibers with adhered insoluble precipitate into a continuous paper web.

US-A-4,772,332 (Nemeh et al) discloses a heat stabilized dispersed slurry of particles of chemically bulked hydrous kaolin clay pigment for use in coating or filling paper and method for preparing same. The patent states that the process comprises preparing a fluid aqueous suspension of kaolin clay, adding thereto a cationic polyelectrolyte for flocculating the clay suspension, filtering the suspension, washing the filtered clay, adding to the filtered clay a dispersant that is a combination of a polyacrylate salt, an anionic water soluble lignosulfonate and a water-soluble naphthalene sulfonate formaldehyde complex to provide a fluid suspension of bulked clay free from a phosphate dispersant.

US-A-3,985,937 (Fife) discloses a corrugating medium laminating adhesive comprising a polymer latex emulsion adhesive containing polyvinyl acetate homopolymers and styrenebutadiene polymers admixed in water with a clay, a paraffin wax, a polyalkylene glycol wetting agent and a lignosulfonate dispersant.

US-A-3,849,184 (Roberts) discloses a coated paperboard containing paperboard consisting of at least one ply consisting essentially of cellulosic fibrous materials, and a coating on at least one surface thereof comprising a water soluble lignosulfonate salt and a non-reactive hydrophobic waxy material.

US-A-3,758,377 (Fife) discloses a process for the preparation of a paper sheet by treating the cellulosic fibers in an aqueous slurry with a mixture of a lignosulfonate and an isoprene resin stabilized with an urea-formaldehyde resin.

TAPPI, Papermakers Conference Proceedings, Book 1, pp. 115-186, (Atlanta, Georgia - April 18-21, 1993) discloses microparticle systems such as for example, a system having a cationic starch or cationic polyacrylamide or anionic polymers and an anionic silica colloid or bentonite or alumina sol for improving dewatering, retention, formation and dry strength.

TAPPI, The Journal Of The Technical Association Of The Pulp And Paper Industry, Vol. 63, No. 6, pp. 63-66 (June, 1980) authorized by C. H. Tay, discloses that water soluble substances such as lignosulfonate originating from wood constituents deactivate cationic polyelectrolytes used for filler retention.

Colloids And Surfaces, Vol. 64, pp. 223-234 (1992), co-authored by P. Li and R. Pelton, discloses that cationic poly (diallyldimethyl ammonium chloride) increased the efficiency of the displacement washing of aqueous kraft lignin from a bed of glass beads. This publication states that improved washing results when the poly (diallyldimethyl am-

monium chloride) concentration is high enough to form an insoluble complex with lignin.

TAPPI, Contaminant Problems And Strategies In Wastepaper Recycling, Seminar Notes (Madison, Wisconsin) pp. 91-96 (April 24-26, 1989), authored by T. H. Wegner, discloses that pulping liquors, such as kraft lignin and saponified extractives, used in papermaking are a major source of white water contaminants and adversely affect the performance of a cationic polyacrylamide used as a drainage aid. More specifically, this publication states that kraft lignin completely negated the effectiveness of polyacrylamide as a drainage aid, and that fines retention was also adversely affected.

EUCEPA/ATICELCA, Dev. & Trends in Sci. & Technol. of Pulp & Pmkg., Vol. 2, Paper No. 31, pp. 1-22 (Oct. 6-10, 1986), co-authored by D. Ahrabi, L. Odberg and G. Strom, discloses that in closed white water systems anionic polymers such as, for example, lignin and liginosulfonate, interfere strongly with cationic polymers that are used to improve retention and drainage on the paper machine.

It will be appreciated by those skilled in the art that the above mentioned background technical publications teach against the addition of sulfonated lignin to paper furnishes having a cationic component as specified hereinafter. Therefore, it will be understood by those skilled in the art that applicants have discovered unexpectedly that the composition and process of the instant invention comprising adding a modified lignin to an aqueous cellulosic furnish having a high molecular weight cationic polymer component results in producing paper or paperboard having improved drainage, retention and formation properties that are superior to results of others previously achieved.

JP-A-57191394 and JP-A-57191394 describe use of specific polymers and lignin to improve paper strength. The processes described in these references do not refer to improvement of drainage, retention and formation in a paper making process as improved by the present invention.

In spite of this background material, there remains a very real and substantial need for a composition and process for making improved paper or paperboard in the areas of drainage, retention, or formation, and combinations thereof.

Brief Description of the Figures

Figure 1 compares the effect on formation between the use of a cationic polymer alone, and cationic polymer and a modified lignin at varying amounts and shear rates.

Figure 2 compares the effect on retention between the use of a cationic polymer alone, and cationic polymer and a modified lignin at varying amounts and shear rates.

Figure 3 compares the effect on opacity between the use of a cationic polymer alone, and cationic polymer and a modified lignin at varying amounts and shear rates.

Figure 4 compares the effect on brightness between the use of a cationic polymer alone, and cationic polymer and a modified lignin at varying amounts and shear rates.

Figure 5 compares the effect on drainage time between the use of a cationic polymer alone, and cationic polymer and a modified lignin at varying amounts and shear rates.

SUMMARY OF THE INVENTION

The present invention has met the above-described needs. The present invention provides a process in which paper or paperboard having unexpectedly improved properties is made by forming an aqueous cellulosic paper furnish, adding to the furnish an effective amount, based on the dry weight of the solids of the furnish, of (A) a high molecular weight cationic polymer as specified hereinafter and (B) a modified lignin as specified hereinafter, draining the slurry to form a sheet and drying the sheet. The weight ratio of the cationic polymer (A) to the modified lignin (B) is from about 10:1 to 1:10, on an active basis, more preferably from about 5:1 to 1:5, and most preferably from about 3:1 to 1:3.

The modified lignin is a sulfonated lignin having a weight average molecular weight greater than 10,000. In a preferred embodiment of this invention, the sulfonated lignin has a degree of sulfonation of from about 0.1 to 10 moles of sulfonic acid groups per 1000 unit weight of the lignin is included.

In yet another aspect of this invention, paper or paperboard produced by the process of this invention is provided wherein the paper or paperboard has improved properties in the areas of retention, drainage or formation, and combinations thereof.

Another embodiment of this invention provides a process in which paper or paperboard is made by forming an aqueous cellulosic paper furnish comprising subjecting the furnish to one or more shear stages, adding to the furnish prior to at least one of the shear stages a high molecular weight cationic polymer (A) as specified hereinafter, adding to the furnish subsequent to the addition of the cationic polymer and at least one shear stage subsequent there to, the said sulfonated lignin (B), draining the furnish to form a sheet and drying the sheet. The weight ratio of the cationic polymer (A) to the sulfonated lignin (B) is from about 10:1 to 1:10, on an active basis, more preferably from about 5:1 to 1:5, and most preferably from about 3:1 to 1:3.

Another aspect of this invention provides a composition for making paper or paperboard comprising (a) an aqueous

cellulosic furnish, (b) a high molecular weight cationic polymer as specified hereinafter, and (c) a sulfonated lignin as specified hereinbefore wherein the ratio of the cationic polymer to the modified lignin is from about 10:1 to 1:10, on an active basis, more preferably from about 5:1 to 1:5 and most preferably from about 3:1 to 1:3.

5 DETAILED DESCRIPTION OF THE INVENTION

The instant invention is directed to a process in which paper or paperboard having improved properties is made and the composition for improving drainage, retention, or formation, and combinations thereof in the manufacture of paper or paperboard.

10 As used herein, the term "furnish" refers to all paper and paperboard furnishes based on, for example, but not limited to, mechanical pulp, semi-bleached kraft pulp, unbleached kraft pulp and/or unbleached sulfite pulp.

As used herein, the term "active basis" means a concentration of additive based on the solids in the stock solution.

As used herein, the term "effective amount" refers to that amount of the composition necessary to bring about a desired result, such as, for example, the amount needed to improve drainage, retention, or formation, and combinations thereof in the manufacture of paper or paperboard.

15 The present invention provides a composition comprising (a) an aqueous cellulosic furnish, (b) a high molecular weight cationic polymer as specified hereinafter, and (c) sulfonated lignin as specified hereinbefore, wherein the ratio of the cationic polymer to the lignin is from about 10:1 to 1:10, on an active basis. The lignin used in the instant invention can be derived from the kraft pulping process and may be, for example, but not limited to, fractionated lignins in terms of molecular weight, purified or may be used in either the protonated or salt forms.

20 The lignin used in the instant invention can be derived from the sulfite pulping process for example, but not limited to, a lignin adduct copolymerized with formaldehyde resulting in a modified lignin having a weight average molecular weight greater than about 50,000 such as for example Dynaspense A commercially available from Lignotech USA, Inc., Greenwich, CT.

25 In a most preferred embodiment of this invention, the composition as described herein includes a sulfonated lignin that has a degree of sulfonation of from about 0.1 to 10 moles of sulfonic acid groups per 1000 unit weight of the lignin.

In a preferred embodiment of this invention, the composition as described herein includes wherein the sulfonated lignin has a weight average molecular weight of greater than 50,000.

30 The composition of the instant invention, as described herein, preferably includes wherein the weight ratio of the cationic polymer to the sulfonated lignin is from about 5:1 to 1:5 and most preferably is from about 3:1 to 1:3.

The cationic polymer of the instant composition is derived from the cationic monomer acryloyloxyethyl trimethyl ammonium chloride.

35 The cationic polymer is a copolymer derived from the hereinbefore mentioned cationic monomer and the nonionic monomer acrylamide, wherein the ratio of the cationic monomer to the nonionic monomer is from about 99:1 to 1:99. Preferably, the weight ratio of the cationic monomer to the nonionic monomer is from about 3:97 to 60:40 and most preferably is from about 10:90 to 23:77. It will be appreciated by those skilled in the art that the ratio of mer units in such copolymers generally is determined by the quantity of cationic units necessary in the instant composition to impart the desired drainage, retention and formation, or combinations thereof for the manufacture of a particular paper or paperboard. Further, additional cationic mer units may be present.

40 It will be understood by those skilled in the art that the cationic polymer component and the sulfonated lignin component of the composition of this invention, as described herein, are water soluble or water dispersible.

45 An effective amount of the composition of the instant invention should be employed. It will be appreciated by those skilled in the art that the dosage of the composition added to the aqueous cellulosic furnish being treated is dependent on the degree of retention, drainage and formation desired. At least about 0.00446 per cent by weight (0.1 pounds per ton) based on the dry weight of solids in the furnish should be added.

The high molecular weight cationic polymer component of the instant composition has a weight average molecular weight above 1,000,000. Most preferably, the high molecular weight cationic polymer component of the instant composition has a weight average molecular weight above 2,000,000.

50 The composition of the instant invention can generally be successfully added to aqueous cellulosic furnishes over the entire pH range customarily employed in the papermaking process. Preferably, the composition of the instant invention is added to aqueous cellulosic furnishes having a pH from about 3 to 10. Therefore, it will be appreciated by those skilled in the art that the composition of the instant invention may be added to aqueous cellulosic paper furnishes that are acid, alkaline, or neutral in character. It will be understood by those skilled in the art that generally an acid furnish has a pH range from about 3.0 to 5.5, an alkaline furnish has a pH range from about 7.0 to greater than about 10.0, and a neutral furnish has a pH range of from about 5.5 to 7.0.

55 In another aspect of this invention, a process is provided for in which paper or paperboard having improved properties is made by forming an aqueous cellulosic paper furnish which comprises adding to the furnish an effective amount, based on the dry weight of the solids of the furnish, of (A) a high molecular weight cationic polymer, as here-

inbefore described, and (B) a sulfonated lignin, as hereinbefore described, draining the furnish to form a sheet and drying the sheet, wherein the weight ratio of the cationic polymer (A) to the modified lignin (B) is from about 10:1 to 1:10, on an active basis, preferably from about 5:1 to 1:5, and most preferably about 3:1 to 1:3. Preferably, the process includes wherein the sulfonated lignin has a degree of sulfonation of from about 0.1 to 10 moles of sulfonic acid groups per 1000 unit weight of the lignin.

In another embodiment of this invention, the process, as hereinbefore described, includes wherein the sulfonated lignin has a weight average molecular weight greater than 50,000.

The process of the instant invention includes adding an effective amount of the composition to the aqueous cellulosic paper furnish. It will be appreciated by those skilled in the art that the dosage of the composition added to the aqueous cellulosic paper furnish is dependent on the drainage, retention and formation parameters desired. At least about 0.00446 per cent by weight (0.1 pounds per ton) of the cationic polymer should be added to the furnish based on the dry weight of solids in the furnish. The instant process includes wherein at least about 0.0046 per cent by weight (0.1 pounds per ton) of the modified lignin is added to the furnish based on the dry weight of solids in the furnish.

It is believed that the pH of the aqueous cellulosic paper furnish is unimportant as the instant composition is effective in treating aqueous cellulosic paper furnishes having a wide range of alkaline, neutral and acidic pH's. Preferably, the process of the instant invention includes wherein the aqueous cellulosic paper furnish has a pH from about 3 to 10.

In another embodiment of the instant invention, a process is provided in which paper or paperboard is made by forming an aqueous cellulosic paper furnish comprising subjecting the furnish to one or more shear stages, adding to the furnish prior to at least one of the shear stages a high molecular weight cationic polymer, as hereinbefore described, adding to the furnish subsequent to the addition of the cationic polymer and at least one shear stage subsequent thereto, a modified lignin, as hereinbefore described, draining the furnish to form a sheet and drying the sheet, wherein the weight ratio of the cationic polymer to the sulfonated lignin is from about 10:1 to 1:10, on an active basis, preferably from about 5:1 to 1:5, and most preferably from about 3:1 to 1:3.

Another aspect of this invention includes paper or paperboard produced by the process of the instant invention, as hereinbefore described, wherein the paper or paperboard has improved properties in the areas of retention, drainage, or formation and combinations thereof.

It will be appreciated by those skilled in the art that the composition and process of this invention may be employed in conjunction with other additives used during the manufacture of paper or paperboard such as, but not limited to, fillers, pigments, binders, and strength aids.

The cationic polymers of the instant composition may be prepared using any conventional polymerization technique that is well known by those skilled in the art.

The cationic polymer and the sulfonated lignin of the instant invention may be added to the paper furnish as hereinbefore described at any convenient point prior to sheet formation. It will be appreciated by those skilled in the art that the exact points of addition are mill specific. Preferably, the cationic polymer and the sulfonated lignin of this invention are added to thin diluted aqueous cellulosic paper furnish. Any suitable method of addition known in the art can be utilized. A preferred method of addition includes adequate dilution to accomplish dispersion of the cationic polymer and the sulfonated lignin throughout the furnish.

It will be appreciated by those skilled in the art that the process and the composition of the instant invention does not contain a solid or particulate component in comparison to currently available microparticle technology employing such as for example silica, bentonite or alum. The process of this invention, therefore, provides a more economical process of improving drainage, retention, or formation and combinations thereof, of paper or paperboard without insoluble residue or solids buildup.

EXAMPLES

The following examples demonstrate the invention in greater detail. These examples are not intended to limit the scope of the invention in any way. In the examples, the following products were used:

Cationic Polymer A is a cationic acrylamide copolymer available from Nalco Chemical Company (Naperville, Illinois).

Cationic Polymer B is a 25 weight % active acryloyloxyethyl trimethyl ammonium chloride/acrylamide copolymer available from Calgon Corporation (Pittsburgh, PA), comprising about 10% by weight acryloyloxyethyl trimethyl ammonium chloride and about 90% by weight acrylamide.

Cationic Polymer C is a 25 weight % active acryloyloxyethyl trimethyl ammonium chloride/acrylamide copolymer available from Calgon Corporation (Pittsburgh, PA), comprising about 15% by weight acryloyloxyethyl trimethyl ammonium chloride and about 85 % by weight acrylamide.

Cationic Polymer D is a 25 weight % active acryloyloxyethyl trimethyl ammonium chloride/acrylamide copolymer available from Calgon Corporation (Pittsburgh, PA), comprising about 23% by weight acryloyloxyethyl trimethyl ammonium chloride and about 77% by weight acrylamide.

EP 0 628 658 B1

Cationic Polymer E is a 25 weight % active acryloyloxyethyl trimethyl ammonium chloride/acrylamide copolymer available from Calgon Corporation (Pittsburgh, PA), comprising about 50% by weight acryloyloxyethyl trimethyl ammonium chloride and about 50 % by weight acrylamide.

5 REAX-905 is a modified sulfonated kraft lignin polymer commercially available from Westvaco, Chemical Division (Charleston Heights, South Carolina) and chemically is a sodium salt of lignosulfonic acid having a weight average molecular weight of about 85,000 and a degree of sulfonation of about 0.8 moles of sulfonic acid groups per 1000 unit weight of the lignin.

10 Polyfon H is a modified sulfonated kraft lignin polymer commercially available from Westvaco, Chemical Division (Charleston Heights, South Carolina) and chemically is a sodium salt of lignosulfonic acid having a weight average molecular weight of about 4,500 and a degree of sulfonation of about 0.5 moles sulfonic acid groups per 1000 unit weight of the lignin.

15 Reax 80 C is a modified sulfonated kraft lignin polymer commercially available from Westvaco, Chemical Division (Charleston Heights, South Carolina) and chemically is a sodium salt of lignosulfonic acid having a weight average molecular weight of about 7,000 and a degree of sulfonation of about 2.0 moles of sulfonic acid groups per 1000 unit weight of the lignin.

20 Reax 82 is a modified sulfonated kraft lignin polymer commercially available from Westvaco, Chemical Division (Charleston Heights, South Carolina) and chemically is a sodium salt of lignosulfonic acid having a weight average molecular weight of about 14,000 and a degree of sulfonation of about 1.5 moles sulfonic acid groups per 1000 unit weight of the lignin.

EXAMPLES 1-26

25 In Examples 1-26, various formulations were tested for their effectiveness in improving the drainage, retention and formation parameters of a stock aqueous cellulosic furnish of a commercial paper mill. This stock aqueous cellulosic furnish had the following make-up: 20/35/15/20/10 weight % kraft/high bright pulp/low bright pulp/paper machine broke/coated broke, respectively, 272kg (600 pounds) of clay per dry ton of finished paper, 4,53kg (ten pounds) of alum per dry ton of finished paper, 2,72kg (6 pounds) of H-2020, commercially available from Calgon Corporation, Pittsburgh, PA, per dry ton of finished paper and 14,95kg (33 pounds) of starch per dry ton of finished paper. This stock aqueous cellulosic furnish had a pH of about 5.0, and a consistency of 0.7788%. The make-up of the composition of each
30 example is shown in Table I.

EXAMPLE	CATIONIC POLYMER	SHEAR RATE	MODIFIED LIGNIN	FEED RATE (#/T ACTIVE)	DRAIN TIME (SECS/150MILS)	FORMATION INDEX	SHEET BRIGHTNESS	SHEET OPACITY	% SHEET ASH
1	--	--	--	--	88	40.3	67.6	89.7	10.6
2	A	Low	--	0.80	80	25.7	68.4	90.3	12.5
3	B	Low	--	0.80	73	31.5	69.6	94.6	18.9
4	C	Low	--	0.80	70	32.4	69.4	93.1	16.3
5	D	Low	--	0.80	73	25.6	69.5	92.2	14.0
6	E	Low	--	0.80	74	15.0	69.0	90.1	11.8
7	B	High	REAX 905	0.80/0.40	69	39.8	70.2	94.9	19.5
8	C	High	REAX 905	0.80/0.40	66	38.8	70.1	94.3	18.3
9	D	High	REAX 905	0.80/0.40	68	33.6	69.9	93.4	16.1
10	E	High	REAX 905	0.80/0.40	70	27.5	69.2	91.3	13.0
11	B	High	REAX 905	1.00/0.50	66	38.5	70.3	95.0	20.2
12	C	High	REAX 905	1.00/0.50	65	36.4	70.1	94.5	18.7
13	D	High	REAX 905	1.00/0.50	64	--	--	--	--
14	E	High	REAX 905	1.00/0.50	68	--	--	--	--
15	B	High	REAX 905	1.20/0.60	65	37.6	70.2	95.3	20.8
16	C	High	REAX 905	1.20/0.60	63	34.0	70.2	95.0	19.7
17	D	High	REAX 905	1.20/0.60	65	--	--	--	--
18	E	High	REAX 905	1.20/0.60	65	--	--	--	--
19	B	High	REAX 905	1.50/0.75	65	33.9	70.1	95.7	21.4
20	C	High	REAX 905	1.50/0.75	62	33.5	70.1	95.6	20.8
21	D	High	REAX 905	1.50/0.75	65	--	--	--	--
22	E	High	REAX 905	1.50/0.75	65	--	--	--	--
23	B	High	REAX 905	1.00/0.25	72	--	--	--	--
24	B	High	REAX 905	1.00/0.50	67	--	--	--	--
25	B	High	REAX 905	1.00/0.75	69	--	--	--	--
26	B	High	REAX 905	1.00/1.00	71	--	--	--	--

Table I shows the rate of shear, the feed rate, drain time, formation index, sheet brightness, sheet opacity, and %

sheet ash (retention) for each example. A low rate of shear, as used herein, is defined as less than or equal to about 600 revolutions per minute (rpm). A high rate of shear, as used herein, is defined as greater than or equal to about 1,200 rpm. Feed rate is the amount of active polymer added in pounds per ton of solids in the furnish. Table I shows under the column designated "FEED RATE" for Examples 2-6 that 0,36kg (0.80 pounds) of one of the listed active cationic polymers, Cationic Polymer A, B, C, D or E, respectively, was added per ton of solids in the furnish. Table I shows under the column designated "FEED RATE" for Example 7 that 0,36kg (0.80 pounds) of active Cationic Polymer B and 0,18kg (0.40 pounds) of active modified lignin REAX 905 were added per ton of solids in the furnish.

Drain time, as used herein, is the time in seconds for a specific amount of water to drain from a testing apparatus, and is a standard technique well known by those skilled in the art. Table I shows under the column designated "DRAIN TIME" that for Example 3, 150 ml of water drained from the treated furnish in 73 seconds. It is desirable to achieve a drainage time in which a specific amount of water is removed from the furnish in the smallest amount of time over the papermaking process.

The formation index was determined by an M/K Formation Tester commercially available by M/K Systems, Inc., Danvers, MA. Sheet brightness and opacity were determined using a Technidyne Model TB-1C apparatus commercially available from Technidyne Corporation, New Albany, Indiana. Percent sheet ash is an indication of filler retention, such as for example, clay, calcium carbonate or titanium oxide. Percent sheet ash was obtained by ashing preweighed sheet samples at about 900 degrees centigrade employing a standard technique well known by those skilled in the art.

The following two paragraphs set forth the drainage and handsheet test procedures employed in the examples.

Drainage Test Procedure

1. A 500 ml sample of well-mixed aqueous cellulosic paper furnish is added to a one liter beaker.
2. Agitation of the furnish is introduced at 1200 rpm, the cationic polymer is added and the timing sequence is started.
3. At the 30 second mark, the agitation is reduced to 600 rpm.
4. At the 40 second mark, the modified lignin is added depending on the formulation of the example as set forth in Tables I and II.
5. At the 60 second mark, the agitation is discontinued and the treated furnish sample is poured into the drainage test apparatus.
6. The test apparatus is then activated and the time required for a specified amount of water to drain from it is measured and recorded.

Handsheet Test Procedure

Steps 1 through 5, above, are duplicated except that the sample size may vary to produce a desired basis weight handsheet, the treated furnish sample is poured into the deckle box of a Noble and Wood handsheet machine and the sheet is prepared employing standard techniques well known by those skilled in the art.

It will be understood that for Examples 1 and 27 wherein no polymer was added, the hereinabove Drainage and Handsheet Test Procedures followed the same steps without any polymeric aids being added.

Agitation was provided by a Britt Jar Stirring apparatus fitted with a one inch diameter marine prop.

In Example 1, the furnish was fed to the paper forming apparatus without the addition of a cationic polymer or modified lignin. Table I shows that Example 1 had a drainage time of about 88 seconds per 150 ml of water, a formation index of about 40.3, a sheet brightness of about 67.6, a sheet opacity of about 89.7 and a % sheet ash (i.e., retention) of about 10.6.

In Examples 2-6, a low rate of shear and a 0.80 feed rate was employed. Table I shows that when the composition of Example 2, a commercially available cationic polymer composition (A) that is currently commercially used for improving the papermaking process, was added to the furnish, a drain time of 80 seconds, a formation index of 25.7, a sheet brightness of 68.4, a sheet opacity of 90.3, and a % sheet ash (retention) of 12.5 was achieved.

Table I shows that Example 3, containing a cationic polymer (B), when added to the furnish resulted in a paper product having a drainage time of about 73 seconds, a formation index of about 31.5, a sheet brightness of about 69.6, a sheet opacity of about 94.6, and a % sheet ash (retention) of about 18.9. From the data of Table I, it will be appreciated by those skilled in the art that each parameter of drainage, retention and formation are improved when the cationic polymers B, C, D and E of Examples 3-6, respectively, are added to the furnish in comparison to the results obtained when cationic polymer A, Example 2, is added to the furnish.

The data of Table I clearly shows that the compositions of the present invention, Examples 7-26, when added to the stock aqueous cellulosic furnish greatly improved the drainage, retention, and formation parameters of the resulting paper in comparison to currently available additives such as the cationic polymers A, B, C, D and E of Examples 2-6, respectively.

Table I shows for the compositions of the instant invention, Examples 7-10, that the active cationic polymer component of the compositions of the instant invention was added in the amount of 0,36kg (0.80 pound) per ton of solids in the furnish and that the active modified lignin polymer component of the composition of the instant invention was added in the amount of 0,18kg (0.40 pound) per ton of solids in the furnish. The data set forth in Table I shows that the composition of Example 7 when added to the furnish resulted in paper having a drainage time of 69 seconds, a formation index of 39.8, a sheet brightness of 70.2, a sheet opacity of 94.9 and a % sheet ash (retention) of 19.5. The data of Table I shows that the compositions of the instant invention, Examples 8-10, produced similar superior results in comparison to the cationic polymer compositions of Examples 2-6. The data of Table I shows for the compositions of the instant invention, Examples 11-26, that by varying the amounts of the active cationic polymer and active modified lignin components of the compositions of the instant invention added per ton of dry weight of solids in the furnish, one or more of the parameters of drainage, retention and formation may be modified as desired.

The data of Table I is set forth graphically in Figures 1-5. Figures 1-5 clearly show the superior results obtained when the compositions of the instant invention are added to an aqueous cellulosic paper furnish in comparison to the cationic polymer compositions of Examples 2-6. In each figure, the cationic polymer composition (A) of Example 2 is shown as the control and is represented in each figure as a horizontal line. The bar graph for Example 1, shown in Figures 1-5, represents results obtained when no cationic polymer and no modified lignin was added to the stock aqueous cellulosic furnish.

Figure 1 shows the data of Table I, Examples 1-12, 15, 16, 19 and 20 for the parameter of formation. Figure 1 clearly shows that each of the compositions of the instant invention, Examples 7-12, 15, 16, 19 and 20, when added to the stock aqueous cellulosic furnish improved the papermaking process in the area of formation over the use of conventional cationic polymer compositions, Examples 2-6.

Figures 2-5 show the data of Table I, Examples 1-12, 15, 16, 19 and 20 for the parameters of retention, opacity, brightness and drainage, respectively. Figures 2-5 show that each of these parameters is improved when the compositions of the present invention, Examples 7-12, 15, 16, 19 and 20, are added to the stock aqueous cellulosic furnish in comparison to the results achieved when a conventional cationic polymer composition, Examples 2-6, is added to the stock aqueous cellulosic furnish.

Examples 27-32

In Examples 27-32 various formulations were tested for their effectiveness in improving the parameter of drainage for an alkaline stock aqueous cellulosic furnish and an acid stock aqueous cellulosic furnish. The alkaline stock aqueous cellulosic furnish had the following makeup: 50/50 weight % hardwood kraft/softwood kraft, respectively, 15 weight % calcium carbonate, 0.5 weight % starch, and 0.25 weight % alkyl ketene dimer (AKD) size. This alkaline stock aqueous cellulosic furnish had a pH of about 8.3, a consistency of about 0.5% and an ash content of 14.81%. The acid stock aqueous cellulosic furnish had the following makeup: 50/50 weight % hardwood kraft/softwood kraft, respectively, 15 weight % clay, 1 weight % alum, and 0.5 weight % resin, and a pH of about 4.0, a consistency of about 0.5% and an ash content of 13.74%. The makeup of the composition of each example is shown in Table II.

TABLE II

EXAMPLE	CATIONIC POLYMER	MODIFIED LIGNIN	FEED RATE #/T ACTIVE	DRAINAGE ALKALINE FURNISH SECS/ 300MLS	DRAINAGE ACID FURNISH SECS/ 200MLS
27	-	-	-	92	89
28	D	-	2.0	72	38
29	D	Polyfon H	2.0/1.0	68	38
30	D	REAX 80 C	2.0/1.0	75	38
31	D	REAX 82	2.0/1.0	61	34
32	D	REAX 905	2.0/1.0	53	32

Table II shows the drainage results achieved when: (1) no cationic polymer and modified lignin are added to the alkaline or acid stock aqueous cellulosic furnish, Example 27; (2) when cationic polymer D is added to the alkaline or acid stock aqueous cellulosic furnish, Example 28; and (3) when the compositions of the instant invention, Examples 31,32 are added to the alkaline or acid stock aqueous cellulosic furnish. It is clear from the data of Table II, that the compositions of the instant invention, Examples 31,32, improve drainage when added to the alkaline or acid stock aqueous cellulosic furnishes.

From the above data, therefore, it will be appreciated by those skilled in the art that the cellulosic, modified lignin and cationic polymer composition and process for making paper or paperboard of the instant invention significantly improve the parameters of drainage, retention, formation and combinations thereof over conventional known cationic polymer technology and microparticle technology.

5

Claims

10

1. A composition for making paper or paperboard which comprises (a) an aqueous cellulosic furnish; (b) a high molecular weight cationic polymer; and (c) a lignin; wherein the weight ratio of the cationic polymer to the lignin present is in the range of from 10:1 to 1:10; and characterised in that the cationic polymer has a weight average molecular weight greater than 1 million and is a copolymer derived from a cationic monomer that is an acryloyloxyethyl trimethyl ammonium chloride and a nonionic monomer that is acrylamide and that the lignin is a sulfonated lignin which has a weight average molecular weight greater than 10,000.

15

2. A composition as claimed in claim 1 and wherein the cationic polymer and the sulfonated lignin are each present in an amount of at least 0.00446% by dry weight (0.1 pounds per ton) of the solids present.

20

3. A composition as claimed in claim 1 or claim 2 and wherein the sulfonated lignin has a degree of sulfonation of from 0.1 to 10 moles of sulfonic acid groups per 1,000 unit weight of said lignin.

4. A composition as claimed in claim 1, 2 or 3 and wherein the sulfonated lignin has a weight average molecular weight greater than 50,000.

25

5. A composition as claimed in claim 1, claim 2 or claim 3 or claim 4 and wherein the weight ratio of the cationic polymer to the modified lignin is in the range 3:1 to 1:3.

30

6. A composition as claimed in any one of the preceding claims and wherein the weight average molecular weight of the cationic polymer is greater than 2 million.

7. A composition as claimed in any one of the preceding claims and wherein the weight ratio of the cationic monomer to the nonionic monomer is in the range from 10:90 to 23:77.

35

8. A process for making paper or paperboard which includes forming a paper making furnish composition, draining the composition to form a sheet and drying the sheet and characterised in that the furnish composition comprises a composition as claimed in any one of claims 1 to 7.

40

9. A process as claimed in claim 8 and wherein the said aqueous cellulosic paper furnish has a pH in the range from 3 to 10.

45

10. A process as claimed in claim 8 or claim 9 and which includes subjecting the furnish to shear stages, adding to the furnish prior to at least one of the shear stages the said high molecular weight cationic polymer and adding to the furnish subsequent to the addition of the cationic polymer and at least one shear stage subsequent thereto the said sulfonated lignin.

11. Paper or paperboard obtainable by a process as claimed in any one of claims 8 to 10.

Patentansprüche

50

1. Zusammensetzung zur Herstellung von Papier oder Pappe, umfassend

- (a) einen wässrigen Zelluloserohstoff;
- (b) ein hochmolekulares kationisches Polymer; und
- (c) ein Lignin;

55

wobei das Gewichtsverhältnis von kationischem Polymer zu dem vorliegenden Lignin im Bereich von 10:1 bis 1:10 ist,

dadurch gekennzeichnet, dass

das kationische Polymer ein gewichtsgemittelt Molekulargewicht größer als 1 Millionen hat und ein Copolymer ist aus einem kationischen Monomer, das ein Acryloyloxyethyl-trimethyl-ammoniumchlorid ist, und einem nicht-ionischen Monomer, das ein Acrylamid ist, und dass das Lignin ein sulfoniertes Lignin ist mit einem gewichtsgemittelten Molekulargewicht größer als 10 000.

2. Zusammensetzung nach Anspruch 1, wobei das kationische Polymer und das sulfoniert Lignin jeweils in einer Menge vorhanden sind von mindestens 0.00446 % Trockengewicht (0,1 Pfund pro Tonne) der vorhandenen Feststoffmasse.
3. Zusammensetzung nach Anspruch 1 oder 2, wobei das sulfoniert Lignin einen Sulfonierungsgrad hat von 0,1 bis 10 Mol Sulfonsäuregruppen pro 1 000 Gewichtseinheiten Lignin.
4. Zusammensetzung nach Anspruch 1, 2 oder 3, wobei das sulfoniert Lignin ein gewichtsgemittelt Molekulargewicht größer als 50 000 hat.
5. Zusammensetzung nach Anspruch 1, 2, 3 oder 4, wobei das Gewichtsverhältnis von kationischem Polymer zu dem modifiziert Lignin im Bereich von 3:1 bis 1:3 ist.
6. Zusammensetzung nach einem der vorstehenden Ansprüche, wobei das gewichtsgemittelt Molekulargewicht des kationischen Polymers größer als 2 Millionen ist.
7. Zusammensetzung nach einem der vorstehenden Ansprüche, wobei das Gewichtsverhältnis von kationischem Monomer zu nicht-ionischem Monomer im Bereich von 10:90 bis 23:77 ist.
8. Verfahren zur Herstellung von Papier oder Pappe, umfassend das Bilden einer Papierrohstoffzusammensetzung, das Entwässern der Zusammensetzung zum Bilden eines Bogens und das Trocknen des Bogens, dadurch gekennzeichnet, dass die Rohstoffzusammensetzung eine Zusammensetzung nach einem der Ansprüche 1 bis 7 enthält.
9. Verfahren nach Anspruch 8, wobei der wässrige Zelluloserohstoff einen pH-Wert im Bereich von 3 bis 10 hat.
10. Verfahren nach Anspruch 8 oder 9, wobei der Rohstoff Scherstufen durchläuft, wobei dem Rohstoff vor mindestens einer der Scherstufen das hochmolekulare kationische Polymer zugegeben wird und dem Rohstoff mindestens ein Scherstufe nach der Zugabe des kationischen Polymers das sulfoniert Lignin zugegeben wird.
11. Papier oder Pappe, erhalten durch ein Verfahren nach einem der Ansprüche 8 bis 10.


Revendications

1. Composition destinée à la fabrication du papier ou du carton qui comprend (a) une composition aqueuse de matière fibreuse cellulosique; (b) un polymère cationique de poids moléculaire élevé; et (c) une lignine; le rapport en poids du polymère cationique à la lignine présente étant de 10:1 à 1:10; et caractérisée en ce que le polymère cationique a un poids moléculaire moyen en poids supérieur à 1 million et est un copolymère dérivé d'un monomère cationique qui est un chlorure d'acryloyloxyéthyl triméthyl ammonium et d'un monomère non ionique qui est de type acrylamide et en ce que la lignine est une lignine sulfonée qui a un poids moléculaire moyen en poids supérieur à 10000.
2. Composition selon la revendication 1 et dans laquelle le polymère cationique et la lignine sulfonée sont chacun présents en quantité d'au moins 0,00446% du poids sec (0,1 livres par tonne) des matières solides présentes.
3. Composition selon la revendication 1 ou la revendication 2 et dans laquelle la lignine sulfonée a un degré de sulfonation compris entre 0,1 et 10 moles de groupes acide sulfonique par 1000 unités en poids de ladite lignine.
4. Composition selon la revendication 1, 2 ou 3 et dans laquelle la lignine sulfonée a un poids moléculaire moyen en poids supérieur à 50000.
5. Composition selon la revendication 1, la revendication 2 ou la revendication 3 ou la revendication 4 et dans laquelle

EP 0 628 658 B1


le rapport en poids du polymère cationique à la lignine modifiée est de 3:1 à 1:3.

- 5
6. Composition selon l'une quelconque des revendications précédentes et dans laquelle le poids moléculaire moyen en poids du polymère cationique est supérieur à 2 million.
- 10
7. Composition selon l'une quelconque des revendications précédentes et dans laquelle le rapport en poids du monomère cationique au monomère non ionique est de 10:90 à 23:77.
- 15
8. Procédé de fabrication de papier ou de carton qui comprend la préparation d'une composition pour fabriquer du papier, l'égouttage de la composition pour former une feuille et le séchage de la feuille et caractérisé en ce que la composition de matière fibreuse comprend une composition telle que revendiquée dans l'une quelconque des revendications 1 à 7.
- 20
9. Procédé selon la revendication 8 et dans lequel ladite composition aqueuse de papier cellulosique a un pH compris entre 3 et 10.
- 25
10. Procédé selon la revendication 8 ou la revendication 9 et qui comprend l'application à la composition d'étapes de cisaillement, l'ajout à la composition avant au moins une des étapes de cisaillement dudit polymère cationique de poids moléculaire élevé et l'ajout à la composition après l'ajout du polymère cationique suivi par au moins une étape de cisaillement de ladite lignine sulfonée.
- 30
- 35
- 40
- 45
- 50
- 55
11. Papier ou carton obtenu par un procédé tel que revendiqué dans l'une quelconque des revendications 8 à 10.

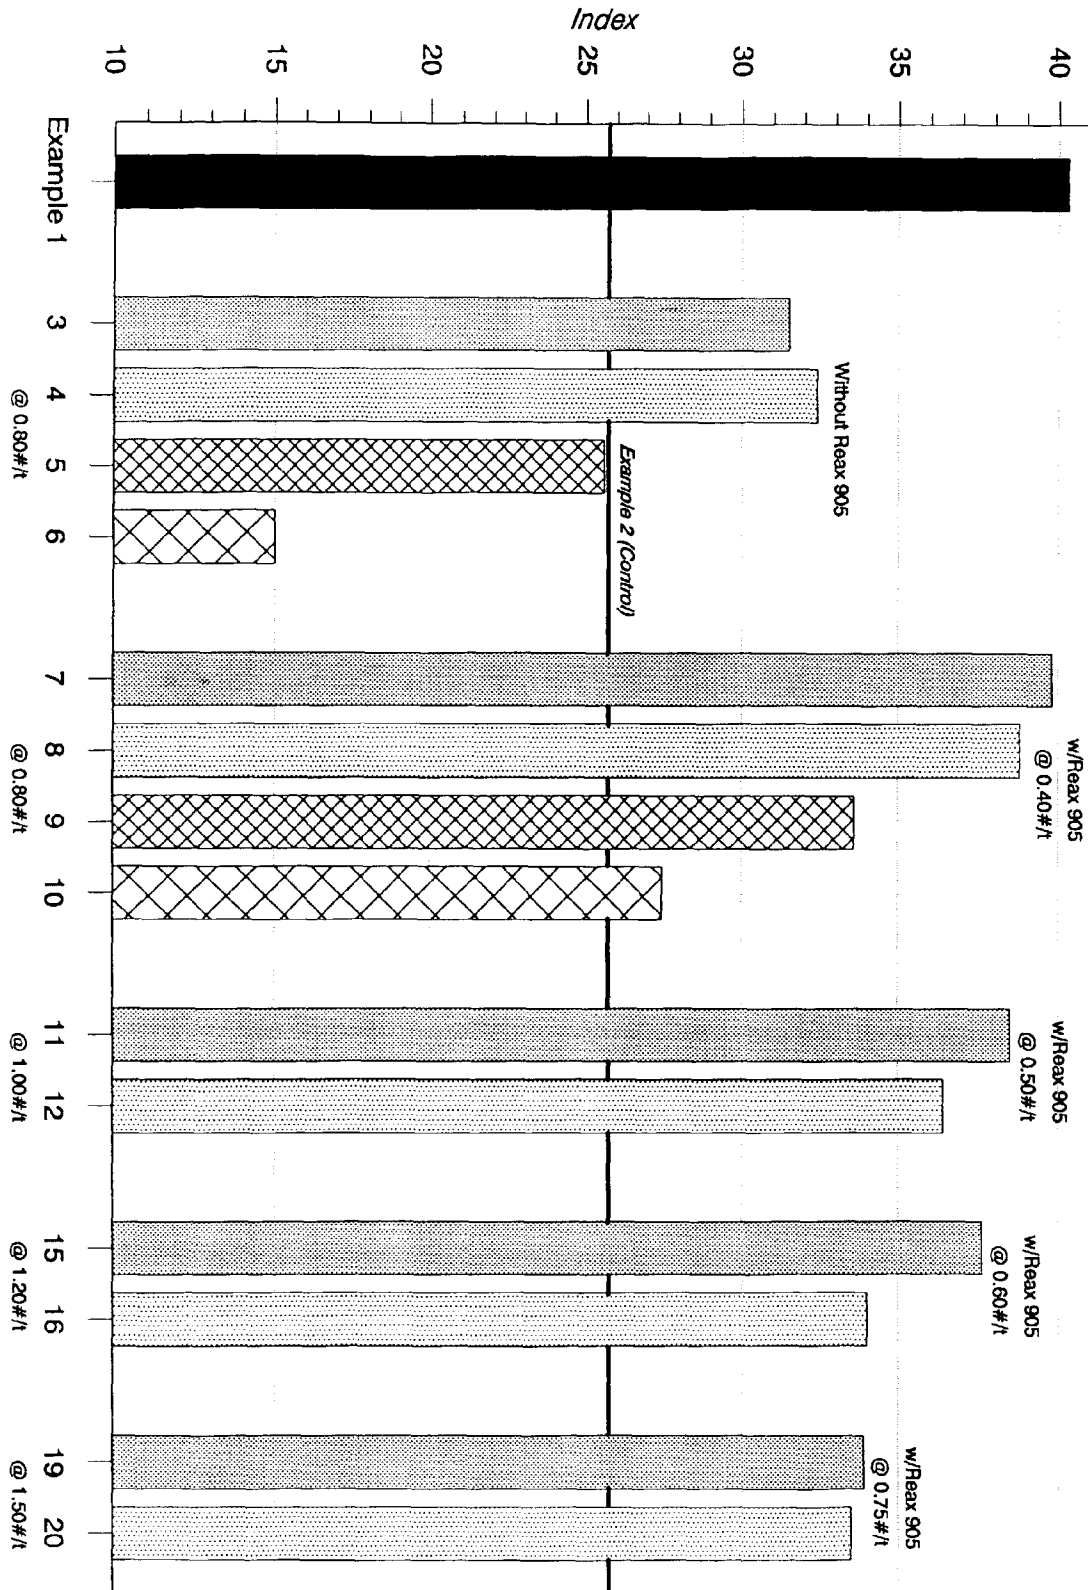

Formation

Figure 1

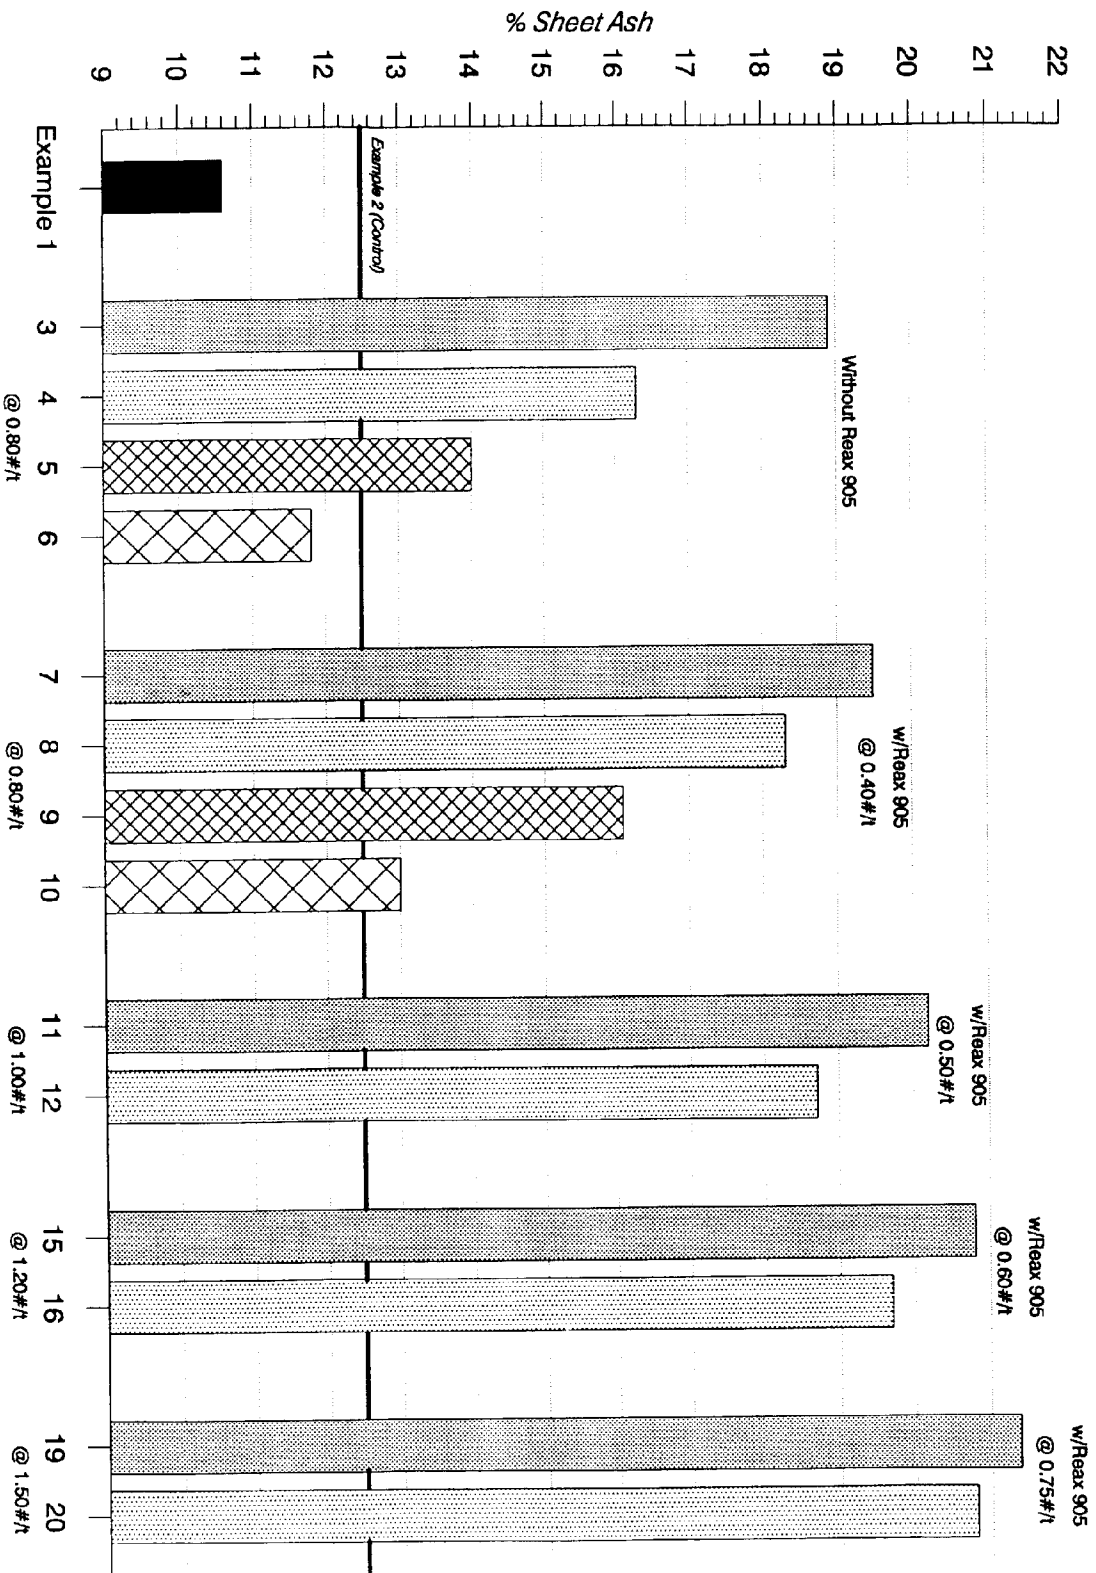


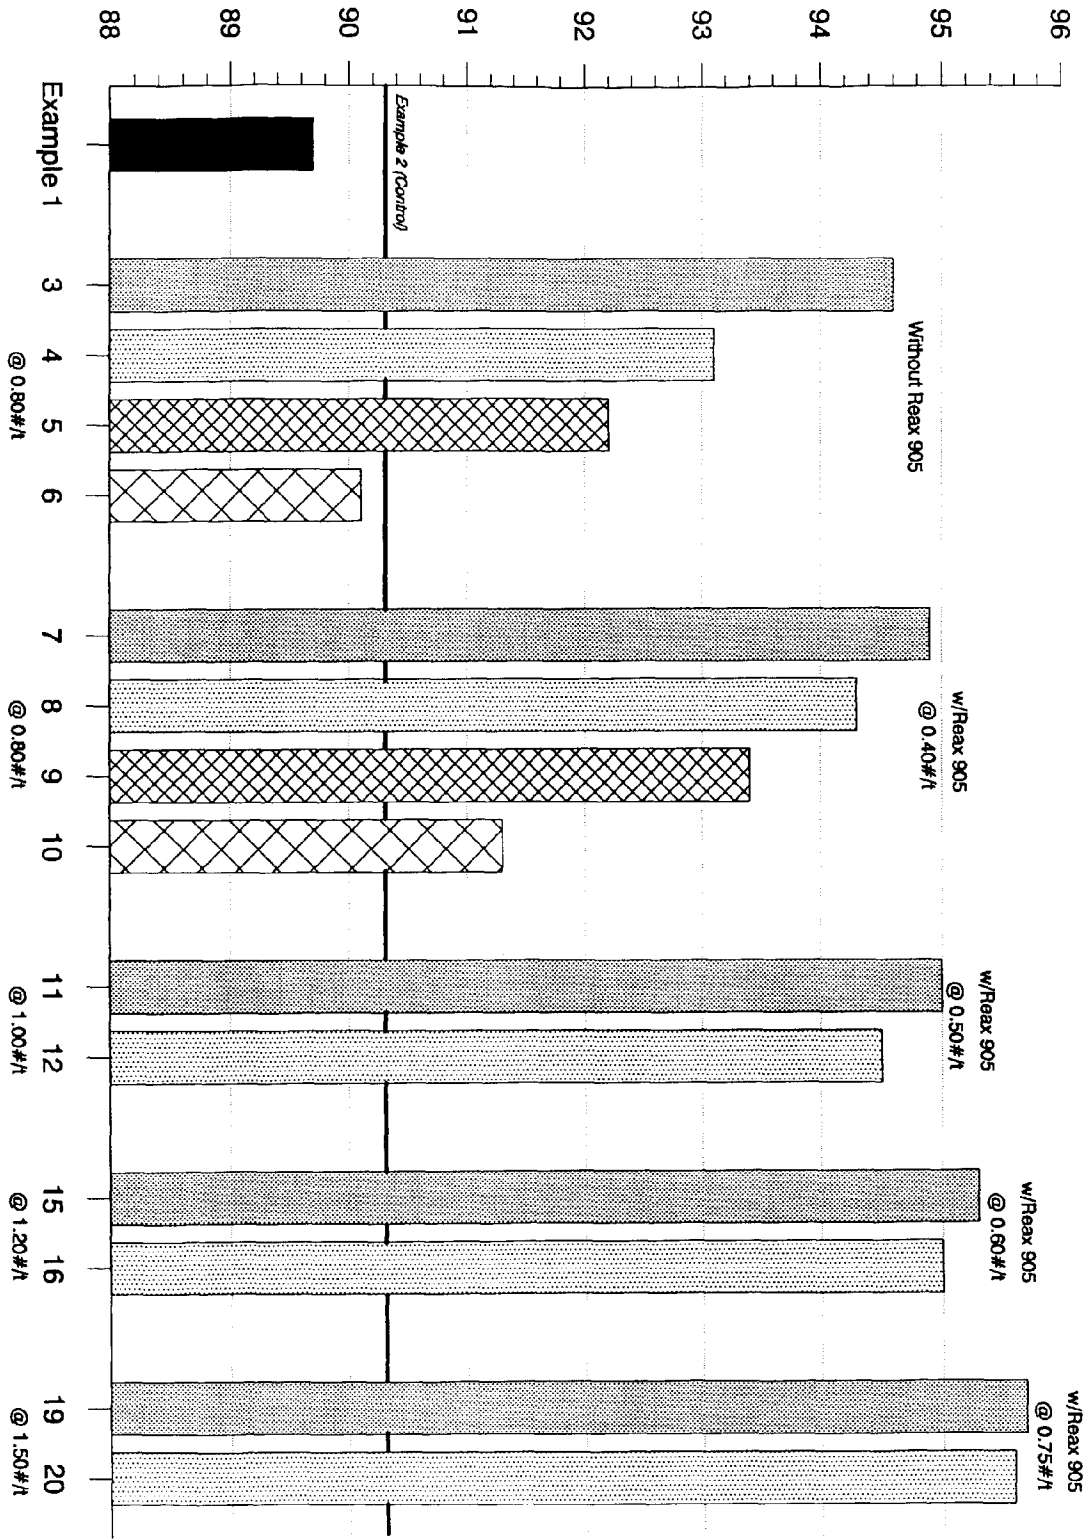


Figure 3
Opacity

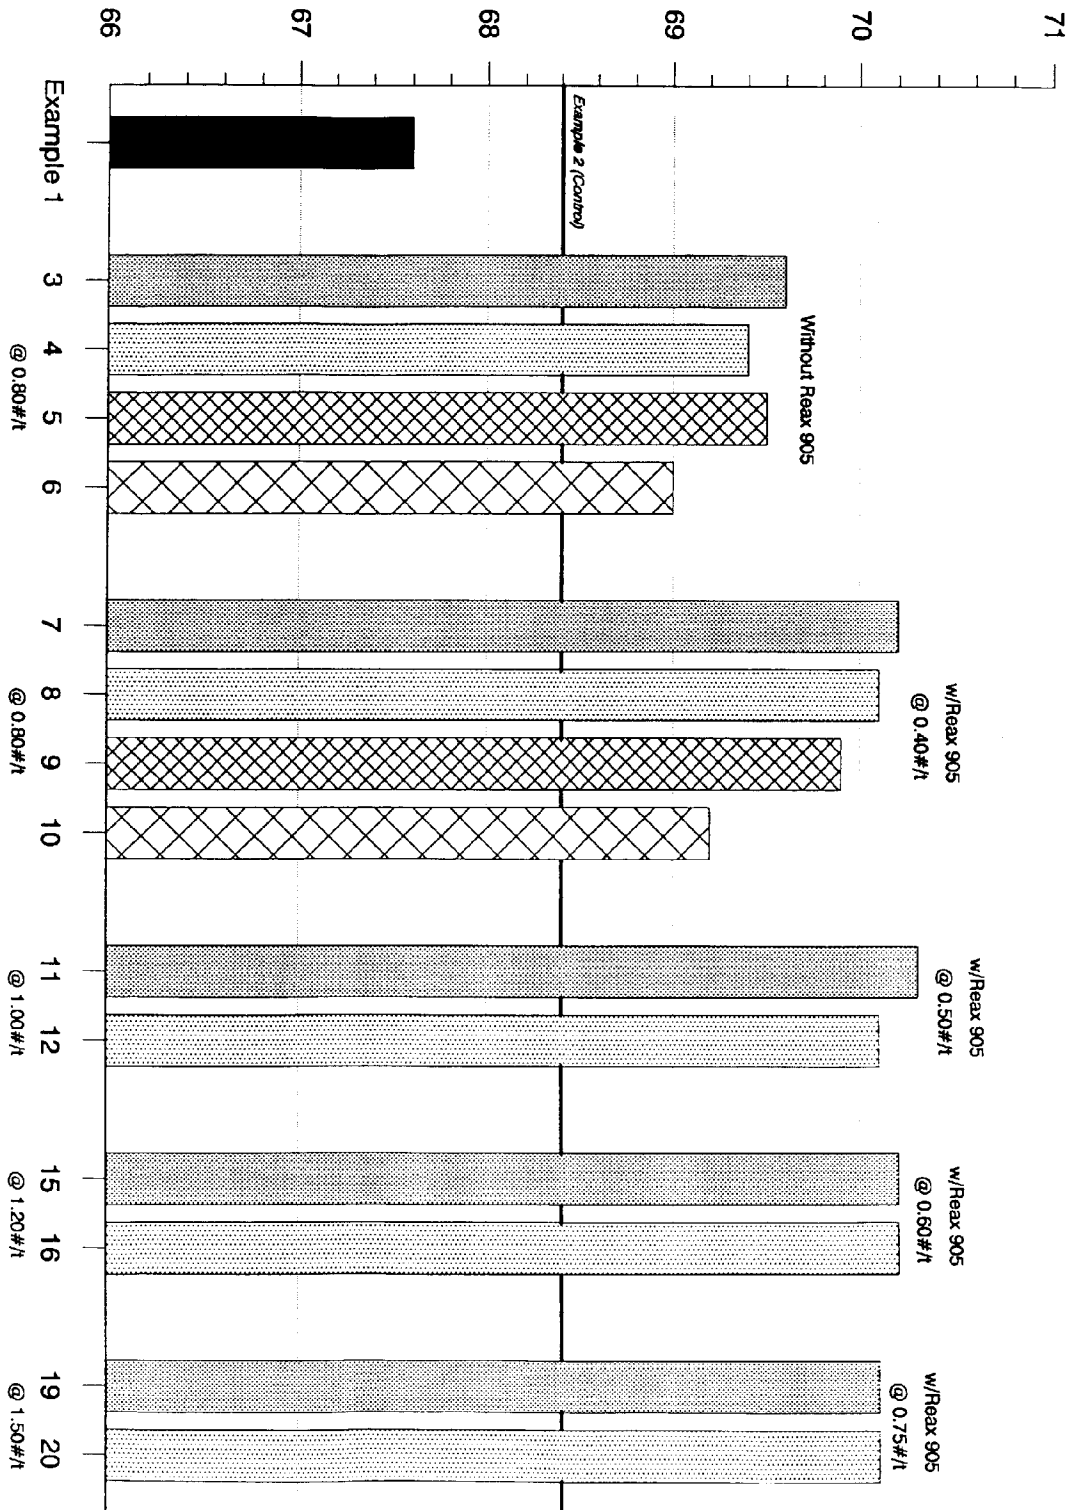

Brightness

Figure 4

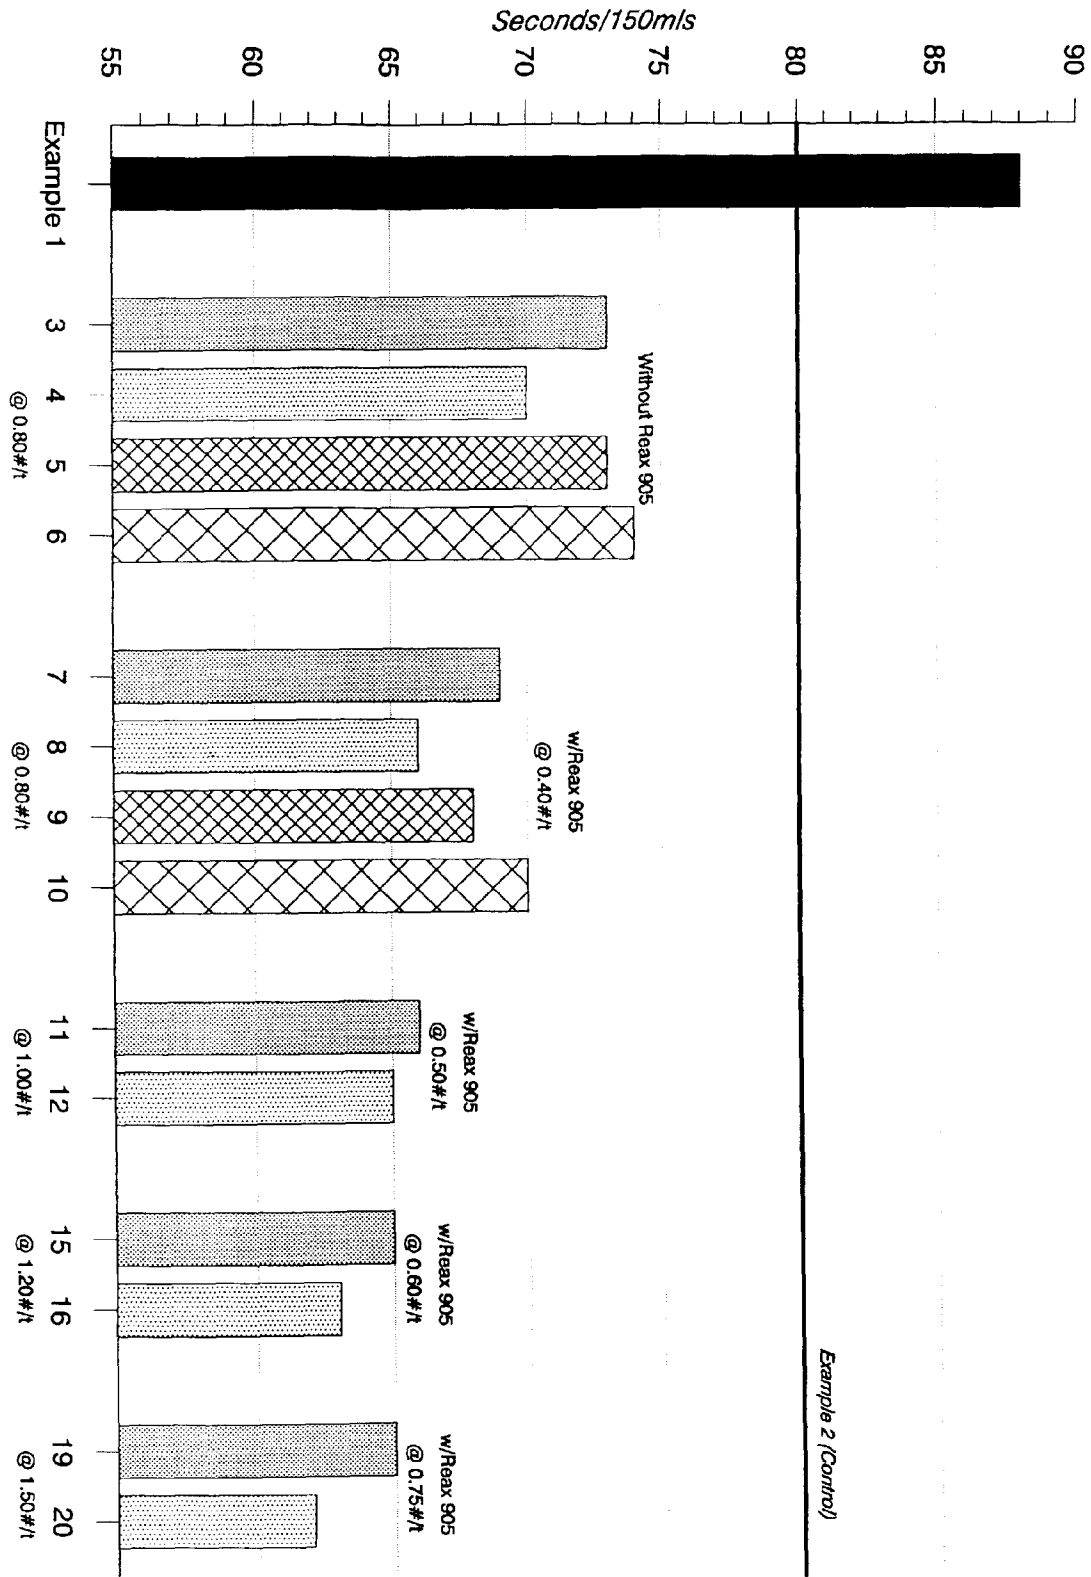


Figure 5
Drainage Time

Figure 5