




(86) **Date de dépôt PCT/PCT Filing Date:** 2011/12/09
 (87) **Date publication PCT/PCT Publication Date:** 2012/06/21
 (45) **Date de délivrance/Issue Date:** 2018/07/17
 (85) **Entrée phase nationale/National Entry:** 2013/06/12
 (86) **N° demande PCT/PCT Application No.:** US 2011/064060
 (87) **N° publication PCT/PCT Publication No.:** 2012/082530
 (30) **Priorité/Priority:** 2010/12/13 (US61/422,253)

(51) **Cl.Int./Int.Cl. C02F 1/00** (2006.01),
B01D 21/01 (2006.01), **B01D 21/02** (2006.01)
 (72) **Inventeurs/Inventors:**
LAROS, TIMOTHY JOHN, US;
BACZEK, FRANK ANDREW, US
 (73) **Propriétaire/Owner:**
FLSMIDTH A/S, DK
 (74) **Agent:** SMART & BIGGAR

(54) **Titre : SYSTEME DE DILUTION D'ALIMENTATION A CANAL DECOUVERT POUR EPAISSISSEUR OU BASSIN DE DECANTATION**
 (54) **Title: OPEN-CHANNEL FEED DILUTION SYSTEM FOR A THICKENER OR SETTLING TANK**

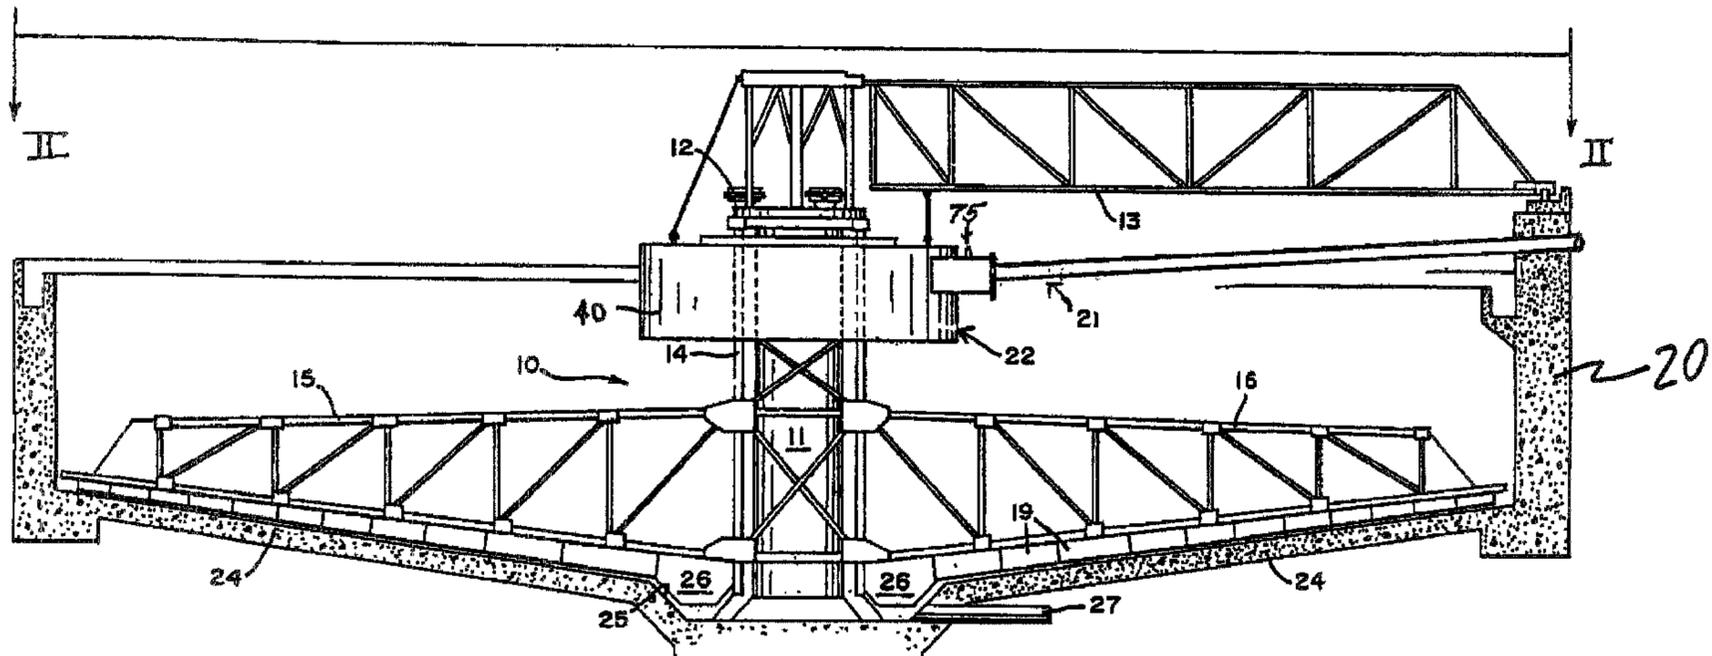

(57) **Abrégé/Abstract:**

An open-channel infeed conduit of a feed dilution system of a thickener/clarifier settling tank is provided with orifices between its upstream inlet end and its outlet end. The orifices are positioned proximate to and in fluid communication with the clarified liquid phase in the tank to draw clarified liquid from the tank into the conduit responsive to or by virtue of momentum transfer between the flow of the liquid slurry feed stream in the conduit and the clarified liquid in the tank.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2012/082530 A1(43) International Publication Date
21 June 2012 (21.06.2012)(51) International Patent Classification:
C02F 1/00 (2006.01)(21) International Application Number:
PCT/US2011/064060(22) International Filing Date:
9 December 2011 (09.12.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/422,253 13 December 2010 (13.12.2010) US(71) Applicant (for all designated States except US): **FLS-MIDTH A/S** [DK/DK]; 77 Vigerslev Alle, DK-2500 Valby (DK).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LAROS, Timothy John** [US/US]; 3764 Sunridge Dr., Park City, Utah 84098 (US). **BACZEK, Frank Andrew** [US/US]; 4746 South Marabow Circle, Holladay, Utah 84117 (US).(74) Agents: **SHARP, Jeffrey A.** et al.; 2040 Avenue C, Bethlehem, Pennsylvania 18017 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: OPEN-CHANNEL FEED DILUTION SYSTEM FOR A THICKENER OR SETTLING TANK

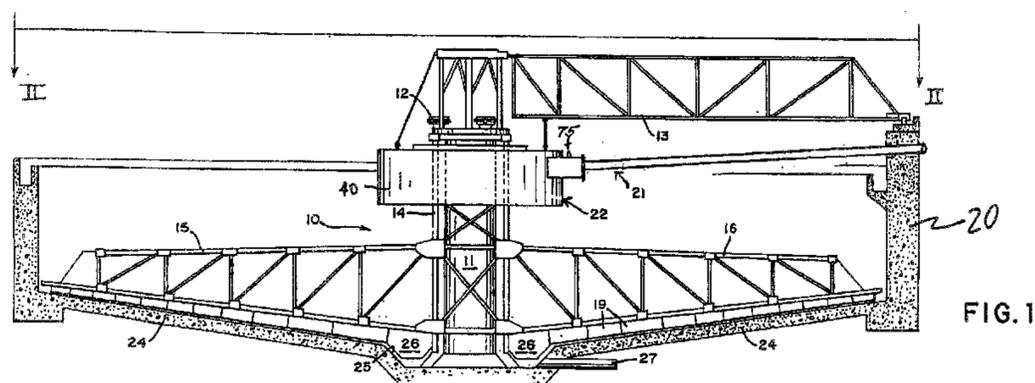


FIG. 1

(57) Abstract: An open-channel infeed conduit of a feed dilution system of a thickener/clarifier settling tank is provided with orifices between its upstream inlet end and its outlet end. The orifices are positioned proximate to and in fluid communication with the clarified liquid phase in the tank to draw clarified liquid from the tank into the conduit responsive to or by virtue of momentum transfer between the flow of the liquid slurry feed stream in the conduit and the clarified liquid in the tank.

OPEN-CHANNEL FEED DILUTION SYSTEM
FOR A THICKENER OR SETTLING TANK

BACKGROUND OF THE INVENTION

5 This invention relates to thickener/clarifier settling tanks used to separate liquid and solid components of an influent feed slurry and specifically relates to feedwell apparatus employed in such thickener/clarifiers to enhance the clarification process. More specifically, the invention relates to a feed dilution system that delivers a diluted solids slurry to a feedwell of a thickener or clarifier tank.

10 Thickener/clarifier settling tanks are used in a wide variety of industries to separate influent feed slurry comprising a solids, or particulate material, containing fluid to produce a "clarified" liquid phase having a lower concentration of solids than the influent feed slurry and an underflow stream having a higher concentration of solids than the influent feed slurry. Thickener/clarifier tanks conventionally comprise a tank having a floor and a continuous wall, which define a volume within which the clarification process takes place. Thickener/clarifier tanks also include an influent feed conduit for delivering influent feed to the tank, an underflow outlet for removing settled solids from the tank and a fluid discharge outlet for directing clarified liquid away from the tank. Thickener/clarifier tanks may also include a rake assembly having rake arms for sweeping along the floor of the tank and may further include an overflow launder or bustle pipe for collecting clarified liquid near the top of the tank.

 Thickener/clarifier settling tanks of the type described operate by introducing an influent feed stream into the volume of the tank where the influent is retained for a period long enough to permit the solids to settle out by gravity from the fluid. The solids that settle to the bottom of the tank produce a sludge or solids bed near the bottom of the tank, which is removed through the underflow outlet. Clarified liquid is formed at or near the top of the thickener/clarifier tank and

is directed away from the tank for further processing or disposal. Settling of solids may be enhanced in some applications by the addition of a flocculant or polymer that forms agglomerates that settle more readily. In many applications, an objective of fluid clarification is to enhance the settling process to achieve a high throughput of solids, and thereby enhance solids
5 recovery.

Many thickener/clarifier settling tanks are constructed with a feedwell, usually centrally located within the tank, into which the influent feed slurry stream is delivered. The feedwell generally serves the purpose of reducing the fluid velocity of the incoming influent feed stream so that the energy in the stream may be dissipated to some degree before entering the tank.
10 Dissipation of energy in the influent feed stream lessens the disruptive effect that the incoming influent feed stream has on the settling rate of the solids in the tank. In other words, introduction into a thickener/clarifier of an influent feed stream under high fluid velocity tends to cause turbulence in the tank and compromises the settling rate of solids. A feedwell may be structured in a variety of ways, therefore, to create or enhance dissipation of energy in the influent feed.
15 For example, the feedwell and influent feed pipe may be structured to introduce influent feed to the feedwell at two opposing directions and into an annular space, such as is disclosed in U.S. Pat. No. 4,278,541 to Eis, et al.

In many feedwell assemblies, the influent feed pipe is incorporated into a dilution feed system including a mixing conduit with a downstream end connected to the feedwell and an
20 upstream end with an eductor structure that delivers both a solids stream or slurry from a feed pipe and a diluting liquid from the clarified liquid at the top of the settling tank. The feed pipe is provided at its outlet end with a nozzle having a circular outlet opening located towards the upstream inlet end of the mixing conduit.

The mixing conduit may take the form of a classical submerged pipe or tube or alternatively an open channel form in which a mixing zone is open to the atmosphere. It has been observed that mixing of the incoming solids slurry with thickener overflow or dilution liquor is generally less complete or effective in the open channel design. It has been observed
5 further that the dilution liquor stream tends to flow along the wall of the mixing channel, outside of the concentrated solids jet from the feed pipe nozzle, and only partially mixes with the concentrated solids jet. This type of performance is not ideal for a feed slurry dilution device that may also be mixing flocculent with a diluted slurry prior to entering a gravity thickener since a combined slurry stream entering the thickener or feedwell should be well
10 flocculated and also diluted to a substantially uniform concentration of solids across the entire cross-sectional area of the mixing channel.

SUMMARY

According to an aspect of the present invention, there is provided a thickener/clarifier apparatus comprising: a settling tank providing for the settling of
15 particulate material residing within liquid contained within said settling tank and facilitating the formation of a clarified liquid phase in an upper region of said settling tank; a feedwell body disposed inside said settling tank; at least one open-channel infeed conduit disposed in said settling tank, said at least one open-channel infeed conduit including an inlet end and an outlet end wherein the outlet end communicates with said feedwell body for delivering thereto
20 a liquid slurry feed stream; a feed pipe; a nozzle provided to a downstream end of the feed pipe; and an eductor structure located proximate the inlet end of said at least one open-channel infeed conduit and being positioned proximate to and in fluid communication with said clarified liquid phase in said settling tank for initially diluting said liquid slurry feed stream with clarified liquid from said settling tank, which, by means of momentum transfer
25 responsive to the movement of the liquid slurry feed stream, entrains or draws said clarified liquid from an upper region of the settling tank; the eductor structure being formed by the positioning of the nozzle relative to the inlet end of the at least one open-channel infeed conduit; said at least one open-channel infeed conduit being provided with at least one orifice between said inlet end and said outlet end, said at least one orifice being positioned proximate
30 to and in fluid communication with said clarified liquid phase in said settling tank to draw

said clarified liquid from said settling tank into said at least one open-channel infeed conduit responsive to or by virtue of momentum transfer between the flow of said liquid slurry feed stream in said at least one open-channel infeed conduit and said clarified liquid in said settling tank.

5 According to another aspect of the present invention, there is provided a feedwell assembly for a thickener/clarifier tank, comprising: a feedwell body disposable inside the thickener/clarifier tank; at least one open-channel infeed conduit disposable in the thickener/clarifier tank, said at least one open-channel infeed conduit including an inlet end and an outlet end, said outlet end communicating with said feedwell body for delivering
10 thereto a liquid slurry feed stream; a feed pipe; a nozzle provided to a downstream end of the feed pipe; and an eductor structure located proximate the inlet end of said at least one open-channel infeed conduit and being positioned proximate to and in fluid communication with a clarified liquid phase in said thickener/clarifier tank for initially diluting said liquid slurry feed stream with clarified liquid from said thickener/clarifier tank, which, by means of momentum
15 transfer responsive to the movement of the liquid slurry feed stream, entrains or draws said clarified liquid from an upper region of the thickener/clarifier tank; the eductor structure being formed by the positioning of the nozzle relative to the inlet end of the at least one open-channel infeed conduit; said at least one open-channel infeed conduit being provided with at least one orifice between said inlet end and said outlet end, said at least one orifice being
20 positionable proximate to and in fluid communication with the clarified liquid phase in the thickener/clarifier tank to draw said clarified liquid from the thickener/clarifier tank into said at least one open-channel infeed conduit responsive to or by virtue of momentum transfer between the flow of said liquid slurry feed stream in said at least one open-channel infeed conduit and the clarified liquid in the thickener/clarifier tank.

25 According to another aspect of the present invention, there is provided a method of diluting an incoming slurry feed stream flowing into a feedwell assembly of a thickener/clarifier tank, said feedwell assembly including a feedwell body disposable inside the thickener/clarifier tank, at least one open-channel infeed conduit disposable in the thickener/clarifier tank, said at least one open-channel infeed conduit including an inlet end
30 and an outlet end, said outlet end communicating with said feedwell body, a nozzle attached

to a downstream end of a feed pipe; and an eductor structure located proximate the inlet end of said at least one open-channel infeed conduit for initially diluting said incoming slurry feed stream with clarified liquid from said thickener/clarifier tank, which, by means of momentum transfer entrains or draws said clarified liquid from an upper region of the thickener/clarifier tank; the eductor structure being formed by the positioning of the nozzle relative to the inlet end of the at least one open-channel infeed conduit; said at least one open-channel infeed conduit being provided with at least one orifice between said inlet end and said outlet end, said at least one orifice being positionable proximate to and in fluid communication with a clarified liquid phase in the thickener/clarifier tank, said method comprising the steps of:

5 flowing the incoming slurry feed stream out of the nozzle and into the inlet end of the at least one open-channel infeed conduit; drawing said clarified liquid from the thickener/clarifier tank into the at least one open-channel infeed conduit via the eductor structure in response to or by virtue of momentum transfer between the flow of said incoming slurry feed stream out of the nozzle and the clarified liquid in the thickener/clarifier tank; drawing said clarified

10 liquid from the thickener/clarifier tank into the at least one open-channel infeed conduit through the at least one orifice in response to or by virtue of momentum transfer between the flow of said flowing slurry feed stream in said at least one open-channel infeed conduit and the clarified liquid in the thickener/clarifier tank; allowing the flowing slurry feed stream in said at least one open-channel infeed conduit to be diluted by and mix with the clarified liquid

15 drawn inside the at least one open-channel infeed conduit thereby producing a diluted and mixed slurry feed stream; and flowing the resulting diluted and mixed slurry feed stream through the outlet end of the at least one open-channel infeed conduit into the feedwell body.

According to another aspect of the present invention, there is provided a thickener/clarifier apparatus comprising: a settling tank providing for the settling of

25 particulate material residing within liquid contained within said settling tank and facilitating the formation of a clarified liquid phase in an upper region of said settling tank; a feedwell body disposed inside said settling tank; at least one open-channel infeed conduit disposed in said settling tank, said at least one open-channel infeed conduit including an inlet end and an outlet end wherein the outlet end communicates with said feedwell body for delivering thereto

30 a liquid slurry feed stream; and said at least one open-channel infeed conduit being provided

with at least one orifice between said inlet end and said outlet end; said at least one orifice being positioned proximate to and in fluid communication with said clarified liquid phase in said settling tank to draw clarified liquid from said settling tank into said at least one open-channel infeed conduit responsive to or by virtue of momentum transfer between the flow of
5 said liquid slurry feed stream in said at least one open-channel infeed conduit and said clarified liquid in said settling tank; wherein said at least one orifice is provided with a flow guide connected to and extending outwardly from an outer side of said at least one open-channel infeed conduit.

According to another aspect of the present invention, there is provided a
10 feedwell assembly for a thickener/clarifier tank, comprising: a feedwell body disposable inside the thickener/clarifier tank; and at least one open-channel infeed conduit disposable in the thickener/clarifier tank, said at least one open-channel infeed conduit including an inlet end and an outlet end, said outlet end communicating with said feedwell body for delivering thereto a liquid slurry feed stream; said at least one open-channel infeed conduit being
15 provided with at least one orifice between said inlet end and said outlet end; said at least one orifice being positionable proximate to and in fluid communication with a clarified liquid phase in the thickener/clarifier tank to draw clarified liquid from the thickener/clarifier tank into said at least one open-channel infeed conduit responsive to or by virtue of momentum transfer between the flow of said liquid slurry feed stream in said at least one open-channel
20 infeed conduit and the clarified liquid in the thickener/clarifier tank; wherein said at least one orifice is provided with a flow guide connected to and extending outwardly from an outer side of said at least one open-channel infeed conduit.

Some embodiments may provide an improved feed dilution system for a feedwell assembly of a thickener/clarifier/settling tank.

25 Some embodiments may provide such a feed dilution system that increases the degree of dilution of a feed stream entering a feedwell.

Some embodiments may provide such a feed dilution system that is inexpensive and has a minimum of moving parts and is consequently reliable and low in required maintenance.

53487-50

Some embodiments may provide a method for the dilution of an incoming slurry feed stream to a feedwell assembly of a thickener/clarifier/settling tank.

These and other features of some embodiments will be apparent from the drawings and description herein.

5 A thickener/clarifier apparatus in accordance with one embodiment comprises a settling tank, a feedwell body disposed inside the tank, at least one open-channel infeed or mixing conduit disposed in the tank, and an eductor structure at an upstream inlet end of the conduit. The tank provides the conditions for settling of particulate material residing within liquid contained within the tank and facilitates the formation of a clarified liquid phase in an
10 upper region of the tank. The open-channel infeed conduit includes outer sides and communicates at an outlet end with the feedwell body for delivering thereto a liquid slurry feed stream. The eductor structure initially dilutes the slurry feed stream with clarified liquid from the tank. Pursuant to this embodiment, the conduit is provided with at least one orifice between its upstream inlet end and its outlet end. The orifice is positioned proximate to and in
15 fluid communication with the clarified liquid phase in the tank to draw clarified liquid from the tank into the conduit responsive to or by virtue of momentum transfer between the flow of the liquid slurry feed stream in the conduit and the clarified liquid in the tank.

In some embodiments, the orifice is preferably one of a plurality of orifices disposed in an upper wall or outer side portion of the conduit between the upstream inlet end
20 and the outlet end of the infeed conduit and positioned proximate to and in fluid communication with the clarified liquid phase in the tank so as to draw clarified liquid from the tank into the conduit in response to, or by virtue of, momentum transfer between the flow of the liquid slurry feed stream in the conduit and the clarified liquid in the tank.

In some embodiments, the orifices may be provided in pairs, members of each
25 pair being disposed transversely across the conduit from one another in opposing sidewalls of the infeed conduit.

In some embodiments, the orifices may be disposed at different vertical elevations along a sidewall of the infeed conduit. More specifically, the orifices may include

53487-50

at least one orifice located at a first distance from an upper edge of the respective sidewall of the infeed conduit and at least another orifice located at a second distance from the upper edge of the respective sidewall, the second distance being substantially greater than the first distance.

5 In some embodiments, the orifices may be of various shapes and sizes, including circular, oval, elongate, triangular, chevron-shaped, rectangular, or rhomboid.

In some embodiments, the orifices may be provided with respective flow guides connected to and extending outwardly from an outer side of the conduit. The flow guides are located adjacent to the respective orifices on a downstream side thereof. The flow
10 guides may extend over and overlap at least a portion of the respective orifices. The flow guides may have a shape that parallels or corresponds to the shape of the given one of the orifices.

An associated feedwell assembly for a thickener/clarifier tank comprises, in accordance with one embodiment, a feedwell body disposable inside the tank, at least one
15 open-channel infeed conduit disposable in the tank and communicating at an outlet end with the feedwell body for delivering thereto a liquid slurry feed stream, and an eductor structure at an upstream or inlet end of the conduit and disposable inside the tank for diluting the slurry feed stream with clarified liquid from the tank. The conduit includes outer sides and is provided with at least one orifice between the upstream or inlet end and the outlet end. The
20 orifice is positionable proximate to and in fluid communication with the clarified liquid phase in the tank to draw clarified liquid from the tank into the conduit responsive to or by virtue of momentum transfer between the flow of the liquid slurry feed stream in the conduit and the clarified liquid in the tank. As indicated above, the orifice is preferably one of a plurality of orifices disposed in an upper wall or side portion of the conduit between the upstream end and
25 the outlet end of the infeed conduit and positionable proximate to and in fluid communication with the clarified liquid phase in the tank so as to draw clarified liquid from the tank into the conduit in response to, or by virtue of, momentum transfer between the flow of the liquid slurry feed stream in the conduit and the clarified liquid in the tank.

53487-50

The orifices are optionally provided with respective flow guides connected to and extending outwardly from an outer side of the conduit.

Some embodiments provide an improved feed dilution system for a feedwell assembly of a thickener/clarifier/settling tank. Some embodiments increase the degree of dilution of a feed stream entering a feedwell without adding system head. Moreover, some
5 embodiments reduce the hydraulic jump at the discharge of the open channel mix tube or infeed conduit into the thickener feedwell.

In some embodiments, these advantages are achieved with a minimum of expense. In some embodiments, an improved feed dilution system as described herein does
10 not entail an increase in maintenance outlays or apparatus downtime, owing in part to the absence of additional moving parts such as extra dilution pumps or mixers.

Some embodiments provide a surprising end result, inasmuch as the supplemental dilution openings of the prior art, which are taught for inclusion in closed tubular infeed conduits, simply do not work. It is demonstrable that in such prior art systems,
15 slurry passes out of the tubular infeed pipes via the openings provided in the infeed pipes. Accordingly, the prior art disinclines one from providing supplemental dilution openings or orifices in slurry infeed conduits of thickener/clarifiers systems. It is a surprising result, contrary to the prior art, that the supplemental dilution openings work in open-channel infeed or mixing conduits.

20 Furthermore, another embodiment provides a method of diluting an incoming slurry feed stream eventually flowing into the feedwell assembly of a thickener/clarifier tank, said method including the steps of flowing the incoming slurry feed stream into the inlet end of the open-channel infeed conduit, drawing clarified liquid from the tank into the infeed conduit through one or more orifices provided in the infeed conduit in response to or by virtue
25 of momentum transfer between the flow of said flowing slurry feed stream in said conduit and the clarified liquid in the tank, allowing the slurry feed stream to be diluted by and mix with the drawn in clarified liquid inside the infeed conduit thereby producing a diluted and mixed

53487-50

slurry feed stream, and flowing the resulting diluted and mixed slurry feed stream through the outlet end of the infeed conduit into the feedwell. Said method could further include the additional steps of providing an eductor structure proximate the infeed conduit inlet for initial dilution of the slurry feed stream and variously flocculating the slurry feed stream, clarified
5 liquid, and/or the combination of the two.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a vertical sectional view of a thickener/clarifier tank having a center pier supporting a rotating sludge raking structure and a feedwell assembly with a feed dilution system in accordance with an embodiment of the present invention.

10 FIG. 2 is a plan view of the thickener/clarifier tank of FIG. 1, taken on line II-II in FIG. 1.

FIG. 3 is a schematic perspective view of a feedwell assembly with a feed dilution system in accordance with an embodiment of the present invention, showing supplemental feed dilution orifices in an open-channel infeed or mixing conduit, in
15 accordance with an embodiment of the present invention.

FIG. 4 is a schematic vertical cross-sectional view of the feed dilution system of FIG. 3.

FIG. 5 is a partial side elevational view of a sidewall of the open-channel infeed or mixing conduit of FIGS. 3 and 4, showing an alternative orifice configuration.

20 FIG. 6 is a partial side elevational view, showing a modification of the orifice configuration of FIG. 5.

FIG. 7 is a partial side elevational view of a sidewall of the open-channel infeed or mixing conduit of FIGS. 3 and 4, showing another alternative orifice configuration.

FIG. 8 is a partial side elevational view of the open-channel infeed or mixing conduit of FIGS. 3 and 4, showing a further alternative orifice configuration.

5 FIG. 9 is a partial side elevational view of a sidewall of the open-channel infeed or mixing conduit of FIGS. 3 and 4, showing an additional alternative orifice configuration.

FIG. 10 is a partial side elevational view of the open-channel infeed or mixing conduit of FIGS. 3 and 4, showing yet another alternative orifice configuration.

FIG. 11 is a partial transverse cross-sectional view taken along line XI-XI in FIG. 6.

10 FIG. 12 is a partial transverse cross-sectional view taken along line XII-XII in FIG. 7.

FIG. 13 is a partial side elevational view of the open-channel infeed or mixing conduit of FIGS. 3 and 4, showing yet a further alternative orifice configuration.

DEFINITIONS

15 The term “open channel” is used herein with respect to a slurry infeed or mixing conduit to indicate that the conduit is open to the ambient air, perhaps along an upper side. The pressure within the conduit is therefore contained within appreciable limits.

The term “upper wall portion” when applied herein to a feedwell infeed conduit refers to any portion of the conduit other than a bottom or under wall panel thereof. The upper wall portion is typically a vertical panel or a substantially vertically oriented wall section, although it
20 may be oriented otherwise depending on the overall shape of the infeed conduit which could be generally u-shaped, v-shaped, rectangular, semi-rectangular, semi-circular or half-piped, etc. Infeed dilution orifices generally do not function if placed in a lower panel of an open channel infeed conduit, as gravity would operate to direct slurry out of the infeed conduit through such an orifice.

The term “flow guide” is used herein to denote a deflector or scoop-shaped element that is provided on an outer surface or outer side of a slurry infeed conduit in association with a dilution orifice in the conduit wall to enhance flow of clarified liquid phase into the conduit via the orifice. Relative to the slurry flow in the conduit, the flow guide is generally located towards the downstream side of the orifice. Typically, the flow guide is adjacent to the respective orifice and extends over or overlaps at least a portion of the orifice. A flow guide may have a shape that echoes or parallels the shape of the respective orifice. Thus, if the orifice is circular or oval, the flow guide has a boundary that is a circular or oval sector. If the orifice is triangular, rhomboidal or chevron-shaped, the flow guide may include two flat plates connected to one another along a linear joint. If the orifice is rectangular or square, the flow guide may include a rectangular or square plate that is inclined at an acute angle relative to the outer surface of the conduit at the orifice. In the latter case, the flow guide may further include a pair of triangular upper and lower side elements each connected along one edge to the rectangular or square guide plate and along another edge to the wall of the conduit. The various flow guides may be wholly separate elements or be cut, bent, formed and/or shaped from the outer side of the slurry infeed conduit itself.

The term “supplemental feed dilution orifice” or “feed dilution orifice” or simply “orifice” is used herein to denote a hole or opening in a wall or panel of an open channel slurry infeed conduit of a feedwell assembly of a thickener/clarifier tank, where the hole or opening is located downstream of the upstream or inlet end of the open channel conduit, which may further also include an eductor structure, and upstream of the outlet end of the open channel conduit, which empties into a feedwell body. The feed dilution orifice is so disposed in the wall of the conduit that the orifice is located in a clarified liquid region of the tank. Clarified liquid is drawn from the tank into the infeed conduit through the orifice owing to a momentum transfer process.

Such momentum transfer will not occur if the conduit is closed or submerged, that is, if it is a tubular member or pipe submerged and not open to the ambient atmosphere, because the internal pressures of the flowing slurry are inevitably so high as to prevent fluid from entering the closed conduit through the orifice.

5

DETAILED DESCRIPTION

As illustrated in FIGS. 1 and 2, a thickener/clarifier comprises a continuously operating thickening or settling tank 20 wherein a sludge raking structure 10 is supported for rotation upon a center pier 11. A drive mechanism 12 of any suitable known construction is mounted atop the pier providing the driving torque for the rake structure. The pier also supports the inner end of an access bridge 13.

Rake structure 10 comprises a central vertical cage portion or cage 14 surrounding the pier 11, and rake arms of girder like construction extending rigidly from the cage. Rake structure 10 has one pair of long rake arms 15 and 16 opposite to one another, and a pair of short rake arms 17 and 18 disposed at right angles thereto, all arms having sludge impelling or conveying blades 19 fixed to the underside thereof.

Rake structure 10 operates in a settling tank 20 to which a feed suspension or feed pulp is supplied through a feed dilution system 21 terminating in a cylindrical feedwell body 22 which surrounds the top end portion of the rake structure and is supported by pier 11.

Tank 20 may be of usual construction, comprising a bottom 24 of shallow inverted conical inclination, and formed with an annular sump 25 around the pier, to which settled solids or sludge are conveyed by rake structure 10. Scraper blades 26, unitary with rake structure 10 and substantially conforming to the profile of sump 25, move the collected sludge to a point of delivery from the sump, as by way of a discharge pipe 27.

Feed dilution system 21 is functionally connected at a downstream end to feedwell body 22. Feedwell body 22 has an annular floor panel 34 (FIG. 2) with an inner edge 36 defining a circular opening 38 and an outer edge contiguous with a cylindrical sidewall 40 of the feedwell body. Feed dilution system 21 is connected to feedwell body 22, perhaps to the feedwell
5 sidewall 40, so as to deliver slurry stream 42 to flow along a circular path inside the feedwell body. Slurry stream 42 has a substantially circular inner boundary located generally above inner edge 36 and a substantially circular outer boundary located adjacent feedwell sidewall 40. The inner and outer boundaries extend parallel to the path of the slurry stream 42.

As depicted in FIG. 3 and more schematically in FIG. 4, feed dilution system 21 includes
10 a slurry or solids feed pipe 44, a nozzle 46 attached to a downstream end of the feed pipe, and a mixing conduit 48 in the form of an open channel having lower corners 49 (only one shown). Feed dilution system 21 may be defined to further include feedwell body 22. At least a portion of nozzle 46 is disposed proximate an upstream or inlet end 50 of mixing conduit 48. A downstream end of mixing conduit 48 may be attached to feedwell sidewall 40 so that the mixing
15 conduit 48 communicates with the feedwell. In FIG. 4, reference designation 52 represents a bed of settled solids in settling tank 20, pipe 54 being provided for removing the thickened underflow.

Nozzle 46 (FIG. 4) may comprise a nozzle body 92 having an inlet end 94 and an outlet end 96, the outlet end being provided with outlet opening (not shown) that ejects a slurry stream
20 58 into conduit 48. The positioning of nozzle 46 relative to upstream end 50 of mixing conduit 48 may form an eductor structure as described in U.S. Patent No. 5,389,250. By means of momentum transfer responsive to the movement of the incoming slurry feed stream 58, the eductor entrains or draws clarified liquid from an upper region of settling tank 20 (arrow 51) and further draws that clarified liquid into the slurry stream inside mixing conduit 48, for purposes of

further, or supplementally, diluting the slurry stream within the mixing conduit 48, prior to, and even for after, delivery of the outgoing slurry stream 69 on and into feedwell body 22.

As depicted in FIGS. 3 and 4, conduit 48 is provided in opposing substantially vertical sides or sidewalls 60 and 62 with openings 64 that serve as supplemental dilution orifices or ports for enabling the drawing of additional clarified liquid from tank 20 into mixing or infeed conduit 48. Orifices 64 are positioned proximate to and in fluid communication with clarified liquid phase in tank 20 to draw clarified liquid from the tank into conduit 48 in response to or by virtue of momentum transfer between the flowing liquid slurry feed stream 58 in conduit 48 and the clarified liquid in tank 20.

Orifices 64 may be disposed in pairs aligned with one another in sidewalls 60 and 62 across open channel conduit 48. As shown, orifices 64 may include a first set of orifices 64a each disposed at one vertical position relative to lower corners 49 and a second set of orifices 64b each disposed at a different vertical position relative to lower corners 49. Alternatively phrased, orifices 64a and 64b may be disposed at different distances d_1 and d_2 from upper edges 66 and 68 of conduit sidewalls 60 and 62.

Flocculant may be delivered via a tube 74 into the dilution fluid or supernatant flow 66 at upstream end 50 of mixing conduit 48 and additionally at points 75, 77 further downstream along the mixing conduit 48. Flocculant may also, additionally or alternatively, be delivered via a tube (not shown) located adjacent to one or more of the orifices 64 such that the flocculant is educted into the mixing conduit 48 along with the clarified dilution liquid.

Orifices 64 may be variously placed in sidewalls 60 and 62 and may have any of a variety of shapes. FIGS. 5 shows sidewall 60 or 62 of infeed conduit 48 provided with oval slurry dilution orifices 80 that are elongated in the direction of slurry flow 58 (FIG. 4). As depicted in FIGS. 6 and 11, sidewalls 60 and 62 of infeed conduit 48 may be further provided with

outwardly extending flow guides 82 in association with each orifice 80, which function as scoops for directing clarified liquid into conduit 48 through the respective orifices 80. Flow guides 82 are each generally in the form of an ovoid section connected to sidewall 60, 62 about the lip of the respective orifice 80. Flow guides 82 may be formed separately and welded to sidewalls 60, 5 62. Alternatively, flow guides 82 may be bent and shaped from the sidewall 60, 62 itself during the formation of the respective orifices 80.

FIG. 7 illustrates sidewall 60 or 62 of infeed conduit 48 provided with rectangular slurry-dilution orifices 84 that are elongated in the direction of slurry flow 58. As depicted in FIG. 7, sidewalls 60 and 62 of infeed conduit 48 may be further provided with outwardly extending flow 10 guides 86a, 86b, 86c (three sizes shown) adjacent each orifice 84, which serve as scoops or deflectors for guiding clarified liquid into conduit 48 via the respective rectangular orifices 84. Flow guides 86a, 86b, 86c each have a generally prismatic form with a rectangular main plate 88 and two triangular wings 90 (FIG. 12). Flow guides 86a, 86b, 86c may be formed separately and welded to sidewalls 60, 62. Alternatively, main plates 88 of flow guides 86a, 86b, 86c may be 15 cut from and bent away from the sidewall 60, 62 during the formation of the respective orifices 84.

As shown in FIG. 8, sidewall 60 or 62 of infeed conduit 48 may be provided with rhomboid-shaped slurry-dilution orifices 92, optionally elongated in the direction of slurry flow 58. Sidewalls 60 and 62 of infeed conduit 48 may be additionally furnished with outwardly 20 projecting flow guides 94 (only one of different possible sizes shown) adjacent each orifice 92, which serve as scoops or deflectors for channeling clarified liquid into conduit 48 via the respective rhomboidal orifices 92. Flow guides 94 each define a generally pyramidal volume and include a triangular main plate and two triangular wings (compare FIGS. 8 and 12). Flow guides 94 may be formed separately and welded to sidewalls 60, 62. Alternatively, the main

plates of flow guides 94 may be cut from and bent away from the sidewall 60, 62 during the formation of the respective orifices 92.

FIG. 9 depicts sidewall 60 or 62 of infeed conduit 48 provided with chevron-shaped slurry-dilution orifices 96 that point like arrowheads in the direction of slurry flow 58. Sidewalls 60 and 62 of infeed conduit 48 may also exhibit outwardly projecting flow guides 98a, 98b (two possible sizes shown) adjacent each orifice 96. Flow guides 98a each define a generally pyramidal volume and include a triangular main plate and two triangular wings (compare FIGS. 9 and 12). Flow guides 98b have a pyramidal base portion and a pair of frusto-pyramidal wings.

FIG. 10 illustrates sidewall 60 or 62 of infeed conduit 48 provided with triangular slurry-dilution orifices 100. Sidewalls 60 and 62 may be supplemented with outwardly projecting flow guides 102 (only one of different possible sizes shown) adjacent each orifice 100. Flow guides 102 each define a generally pyramidal volume and include a triangular main plate and two triangular wings (compare FIGS. 10 and 12). Flow guides 102 may be formed separately and welded to sidewalls 60, 62. Alternatively, the main plates of flow guides 102 may be cut from and bent away from the sidewall 60, 62 during the formation of the respective orifices 100.

FIG. 13 illustrates sidewall 60 or 62 of infeed conduit 48 as provided with rectangular slurry-dilution orifices 104 that are elongated in a vertical direction, generally perpendicular to slurry flow 58. Sidewalls 60 and 62 may be provided with outwardly extending flow guides 106 adjacent each orifice 104. Flow guides 106 each define a prismatic volume with an elongate rectangular main plate and two triangular wings (see FIG. 12).

It can be observed that the flow guides 82, 86a, 86b, 86c, 94, 98a, 98b, 102 and 106 generally mirror or match to some extent the geometric shapes of the respective orifices 80, 84, 92, 96, 100, and 104. This is a natural consequence in some cases of the flow guides being formed in part of material cut from the conduit wall 60 or 62 during the formation of the

respective orifices. In some cases, depending on various factors such as the type of infeed slurry and the flow response of the diluting fluid or liquid, non-matching flow guide shapes may be used or even preferred.

It is to be noted that infeed conduit 48 may be provided with orifices 64 (FIGS. 3 and 4) of different shapes and sizes. For instance, orifices located upstream, closer to upstream end 50 of conduit 48, might be rectangular or square (FIGS. 7, 13), while downstream orifices located closer to feedwell body 22 might be circular or oval (FIGS. 3-6). Thus, the selection of orifice shape may vary in accordance with longitudinal position along conduit 48.

Furthermore, orifices 64 may be located in two levels, an upper level and a lower level, as illustrated in FIGS. 3 and 4. Alternatively, the orifices might be located all at the same level, in a linear array, or in groups or clusters. Other arrangements and configurations might occur to those skilled in the art.

In addition to the previously described apparatus, the present invention provides a method of diluting an incoming slurry feed stream eventually flowing into the feedwell assembly of a thickener/clarifier settling tank, said method including the steps of flowing the incoming slurry feed stream into the inlet end of the open-channel infeed conduit, drawing clarified liquid from the tank into the infeed conduit through one or more orifices provided in the infeed conduit in response to or by virtue of momentum transfer between the flow of said flowing slurry feed stream in said conduit and the clarified liquid in the tank, allowing the slurry feed stream to be diluted by and mix with the drawn in clarified liquid inside the infeed conduit thereby producing a diluted and mixed slurry feed stream, and flowing the resulting diluted and mixed slurry feed stream through the outlet end of the infeed conduit into the feedwell. Said method could further include the additional steps of providing an eductor structure proximate the infeed conduit inlet

for initial dilution of the slurry feed stream and variously flocculating the slurry feed stream, clarified liquid, and/or the combination of the two.

Although the invention has been described in terms of particular embodiments, methods and applications, one of ordinary skill in the art, in light of this teaching, can generate additional
5 embodiments, methods and modifications without departing from the spirit of or exceeding the scope of the claimed invention. It is believed that the invention is useful only in feedwell assemblies having slurry infeed conduits of the open channel type and is particularly useful in such feedwell assemblies having eductor structures for primary or at least initial slurry dilution at the upstream input or inlet ends of the open-channel infeed conduits. The invention is believed
10 to be effective with singular or multiple infeed paths, with or without spill lips (i.e., annular bottom panels or shelves in the feedwell bodies), etc. In addition, the open channel infeed conduit 48 may have any cross-sectional shape including, by way of example, diamond or square, rectangular, triangular or V-shaped, trough or U-shaped, semi-circular or half-piped.

Accordingly, it is to be understood that the drawings and descriptions herein are proffered
15 by way of example to facilitate comprehension of the invention and should not be construed to limit the scope thereof which is only defined by the broadest possible interpretation of the appended claims and their equivalents.

Furthermore, a contractor or other entity may provide, or be hired to provide, the apparatus and/or method such as those disclosed in the present specification and shown in the
20 figures. For instance, the contractor may receive a bid request for a project related to designing a system for supplemental feed dilution or may offer to design such a method and accompanying system. The contractor may then provide the apparatus and/or method such as those discussed above. The contractor may provide such an apparatus and/or method by selling the apparatus and/or method or by offering to sell the apparatus and/or method, and/or the various

accompanying parts and equipment to be used with and/or for said method. The contractor may provide a method and/or related equipment that are configured to meet the design criteria of a client or customer. The contractor may subcontract the fabrication, delivery, sale, or installation of a component of, or of any of the devices or of other devices contemplated for use with the
5 method. The contractor may also maintain, modify or upgrade the provided devices and their use within the general method. The contractor may provide such maintenance or modifications by subcontracting such services or by directly providing those services.

CLAIMS:

1. A thickener/clarifier apparatus comprising:

a settling tank providing for the settling of particulate material residing within liquid contained within said settling tank and facilitating the formation of a clarified liquid phase in an upper region of said settling tank;

a feedwell body disposed inside said settling tank;

at least one open-channel infeed conduit disposed in said settling tank, said at least one open-channel infeed conduit including an inlet end and an outlet end wherein the outlet end communicates with said feedwell body for delivering thereto a liquid slurry feed stream;

a feed pipe;

a nozzle provided to a downstream end of the feed pipe; and

an eductor structure located proximate the inlet end of said at least one open-channel infeed conduit and being positioned proximate to and in fluid communication with said clarified liquid phase in said settling tank for initially diluting said liquid slurry feed stream with clarified liquid from said settling tank, which, by means of momentum transfer responsive to the movement of the liquid slurry feed stream, entrains or draws said clarified liquid from an upper region of the settling tank;

the eductor structure being formed by the positioning of the nozzle relative to the inlet end of the at least one open-channel infeed conduit;

said at least one open-channel infeed conduit being provided with at least one orifice between said inlet end and said outlet end,

said at least one orifice being positioned proximate to and in fluid communication with said clarified liquid phase in said settling tank to draw said clarified liquid from said settling tank into said at least one open-channel infeed conduit responsive to

or by virtue of momentum transfer between the flow of said liquid slurry feed stream in said at least one open-channel infeed conduit and said clarified liquid in said settling tank.

2. The thickener/clarifier apparatus defined in claim 1 wherein said at least one orifice is one of a plurality of orifices disposed in an upper wall portion of said at least one open-channel infeed conduit between said inlet end and said outlet end of said at least one open-channel infeed conduit and positioned proximate to and in fluid communication with said clarified liquid phase in said settling tank so as to draw said clarified liquid from said settling tank into said at least one open-channel infeed conduit in response to, or by virtue of, the momentum transfer between the flow of said liquid slurry feed stream in said at least one open-channel infeed conduit and said clarified liquid in said settling tank.

3. The thickener/clarifier apparatus defined in claim 2 wherein said plurality of orifices are provided in pairs of orifices, members of each pair of orifices being disposed transversely across said at least one open-channel infeed conduit from one another in opposing sidewalls of said at least one open-channel infeed conduit.

4. The thickener/clarifier apparatus defined in claim 2 wherein at least one of said orifices is located at a first distance from an upper edge of a respective sidewall of said at least one open-channel infeed conduit, at least another of said orifices being located at a second distance from an upper edge of a respective sidewall of said at least one open-channel infeed conduit, said second distance being greater than said first distance.

5. The thickener/clarifier apparatus defined in claim 1 wherein said at least one orifice is provided with a flow guide connected to and extending outwardly from an outer side of said at least one open-channel infeed conduit.

6. The thickener/clarifier apparatus defined in claim 5 wherein said flow guide is located adjacent to said at least one orifice on a downstream side thereof.

7. The thickener/clarifier apparatus defined in claim 5 wherein said flow guide extends over and overlaps at least a portion of said at least one orifice.

8. The thickener/clarifier apparatus defined in claim 5 wherein said flow guide has a shape that corresponds to the shape of said given one of said orifices.

9. The thickener/clarifier apparatus defined in claim 1 wherein said at least one orifice has a shape taken from the group consisting of circular, oval, elongate, triangular, 5 chevron-shaped, rectangular, and rhomboid.

10. A feedwell assembly for a thickener/clarifier tank, comprising:

a feedwell body disposable inside the thickener/clarifier tank;

at least one open-channel infeed conduit disposable in the thickener/clarifier tank, said at least one open-channel infeed conduit including an inlet end and an outlet end, 10 said outlet end communicating with said feedwell body for delivering thereto a liquid slurry feed stream;

a feed pipe;

a nozzle provided to a downstream end of the feed pipe; and

an eductor structure located proximate the inlet end of said at least one open- 15 channel infeed conduit and being positioned proximate to and in fluid communication with a clarified liquid phase in said thickener/clarifier tank for initially diluting said liquid slurry feed stream with clarified liquid from said thickener/clarifier tank, which, by means of momentum transfer responsive to the movement of the liquid slurry feed stream, entrains or draws said clarified liquid from an upper region of the thickener/clarifier tank;

20 the eductor structure being formed by the positioning of the nozzle relative to the inlet end of the at least one open-channel infeed conduit;

said at least one open-channel infeed conduit being provided with at least one orifice between said inlet end and said outlet end,

said at least one orifice being positionable proximate to and in fluid 25 communication with the clarified liquid phase in the thickener/clarifier tank to draw said

clarified liquid from the thickener/clarifier tank into said at least one open-channel infeed conduit responsive to or by virtue of momentum transfer between the flow of said liquid slurry feed stream in said at least one open-channel infeed conduit and the clarified liquid in the thickener/clarifier tank.

5 11. The feedwell assembly defined in claim 10 wherein said at least one orifice is one of a plurality of orifices disposed in an upper wall portion of said at least one open-channel infeed conduit between said inlet end and said outlet end of said at least one open-channel infeed conduit and positionable proximate to and in fluid communication with the clarified liquid phase in the thickener/clarifier tank so as to draw said clarified liquid from the
10 thickener/clarifier tank into said at least one open-channel conduit in response to, or by virtue of, the momentum transfer between the flow of said liquid slurry feed stream in said at least one open-channel conduit and the clarified liquid in the thickener/clarifier tank.

12. The feedwell assembly apparatus defined in claim 10 wherein said at least one orifice is provided with a flow guide connected to and extending outwardly from an outer side
15 of said at least one open-channel infeed conduit.

13. The feedwell assembly apparatus defined in claim 12 wherein said flow guide is located adjacent to the at least one orifice on a downstream side thereof.

14. The feedwell assembly apparatus defined in claim 12 wherein said flow guide extends over and overlaps at least a portion of the at least one orifice.

20 15. A method of diluting an incoming slurry feed stream flowing into a feedwell assembly of a thickener/clarifier tank, said feedwell assembly including a feedwell body disposable inside the thickener/clarifier tank, at least one open-channel infeed conduit disposable in the thickener/clarifier tank, said at least one open-channel infeed conduit including an inlet end and an outlet end, said outlet end communicating with said feedwell
25 body, a nozzle attached to a downstream end of a feed pipe; and

an eductor structure located proximate the inlet end of said at least one open-channel infeed conduit for initially diluting said incoming slurry feed stream with clarified

liquid from said thickener/clarifier tank, which, by means of momentum transfer entrains or draws said clarified liquid from an upper region of the thickener/clarifier tank;

the eductor structure being formed by the positioning of the nozzle relative to the inlet end of the at least one open-channel infeed conduit;

5 said at least one open-channel infeed conduit being provided with at least one orifice between said inlet end and said outlet end, said at least one orifice being positionable proximate to and in fluid communication with a clarified liquid phase in the thickener/clarifier tank, said method comprising the steps of:

10 flowing the incoming slurry feed stream out of the nozzle and into the inlet end of the at least one open-channel infeed conduit;

 drawing said clarified liquid from the thickener/clarifier tank into the at least one open-channel infeed conduit via the eductor structure in response to or by virtue of momentum transfer between the flow of said incoming slurry feed stream out of the nozzle and the clarified liquid in the thickener/clarifier tank;

15 drawing said clarified liquid from the thickener/clarifier tank into the at least one open-channel infeed conduit through the at least one orifice in response to or by virtue of momentum transfer between the flow of said flowing slurry feed stream in said at least one open-channel infeed conduit and the clarified liquid in the thickener/clarifier tank;

20 allowing the flowing slurry feed stream in said at least one open-channel infeed conduit to be diluted by and mix with the clarified liquid drawn inside the at least one open-channel infeed conduit thereby producing a diluted and mixed slurry feed stream; and

 flowing the resulting diluted and mixed slurry feed stream through the outlet end of the at least one open-channel infeed conduit into the feedwell body.

16. A thickener/clarifier apparatus comprising:

a settling tank providing for the settling of particulate material residing within liquid contained within said settling tank and facilitating the formation of a clarified liquid phase in an upper region of said settling tank;

5 a feedwell body disposed inside said settling tank;

at least one open-channel infeed conduit disposed in said settling tank, said at least one open-channel infeed conduit including an inlet end and an outlet end wherein the outlet end communicates with said feedwell body for delivering thereto a liquid slurry feed stream; and

10 said at least one open-channel infeed conduit being provided with at least one orifice between said inlet end and said outlet end;

said at least one orifice being positioned proximate to and in fluid communication with said clarified liquid phase in said settling tank to draw clarified liquid from said settling tank into said at least one open-channel infeed conduit responsive to or by virtue of momentum transfer between the flow of said liquid slurry feed stream in said at least one open-channel infeed conduit and said clarified liquid in said settling tank;

wherein said at least one orifice is provided with a flow guide connected to and extending outwardly from an outer side of said at least one open-channel infeed conduit.

17. The thickener/clarifier apparatus defined in claim 12 wherein said flow guide is located adjacent to said at least one orifice on a downstream side thereof.

18. The thickener/clarifier apparatus defined in claim 12 wherein said flow guide extends over and overlaps at least a portion of said at least one orifice.

19. The thickener/clarifier apparatus defined in claim 12 wherein said flow guide has a shape that corresponds to the shape of said given one of said orifices.

20. A feedwell assembly for a thickener/clarifier tank, comprising:

a feedwell body disposable inside the thickener/clarifier tank; and

at least one open-channel infeed conduit disposable in the thickener/clarifier tank, said at least one open-channel infeed conduit including an inlet end and an outlet end,
5 said outlet end communicating with said feedwell body for delivering thereto a liquid slurry feed stream;

said at least one open-channel infeed conduit being provided with at least one orifice between said inlet end and said outlet end;

said at least one orifice being positionable proximate to and in fluid
10 communication with a clarified liquid phase in the thickener/clarifier tank to draw clarified liquid from the thickener/clarifier tank into said at least one open-channel infeed conduit responsive to or by virtue of momentum transfer between the flow of said liquid slurry feed stream in said at least one open-channel infeed conduit and the clarified liquid in the thickener/clarifier tank;

15 wherein said at least one orifice is provided with a flow guide connected to and extending outwardly from an outer side of said at least one open-channel infeed conduit.

21. The feedwell assembly apparatus defined in claim 20 wherein said flow guide is located adjacent to the at least one orifice on a downstream side thereof.

22. The feedwell assembly apparatus defined in claim 20 wherein said flow guide
20 extends over and overlaps at least a portion of the at least one orifice.

FIG. 1

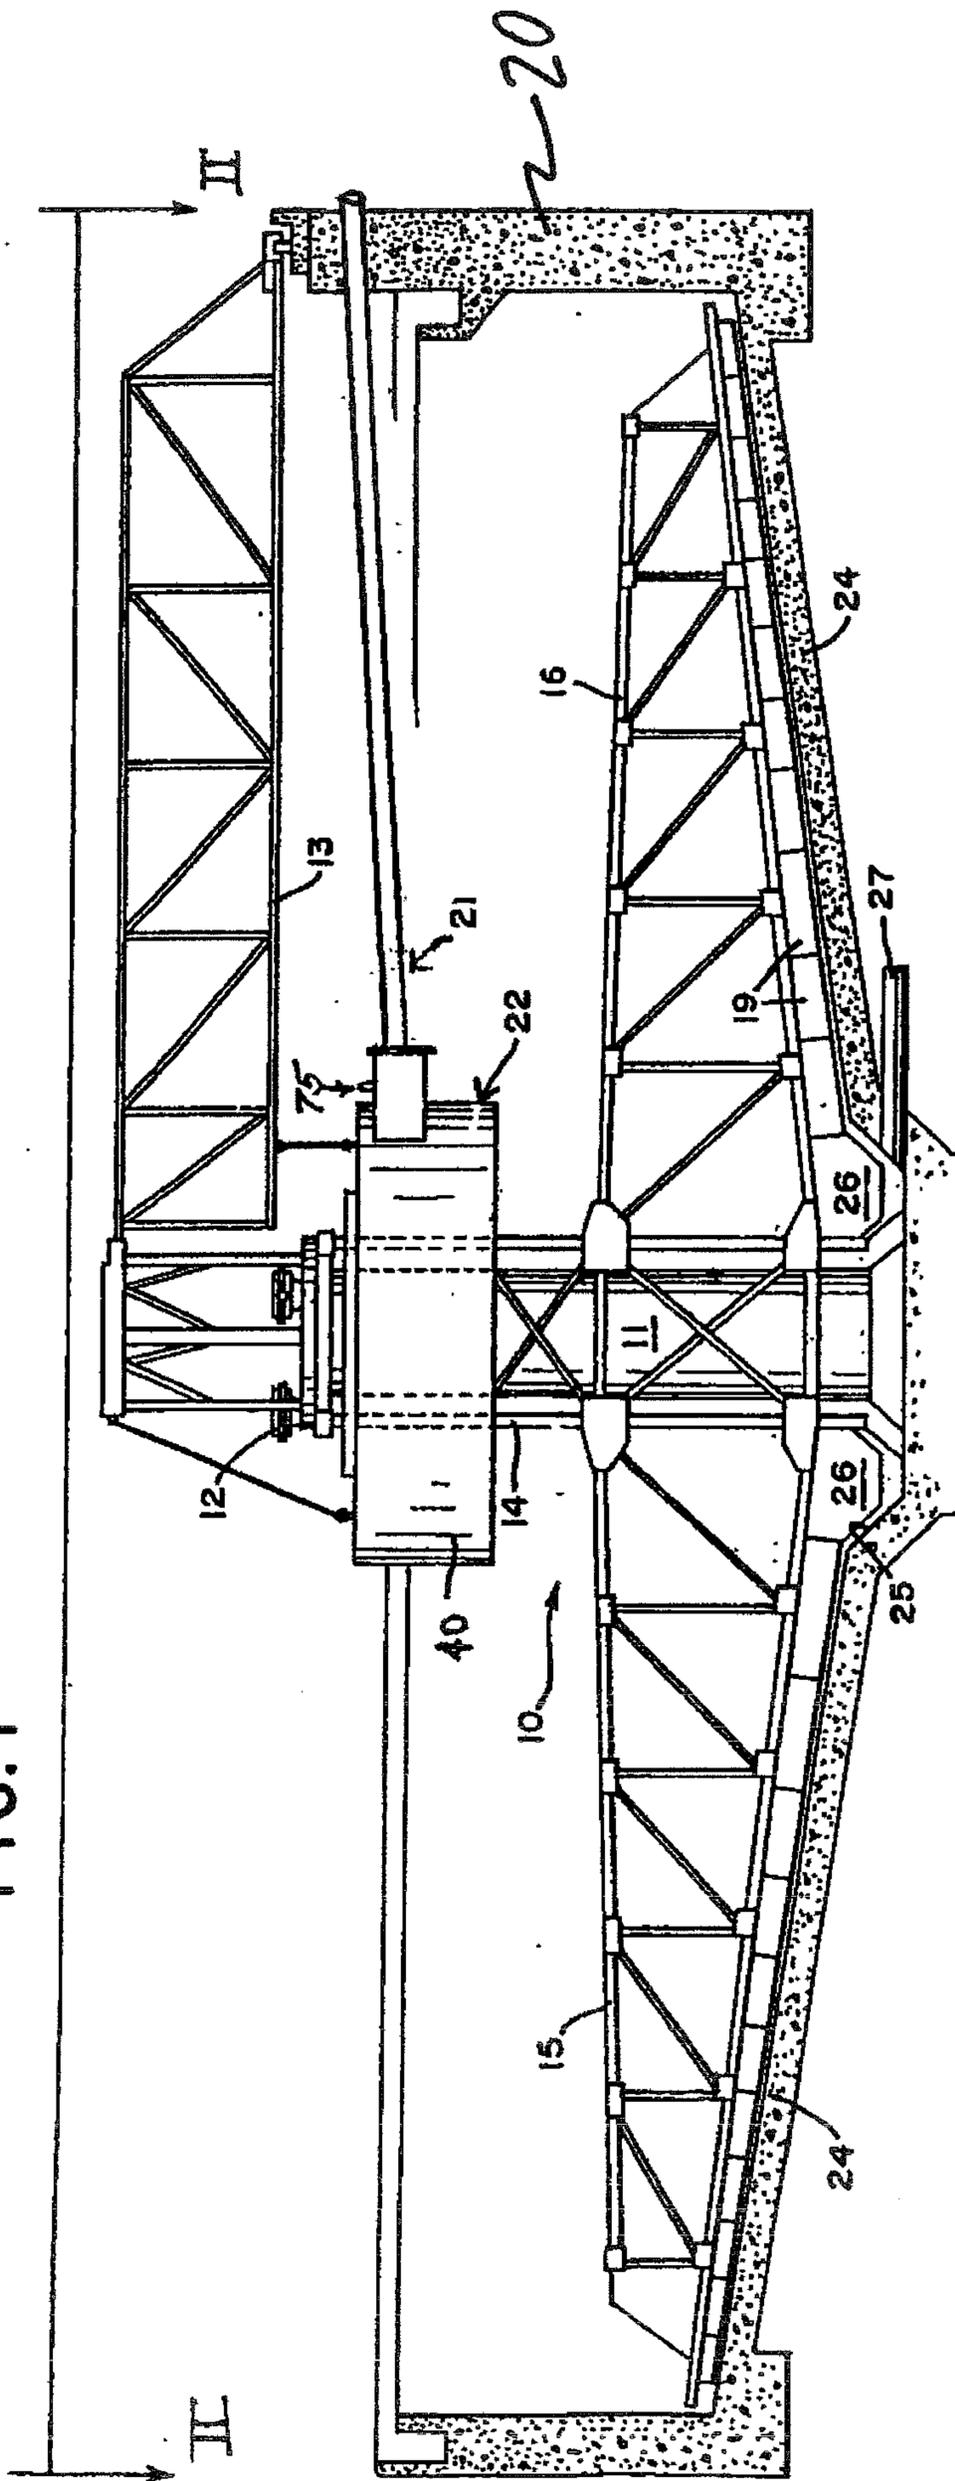
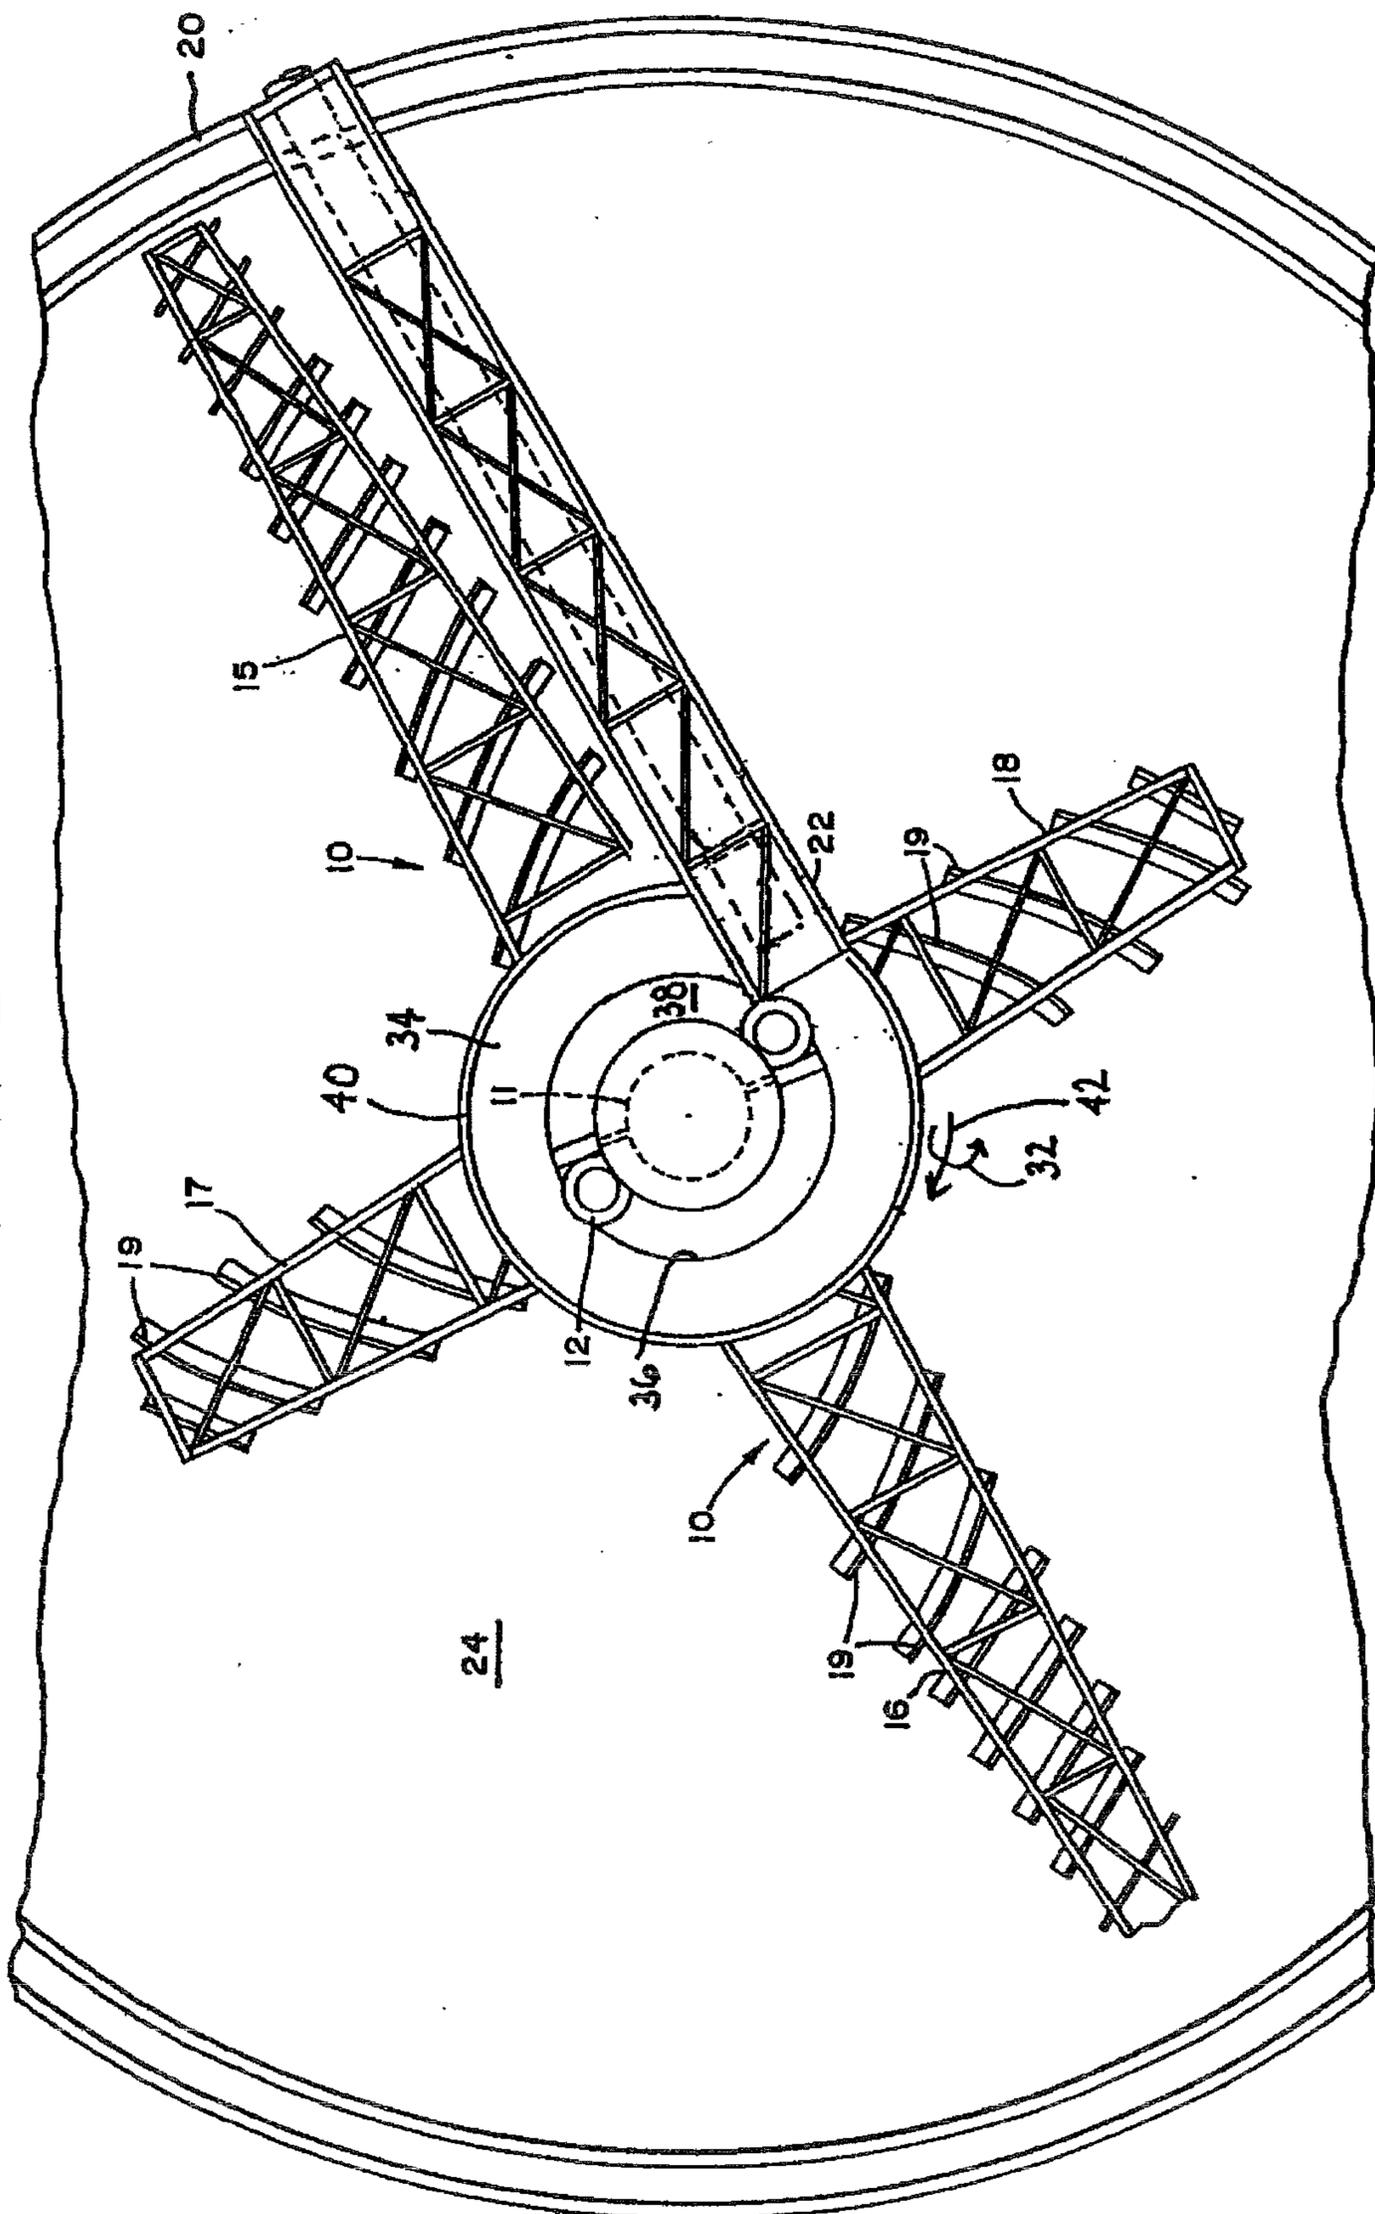


FIG. 2



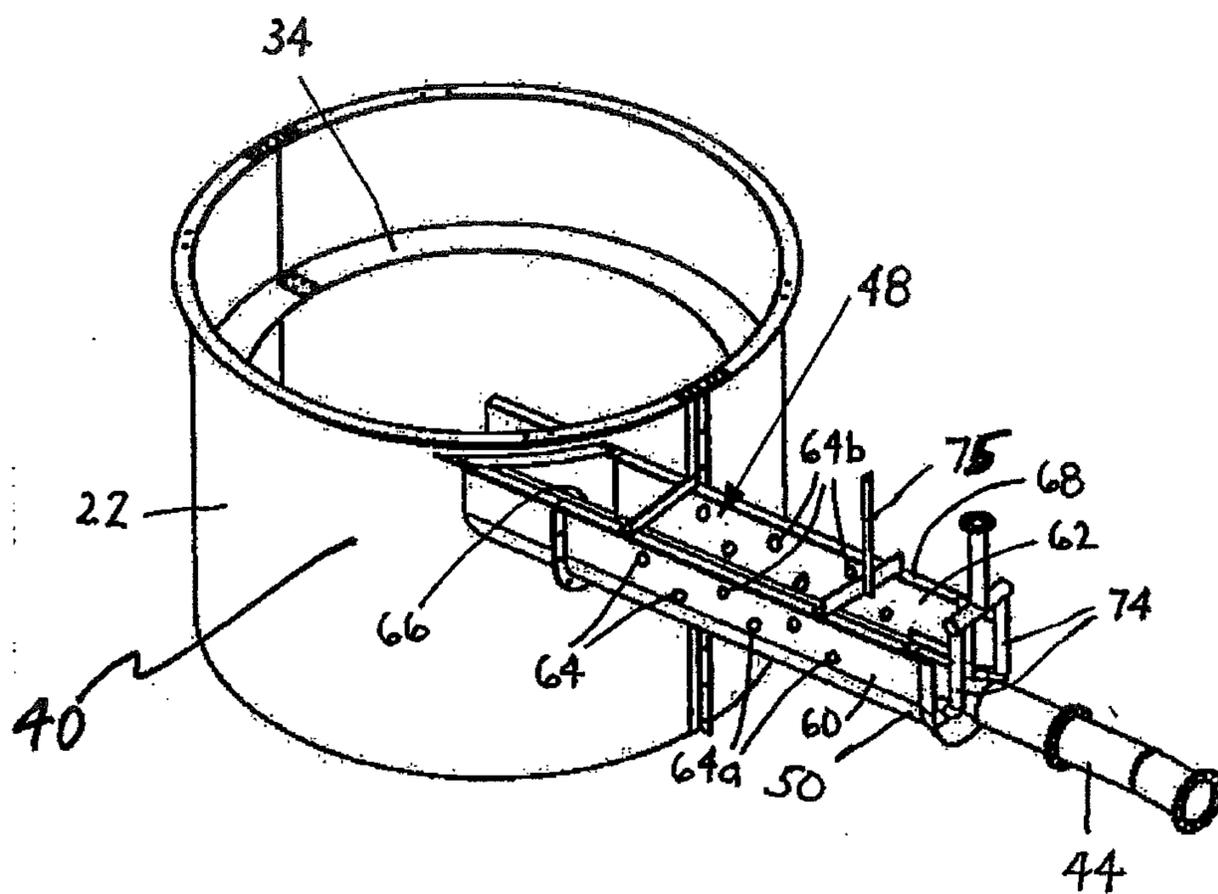


FIG. 3

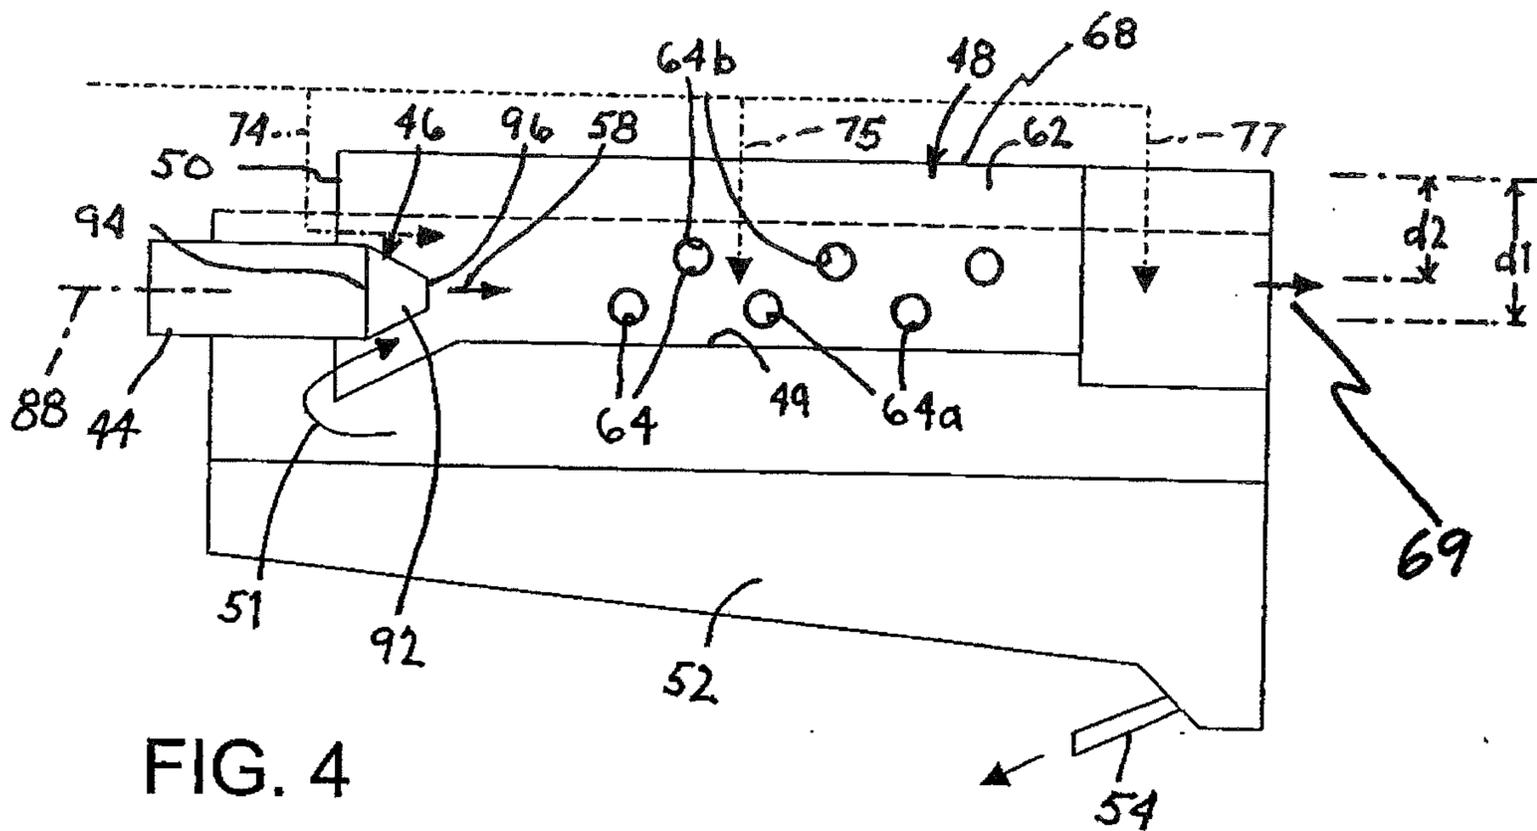


FIG. 4

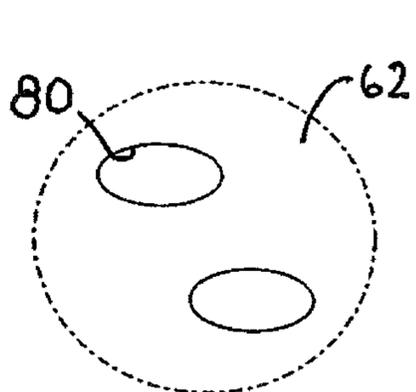


FIG. 5

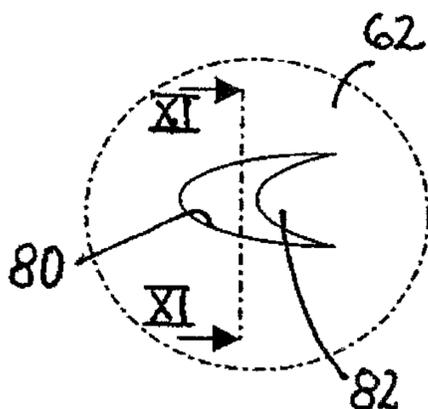


FIG. 6

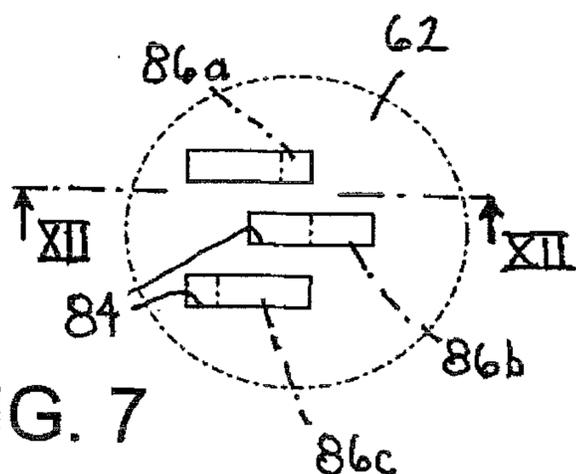


FIG. 7

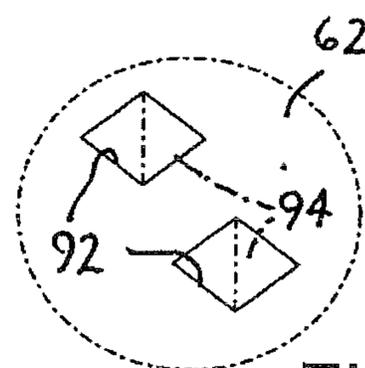


FIG. 8

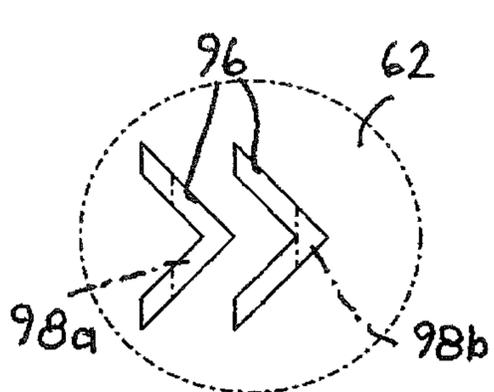


FIG. 9

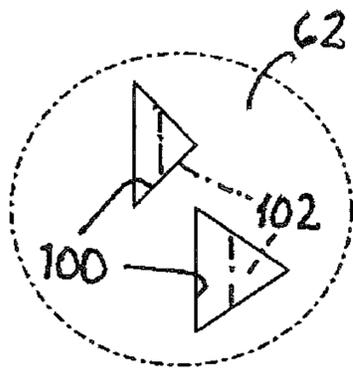


FIG. 10




FIG. 11

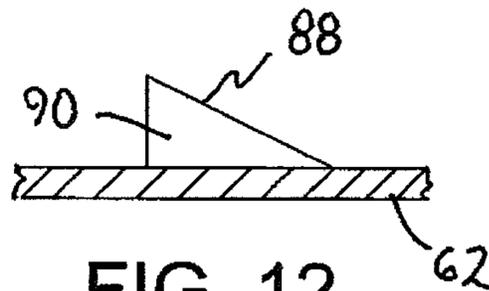


FIG. 12

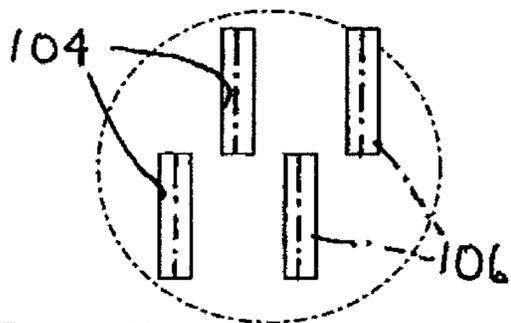


FIG. 13

