



US 20020050345A1

(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2002/0050345 A1**

Miura et al.

(43) **Pub. Date:**

May 2, 2002

(54) **HEAT EXCHANGER FOR AIR COMPRESSOR**

Publication Classification

(51) **Int. Cl.⁷** **F28D 7/02; F28F 3/00**

(52) **U.S. Cl.** **165/166; 165/164**

(76) **Inventors:** Haruo Miura, Chiyoda (JP); Kazuki Takahashi, Tsuchiura (JP); Seiji Tsuru, Tsuchiura (JP); Minoru Taniyama, Ami (JP); Tomohiro Naruse, Chiyoda (JP); Toshio Hattori, Ushiku (JP)

(57) **ABSTRACT**

Correspondence Address:
**ANTONELLI TERRY STOUT AND KRAUS
SUITE 1800
1300 NORTH SEVENTEENTH STREET
ARLINGTON, VA 22209**

A heat exchanger used in a screw air compressor has a low temperature chamber through which low temperature fluid flows and a high temperature chamber through which high temperature fluid flows. The low temperature chamber and the high temperature chamber are separated by a partition plate. The high temperature chambers and the low temperature chambers are alternately arranged in layers, so that the low temperature chambers are disposed at both ends in a layered direction. Additionally, the flowing direction of the low temperature fluid in the low temperature chambers and the flowing direction of the high temperature fluid in the high temperature chambers are substantially orthogonal to each other.

(21) **Appl. No.:** 09/921,926

(22) **Filed:** Aug. 6, 2001

(30) **Foreign Application Priority Data**

Oct. 31, 2000 (JP) 2000-337253

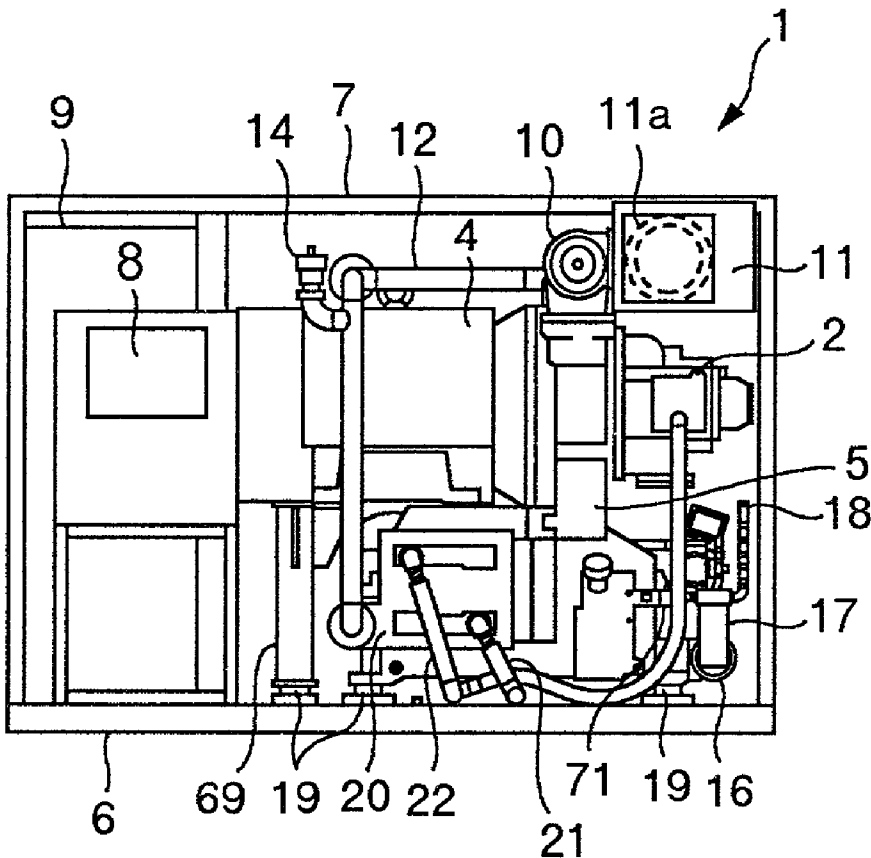


FIG.1

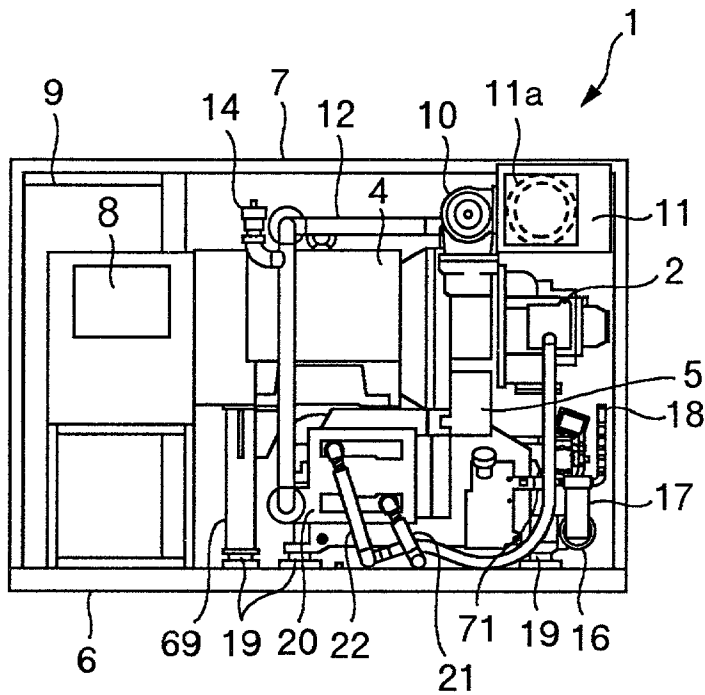


FIG.2

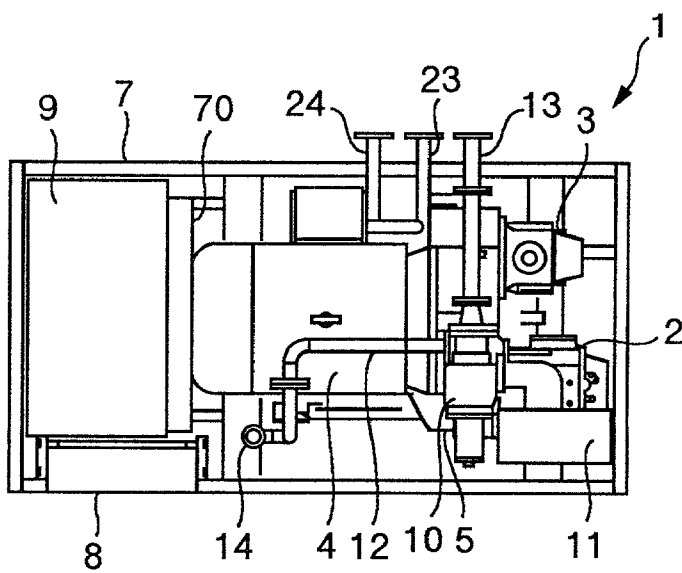


FIG.3

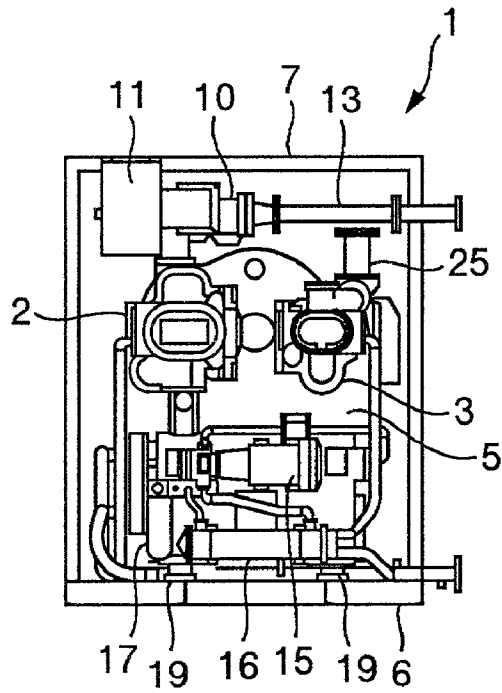


FIG.4

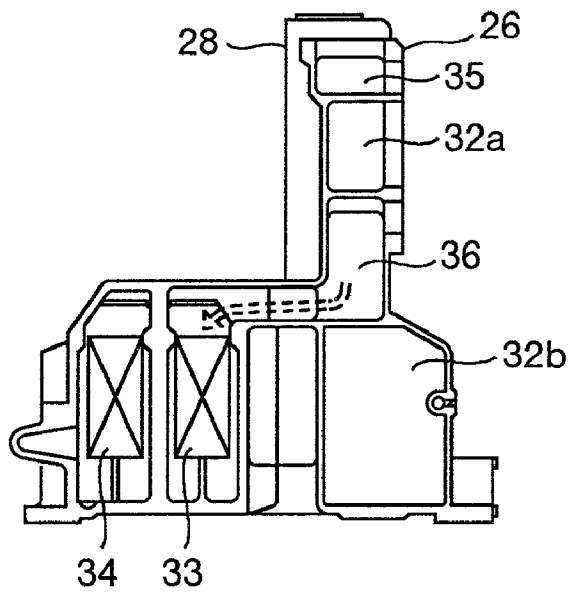


FIG.5

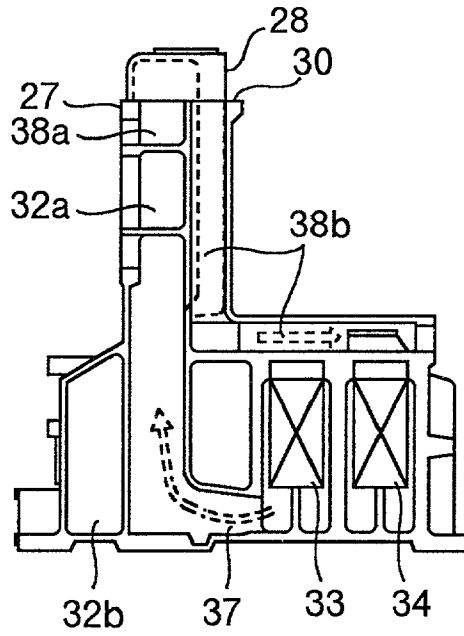


FIG.6

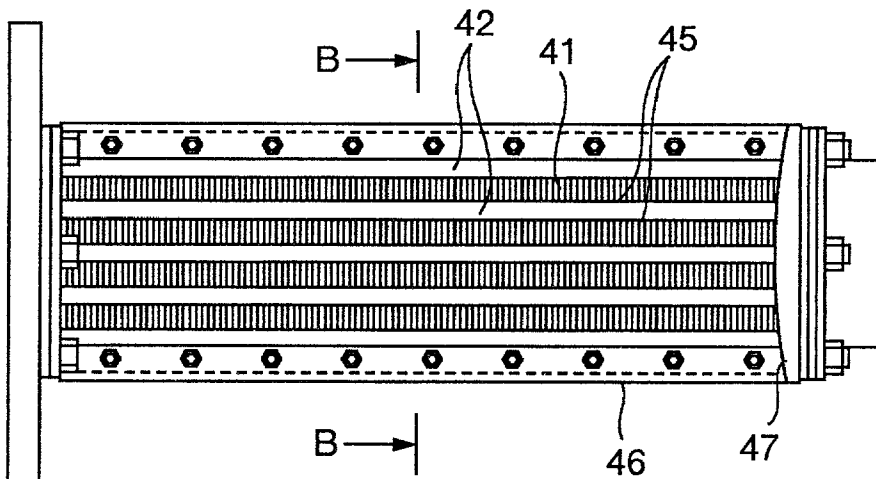


FIG. 7

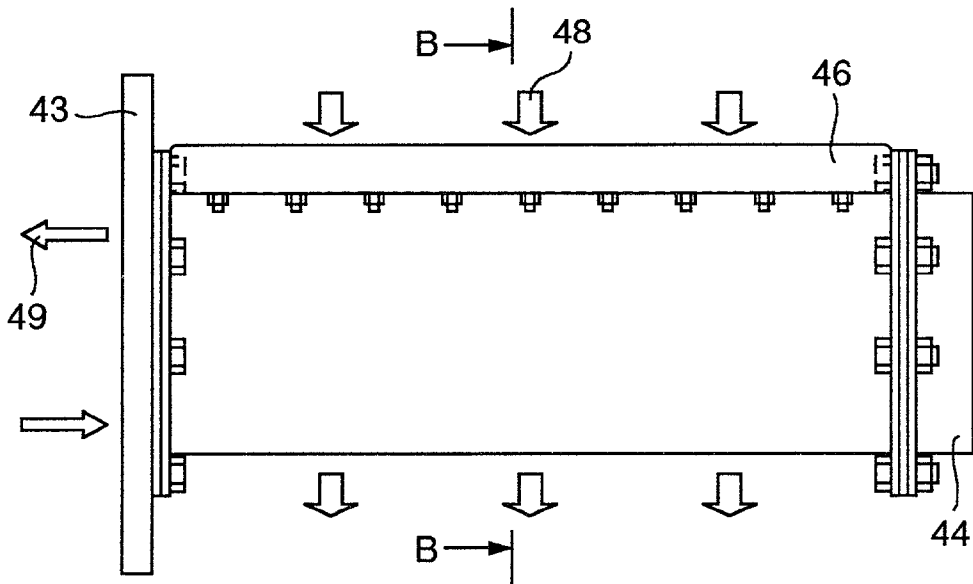


FIG. 8

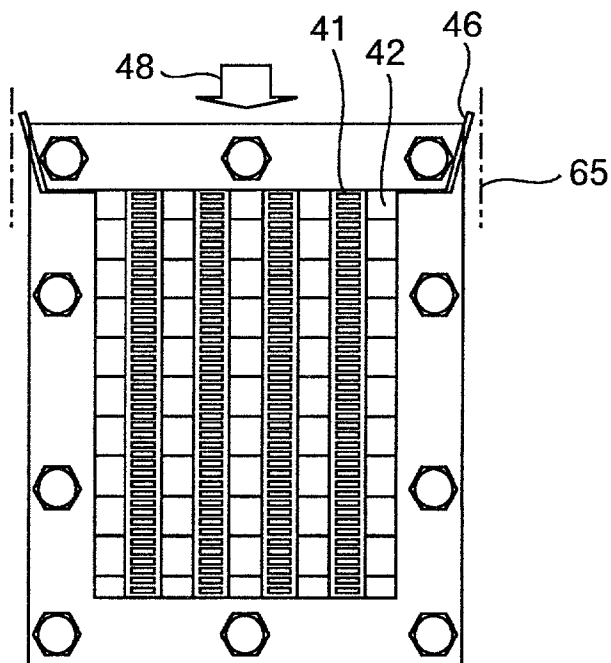


FIG. 9

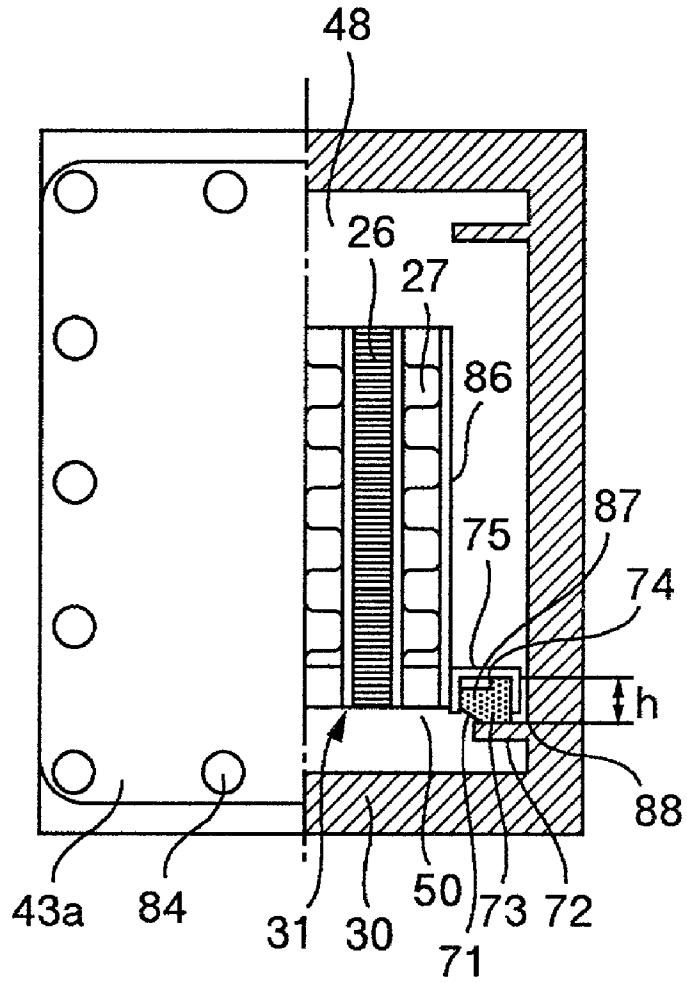


FIG.10

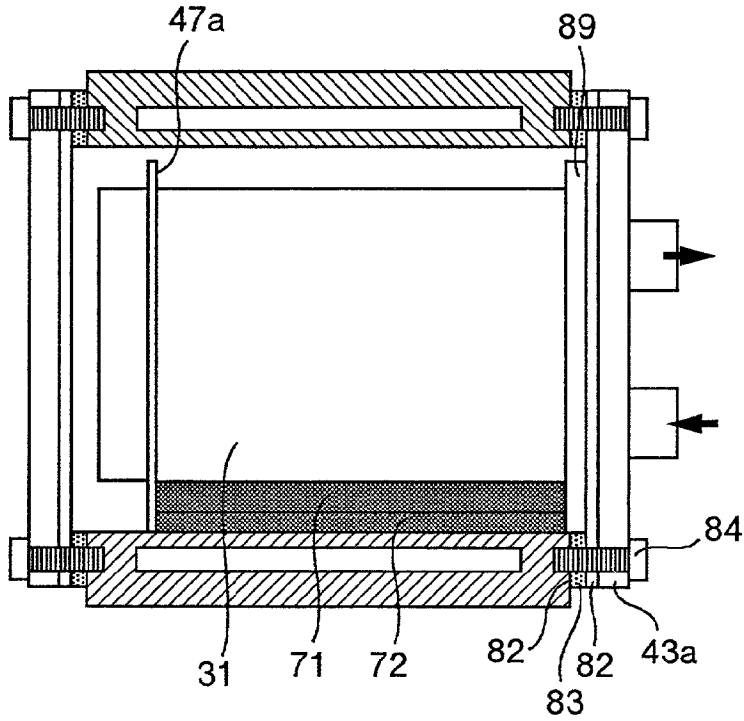


FIG.11

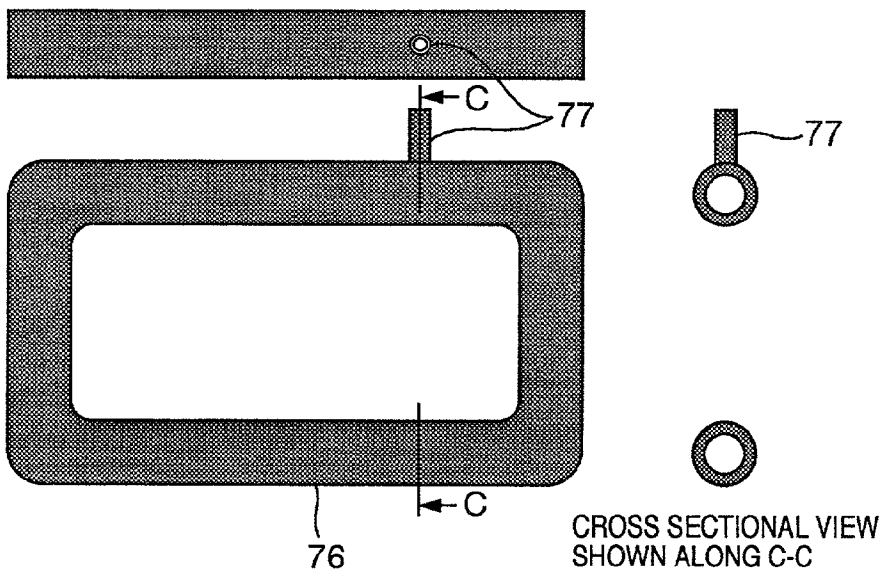


FIG.12A

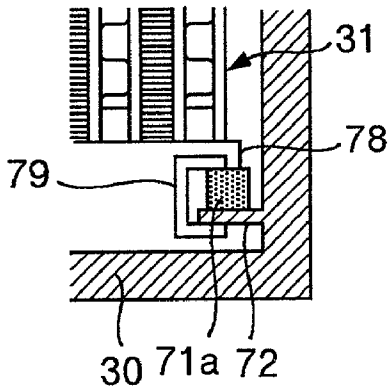


FIG.12B

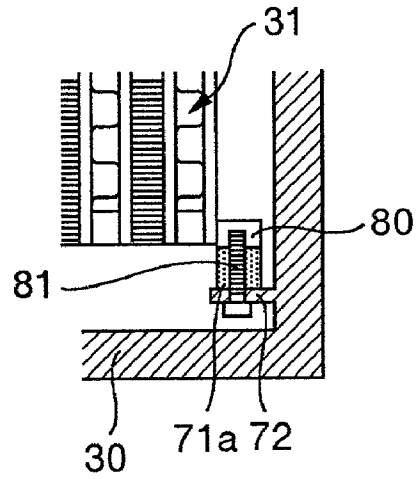


FIG.13

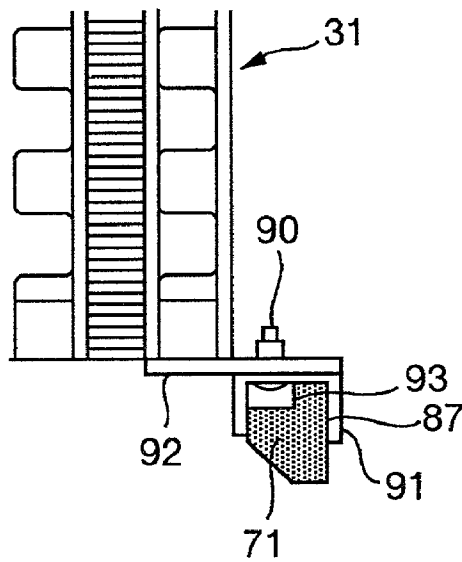


FIG.14

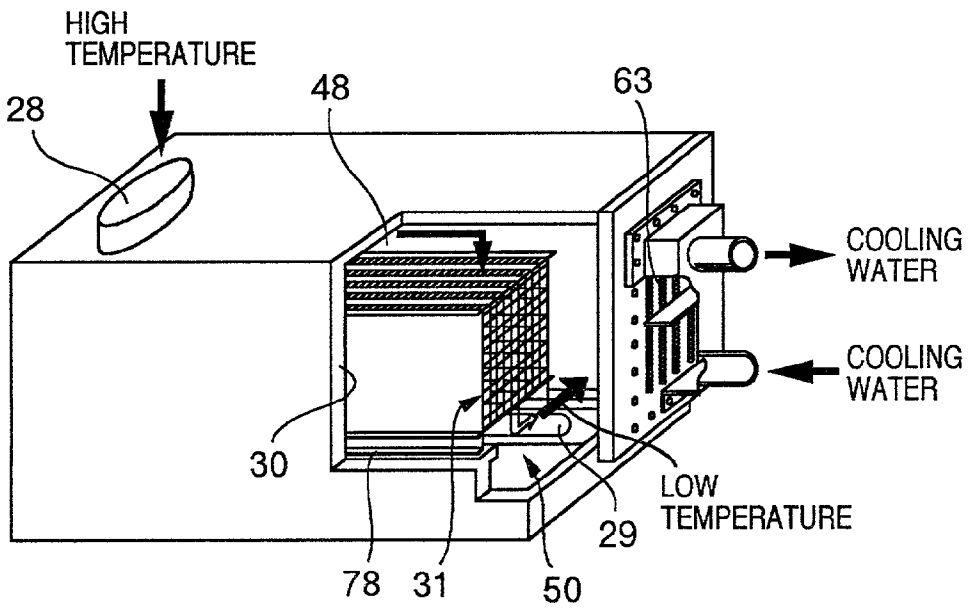


FIG.15

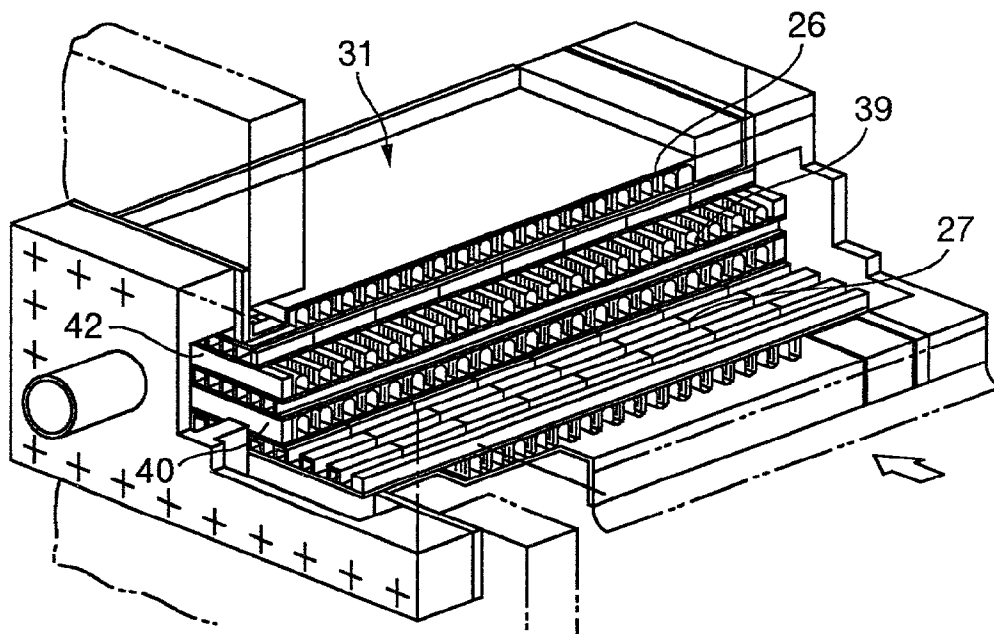


FIG.16

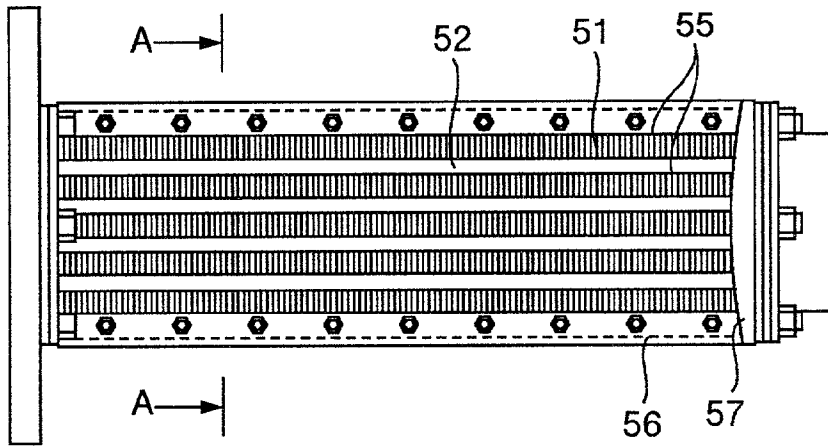


FIG.17


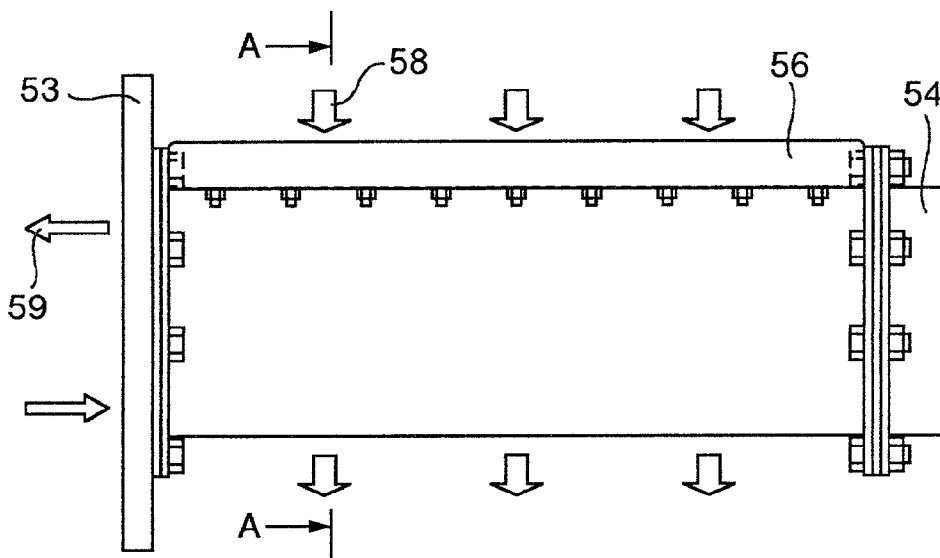


FIG.18

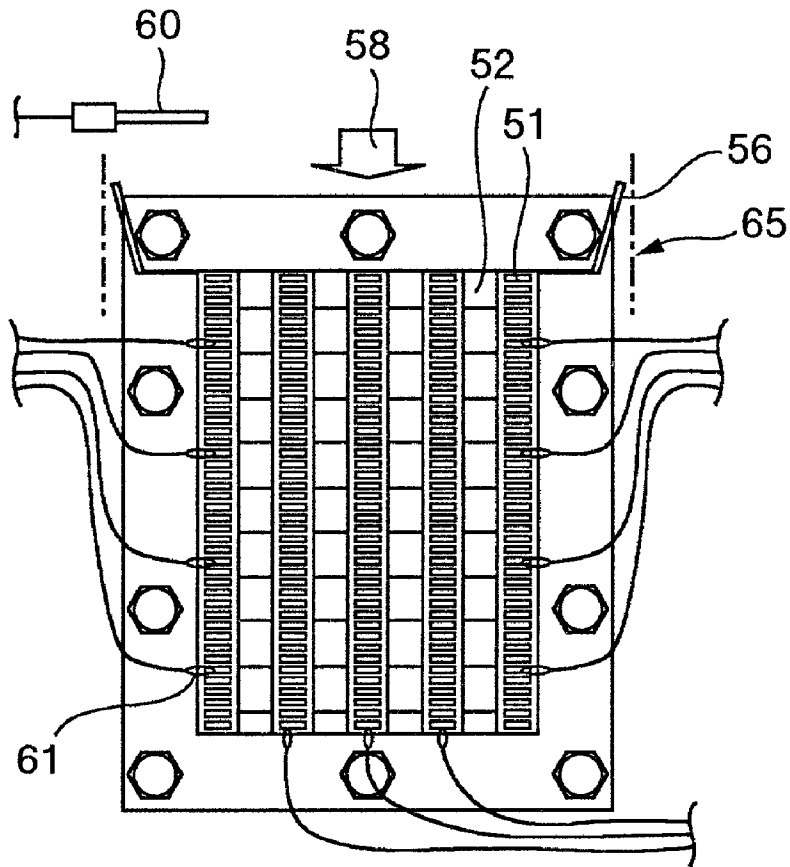

HEAT EXCHANGER FOR AIR COMPRESSOR

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a medium or small capacity air compressor which is used as a power air source or the like for factories, and more particularly to a heat exchanger provided in those air compressors.

[0002] A screw-type compressor and a compact turbo compressor are known as a medium or small capacity air compressor whose discharge pressure is approximately 0.7 MPa in gauge pressure and whose output power is in a class from less than 100 kW to several hundreds kW, and are used as a power air source for factories. An example of such an air compressor is disclosed in JP-A-8-105386 or JP-A-2000-120585. In these specifications, a laminated type of heat exchanger or a fin tube type of heat exchanger is used for cooling compressed air generated by the medium or small capacity turbo compressor.

[0003] In JP-A-8-105386, a gas cooler for cooling the compressed gas is inserted with a predetermined gap into a cooler shell through which the compressed gas flows while a seal part is formed on an outer circumferential part of the gas cooler for sealing the gap to divide the inside of the cooler shell into a high temperature side and a low temperature side, so that the seal part of the gas cooler has rigidity and sealability. The seal part projects from the outer circumferential part of the gas cooler, and is elastically contacted with an inner wall of the cooler shell. Further, JP-A-2000-120585 discloses a pressure container provided with a pair of rails having a recess part at one end thereof, in which a nest accommodated in the pressure container is provided with a roller to be fitted into the recess part after traveling on the rail, so that reliability and maintenance efficiency of the seal are improved.

[0004] The sealing ability is improved by way of each sealing method described in the above prior art, however, it becomes complicated to process the seal part because of its complicated structure. In addition, the assembling is troublesome because the elastic seal becomes resistant when the nest is inserted into a casing. Further, it is also difficult to completely prevent leakage.

BRIEF SUMMARY OF THE INVENTION

[0005] In view of disadvantages of the above prior art, an object of the present invention is to prevent the heat exchange efficiency from decreasing due to the leakage between a cooling apparatus nest and a casing, by a simple structure. Another object of the present invention is to provide a high performance heat exchanger capable of cooling high temperature fluid. The present invention achieves at least one of these objects.

[0006] In order to achieve the above-described object, according to one aspect of the present-invention, there is provided a heat exchanger for an air compressor, comprising a heat exchanger nest having a plurality of low temperature chambers through which low temperature fluid flows and a plurality of high temperature chambers through which high temperature fluid flows, the low temperature chambers and the high temperature chambers being alternately arranged in layers through a partition plate interposed therebetween, wherein a flowing direction of the low temperature fluid in

the low temperature chambers and a flowing direction of the high temperature fluid in the high temperature chambers are substantially orthogonal to each other, and the both ends of the layered heat exchanger nest are the low temperature chambers.

[0007] According to another aspect of the present invention, there is provided a heat exchanger for an air compressor, comprising a heat exchanger nest formed by alternately arranging a plurality of low temperature chambers through which low temperature fluid flows and a plurality of high temperature chambers through which high temperature fluid flows in layers through a partition plate interposed therebetween, wherein the number of the high temperature chambers is smaller than that of the low temperature chambers by one, and a flowing direction of the low temperature fluid in the low temperature chambers and a flowing direction of the high temperature fluid in the high temperature chambers are substantially orthogonal to each other.

[0008] In these respect, features, it is desirable that the low temperature fluid is cooling water and the high temperature fluid is compressed air. Further, the heat exchanger for an air compressor having these features may be provided in a screw compressor.

[0009] In the above-described aspects, it is desirable that the heat exchanger further comprises a container for accommodating the heat exchanger nest, in which the container is provided with a container side projecting seal formed on an inner surface of a side thereof, and the heat exchanger nest is also provided with a nest side projecting seal formed on a side thereof, wherein the container side seal and the nest side seal are coupled through a seal member which can be elastically deformed in contact with both seals, so as to form a seal part for partitioning the inside of the container into several portions.

[0010] Preferably, the nest side seal may be provided in the vicinity of an outlet of the low temperature fluid; the nest side seal may be provided so as to project from a bottom surface of the heat exchanger nest, so that compressive load is loaded on the seal member due to the mass of the heat exchanger nest; the cross sectional area of the seal member may be larger than those of contacting parts between the seal member and the container side seal, and the seal member and the nest side seal; the seal member may include at least one of ethylene-propylene rubber, acrylic rubber, silicone rubber, and fluoro-rubber, as a principal component; the seal member may be a gas tube seal which is constituted by forming a polymeric material into a tube, and sealing or injecting gas therein; and a clamp may be provided for pressing the heat exchanger nest to the container side seal.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

[0011] FIGS. 1-4 are a front view, a plane view, and a side view of an embodiment of a screw compressor having a heat exchanger according to the present invention, and a cross sectional view of a casing of the screw compressor, respectively;

[0012] FIG. 5 is another cross sectional view of the casing shown in FIG. 4;

[0013] FIG. 6 is a plane view of one embodiment of a heat exchanger according to the present invention, and

[0014] FIG. 7 is a side view thereof;

[0015] FIGS. 8 and 9 are cross sectional views of another embodiment of the heat exchanger according to the present invention, and FIG. 10 is a front view of the heat exchanger shown in FIG. 9;

[0016] FIG. 11 is a three-side view of another embodiment of a seal member according to the present invention;

[0017] FIGS. 12A, 12B, and 13 are cross sectional views of variations of a seal member according to the present invention;

[0018] FIG. 14 is a view for explaining flow of air which flows in the heat exchanger according to the present invention;

[0019] FIG. 15 is a view for explaining details of water chambers and gas chambers according to the present invention;

[0020] FIGS. 16-19 are a plane view, a side view, and an A-A cross sectional view of the heat exchanger used in a preliminary test, and a view for explaining a state where an outer gas chamber is closed using the A-A cross sectional view, respectively; and

[0021] FIG. 20 is a view for explaining cooling performance in the preliminary test.

DETAILED DESCRIPTION OF THE INVENTION

[0022] Now, some embodiments of the present invention will be described referring to the drawings. At first, findings based on preliminary tests related to the present invention will be described. In a heat exchanger according to the present invention, there are formed flow passages which are separated by a partition plate and orthogonal to each other, through which two different kinds of working fluids flow respectively. When the working fluids flow through the orthogonal flow passages respectively, the heat is transferred from a high temperature chamber on a high temperature side to a low temperature chamber on a low temperature side through the partition plate. This allows the fluid on the high temperature side to be cooled. The high temperature chamber and the low temperature chamber make a pair, and a plurality of pairs are stacked in multiple layers to form a heat exchanger, referred to as a nest. Examples of such heat exchangers are described in Heat Transfer Engineering Data Book (forth Edition), published by the Japan Society of Mechanical Engineers, p. 261. According to this publication, this type of heat exchanger is classified as a compact heat exchanger. In the compact heat exchanger, since a heat transfer coefficient on the high temperature chamber side is small when using cooling water as a fluid for the low temperature chamber and using compressed air as a fluid for the high temperature chamber, a corrugated fin is employed or a slit referred to as a louver is provided in the corrugated fins to increase heat transfer area and to improve the heat transfer coefficient. In view of this advantage regarding the miniaturization, it is readily thought of to apply the compact heat exchanger to a compressor. However, since the difference between the heat transfer coefficients is large in the heat exchanger for the air compressor as described above, it is not possible to achieve sufficient performance by simply applying the compact heat exchanger to the air compressor. Thus,

according to the present invention, there is used a nest in which the number of high temperature chambers is larger than that of low temperature chambers as described below in detail, in consideration of the property of a compact heat exchanger and the economy.

[0023] A nest having five lines of high temperature chambers and four lines of low temperature chambers was fabricated so as to make the number of the high temperature chambers larger than that of the low temperature chambers, and then its cooling ability was measured, however, desired cooling ability (heat passing coefficient) can not be obtained. Then, temperature distribution of the fluid in the high temperature chambers (hereinafter, referred to as gas chambers) disposed at both ends, and gas outlet temperature of the gas chambers disposed between the low temperature chambers (hereinafter, referred to as water chambers) at the middle of the nest were measured. The result will be described referring to FIGS. 16 to 20. FIGS. 16 and 17 are a plane view and a side view of a corrugated fin type heat exchanger nest designed as a cooler for an air compressor, respectively.

[0024] The total number of the gas chambers 51 is five, and that of the water chambers 52 is four, so that the gas chambers 51 is disposed at both ends. The heat passing amounts on a water side and a air side are balanced by increasing the heat transfer area on the air side of which the thermal conductivity is lower than that of water. A gas flow direction 58 in FIG. 17 is from top to bottom, while the cooling water 59 enters from a lower part of a front side tube plate 53, and changes its direction at a rear side water chamber case 54 to exit from an upper part of the front side tube plate 53. Accordingly, the two kinds of working fluids are separated by the partition plate 55 and orthogonal to each other. Heat is transferred from the high temperature side to the low temperature side through the partition plate 55. The high temperature fluid flows from top to bottom, while the cooling water enters from the lower part of the front side tube plate 53 so as to be orthogonal to the flow of the high temperature fluid, then changes its direction at the rear side water chamber case 54, and flows out from the upper part of the front side tube plate. Corrugated fins are provided in the gas chamber so as to increase the heat transfer area by the fins. The heat transfer area is increased by the fins, so that the lower thermal conductivity as compared with water is compensated.

[0025] Although not shown, a heat exchanger for an air compressor is formed by enclosing and attaching the nest used in this embodiment to a casing. In this case, a gap formed between the nest and the casing is sealed with seal plates 56, 57 at a part around a nest inlet. By using this heat exchanger, a cooling ability test for high temperature compressed air was performed. FIG. 18 is a sectional view taken along a line A-A in FIGS. 16 and 17, and is a sectional view at a position of $\frac{1}{4}$ of the nest length. FIG. 18 also shows measuring positions of gas temperature. The high temperature air flowing from the top flows toward the bottom while the air is cooled in the gas chamber 51. The gap between the nest and a casing wall 65 is sealed with the seal plate 56. It was found that a small amount of air leaks from the gap and flows to the nest outlet side while the air maintains high temperature. Temperature sensors 61 were provided at the outlets of the gas chambers disposed at both ends and the gas chambers disposed in the middle in order to measure the gas

temperatures. The temperature sensor **60** was provided to measure the temperature at the inlets. **FIG. 19** shows a cross section when the inlets of the gas chambers disposed at both ends of the nest shown in **FIGS. 16, 17** are closed by closed plates **62**. **FIG. 19** is a cross sectional view taken along the line A-A in **FIGS. 16 and 17**. Temperature sensors were placed on three lines in the middle to measure the outlet temperatures of the gas chambers.

[0026] **FIG. 20** shows results of the temperature measurement in these two cases. With respect to symbols shown in **FIG. 20**, the first number thereof denotes the test order, and the next number denotes a position of the gas chamber at which the measurement is performed, while the last character designates a cross sectional position. For example, in the case of "1-3A", the first number "1" is the test number corresponding to the case where five gas lines and four water chambers are provided, the "3" denotes the third line of the gas chambers, and the "A" denotes a A-A cross sectional position. When the first number is "2", this indicates a test result of the case where the gas chambers disposed at both ends are closed. As apparent from this drawing, the outlet temperatures of the gas chambers disposed at both ends are significantly high as compared with the outlet temperatures of the gas chambers disposed in the middle. Also, even if the gas chambers disposed at both ends are closed, the outlet temperatures of the gas chambers disposed in the middle are little changed. In both tests, of course, the quantities of heat at the inlets are the same. Accordingly, there was obtained a test result that the cooling ability is higher in the case that the gas chambers disposed at both ends are absent, even if the heat transfer area reduces to be $\frac{3}{5}$. This means that, in the outside gas chambers, the gap between the casing and the nest becomes wide. The casing is heated by the high temperature fluid because the heat exchanger according to this embodiment encloses the nest in the casing. Further, since there is the leakage of the high temperature fluid, the heat is input from the outside into the fluid in the gas chambers disposed at both ends of the nest, thereby the cooling performance is reduced, as estimated.

[0027] Some embodiments of the present invention based on the above-described findings will be described referring to **FIGS. 1 to 15**. **FIGS. 1 to 3** are a plane view, a top view, and a side view of a two-stage screw compressor provided with a heat exchanger according to the present invention respectively, and in these drawings, a cover constituting a package is eliminated. **FIGS. 4 and 5** are cross sectional views showing the structure of a casing part in which a heat exchanger is enclosed.

[0028] The screw compressor according to this embodiment is a two-stage compressor including a low pressure stage (a first stage) compressor and a high pressure stage (a second stage) compressor. Fluid to be treated is air, and a discharge pressure is in order of approximately 0.7 to 1.0 MPa in gauge pressure. This compressor is used as a general industrial factory air source, for example. The configuration of the compressor will be described below in detail. The low pressure stage compressor **2** and the high pressure stage compressor **3** are mounted on a speed-up gears casing **5**, and a rotor which is provided in each stage compressor is rotated by a motor **4**. Each air passage for first stage suction, first stage discharge, second stage suction, and second stage discharge is formed by dividing the inside of the speed-up gears casing **5** with partition walls. The high temperature air

pressurized in each stage compressor passes through respective passages, and cooled in an intercooler and an aftercooler described below. Cooling water is supplied to these coolers through a cooling water piping **21**. The cooling water is, at first, guided to a water chamber cover **20**, then guided to the nest, thereafter discharged from an outlet piping **22**. The screw compressor has an oil pump **15**, an oil cooler **16**, a suction filter **11**, a volume control valve **10**, and other accessories.

[0029] **FIG. 4** shows an inlet part of the intercooler and a state of the cooler enclosed and attached. In **FIG. 4**, a compressing stage is eliminated. The high temperature air pressurized in the first stage compressor enters into an intercooler chamber **33** through a passage **36** in the casing. **FIG. 5** shows an outlet part of the intercooler and an inlet part into the aftercooler. In **FIG. 5**, the compressing stage is also eliminated. The air cooled in the intercooler is taken into the two-stage compressor through the passage **37**. The high temperature air pressurized in the two-stage compressor flows into an aftercooler chamber **34** through a passage **38** in the casing. In this embodiment, a gap formed between the casing and the cooler nest is sealed around an upper inlet.

[0030] **FIGS. 6 and 7** show the nest structure. **FIG. 6** is a plane view of the nest seen from a direction in which the gas flows into the nest. **FIG. 7** is a side view of **FIG. 6**. In this embodiment, the high temperature fluid flows from top to bottom, while the cooling water enters from a lower part so as to be orthogonal to the flow of the high temperature fluid, and flows out from an upper part. The nest according to this embodiment has four lines of gas chambers **41** and five lines of water chambers **42**. The chambers are arranged so that the water chambers **42** are at both ends thereof. On the other hand, each gas chamber **41** is provided with the water chambers at both sides. In **FIG. 7**, the gas **48** flows from top to bottom, while the cooling water **49** enters from a lower part of the front side tube plate **43**, then changes its direction at a rear side water chamber case **44**, thereafter flows out from an upper part of the front side tube plate. The two kinds of working fluids flow while being separated by the partition plate **45** and orthogonal to each other. Heat is transferred from a high temperature chamber side to a low temperature chamber side through the partition plate. Corrugated fins are formed in the gas chamber. The gap between the nest and the casing is sealed with seal plates **46** and **47** around the nest inlet. Additionally, a part around the nest outlet may be sealed also.

[0031] **FIG. 8** shows a B-B sectional view of the cooler nest shown in **FIGS. 6 and 7**. The water chambers **42** are placed at both ends thereof and each gas chamber **41** is sandwiched between the water chambers. By using the cooler nest according to the embodiment, the high temperature fluid is sufficiently cooled because it passes through the gas chambers sandwiched between the water chambers. Additionally, although it is difficult to achieve complete sealing by sealing the gap between the casing and the nest with the seal plate **46**, a small amount of leaked high temperature fluid does not heat the fluid flowing in the gas chambers, and alternately the high temperature fluid is cooled by the cooling water flowing around the high temperature fluid, so that the leaked gas is also efficiently cooled.

[0032] Another embodiment of the present invention will be described referring to **FIGS. 9 to 15**. This embodiment

describes the case where an intercooler and an aftercooler are individually constituted, but of course, a plurality of heat exchangers may be integrated as is the case with the above-described embodiment. A corrugated-fin-type heat exchanger nest **31** is enclosed in a container **30** constituting the aftercooler or the intercooler. On the bottom parts of both, right and left sides of the heat exchanger nest **31**, there are provided fixing members **88** having a U-shape in its cross section. On both of right and left inner wall surfaces of the container **30**, which correspond to the fixing members **88**, projections **72** are formed.

[0033] By putting a seal member **71** on an upper surface of the projection **72** and holding the seal member **71** in a groove **87** formed by the fixing member **88**, a space inside of the container **30** is divided to a space through which the high temperature air **48** flows, and a space through which the low temperature air **50** cooled by the heat exchange in the heat exchanger nest **31** flows. In this case, the heat exchanger nest **31** and the seal member **71** are hermetically held by closely contacting an inner wall surface **75** of the fixing member **88** with an outer surface **74** of the seal member **71**. The seal member **71** is a sufficient elastically deformable material such as rubber. Additionally, with respect to the shape of the seal member **71**, a cutout part is formed on the fixing member **88** side, and the projection side **72** is made to be a taper shape, in consideration of the adherability with the projection **72** and the fixing member **88**.

[0034] In this embodiment constructed so, heat degradation of the seal member **71** formed from rubber or the like can be reduced because the seal member **71** is placed on the low temperature air **50** side. Since the seal member **71** is placed under the heat exchanger nest **31**, the seal member **71** is compressively deformed by the weight of the heat exchanger nest **31**, so that the surface pressure can be securely applied to the seal surface.

[0035] The seal member **71** is an elastically deformable material such as rubber, so that the securely sealing can be performed without generating any gap even if a surface of the projection **72** of the container **30** is very uneven like a casting surface. Additionally, the inner wall surface **75** of the fixing member **88** and an outer surface **26** of the seal member **71** are closely contacted, so that the occurrence of gaps, which may occur when the heat exchanger nest **31** is fixed, can be prevented.

[0036] Then, thickness h (see FIG. 9) of the seal member **71** is set such that a surface **73** of the seal member **71** abutted to the projection **72** is lower than a bottom surface **8** of the fixing member **88** and a tube plate **89**, which bottom surface **8** is a lowest surface of the heat exchanger nest **31**. This allows the seal member **71** to be compressively deformed by the weight of the heat exchanger nest **31** when the heat exchanger nest **31** is placed in the container **30**. Further, since the surface **73** of the seal member **71** abutted to the projection **72** and the outer surface **74** of the seal member **71** abutted to the fixing member **88** have smaller cross sectional areas than the cross sectional area of the seal member **71**, so that the rigidity in the contact surface of the seal member **71** can be small. Accordingly, it is possible to contact the outer surface **74** of the seal member **71** to the inner wall surface **75** of the fixing member **88**, easily.

[0037] By the way, the inlet air temperature of the heat exchanger such as an intercooler or an aftercooler used in the screw compressor reaches to not less than approximately

200 degrees Celsius, at pressure of approximately 0.1 MPa. The desirable seal materials for using under such a high temperature are ethylene-propylene rubber, acrylic rubber, silicone rubber, fluororubber, and the other material having high heat resistance.

[0038] A variation of the embodiment shown in FIG. 9 is shown in FIG. 11. FIG. 11 is a three-side view showing a front view, a top view, and a side sectional view together. A gas tube seal **76** is formed by forming a polymeric material having high heat resistance and high elasticity into a tube shape and by sealing or injecting gas such as air therein. By using a tube-shaped seal, the elastically deforming amount can be increased. Particularly, a gas filling port **77** and the piping for filling the gas from outside of the container **30** to the gas filling port **77** are provided, so that reliable sealing can be obtained by only filling the gas in the gas tube seal **76** and by pressuring the gas, after the heat exchanger nest **31** is fixed to the container **30**. When the heat exchanger nest **31** is removed from the container **30**, the heat exchanger nest **31** can be readily removed from the container **30** only by degassing the tube **76**. The preferable materials for the tube is polyacetal, fluoro-resin, or the other material having high heat resistance and elasticity.

[0039] Another variation of the present invention is shown in FIGS. 12A and 12B. In FIG. 12A, the weight of the heat exchanger nest **31** is loaded on the seal member **71a** placed on the projection **72** through a clasp **78** provided on the bottom part of the heat exchanger nest **31**. Then, the clasp **78** and the projection **72** are clamped by using a latch **79**. Another clamping way is that, as shown in FIG. 12B, the seal member **71a** is sandwiched between the heat exchanger fixing plate **80** and the projection **72** provided on the lowest part of the side of the heat exchanger nest **31**, and the bolt **33** which penetrates through the projection **72** and the seal member **71a** is screwed to the heat exchanger fixing plate **80**. In case of using either of these ways, the secure sealing can be performed by elastically deforming the seal member. Additionally, by fixing the seal member to the heat exchanger nest with the adhesive, the leakage of the gas between the heat exchanger nest and the seal member can be more securely prevented.

[0040] Still further variation of the present invention is shown in FIG. 13. A thin plate **92** is mounted on the bottom surface of the heat exchanger nest **31** so as to extend in a transverse direction of the heat exchanger nest **31**, and a groove plate **91** having a U-shape in cross section is mounted to the existing portion with a bolt **90**. Then, the seal member **71** is held in the groove **87** of the groove plate **91**. According to this variation, even if the fixing bolt **90** is loosened and dropped during operation of the heat exchanger, it can be prevented that the dropped bolt **90** flows to the gas flow passage, because the receiving surface **93** is formed in the seal member **71**.

[0041] FIGS. 14 and 15 show a partly sectional perspective views of a heat exchanger using the seal members **71** and **71a** shown in the above-described embodiments and variations. In FIG. 15, a bottom surface is shown on the left side of the figure, and a right side surface is shown on the lower side of the figure, for convenient of the description. The high temperature air **48** discharged from the compressor or the like is suctioned from the suction port **28**, and performs the heat exchange with the cooling water in the heat exchanger nest **31** to become low temperature air **50**, then the air is discharged from a discharging port **29** to the outside. On the side of the outlet and inlet port of the cooling

water, a water chamber **63** is provided. The heat exchanger nest **31** has the water chambers (lines) and the gas chambers (lines) as described in detail in above-described embodiments, and they have the corrugated fins **26, 27**. In **FIG. 15**, tube plates **27** are placed between the chambers, and an outer bar **29** is provided on the tube plate side.

[0042] According to the embodiments and variations described above, the heat exchanger nest can be readily removed from the container of the heat exchanger, and the sealing can be securely preformed, so that the reliable and efficient heat exchanger can be obtained. Additionally, cleaning and checking can be performed only by removing the cover, so that the maintenance ability is improved. Further, by decreasing the temperature of the working fluid at the outlet of the heat exchanger, the compressor power is reduced, which can contribute to the energy saving.

[0043] As described above in detail, in the compact type heat exchanger according to the present invention, the number of low temperature chambers is larger than that of the high temperature chambers by one chamber (one line), and the low temperature chambers are disposed at both ends, so that the compact heat exchanger having excellent cooling performance can be obtained. Further, the sealing ability inside the heat exchanger can be improved.

What is claimed is:

1. A heat exchanger for an air compressor, comprising
 - a heat exchanger nest having a plurality of low temperature chambers through which low temperature fluid flows and a plurality of high temperature chambers through which high temperature fluid flows, the low temperature chambers and the high temperature chambers being alternately arranged in layers through a partition plate interposed therebetween, wherein a flowing direction of the low temperature fluid in the low temperature chambers and a flowing direction of the high temperature fluid in the high temperature chambers are substantially orthogonal to each other, and the both ends of the layered heat exchanger nest are the low temperature chambers.
2. A heat exchanger for an air compressor, comprising
 - a heat exchanger nest formed by alternately arranging a plurality of low temperature chambers through which low temperature fluid flows and a plurality of high temperature chambers through which high temperature fluid flows in layers through a partition plate interposed therebetween, wherein the number of the high temperature chambers is smaller than that of the low temperature chambers by one, and a flowing direction of the low temperature fluid in the low temperature chambers and a flowing direction of the high temperature fluid in the high temperature chambers are substantially orthogonal to each other.
3. A heat exchanger according to claim 1, wherein the low temperature fluid is cooling water and the high temperature fluid is compressed air.
4. A screw compressor provided with a heat exchanger according to claim 1.
5. A screw compressor provided with a heat exchanger according to claim 2.
6. A heat exchanger according to claim 1, further comprising a container for accommodating the heat exchanger nest, wherein the container is provided with a container side

projecting seal formed on an inner surface of a side thereof, and the heat exchanger nest is also provided with a nest side projecting seal formed on a side thereof, and wherein the container side seal and the nest side seal are coupled through a seal member which can be elastically deformed in contact with both seals, so as to form a seal part for partitioning the inside of the container into several portions.

7. A heat exchanger according to claim 2, further comprising a container for accommodating the heat exchanger nest, wherein the container is provided with a container side projecting seal formed on an inner surface of a side thereof, and the heat exchanger nest is also provided with a nest side projecting seal formed on a side thereof, and wherein the container side seal and the nest side seal are coupled through a seal member which can be elastically deformed in contact with both seals, so as to form a seal part for partitioning the inside of the container into several portions.

8. A heat exchanger according to claim 6, wherein the nest side seal is provided in the vicinity of an outlet of the low temperature fluid.

9. A heat exchanger according to claim 7, wherein the nest side seal is provided in the vicinity of an outlet of the low temperature fluid.

10. A heat exchanger according to claim 6, wherein the nest side seal is provided so as to project from a bottom surface of the heat exchanger nest, so that compressive load is loaded on the seal member due to the mass of the heat exchanger nest.

11. A heat exchanger according to claim 7, wherein the nest side seal is provided so as to project from a bottom surface of the heat exchanger nest, so that compressive load is loaded on the seal member due to the mass of the heat exchanger nest.

12. A heat exchanger according to claim 6, wherein the cross sectional area of the seal member is larger than those of contacting parts between the seal member and the container side seal, and the seal member and the nest side seal.

13. A heat exchanger according to claim 7, wherein the cross sectional area of the seal member is larger than those of contacting parts between the seal member the container side seal and, the seal member and the nest side seal.

14. A heat exchanger according to claim 6, wherein the seal member includes at least one of ethylene-propylene rubber, acrylic rubber, silicone rubber, and fluoro-rubber, as a principal component.

15. A heat exchanger according to claim 7, wherein the seal member includes at least one of ethylene-propylene rubber, acrylic rubber, silicone rubber, and fluoro-rubber, as a principal component.

16. A heat exchanger according to claim 6, wherein the seal member is a gas tube seal which is constituted by forming a polymeric material into a tube, and sealing or injecting gas therein.

17. A heat exchanger according to claim 7, wherein the seal member is a gas tube seal which is constituted by forming a polymeric material into a tube, and sealing or injecting gas therein.

18. A heat exchanger according to claim 6, further comprising a clamp for pressing the heat exchanger nest to the container side seal.

19. A heat exchanger according to claim 7, further comprising a clamp for pressing the heat exchanger nest to the container side seal.

* * * * *