



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 270 797 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:

**02.01.2003 Bulletin 2003/01**

(51) Int Cl.7: **D06M 11/61**, D06M 11/84,  
D06M 15/423, D06M 11/38,  
D06M 11/40, D06M 13/12,  
D06M 13/192, D06M 13/11  
// D06M101/06

(21) Application number: **02016577.5**

(22) Date of filing: **22.05.1997**

(84) Designated Contracting States:  
**BE DE**

(30) Priority: **23.05.1996 JP 15047096**  
**10.09.1996 JP 26016696**  
**10.09.1996 JP 26016996**  
**11.09.1996 JP 26249096**  
**02.10.1996 JP 28134296**  
**22.10.1996 JP 29821796**

(62) Document number(s) of the earlier application(s) in  
accordance with Art. 76 EPC:  
**97108329.0 / 0 808 939**

(71) Applicant: **Nisshinbo Industries, Inc.**  
**Chuo-ku, Tokyo (JP)**

(72) Inventors:  
• **Yanai, Yuichi, c/o Miai Plant**  
**Miai-cho, Okazaka-shi, Aichi-ken (JP)**  
• **Hirai, Takayuki, c/o Miai Plant**  
**Miai-cho, Okazaka-shi, Aichi-ken (JP)**  
• **Oba, Masayoshi, c/o Miai Plant**  
**Miai-cho, Okazaka-shi, Aichi-ken (JP)**

- **Ikeda, Kiyoshi, c/o Miai Plant**  
**Miai-cho, Okazaka-shi, Aichi-ken (JP)**
- **Takagi, Yasushi, c/o Miai Plant**  
**Miai-cho, Okazaka-shi, Aichi-ken (JP)**
- **Ishikawa, Takeo, c/o Miai Plant**  
**Miai-cho, Okazaka-shi, Aichi-ken (JP)**
- **Harada, Kazuhiko, c/o Miai Plant**  
**Miai-cho, Okazaka-shi, Aichi-ken (JP)**
- **Iida, Hirota, c/o Miai Plant**  
**Miai-cho, Okazaka-shi, Aichi-ken (JP)**
- **Ito, Ryuichi, c/o Miai Plant**  
**Miai-cho, Okazaka-shi, Aichi-ken (JP)**
- **Hasegawa, Osamu, c/o Tokyo Research Center**  
**Adachi-ku, Tokyo (JP)**

(74) Representative:  
**TER MEER STEINMEISTER & PARTNER GbR**  
**Patentanwälte,**  
**Mauerkircherstrasse 45**  
**81679 München (DE)**

Remarks:

This application was filed on 24 - 07 - 2002 as a  
divisional application to the application mentioned  
under INID code 62.

(54) **Shrink-proof treatment of cellulosic fiber textile**

(57) A method for shrink-proofing a cellulosic fiber  
textile that involves liquid ammonia treatment, hot water  
treatment under tension or under no tension for 10 min-  
utes to 5 hours subsequent to liquid ammonia treatment,  
wherein the hot water treatment is carried out in hot wa-

ter at a temperature of 100 to 150°C, in particular for at  
least 2 hours at 100°C, at least 1 hour at 110°C, at least  
40 minutes at 120°C, and at least 20 minutes at 130°C,  
respectively, and with optional resin treatment.

**EP 1 270 797 A2**

**Description**BACKGROUND OF THE INVENTION5 Field of the Invention

**[0001]** This invention relates to a method for the shrink-proof treatment of a cellulosic fiber textile. More particularly, it relates to a method for treating a cellulosic fiber textile to be fully shrink-proof without a substantial loss of strength so that it may experience minimal shrinkage after washing and minimal hand-and-feel hardening after repetitive washing.

10 Prior Art

**[0002]** Heretofore, cellulosic fiber textiles have been widely used as clothing materials since they have the advantages of moderate moisture absorption, good hand-and-feel textures, and ease of treatment. Such cellulosic fiber textiles, however, suffer from shrinkage after washing and hand-and-feel hardening after repetitive washing.

**[0003]** The cause of the shrinkage after washing is correlated to two phenomena. One phenomenon is the deformation of woven and knitted goods by various forces applied during their manufacture and treatment. More particularly, as washing causes woven and knitted goods to be tossed and turned in a free state without the application of force, they tend to resume their original stable state, inviting shrinkage. Such shrinkage can be prevented by mechanical methods such as is typified by sanforization. The method using a sanforizing machine of the rubber belt or felt blanket type is to impart shrink-proofness by physically and continuously compressing the fabric for contraction to reduce the shrinkage potential of the fabric. However, the method cannot achieve a full reduction of the shrinkage potential of thick fabric pieces or hard finished fabrics.

**[0004]** The other phenomenon is the shrinkage of woven and knitted goods as a result of individual fibers absorbing water to swell and to increase their cross-sectional area. This shrinkage occurs upon the absorption of water. After the fabric is dried to remove the water, the fabric tissue cannot recover its original size prior to swelling by itself. The fabric remains shrunk.

30 SUMMARY OF THE INVENTION

**[0005]** An object of the present invention is to provide a method for treating a cellulosic fiber textile to be fully shrink-proof without a substantial loss of strength so that it may experience minimal shrinkage after washing and minimal hand-and-feel hardening after repetitive washing.

**[0006]** We have found that by treating a cellulosic fiber textile with liquid ammonia and then treating the fiber textile under tension or under no tension with hot water for 10 minutes to 5 hours subsequent to liquid ammonia treatment, wherein the hot water treatment is carried out in hot water at a temperature of 100 to 150°C, in particular for at least 2 hours at 100°C, at least 1 hour at 110°C, at least 40 minutes at 120°C, and at least 20 minutes at 130°C, respectively, the cellulosic fiber textile can be rendered fully shrink-proof so that it may experience minimal shrinkage after washing and minimal hand-and-feel hardening after repetitive washing. This is accomplished without a substantial loss of strength.

**[0007]** More particularly, when a cellulosic fiber textile is impregnated with liquid ammonia, the liquid ammonia penetrates into not only the amorphous regions, but also the crystalline regions of the cellulose to break down the hydrogen bonds so that the fibers in their entirety are swollen. Thereafter, heat treatment is carried out to evaporate the liquid ammonia whereupon hydrogen bonds are newly formed and a cellulose III crystalline structure is created at least partially in the crystalline region. The crystals are fixed in a swollen state. This results in a lower crystallinity. When such a fabric is given a resin finish, the crease and shrink-proof properties are improved with a slight loss of strength. This fact is well known in the art.

**[0008]** In contrast, by treating a cellulosic fiber textile with hot water subsequent to liquid ammonia treatment, the cellulose III crystalline structure is restored to the cellulose I or II crystalline structure, during which process the swollen state is maintained due to the penetration of hot water. Then, the fiber structure is set as swollen and relaxed. As a result, the influence of swelling and tension relaxation by water upon washing is minimized or eliminated. Shrink-proof treatment is accomplished in this way.

**[0009]** Subsequent resin treatment on the thus treated cellulosic fiber textile can impart improved crease or shrink-proof properties without a substantial loss of strength when compared with the prior art resin treatment.

**[0010]** More particularly, the prior art resin treatment of a cellulosic fiber textile has the tendency that as the amount of resin added increases, the crease or shrink-proof properties are improved, but the tensile strength is reduced at the same time. An improvement in the crease or shrink-proof properties is achieved by introducing crosslinks between the

cellulosic fibers to stabilize the hydrogen bonds while a lowering of the tensile strength occurs because of the introduction of crosslinks which invite the likelihood of local brittle fracture. These are contradictory to each other. It is desired to find a compromise between the shrink-proof improvement and strength loss. Since cellulosic fibers have a heterogeneous structure including crystalline and amorphous portions or skin and interior portions, it is desired to

5 achieve a uniform distribution of the crosslinking sites in order to prevent strength lowering.  
**[0011]** Such a demand is satisfied as follows. When fibers which have been fully swollen by liquid ammonia treatment are treated under tension or under no tension with hot water as described in claim 1, the fiber structure in a swollen state undergoes some changes to improve the accessibility of the cellulose, resulting in an ideal cellulose crystal structure having crosslinking points distributed as uniformly as possible, achieving improved crease or shrink-proof properties. When the fibers in such a state are further treated with a resin, a smaller amount of resin is sufficient to improve the shrink-proof properties. The smaller amount of resin added leads to less lowering of the strength. A reasonable compromise between the above-mentioned contradictory demands is reached in this way.

10  
**[0012]** The shrink-proof treatment method of the present invention is successful in producing a fully shrink-proof cellulosic fiber textile, without a substantial loss of strength, which experiences minimal shrinkage after washing and minimal hand-and-feel hardening after repetitive washing. Especially, improved crease or shrink-proof properties can be imparted to even such thin, low strength fabrics made of cotton, linen, rayon, etc. while maintaining a practically acceptable strength.

15 Accordingly, the present invention provides a method for the shrink-proof treatment of a cellulosic fiber textile, comprising the steps of treating the fiber textile with liquid ammonia, then treating the fiber textile under tension or under no tension with hot water for 10 minutes to 5 hours subsequent to liquid ammonia treatment, wherein the hot water treatment is carried out in hot water at a temperature of 100 to 150°C, in particular for at least 2 hours at 100°C, at least 1 hour at 110°C, at least 40 minutes at 120°C, and at least 20 minutes at 130°C, respectively, and optionally treating the fiber textile with a resin.

## 25 BRIEF DESCRIPTION OF THE DRAWINGS

### **[0013]**

30 FIG. 1 is a graph showing the dry crease-proof property vs. the tensile strength of the fabric pieces treated in Example 18 and Comparative Example 15.

FIG. 2 is a graph showing the dry crease-proof property vs. the tensile strength of the fabric pieces treated in Example 19 and Comparative Example 16.

FIG. 3 is a graph showing the dry crease-proof property vs. the tensile strength of the fabric pieces treated in Example 20 and Comparative Example 17.

35 FIG. 4 is a graph showing the dry crease-proof property vs. the tensile strength of the fabric pieces treated in Example 21 and Comparative Example 18.

FIG. 5 is a graph showing the dry crease-proof property vs. the tensile strength of the fabric pieces treated in Example 22 and Comparative Example 19.

40 FIG. 6 is a graph showing the dry crease-proof property vs. the tensile strength of the fabric pieces treated in Example 23 and Comparative Example 20.

## DETAILED DESCRIPTION OF THE INVENTION

45 **[0014]** The shrink-proof treatment method of the invention involves the step (1) of treating a cellulosic fiber textile with liquid ammonia, and the step (2) of treating the fiber textile under tension or under no tension with hot water or a caustic alkali.

**[0015]** A cellulosic fiber textile which can be processed by the method of the invention is composed of cellulosic fibers including natural fibers and regenerated cellulose fibers, for example, cotton, hemp, rayon, polynosics, cuprammonium fibers, and high-strength regenerated cellulose fibers (available under the trade name of Tencel, for example). These natural fibers and regenerated cellulose fibers may take the form of composite fibrous materials obtained by blending with other fibers such as synthetic fibers, typically polyesters and polyamides. The composite fibrous materials should preferably have a greater content of cellulosic fibers, more preferably a cellulosic fiber content of at least 50% by weight. The alkali treatment can be applied only to fibers which are insoluble in the alkali solution to be used.

50  
**[0016]** The cellulosic fiber textile which can be used herein includes woven fabrics, knitted goods and non-woven fabrics. If desired, the textile may be subjected to pretreatment such as singeing, desizing, scouring, bleaching, and mercerizing. Also, the textile may have been dyed or printed.

**[0017]** First, the cellulosic fiber textile is treated with liquid ammonia, for example, by impregnating the textile with liquid ammonia kept at a temperature of -33°C or lower under atmospheric pressure. The said impregnating means

include dipping in liquid ammonia, spraying of liquid ammonia, and coating of liquid ammonia. The said impregnating time may be properly selected in the range of about 5 to 40 seconds.

**[0018]** Liquid ammonia is most often used to induce a transition of cellulose I or II in the cellulosic fiber textile into cellulose III, although lower alkylamines such as methylamine and ethylamine may be used if desired. At the end of the process, the ammonia is removed from the liquid ammonia-treated cellulosic fiber textile by heating.

**[0019]** The liquid ammonia treatment causes the cellulose I or II crystalline structure to convert to the cellulose III crystalline structure in proportion to the impregnating time. The content of cellulose III crystalline structure based on the entire crystals reaches about 10% at an impregnating time of 5 seconds, about 15% at 8 seconds, about 25% at 12 seconds, about 35% at 18 seconds, and about 40% at 20 seconds or longer.

**[0020]** It is preferred that the content of cellulose III crystalline structure is less than 40%, more preferably 10 to 35% based on the entire crystals when hot water treatment is carried out subsequent to the liquid ammonia treatment. No satisfactory shrink-proofness would be expectable with a cellulose III content of less than 10% whereas hand-and-feel would become hard with a cellulose III content of 40% or more.

**[0021]** Next, the cellulosic fiber textile having a cellulose III crystalline structure created by the liquid ammonia treatment is subjected to hot water treatment or a caustic alkali treatment while it is kept under tension or under no tension, thereby causing a transition of at least a part of the cellulose III crystalline structure in the cellulosic fiber textile into a cellulose I or II crystalline structure.

**[0022]** More specifically, according to the invention, at least a part of the cellulose III crystalline structure is converted into a cellulose I or II crystalline structure by either of the following procedures of: (a) first converting the cellulose I crystalline structure of the native cellulose into cellulose III through liquid ammonia treatment and converting it back to cellulose I through hot water treatment; (b) first converting the cellulose II crystalline structure of regenerated cellulose into cellulose III through liquid ammonia treatment and converting it back to cellulose II through hot water treatment; (c) first converting the cellulose I crystalline structure of the native cellulose into cellulose II through mercerization, then converting it into cellulose III through liquid ammonia treatment and converting it back to cellulose II through hot water treatment; and (d) first converting the cellulose I or II crystalline structure of the native cellulose into cellulose III through liquid ammonia treatment and converting it to cellulose II through caustic alkali treatment.

**[0023]** During transition of the cellulose crystalline structure, all the cellulose crystals do not necessarily undergo transition. The crystalline state of the final product is a mixture of the cellulose crystalline states created in the steps it has passed through.

**[0024]** Hot water treatment is carried out by dipping the cellulosic fiber textile in hot water at a temperature of 100 to 150°C, preferably 110 to 140°C. More particularly, an apparatus capable of hot water treatment under high pressure is used. For example, hot water treatment is carried out by high-pressure liquid flow dyeing machines, high-pressure paddle dyeing machines, high-pressure jigger dyeing machines, high-pressure drum dyeing machines, or high-pressure beam dyeing machines.

**[0025]** The time of such hot water treatment varies with the temperature of the hot water and the like although it is generally about 10 minutes to about 5 hours, preferably about 20 minutes to about 4 hours. An appropriate time is at least 2 hours at 100°C, at least 1 hour at 110°C, at least 40 minutes at 120°C, and at least 20 minutes at 130°C.

**[0026]** The hot water treatment causes at least a portion, preferably at least 25%, more preferably at least 40% of the cellulose III crystalline structure in the fiber textile to convert back to the cellulose I or II crystalline structure. More particularly, when the crystalline structure is converted from cellulose I to cellulose III by the liquid ammonia treatment, it can be converted back to cellulose I by the hot water treatment. When started from cellulose II, the crystalline structure can be converted back to cellulose II by the hot water treatment. The percent conversion of cellulose III to cellulose I or II is calculated according to  $\{(a \text{ percent content of cellulose III in the entire crystals prior to hot water treatment}) - (a \text{ percent content of cellulose III in the entire crystals subsequent to hot water treatment})\} / (a \text{ percent content of cellulose III in the entire crystals prior to hot water treatment}) \times 100\%$ .

**[0027]** Hot water treatment is carried out while the textile is kept either under tension or under no tension. Depending on the type and application of the textile, hot water treatment is carried out using a high-pressure liquid flow dyeing machine, a high-pressure drum dyeing machine or a high-pressure paddle dyeing machine while the textile is kept under no tension. Alternatively, hot water treatment is carried out using a high-pressure beam dyeing machine or a high-pressure jigger dyeing machine while the textile is kept in a flat state (or under tension).

**[0028]** When hot water treatment is carried out on the textile kept under no tension using a high-pressure liquid flow dyeing machine, a high-pressure drum dyeing machine or a high-pressure paddle dyeing machine, the stresses in the textile material are released, resulting in improved shrink-proofness. As additional advantages, the wet/dry crease-proof properties are improved due to the setting effect of the hot water treatment, a sensory drape and body feeling is imparted, and the surface appearance is changed.

**[0029]** On the other hand, when hot water treatment is carried out on the textile kept in a flat state (or under tension) using a high-pressure beam dyeing machine or a high-pressure jigger dyeing machine, advantages are obtained in that no creases or irregularities are introduced into the textile and the selvage is not rolled since the textile is kept flat

during such hot water treatment. Treatment on a mass scale becomes possible.

**[0030]** The hot water treatment is applicable to dyed and printed textiles. In such cases, the cellulosic fiber textile is dyed or printed prior to hot water treatment. Since hot water treatment need not use basic or acidic aids such as caustic soda and acetic acid, the hot water treatment of dyed and printed textiles does not detract from the color or dye fastness. Due to the eliminated need for a resin finish, little lowering of the strength occurs. Without a resin finish, the hot water treatment of a cellulosic fiber textile at a zero tension, in a relaxed state, yields shrink-proof natural cellulose fiber woven fabrics having a percent warp wash-shrinkage after 10 cycles of washing of up to 1.5% for cotton fabric, up to 2.0% for linen fabric, and up to 2.0% for ramie fabric. There can be also obtained shrink-proof natural cellulose fiber knitted goods such as single tuck cotton knitted goods having a total percent warp/weft wash-shrinkages after 10 cycles of washing of up to 15.0%. There can be further obtained shrink-proof regenerated cellulose fiber woven fabrics having a percent warp wash-shrinkage after 10 cycles of washing of up to 3.0% for rayon spun fabric, up to 3.5% for rayon filament x rayon spun fabric and up to 2.0% for cuprammonium rayon fabric. It is noted that the percent shrinkage is determined by washing a fabric according to the JIS L-217 103 method, followed by tumble drying.

**[0031]** In another procedure, subsequent to the above-mentioned liquid ammonia treatment, the cellulosic fiber textile is subjected to caustic alkali treatment. The caustic alkali treatment is done on the cellulosic fiber textile which is kept under tension or under no tension.

**[0032]** Caustic alkali treatment is carried out using well known apparatus such as mercerizing machines. More particularly, the cellulosic fiber textile is impregnated with an aqueous solution of a caustic alkali, thereby converting at least a part of the cellulose III crystalline structure into a cellulose II crystalline structure. The caustic alkali used herein is typically sodium hydroxide (NaOH) or potassium hydroxide (KOH), with sodium hydroxide being preferred. Other alkaline chemicals may be used if necessary.

**[0033]** Typically the textile is treated with an aqueous solution of caustic alkali having a caustic alkali concentration of 0.1 to 40% by weight at a temperature of -10°C to 150°C for about 20 seconds to about 24 hours.

**[0034]** Where caustic alkali treatment is carried out using a caustic alkali aqueous solution at temperatures of 90°C or less, which treatment is referred to as low-temperature alkali treatment, hereinafter, the solution should preferably have a caustic alkali concentration of 10 to 40%, more preferably 15 to 40%, most preferably 15 to 30% by weight. An appropriate treating temperature is -10°C to 90°C, more preferably 10°C to 40°C. The time of caustic alkali treatment need not be specifically determined since it varies with the concentration and temperature of the caustic alkali solution. The treating time is typically about 20 seconds to 24 hours.

**[0035]** Where caustic alkali treatment is carried out using a caustic alkali aqueous solution at temperatures of higher than 90°C, which treatment is referred to as high-temperature alkali treatment, hereinafter, the solution should preferably have a caustic alkali concentration of 0.1 to 10%, more preferably 0.2 to 5% by weight. An appropriate treating temperature is more than 90°C to 150°C, more preferably 100°C to 150°C, most preferably 110°C to 140°C. The time of caustic alkali treatment need not be specifically determined since it varies with the concentration and temperature of the caustic alkali solution. The treating time is typically about 1 minute to about 5 hours, preferably 10 minutes to 5 hours, more preferably 20 minutes to 3 hours.

**[0036]** The caustic alkali treatment would become ineffective if the caustic alkali concentration is too low. If the caustic alkali concentration is too high, no further improvement is recognized and there would result the drawback that a subsequent neutralizing step to remove the caustic alkali requires a more time and cost.

**[0037]** The above-mentioned low- and high-temperature alkali treatments can be done while the cellulosic fiber textile is kept under tension or under no tension.

**[0038]** The amount of caustic alkali aqueous solution applied to the cellulosic fiber textile is preferably at least 50% by weight of a portion of the cellulosic fiber textile to be impregnated. Where the caustic alkali aqueous solution is applied throughout the cellulosic fiber textile, a mangle padder may be used. Where the caustic alkali aqueous solution is applied to selected portions of the cellulosic fiber textile, a printing machine as used in printing techniques may be used.

**[0039]** If desired, the cellulosic fiber textile can be dyed or printed prior to the application of the caustic alkali aqueous solution.

**[0040]** The caustic alkali treatment is carried out while the cellulosic fiber textile is kept under tension or under no tension. Depending on the type and application of the textile, the caustic alkali treatment is carried out using a liquid flow dyeing machine, a drum dyeing machine or a paddle dyeing machine while the textile is kept under no tension. Alternatively, the caustic alkali treatment is carried out using a mercerizing machine, a high-pressure beam dyeing machine or a high-pressure jigger dyeing machine while the textile is kept under tension. The caustic alkali treatment under no tension gives the same advantages as achieved with the hot water treatment.

**[0041]** The caustic alkali treatment under tension using a mercerizing machine has the advantages that no creases or irregularities are introduced into the textile and the selvage is not rolled since the textile is kept flat during the caustic alkali treatment, and treatment on a mass scale is possible. In this case, the treating time is usually about 20 to 80 seconds.

[0042] The thus caustic alkali treated cellulosic fiber textile is then treated with an acid for neutralizing the alkali and washed with water. The acid used herein includes inorganic acids such as sulfuric acid and hydrochloric acid and organic acids such as acetic acid and formic acid.

5 [0043] The above-mentioned method involving liquid ammonia treatment and subsequent hot water or caustic alkali treatment has several advantages. Since resin as typified by formaldehyde are not used at all, no formaldehyde is left in the textile. A fully shrink-proof cellulosic fiber textile which experiences minimal shrinkage after washing and minimal hand-and-feel hardening after repetitive washing is obtained without a substantial loss of strength. The invention is effective for imparting good shrink-proofness to pieces of thick fabric or hard finished fabric as well as giving an improved luster and dyeing density.

10 [0044] According to the shrink-proofing method of the invention, after the above-mentioned liquid ammonia treatment and subsequent hot water or caustic alkali treatment under tension or under no tension, resin finishing can be carried out if desired.

15 [0045] The resin used herein is any of the compounds that react with a hydroxyl group of cellulose to form a crosslink, for example, aldehydes such as formaldehyde, glyoxal, and glutaraldehyde, epoxy compounds such as diglycidyl ether, polycarboxylic acids such as tetrabutane-carboxylic acid, and cellulose reactive N-methylol compounds such as dimethylol urea, trimethylol melamine, dimethylol ethylene urea, and dimethylol dihydroxy ethylene urea. Of these, cellulose reactive N-methylol compounds are preferred because of the good balance of the crease or shrink-proof improvement and the textile strength loss.

20 [0046] An appropriate amount of such a resin added is 1 to 10% by weight, especially 2 to 6% by weight calculated as solids based on the weight of the cellulosic fiber textile to be treated therewith. Less than 1% of the resin would be less effective for a resin finish whereas more than 10% of the resin would induce a substantial loss in strength.

25 [0047] For the resin according to the invention, reaction of the cellulosic fiber textile with formaldehyde in the vapor phase, which is known as the VP reaction, is advantageously employable because of the effective crease or shrink-proof improvements. For the details of VP reaction, reference should be made to the Journal of the Japanese Cellulosic Society, Vol. 2, page 22.

30 [0048] In the VP reaction, the amount of formaldehyde added is preferably 0.1 to 3% by weight calculated as solids based on the weight of the cellulosic fiber textile. This is because if formaldehyde having a smaller molecular weight than the N-methylol compounds is added in the same amount as the N-methylol compounds, too much crosslinking is introduced and causes a drop in strength. Less than 0.1% of formaldehyde would be less effective for the resin finish whereas more than 3% of formaldehyde would induce a substantial drop in strength.

35 [0049] In the resin treatment step, a catalyst may be added for increasing the reactivity of the resin with the cellulose to achieve rapid resin treatment. The catalyst used herein is any of the catalysts commonly used for resin treatment, for example, borofluorides such as ammonium borofluoride, sodium borofluoride, potassium borofluoride, and zinc borofluoride, neutral metal salt catalysts such as magnesium chloride, magnesium sulfate and magnesium nitrate, and inorganic acids such as phosphoric acid, hydrochloric acid, sulfuric acid, sulfurous acid, hyposulfurous acid, and boric acid. If desired, the catalyst is combined with a cocatalyst, for example, organic acids such as citric acid, tartaric acid, malic acid, and maleic acid.

40 [0050] If desired, an auxiliary agent is added to the resin for ensuring a smooth reaction of the resin with the cellulose. That is, the auxiliary agent functions to promote the reaction of the resin with the cellulose, to render the crosslinking reaction uniform as a reaction solvent, and to swell the cellulose. Exemplary auxiliary agents include polyhydric alcohols such as glycerin, ethylene glycol, polyethylene glycol, and polypropylene glycol; ether alcohols such as ethylene glycol monoethyl ether, diethylene glycol monoethyl ether, ethylene glycol monomethyl ether, diethylene glycol monomethyl ether, and diethylene glycol monobutyl ether; nitrogenous solvents such as dimethylformamide, morpholine, 2-pyrrolidone, dimethylacetamide, and N-methylpyrrolidone; and esters such as ethyl acetate, isopropyl acetate, butyl acetate, amyl acetate, ethylene glycol monomethyl ether acetate, ethylene glycol monoethyl ether acetate and  $\gamma$ -butyrolactone.

45 [0051] It is noted that in addition to the above-mentioned chemicals, other additives can be added to the resin if desired, for example, softeners for hand-and-feel adjustment and formaldehyde scavengers for reducing the concentration of free formaldehyde.

50 [0052] Any desired method may be used to apply the resin to the cellulosic fiber textile. A choice may be made from among the well-known methods such as pad drying and the vapor phase (VP) reaction of formaldehyde. The pad drying method involves dipping a piece of the fabric in a liquid preparation of the resin, squeezing the fabric at a squeeze rate of 50 to 120%, and drying the fabric at an ambient temperature of about 70 to 100°C to remove the water. A long drying time is required at an ambient temperature below 70°C whereas at an ambient temperature above 100°C, migration of the resin can occur, resulting in a non-uniform distribution of the resin. Thereafter, the cellulose together with the resin is heat treated at a temperature of 120 to 170°C, especially 130 to 160°C for 1 to 15 minutes, especially 2 to 10 minutes, to induce crosslinking. The temperature and time of heat treatment vary with the type and amount of resin, the type and amount of catalyst, and the like. Reaction would be slow at a heat treating temperature of less than 120°C whereas a heat treating temperature of higher than 170°C would cause yellowing of the fabric.

5 [0053] The VP reaction method uses formaldehyde as the resin and applies formaldehyde in the vapor phase to the fabric. In the usual procedure, a softener, polyethylene glycol, etc. are previously applied to the fabric by the pad drying method or the like. The fabric is placed in a closed container, into which formaldehyde and an acidic gas such as sulfur dioxide are introduced whereby the fabric adsorbs the gaseous compounds. The fabric is then heated to induce crosslinking. Preferably, the amount of formaldehyde bonded is about 0.1 to 3% by weight of the fabric, the temperature is 20 to 160°C and the treating time is about 1 to 60 minutes.

10 [0054] In the embodiment wherein the shrink-proof treatment is followed by resin treatment, the amount of resin added can be extremely reduced as compared with the conventional resin treatment, which contributes to a reduced drop in the fabric strength. A more crease or shrink-resistant cellulosic fiber textile is obtained. Even in the case of such thin, low strength fabrics as cotton, linen and rayon, a high degree of crease or shrink-proofing can be imparted while maintaining a practically acceptable strength.

[0055] After the shrink-proof treatment according to the invention, the cellulosic fiber textile may be subjected to a final finishing treatment such as tentering and hand-and-feel adjustment.

15 EXAMPLES

[0056] Examples of the present invention are given below by way of illustration and not by way of limitation.

20 Example 1

[0057] A plain weave cotton 100% fabric of 50-count single yarn (warp density 148 yarns/inch, weft density 80 yarns/inch) was conventionally bleached, treated with liquid ammonia for 10 seconds, and heated to evaporate the ammonia. The fabric was then treated with hot water under no tension at 130°C for 2 hours by means of a high-pressure liquid flow dyeing machine, followed by dewatering, drying, and tentering.

25 Example 2

[0058] Treatment as in Example 1 was done on a plain weave linen 100% fabric of 60-count single yarn (warp density 60 yarns/inch, weft density 52 yarns/inch).

30 Example 3

[0059] Treatment as in Example 1 was done on a plain weave ramie 100% fabric of 60-count single yarn (warp density 52 yarns/inch, weft density 56 yarns/inch).

35 Example 4

[0060] Treatment as in Example 1 was done on an ordinary single tuck cotton knit obtained by knitting 40-count two-folded yarns of cotton by a knitting machine with a cylinder diameter of 30 inches and a needle density of 18 needles/inch.

40 Comparative Example 1

[0061] The procedure of Example 1 was repeated except that the liquid ammonia treatment was omitted.

45 Comparative Example 2

[0062] The procedure of Example 2 was repeated except that the liquid ammonia treatment was omitted.

50 Comparative Example 3

[0063] The procedure of Example 3 was repeated except that the liquid ammonia treatment was omitted.

55 Comparative Example 4

[0064] The procedure of Example 4 was repeated except that the liquid ammonia treatment was omitted.

[0065] The woven and knitted fabrics of Examples 1 to 4 and Comparative Examples 1 to 4 were subjected to a washing test (JIS L-217 103 method) involving 1 cycle of washing or 10 cycles of washing, followed by tumble drying.

## EP 1 270 797 A2

The woven fabric was measured for its warp shrinkage. For the knit fabric, the sum of the warp and weft shrinkages was determined. The results are shown in Table 1.

Table 1

		Cotton		Linen		Ramie		Cotton knit	
		E1	CE1	E2	CE2	E3	CE3	E4	CE4
Warp shrinkage (%)	1 cycle of washing	0.7	1.7	0.4	3.0	0.4	1.7	12.0*	23.0*
	10 cycles of washing	1.1	4.0	1.4	4.3	1.1	3.0	15.0*	25.0*
Cellulose III content (%)	Before treatment	20.5	0	18.4	0	24.9	0	-	-
	After treatment	4.7	0	10.5	0	11.7	0	-	-
Crystal conversion from cellulose III to cellulose I (%)**		77.1	0	43.1	0	46.9	0	-	-

\* Sum of the warp and weft shrinkages

\*\* The contents of cellulose I, II and III crystalline structures were determined by analyzing the fabric by means of a wide angle X-ray diffractometer to produce a diffraction chart, separating peaks characteristic of the respective crystal types from the chart using a peak separating program, and calculating the ratio of peak areas.

### Example 5

**[0066]** A plain weave spun rayon 100% fabric of 30-count single yarn (warp density 68 yarns/inch, weft density 60 yarns/inch) was conventionally bleached, treated with liquid ammonia for 10 seconds, and heated to evaporate the ammonia. The fabric was then treated with hot water under no tension at 130°C for 2 hours by means of a high-pressure liquid flow dyeing machine, followed by dewatering, drying, and tentering.

### Example 6

**[0067]** Treatment as in Example 5 was done on a plain weave warp rayon filament fabric of 120-denier rayon filaments as the warp (warp density 120/inch) and 30-count single yarn rayon staples as the weft (weft density 60/inch).

### Example 7

**[0068]** Treatment as in Example 5 was done on a plain weave cuprammonium rayon 100% fabric of 75-denier cuprammonium rayon filaments as the warp (warp density 144/inch) and 120-denier cuprammonium rayon filaments as the weft (weft density 87/inch).

### Comparative Example 5

**[0069]** The procedure of Example 5 was repeated except that the liquid ammonia treatment was omitted.

### Comparative Example 6

**[0070]** The procedure of Example 6 was repeated except that the liquid ammonia treatment was omitted.

### Comparative Example 7

**[0071]** The procedure of Example 7 was repeated except that the liquid ammonia treatment was omitted.

**[0072]** The woven fabrics of Examples 5 to 7 and Comparative Examples 5 to 7 were subjected to a washing test (JIS L-217 103 method) involving 1 cycle of washing or 10 cycles of washing, followed by tumble drying. The woven fabric was measured for its warp shrinkage. The results are shown in Table 2.



Table 2

		Rayon spun woven fabric		Rayon filament x rayon spun woven fabric		Cuprammonium rayon woven fabric	
		E5	CE5	E6	CE6	E7	CE7
Warp shrinkage (%)	1 cycle of washing	1.4	5.8	2.5	23.0	1.0	6.5
	10 cycles of washing	2.0	7.3	3.0	25.0	1.5	9.5

Example 8

**[0073]** A 7-count cotton denim 100% woven fabric (warp density 65 yarns/inch, weft density 43 yarns/inch) was impregnated with liquid ammonia at -34°C for 10 seconds, heated to evaporate the ammonia, desized conventionally, and then treated with hot water in a flat state at 130°C for 2 hours by means of a high-pressure beam dyeing machine, followed by tentering.

Example 9

**[0074]** Treatment as in Example 8 was done on an 8-count cotton/rayon (40/60) mix denim 100% woven fabric (warp density 69 yarns/inch, weft density 43 yarns/inch).

Example 10

**[0075]** Treatment as in Example 8 was done on a Tencel denim 100% woven fabric of 21-count warp yarn (warp density 115 yarns/inch) and 10-count weft yarn (weft density 54 yarns/inch).

Comparative Example 8

**[0076]** The procedure of Example 8 was repeated except that the hot water treatment was omitted.

Comparative Example 9

**[0077]** The procedure of Example 9 was repeated except that the hot water treatment was omitted.

Comparative Example 10

**[0078]** The procedure of Example 10 was repeated except that the hot water treatment was omitted.

**[0079]** The woven fabrics of Examples 8 to 10 and Comparative Examples 8 to 10 were examined for their shrinkage and tensile strength by the following tests. The results are shown in Table 3.

Shrinkage

**[0080]** The fabric was washed 1, 5 and 10 cycles according to JIS L-1096 F-2 method, followed by tumble drying. The fabric was measured for its warp and weft shrinkage.

Tensile strength

**[0081]** The weft tensile strength was measured according to JIS L-1096.

Table 3

		E8		CE8		E9		CE9		E10		CE10	
		Warp	Weft	Warp	Weft	Warp	Weft	Warp	Weft	Warp	Weft	Warp	Weft
Shrinkage 1 (%)	cycle of washing	6.9	-0.2	9.4	-1.7	6.7	-0.7	10.0	-1.7	4.4	0.4	7.6	0.4
	5 cycles of washing	7.8	-0.4	12.2	-1.6	8.0	-0.3	12.2	-1.3	4.4	0.4	8.4	0.5
	10 cycles of washing	8.9	-0.2	13.3	-1.1	8.4	0.0	12.9	-1.1	5.3	0.4	8.9	0.2
Weft tensile strength (kg/cm <sup>2</sup> )		92.3		116.0		109.0		112.3		172.7		165.7	

## EP 1 270 797 A2

### Example 11

**[0082]** A cotton 100% woven fabric of 80-count two-folded yarn plain weave (warp density 149 yarns/inch, weft density 62 yarns/inch) was conventionally bleached, impregnated with liquid ammonia at -34°C for 10 seconds, and heated to evaporate the ammonia. The fabric was then impregnated under tension with a 20 wt% caustic alkali at 25°C for 60 seconds, neutralized, and washed with water, followed by dewatering, drying and tentering.

### Comparative Example 11

**[0083]** The procedure of Example 11 was repeated except that the liquid ammonia treatment was omitted.

### Comparative Example 12

**[0084]** The procedure of Example 11 was repeated except that the caustic alkali treatment was omitted.

**[0085]** The woven fabrics of Example 11 and Comparative Examples 11 and 12 were examined for their shrinkage and tensile strength as in Example 8. The results are shown in Table 4.

Table 4

		E11		CE11		CE12	
		Warp	Weft	Warp	Weft	Warp	Weft
Shrinkage (%)	1 cycle of washing	0.7	1.5	1.3	2.2	1.1	2.7
	5 cycles of washing	0.7	1.8	2.0	2.2	1.6	3.1
	10 cycles of washing	1.1	1.8	2.4	2.5	1.8	3.3
Weft tensile strength (kgf)		42.3		39.0		39.4	

### Example 12

**[0086]** A 40-count two-folded yarn single tuck (30 inches x 18 gauge) cotton 100% knit was conventionally bleached and mercerized, impregnated with liquid ammonia at -34°C for 10 seconds, and heated to evaporate the ammonia. The fabric was then impregnated with a 16 wt% caustic alkali at 25°C for 50 seconds, neutralized, and washed with water, followed by dewatering, drying and tentering.

### Example 13

**[0087]** The procedure of Example 12 was repeated except that the mercerizing treatment was omitted.

### Comparative Example 13

**[0088]** The procedure of Example 12 was repeated except that the caustic alkali treatment was omitted.

### Comparative Example 14

**[0089]** The procedure of Example 13 was repeated except that the caustic alkali treatment was omitted.

**[0090]** The woven fabrics of Examples 12 and 13 and Comparative Examples 13 and 14 were examined for their washing shrinkage as in Example 8 and for their burst strength according to JIS L-1018 Mullen method. The results are shown in Table 5.

Table 5

		E12		E13		CE13		CE14	
		Warp	Weft	Warp	Weft	Warp	Weft	Warp	Weft
Shrinkage (%)	1 cycle of washing	5.2	6.8	5.9	7.2	8.5	7.5	9.0	7.9
	5 cycles of washing	5.3	7.5	6.1	7.4	8.8	8.0	9.9	8.5
	10 cycles of washing	5.7	8.0	6.2	8.5	9.5	8.8	10.3	9.0

EP 1 270 797 A2

Table 5 (continued)

	E12		E13		CE13		CE14	
	Warp	Weft	Warp	Weft	Warp	Weft	Warp	Weft
Burst strength (kg/cm <sup>2</sup> )	10.5		10.1		9.1		8.7	

[0091] The following examples illustrate high-temperature alkali treatment.

Examples 14-17

[0092] A plain weave cotton 100% fabric of 40-count single yarn (warp density 132 yarns/inch, weft density 71 yarns/inch) was conventionally bleached, impregnated with liquid ammonia at -34°C for 10 seconds, and heated to evaporate the ammonia. The fabric was then impregnated under no tension with a caustic alkali solution having an alkali concentration and a temperature as shown in Table 6 for a time as shown in Table 6, neutralized, and washed with water, followed by dewatering, drying and tentering.

[0093] The fabrics of Examples 14 to 17 were examined for shrinkage and tensile strength as in Example 1. The results are shown in Table 6.

Table 6

		E14		E15		E16		E17	
Caustic treatment		130°Cx2hr.		130°Cx2hr.		130°Cx2hr.		130°Cx2hr.	
Alkali concentration (wt%)		0.5		1.0		3.0		5.0	
		Warp	Weft	Warp	Weft	Warp	Weft	Warp	Weft
Shrinkage (%)	1 cycle of washing	1.8	-0.1	1.9	-0.2	1.7	0.1	1.3	-0.1
	5 cycles of washing	2.1	-0.6	2.2	-0.5	1.7	-0.6	1.6	-0.6
	10 cycles of washing	2.3	-0.9	2.6	-0.7	2.1	-0.4	1.9	-0.8
Tensile strength (kgf)		93.3	45.0	88.0	45.7	82.3	44.0	83.7	42.3

Examples 18-19 & Comparative Examples 15-16

[0094] A cotton 100% plain weave fabric (warp: 50 count, density 148 yarns/inch, weft: 50 count, density 80 yarns/inch) was impregnated with liquid ammonia at -34°C for 20 seconds, heated to evaporate the ammonia, and then treated with hot water at 130°C for 1 hour in a flat state by means of a high-pressure beam dyeing machine.

[0095] Thereafter, the fabric was subjected to resin treatment by preparing a resin solution according to the formulation shown in Tables 7 and 8 and applying it by a pad drying method. The resin treatment included the application of the resin solution by a mangle with a squeeze rate set at 60%, pre-drying at 85°C for 15 minutes, and heat treatment under the conditions as shown in Tables 7 and 8. The thus obtained fabrics of Examples 18 and 19 were examined for their dry crease-proof property and tensile strength. The results are shown in Tables 7 and 8. The relationship of the tensile strength to the dry crease-proof property is shown in FIGS. 1 and 2. It is noted that the fabric was measured for its tensile strength and dry crease-proof property according to JIS L-1096.

[0096] Comparative Examples 15 and 16 were the same as Examples 18 and 19, respectively, except that the hot water treatment was omitted.

EP 1 270 797 A2

Table 7

		E18				CE15				
5	Hot water treatment	High-pressure beam dyeing machine				None				
10	Resin formulation (g/100 ml)	LNB20*1	20	15	10	5	20	15	10	5
		Zinc borofluoride*2	1	1	1	1	1	1	1	1
		FW*4	2	2	2	2	2	2	2	2
		PE-140*5	1	1	1	1	1	1	1	1
		PEG200*6	3	3	3	3	3	3	3	3
15	Heat treatment	Temperature (°C)	140	140	140	140	140	140	140	140
		Time (min.)	6	6	6	6	6	6	6	6
20	Fabric properties	Tensile strength (kgf)	23.6	24.2	26.1	29.8	20.9	23.2	25.3	29.6
		Dry crease-proof property (°)	300	287	270	241	290	271	248	225

Table 8

		E19				CE16				
25	Hot water treatment	High-pressure beam dyeing machine				None				
30	Resin formulation (g/100 ml)	LNB20*1	20	15	10	5	20	15	10	5
		Cat.M*3	3	3	3	3	3	3	3	3
		FW*4	2	2	2	2	2	2	2	2
		PE-140*5	1	1	1	1	1	1	1	1
		PEG200*6	3	3	3	3	3	3	3	3
35	Heat treatment	Temperature (°C)	160	160	160	160	160	160	160	160
		Time (min.)	2	2	2	2	2	2	2	2
40	Fabric properties	Tensile strength (kgf)	22.0	26.2	29.2	35.3	27.9	28.5	30.5	35.3
		Dry crease-proof property (°)	300	290	271	244	281	265	262	240

\*1 Riken Resin LNB20: Cellulose-reactive N-methylol resin, solids 40%, by Miki Riken Kogyo K.K.

\*2 Zinc borofluoride: Aqueous solution of 45% zinc borofluoride by Morita Chemical K.K.

\*3 Cat.M: Magnesium chloride catalyst by Dai-Nihon Ink Chemical Industry K.K.

\*4 Sumitex buffer FW: Formaldehyde scavenger by Sumitomo Chemical K.K.

\*5 Meikatex PE-140: Polyethylene softener by Meisei Chemical K.K.

\*6 PEG200: Polyethylene glycol by Sanyo Chemicals K.K.

**[0097]** It is noted that the resin solution was prepared by adding water to the chemicals of the formulation shown in Tables 7 and 8 to a total volume of 100 ml.

Example 20 and Comparative Example 17

**[0098]** A cotton 100% plain weave fabric as used in Example 18 was impregnated with liquid ammonia at -34°C for 10 seconds, heated to evaporate the ammonia, treated under no tension with hot water at 130°C for 1 hour by means of a high-pressure liquid flow dyeing machine, and finally resin finished using the resin formulation and conditions shown in Table 9. The thus treated fabric of Example 20 was measured for its physical properties as in Example 18. The results are shown in Table 9 and FIG. 3.

**EP 1 270 797 A2**

**[0099]** Comparative Example 17 was the same as Example 20 except that the hot water treatment was omitted.

Table 9

		E20				CE17			
Hot water treatment		High-pressure liquid flow dyeing machine				None			
Resin formulation (g/100 ml)	LNB20*1	20	15	10	5	20	15	10	5
	Zinc borofluoride*2	1	1	1	1	1	1	1	1
	FW*4	2	2	2	2	2	2	2	2
	PE-140*5	1	1	1	1	1	1	1	1
	PEG200*6	3	3	3	3	3	3	3	3
Heat treatment	Temperature (°C)	140	140	140	140	140	140	140	140
	Time (min.)	6	6	6	6	6	6	6	6
Fabric properties	Tensile strength (kgf)	21.4	22.0	22.8	21.4	19.8	20.0	20.2	20.4
	Dry crease-proof property (°)	281	271	267	252	274	262	253	250

**Example 21 and Comparative Example 18**

**[0100]** A cotton 100% plain weave fabric as used in Example 18 was impregnated with liquid ammonia at -34°C for 20 seconds, heated to evaporate the ammonia, treated under tension with 20 wt% caustic soda at 25°C for 60 seconds by means of a conventional mercerizing machine, and finally resin finished using the resin formulation and conditions shown in Table 10. The thus treated fabric of Example 21 was measured for its physical properties as in Example 18. The results are shown in Table 10 and FIG. 4.

**[0101]** Comparative Example 18 was the same as Example 21 except that the caustic soda treatment was omitted.

Table 10

		E21				CE18			
Hot water treatment		Mercerizing machine				None			
Resin formulation (g/100 ml)	LNB20*1	20	15	10	5	20	15	10	5
	Zinc borofluoride*2	1	1	1	1	1	1	1	1
	FW*4	2	2	2	2	2	2	2	2
	PE-140*5	1	1	1	1	1	1	1	1
	PEG200*6	3	3	3	3	3	3	3	3
Heat treatment	Temperature (°C)	140	140	140	140	140	140	140	140
	Time (min.)	6	6	6	6	6	6	6	6
Fabric properties	Tensile strength (kgf)	26.4	27.0	27.8	28.4	20.9	23.2	25.3	29.6
	Dry crease-proof property (°)	281	271	267	252	290	271	248	225

**Example 22 and Comparative Example 19**

**[0102]** A linen 100% plain weave fabric (warp: hemp, 60 count, density 60 yarns/inch, weft: hemp, 60 count, density 52 yarns/inch) was impregnated with liquid ammonia at -34°C for 10 seconds, heated to evaporate the ammonia, treated under no tension with hot water at 130°C for 1 hour by means of a high-pressure liquid flow dyeing machine, and finally resin finished using the resin formulation and conditions shown in Table 11. The thus treated fabric of Example

**EP 1 270 797 A2**

22 was measured for its physical properties as in Example 18. The results are shown in Table 11 and FIG. 5.

**[0103]** Comparative Example 19 was the same as Example 22 except that the hot water treatment was omitted.

Table 11

		E22				CE19			
Hot water treatment		High-pressure liquid flow dyeing machine				None			
Resin formulation (g/100 ml)	LNB20*1	18	15	12	9	18	15	12	9
	Zinc borofluoride*2	1	1	1	1	1	1	1	1
	FW*4	2	2	2	2	2	2	2	2
	PE-140*5	1	1	1	1	1	1	1	1
	PEG200*6	3	3	3	3	3	3	3	3
Heat treatment	Temperature (°C)	120	120	120	120	120	120	120	120
	Time (min.)	6	6	6	6	6	6	6	6
Fabric properties	Tensile strength (kgf)	20.2	21.2	22.2	24.0	19.8	20.4	21.0	22.4
	Dry crease-proof property (°)	227	223	215	204	217	213	213	206

Example 23 and Comparative Example 20

**[0104]** A rayon 100% plain weave fabric (warp: 30 count, density 68 yarns/inch, weft: 30 count, density 60 yarns/inch) was impregnated with liquid ammonia at -34°C for 10 seconds, and heated to evaporate the ammonia, treated under no tension with hot water at 130°C for 1 hour by means of a high-pressure liquid flow dyeing machine, and finally resin finished using the resin formulation and conditions shown in Table 12. The thus treated fabric of Example 23 was measured for its physical properties as in Example 18. The results are shown in Table 12 and FIG. 6.

**[0105]** Comparative Example 20 was the same as Example 23 except that the hot water treatment was omitted.

Table 12

		E23				CE20			
Hot water treatment		High-pressure liquid flow dyeing machine				None			
Resin formulation (g/100 ml)	LNB20*1	20	15	10	5	20	15	10	5
	Zinc borofluoride*2	1	1	1	1	1	1	1	1
	FW*4	2	2	2	2	2	2	2	2
	PE-140*5	1	1	1	1	1	1	1	1
	PEG200*6	3	3	3	3	3	3	3	3
Heat treatment	Temperature (°C)	120	120	120	120	120	120	120	120
	Time (min.)	10	10	10	10	10	10	10	10
Fabric properties	Tensile strength (kgf)	19.6	22.0	25.6	19.6	26.6	25.8	28.2	32.2
	Dry crease-proof property (°)	248	249	227	230	207	205	202	184

## EP 1 270 797 A2

### Example 24 and Comparative Example 21

**[0106]** A cotton 100% plain weave fabric as used in Example 18 was impregnated with liquid ammonia at -34°C for 20 seconds, heated to evaporate the ammonia, and treated under no tension with hot water at 130°C for 1 hour by means of a high-pressure liquid flow dyeing machine. Finally as resin treatment, a softener and polyethylene glycol as shown in Table 13 were previously applied to the fabric by a pad drying method, and a crosslinking reaction (VP reaction) was carried out in formaldehyde and sulfur dioxide gas at 50 to 120°C for 10 minutes. The amount of formaldehyde bonded was 0.3% by weight.

**[0107]** The thus treated fabric of Example 24 was measured for its physical properties as in Example 18. The results are shown in Table 13.

**[0108]** Comparative Example 21 was the same as Example 24 except that the hot water treatment was omitted.

Table 13

		E24	CE21
Hot water treatment		High-pressure beam dyeing machine	None
Treating agent (g/100 ml)	PE-140* <sup>5</sup>	1	1
	PEG200* <sup>6</sup>	3	3
Fabric properties	Tensile strength (kgf)	43.0	40.3
	Dry crease-proof property (°)	258	246

### Example 25 and Comparative Example 22

**[0109]** A 40-count two-folded yarn single tuck (30 inches x 18 gauge) cotton 100% knit was conventionally bleached, impregnated with liquid ammonia at -34°C for 20 seconds, heated to evaporate the ammonia, treated under no tension with hot water at 130°C for 1 hour by means of a high-pressure liquid flow dyeing machine, spin dried and heat dried. Resin treatment was then carried out by means of a tenter. The treating resin formulation and conditions were the same as in Example 18. The fabric was examined for the shrinkage (warp + weft) after washing and tumble drying according to JIS L-217 103 method and for its burst strength according to JIS L-1018 Mullen method. The results are shown in Table 14.

**[0110]** Comparative Example 22 was the same as Example 25 except that the fabric was washed under no tension with warm water at 60°C for 1 hour instead of the hot water treatment.

Table 14

Resin concentration		5%		10%		15%		20%	
		E25	CE22	E25	CE22	E25	CE22	E25	CE22
Warp + weft shrinkage (%)	1 cycle of washing	10.3	13.5	6.8	9.8	4.3	7.3	2.5	4.1
	5 cycles of washing	11.3	15.8	7.9	11.3	6.3	8.7	3.4	6.2
	10 cycles of washing	11.5	16.4	8.0	12.4	6.7	9.5	4.5	7.3
Burst strength (kg/cm <sup>2</sup> )		7.0	7.2	5.1	5.2	4.4	4.2	4.4	4.1

### Example 26 and Comparative Example 23

**[0111]** The procedure of Example 25 was repeated except that the same knit fabric as in Example 21 was treated under tension with 16 wt% caustic soda at 25°C for an impregnating time of 50 seconds by means of a conventional mercerizing machine prior to the liquid ammonia treatment. The fabric was examined for its washing shrinkage (warp + weft) and its burst strength as in Example 25. The results are shown in Table 15.

**[0112]** Comparative Example 23 was the same as Example 26 except that the fabric was washed under no tension with warm water at 60°C for 1 hour instead of the hot water treatment.



Table 15

Resin concentration		5%		10%		15%		20%	
		E26	CE23	E26	CE23	E26	CE23	E26	CE23
Warp + weft shrinkage (%)	1 cycle of washing	9.2	12.8	5.7	8.8	3.7	6.2	2.4	3.7
	5 cycles of washing	10.4	14.9	6.7	10.1	5.7	7.6	3.3	5.5
	10 cycles of washing	10.6	15.5	7.5	11.7	5.9	8.7	4.4	6.7
Burst strength (kg/cm <sup>2</sup> )		8.3	8.3	6.2	6.1	5.2	5.2	5.1	4.8

Example 27 and Comparative Example 24

**[0113]** The procedure of Example 25 was repeated except that the same knit fabric as in Example 25 was treated under tension with 16 wt% caustic soda at 25°C for an impregnating time of 50 seconds by means of a conventional mercerizing machine instead of the hot water treatment. The fabric was examined for its washing shrinkage (warp + weft) and its burst strength as in Example 25. The results are shown in Table 16.

**[0114]** Comparative Example 24 was the same as Example 27 except that the mercerizing treatment was omitted.

Table 16

Resin concentration		5%		10%		15%		20%	
		E27	CE24	E27	CE24	E27	CE24	E27	CE24
Warp + weft shrinkage (%)	1 cycle of washing	8.3	13.5	5.2	9.9	4.0	6.8	2.8	4.8
	5 cycles of washing	9.2	15.1	6.5	11.2	5.5	7.5	3.5	6.2
	10 cycles of washing	9.8	15.9	7.3	11.9	5.7	8.2	3.9	6.9
Burst strength (kg/cm <sup>2</sup> )		8.3	6.5	7.4	5.8	6.2	4.7	5.5	4.3

**[0115]** According to the present invention, improved crease or shrink-proof properties can be imparted to a cellulosic fiber-containing a structure without a substantial loss of fabric strength. Especially, improved crease or shrink-proof properties can be imparted to even thin, low strength fabrics while maintaining a practically acceptable strength. In the embodiment wherein the shrink-proof treatment is followed by resin treatment, the balance of the fabric strength and the crease or shrink-proof properties are further improved so that improved shrink-proof properties can be imparted while minimizing the loss in fabric strength.

**[0116]** Although some preferred embodiments have been described, many modifications and variations may be made thereto in the light of the above explanations. It is, therefore, to be understood that within the scope of the appended claims, the invention may be practiced otherwise than as specifically described.

**Claims**

1. A method for the shrink-proof treatment of a cellulosic fiber textile, which comprises treating the fiber textile with liquid ammonia, **characterized by** treating the fiber textile under tension or under no tension with hot water for 10 minutes to 5 hours subsequent to liquid ammonia treatment, wherein the hot water treatment is carried out in hot water at a temperature of 100 to 150°C, in particular for at least 2 hours at 100°C, at least 1 hour at 110°C, at least 40 minutes at 120°C, and at least 20 minutes at 130°C, respectively.
2. The method according to claim 1, wherein after the hot water treatment, the fiber textile is treated with a resin.
3. The method according to claim 2, wherein the resin treatment uses a cellulose reactive N-methylol compound.
4. The method according to claim 2, wherein the resin treatment uses formaldehyde.
5. The method of any one of claims 1 to 4, wherein the cellulosic fiber textile is constructed of natural cellulose.

6. The method of any one of claims 1 to 4, wherein the cellulosic fiber textile is constructed of regenerated cellulose.

5

10

15

20

25

30

35


40

45

50

55

**FIG.1**

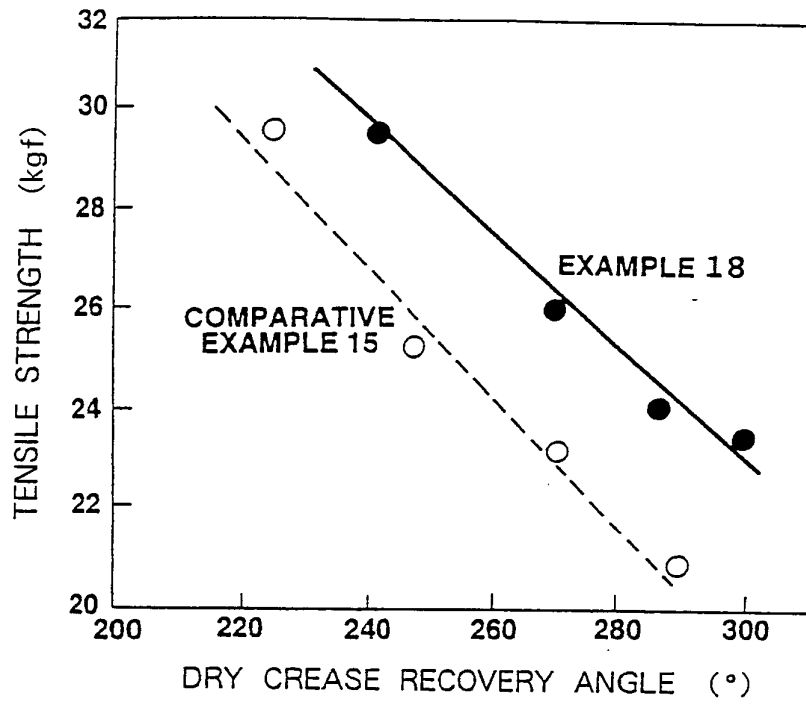

**FIG.2**

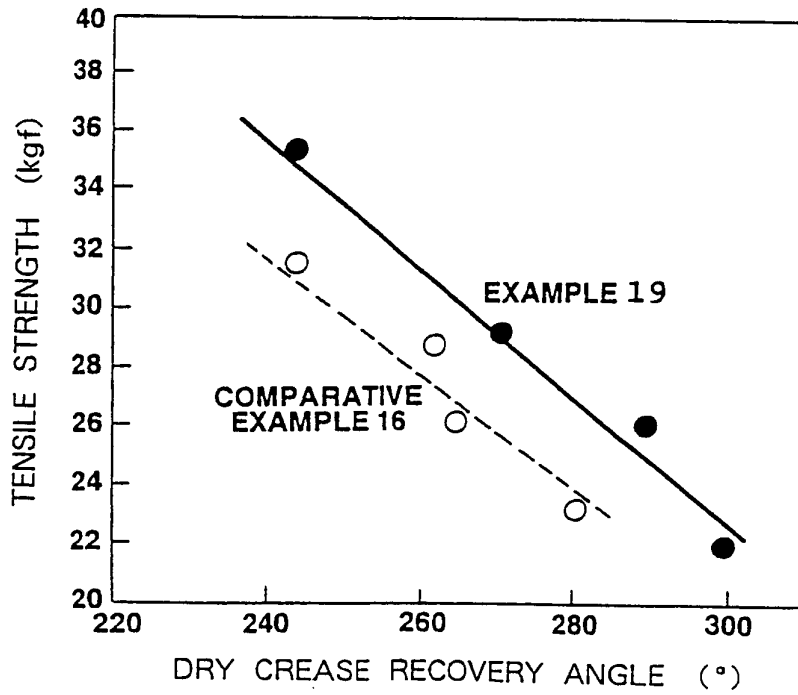


FIG.3

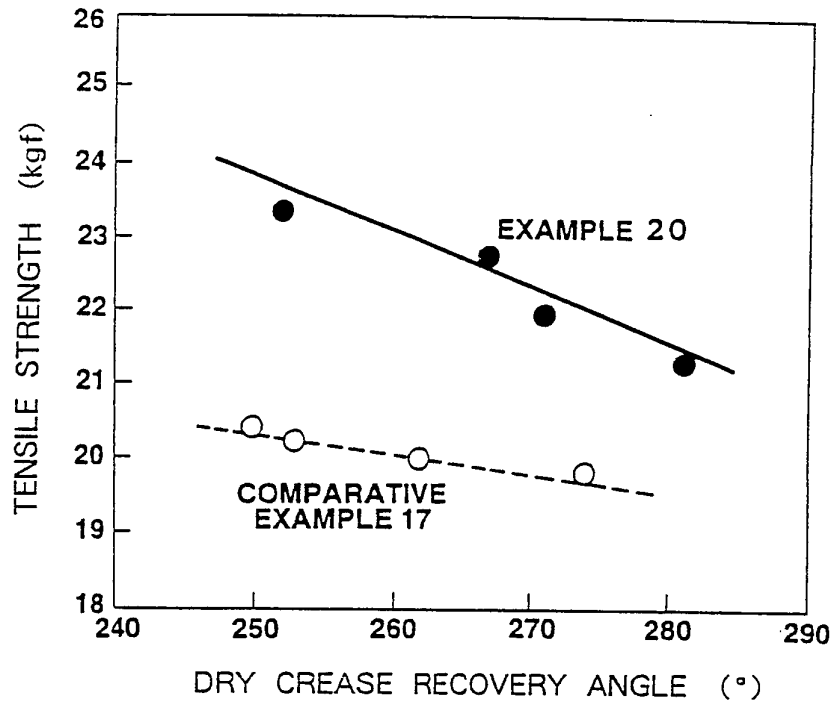


FIG.4

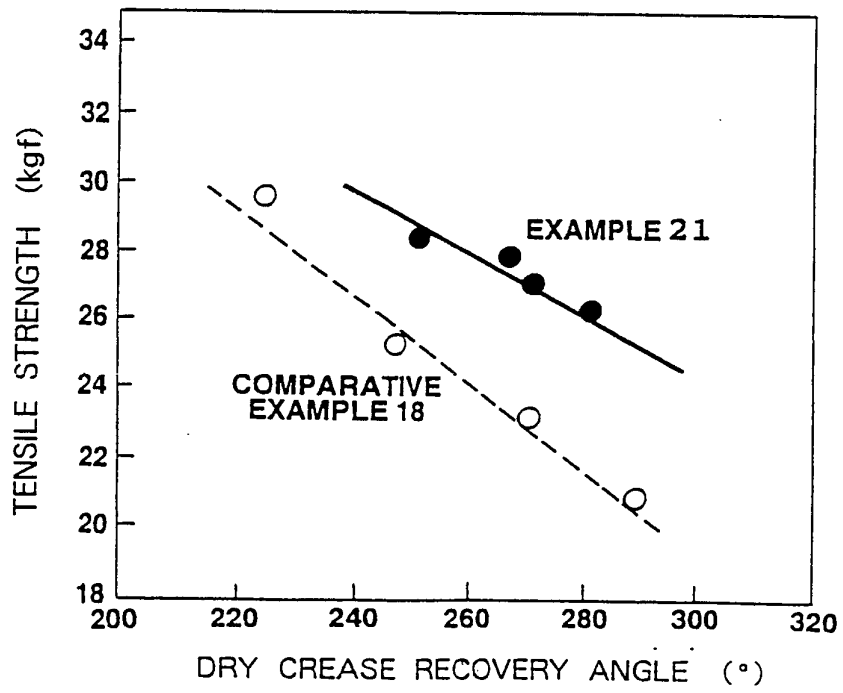


FIG.5

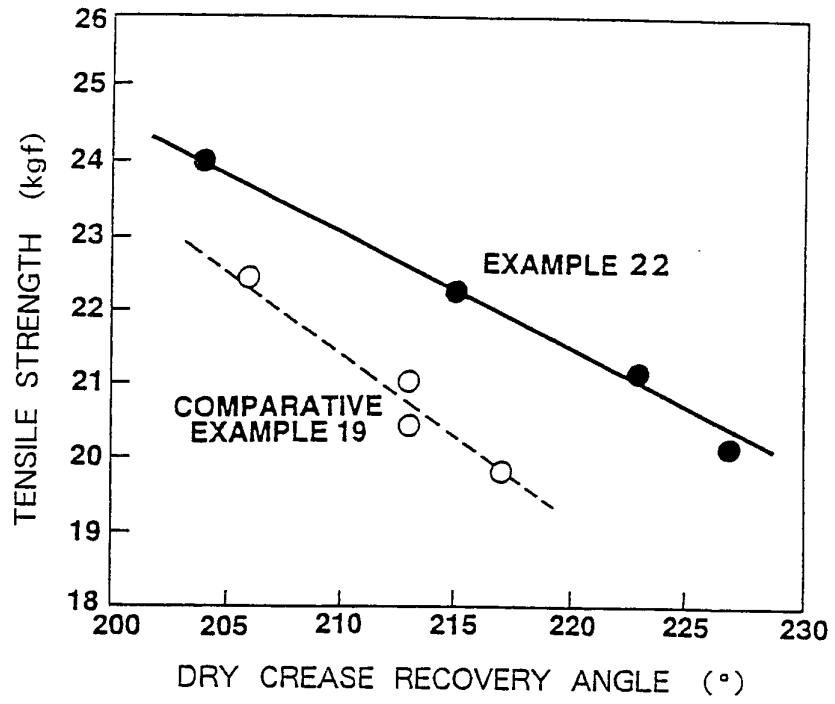


FIG.6

