

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 November 2009 (05.11.2009)

PCT

(10) International Publication Number
WO 2009/134445 A1

(51) International Patent Classification:
C03C 10/00 (2006.01)

(21) International Application Number:
PCT/US2009/002721

(22) International Filing Date:
1 May 2009 (01.05.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/049,614 1 May 2008 (01.05.2008) US

(71) Applicant (for all designated States except US): **CORNING INCORPORATED** [US/US]; 1 Riverfront Plaza, Corning, NY 14831 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BEALL, George, H** [US/US]; 16 Woodland Drive, Big Flats, NY 14814 (US). **PINCKNEY, Linda, R** [US/US]; 1560 Caton Road, Corning, NY 14830 (US). **TIETJE, Steven, A** [US/US]; 9769 Church Creek Road, Lindley, NY 14858 (US).

(74) Agent: **DOUGLAS, Walter, M**; Corning Incorporated, Intellectual Property Department, SP-TI-3-1, Corning, NY 14831 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: COLORED MACHINABLE GLASS-CERAMICS

FIGURE 1

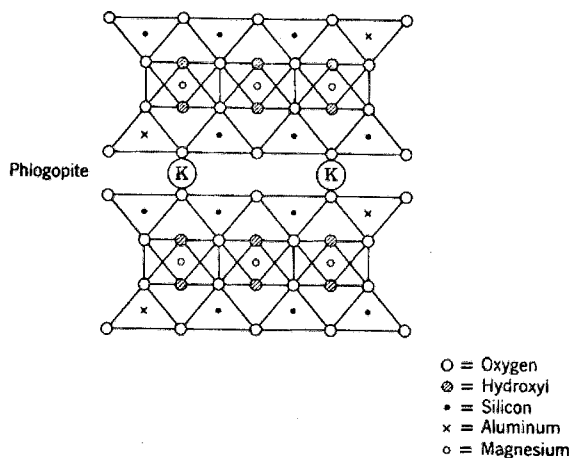

(57) Abstract: The invention relates to opaque, colored glass ceramic articles and to the production of opaque, colored glass-ceramic articles which can be readily formed to a desired shape using standard metal-working tools. The glass-ceramic material used to make such articles contains mica crystals as the predominant phase. The desired color is obtained through the addition of a colorant system to the precursor glass. In a particular embodiment the invention is directed to a black glass ceramic article, the black color being obtained by the addition of iron oxides in levels as high as 20 wt%, which can yield a glass ceramic having an iron rich mica phase and/or a glass ceramic having an iron rich mica phase plus an iron oxide phase.

WO 2009/134445 A1

COLORED MACHINABLE GLASS-CERAMICS

Cross-reference to Related Applications

This application claims the benefit of priority under 35 U.S.C. § 119(e) of U.S. Provisional Application Serial No. 61/049,614 filed on May 1, 2008.

Technical Field

[0001] The invention is directed to colored machinable glass-ceramics that can be used as durable housings for electronic devices. In particular the invention is directed to mica-phase-containing glass ceramics that can be used as durable housings for electronic devices.

Background

[0002] Mica is classified as a phyllosilicate; its basic structural feature is a composite sheet in which a layer of octahedrally-coordinated cations is sandwiched between two identical layers of linked (Si,Al)O₄ tetrahedra. The general formula of the mica structure can be found in Dana's New Mineralogy, R.V. Gaines et al., eds. (John Wiley & Sons, New York 1997), pages 1444-1446 and the structure can be written as:

$A_{0.5}R_{2.3}T_4O_{10}X_2$ where:

A = a large monovalent or bivalent ion (e.g. Na⁺, K⁺, Rb⁺, Cs⁺, Ca²⁺, Sr²⁺, Ba²⁺),
or a *partial vacancy* (partial vacancy denoted by subscript "0"),

R = an octahedrally-coordinated cation (e.g. Li⁺, Mg²⁺, Fe²⁺, Mn²⁺, Zn²⁺, Al³⁺, Fe³⁺, Mn³⁺, V³⁺),

T = a tetrahedrally-coordinated cation (predominantly Si⁴⁺, with Al³⁺ and B³⁺),
and

X = is an anion (predominantly OH⁻ in minerals, but F⁻ in glass-ceramics. X may also be partially O²⁻.)

[0003] Micaceous minerals are extremely common in rocks, and numerous classification systems exist for them. In glass-ceramics, micaceous minerals are typically classified as alkaline (containing alkali ions) and non-alkaline (containing no monovalent ions), and as trisilicic (where

T₄ in the formula above is (Si₃Al)) and tetrasilicic (Si₄). These compositional parameters can be varied to produce desired properties in a glass-ceramic.

[0004] Machinable mica glass-ceramics based on mica crystal phases were originally disclosed in the art more than thirty years ago [e.g. U.S. Patent Nos. 3,689,296, 3,732,087, 3,839,055, and 3,756,838], and Table 1 below shows general formulas for trisilicic, tetrasilicic and non-alkali glass-ceramics having mica structures, the alkali-containing glass-ceramics being included in the trisilicic and tetrasilicic categories. These materials have found numerous uses based on their unusual capability of being machinable to high tolerance using conventional high speed metal-working tools. By suitably tailoring their compositions and nucleation and crystallization temperatures, a wide range of microstructures can be obtained, including the "house-of-cards" microstructure of relatively large mica crystals with high two-dimensional aspect ratios, which most enhances the inherent machinability of the materials (see W. Höland and G. Beall, Glass Ceramic Technology (Amer. Ceramic Soc., Westerville, OH, 2002), pages 7-9 and 236-241. Additionally, one can refer to U.S. Patent No. 2,920,971 (Stookey), the basic patent in the field of glass-ceramics, which provides an extensive study of the practical aspects and theoretical considerations that must be understood in the manufacture of such articles as well as a discussion of the crystallization.

[0005] The machinable mica glass-ceramics typically have an inherent white color. For certain applications, however, especially for consumer-oriented products, a colored machinable glass-ceramic is desired. Of particular interest would be a black or deep charcoal grey color. The addition of colorants to opaque glass-ceramics has been disclosed in the art. Colored canasite glass-ceramics were disclosed in U.S. Patent No. 5,070,044, but these are not machinable materials. D.G. Grossman in U.S. Patent No. 3,732,087 discloses the addition of glass colorants, for example, transition metal oxides, rare earth oxides, and colloidal metals such as Au, to tetrasilicic mica glass-ceramics, typically in levels less than 2%. In a preferred embodiment, the colorant was added to the molten glass just prior to forming, leading to a marble-like effect in the final glass-ceramic. While the patent indicates that less than 5% colorant is preferred, claim 2 of the patent covers a total of 0-20% of glass colorants.

[0006] Durable glass-ceramic articles for use as the outer shell or body of consumer electronics, for example, cellphones, music players, notebook computers, game controllers, computer “mice”, electronic book readers and other devices, are desirable and possess certain advantages such as weight and/or resistance to impact damage (e.g., denting), over the present materials such as plastic and metal. It is particularly desirable to have colored durable glass-ceramic articles for such uses.

Summary

[0007] The invention relates to opaque, colored glass-ceramic articles and to the production of opaque, colored glass-ceramic articles which can be readily formed to a desired shape using standard metal-working tools. The glass-ceramic material used to make such articles contains mica crystals as the predominant crystalline phase. The desired color is obtained through the addition of a colorant system to the precursor glass. By adding the colorant to the glass precursor the color is homogeneous throughout the article's body and is not restricted to the surface of the article. The colors comprise the range from white to black, and include yellow, blue, green, gray, and such other colors as may be attainable by the addition of selected colorants to the precursor glass. In a particular embodiment the invention is directed to a black glass-ceramic article, the black color being obtained by the addition of iron oxides in levels as high as 20 wt%, which can yield a phase assemblage of an iron-rich mica phase, or a mixture of a mica phase and an iron oxide phase. The glass-ceramic article can be used in a variety of consumer electronic articles, for example, cellphones and other electronic devices capable of wireless communication, music players, notebook computers, game controllers, computer “mice”, electronic book readers and other devices. The glass-ceramic articles have been found to have a “pleasant feel” when held in the hand.

[0008] Colored, machinable glass-ceramic articles can be made by providing batched materials within the compositional ranges cited herein and, after preparing a glass from said batched materials, ceramming the glass to form a colored, machinable glass-ceramic. The times and temperature for ceramming the composition of the invention are typically in the range of 3-12 hours and 850-1200 °C.

Brief Description of the Drawings

[0009] Figure 1 is a schematic illustration of the phlogopite structure $\text{KMg}_3(\text{Si}_3\text{Al})\text{O}_{10}(\text{OH},\text{F})_2$ showing tetrahedral and octahedral layers with K^+ ions between the layers.

[0010] Figure 2 is an X-ray diffraction pattern of composition VF with the mica (M) and hematite (H) peaks marked,

[0011] Figure 3 is a picture of a machined black glass-ceramic body having a hole drilled through the body

Detailed Description

[0012] When a composition herein is given a range of 0-X wt%, this refers to the amount of material added to a batch and excludes contaminant levels of the same material. As those skilled in the art know, metals, for example iron, are frequently found at contaminant levels in batched glass and glass-ceramic products. Consequently, in those cases where a batch material is described as being in a range of 0- X wt%, it is to be understood that this refers to “added material” and that in those cases where the “added material is 0 wt%” any such that may be present in the final glass-ceramic material is contaminant material.

[0013] As has been indicated above, a number of machinable glass-ceramic compositions have been described in the prior art, including those based on trisilicic mica crystal structures (US 3,689,293), tetrasilicic mica structures (US 3,732,087 and 3,839,055), and non-alkali-containing mica structures (US 3,756,838). Table 1 gives a summary of the compositions described in this prior art.

[0014] Table 1: General types of mica structures in glass-ceramics (prior art)

Wt%	Trisilicic mica GCs	Tetrasilicic GC	Non-alkali mica GC
SiO ₂	25-60	45-75	30-65
Al ₂ O ₃	5-25	0-5	5-26
B ₂ O ₃	5-15	0	
MgO	5-25	8-30	10-35
F	4-20	3-15	4-12
K ₂ O	See below	2-20	
Li ₂ O	0-7	0-5	
R ₂ O	2-20	See below	
ZrO ₂		0-7	
SrO			5-25
BaO			0-25
Where	The sum of Al ₂ O ₃ +B ₂ O ₃ = 15-35% The sum of MgO+Li ₂ O = 6-25% R ₂ O = alkali oxides: K ₂ O = 0-15% Na ₂ O=0-15% Rb ₂ O =0-15% Cs ₂ O=0-20%	Na ₂ O = 0-5	

[0015] The glass-ceramics can be colored using selected metal colorants, generally in the form of their oxides or sulfides. They are added as dopants in an amount of greater than zero (>0) up to ~ 3 wt%. Examples of the resulting colors include:

- No additives: White
- Co₃O₄, CoO: Blue-violet
- NiO: Grey-brown
- Cr₂O₃: Green-brown
- CuO: Blue-green
- FeO, Fe₂O₃: Green-brown
- NiS: Grey
- CdS: Yellow.

These types of colors are similar to those described in prior art U.S. Patent Nos. 3,689,293 and 5,070,044.

[0016] In the course of investigating colored machinable glass-ceramics and preparing samples within the compositional range recited above, we have discovered a new area of colored, iron-rich machinable glass-ceramics based on iron-rich micas which is in some instances mixed with iron oxides. No prior art specific to the high levels of iron in a machinable glass-ceramic has been found.

[0017] Generally, the colored glass-ceramics of the invention have a composition which comprises, in weight %:

SiO ₂	25-75%
Al ₂ O ₃	0-26%
B ₂ O ₃	0-15%
MgO	5-35%
F	3-20 %
K ₂ O	0-20%
TiO ₂	0-5%
Na ₂ O	0-15%
Li ₂ O	0-7%
ZrO ₂	0-7%
SrO	0-25%
BaO	0-25%

and colorant in an amount of >0 wt% colorant ≤ 3 wt%, except that when the colorant is iron the iron is present in an amount of >0 wt% colorant ≤ 20 wt%. The colorants are added in the form of metal oxides and/or sulfides. Examples, without limitation, of such colorants are Co₃O₄, CoO, NiO, Cr₂O₃, CuO, FeO, Fe₂O₃, NiS, and CdS. Other metal colorants known in the art of glass making can also be used to contain the desired colors. Using the above compositional range one can prepare glass-ceramics in which the mica structures are trisilicic, tetrasilicic or non-alkali. For example, when all the above, excluding colorant, are present one can prepare a glass-ceramic in which the mica phase is trisilicic. By deleting the boron and the alumina, or reducing the alumina to less than 5 wt%, one can prepare a glass-ceramic in which the mica phase is tetrasilicic. By deleting the alkali (Na and K, Li being considered an alkali in these compositions), one can prepare a glass-ceramic in which the mica phase is non-alkali. Further, in the glass-ceramics of the invention the mica phase is selected from the

group consisting of trisilicic, tetrasilicic or non-alkali-containing mica phases, and intermediate mica phases, for example, those between the trisilicic and tetrasilicic phases.

[0018] In one embodiment of the invention the colored, iron-rich machinable glass-ceramics have a composition which comprises, in weight %:

SiO ₂	40-65%
Al ₂ O ₃	10-20%
B ₂ O ₃	3-10%
MgO	10-25%
F	4-9 %
K ₂ O	1-15%
FeO + Fe ₂ O ₃	2-20%
TiO ₂	0-5%
Na ₂ O	0-5%
Li ₂ O	0-5%

These glass-ceramics contain an iron-rich, trisilicic mica phase and may further contain an iron oxide phase. In some embodiments of the invention the preferred iron level is the range of 7-20 wt% to achieve the desired black color.

[0019] Examples of colored machinable glass-ceramics, including the iron-mica-based glass-ceramics, are given in Tables 2 and 3. The oxides and sulfides preceded by "x" are added in excess of 100% of the nominal value shown. Table 2 shows that many different glass-ceramic colors can be attained by proper selection of the metal oxide or sulfide used in forming the glass batch that is ultimately cerammed to form the glass-ceramic. It is also important to note that in many instances the color of the batched glass and the final glass-ceramic is different. For example, for Table 2 samples TV, TW and VL, the glass composition is black, but the final glass-ceramic color is blue-violet, beige and brown, respectively. Consequently, some experimentation, which is within the ability of one skilled in the art, may be necessary to insure that the desired glass-ceramic color is attained. In Table 2, composition VL contains an iron-rich tetrasilic mica phase. Table 3 lists two black, glass-ceramics having an iron-rich trisilicic mica phase.

[0020] Table 2: Colored machinable glass-ceramics

Wt% (batched)	TU	TV	TW	TY	TZ	UA
SiO ₂	61.2	61.2	61.2	61.2	61.2	61.2
B ₂ O ₃	-	-	-	-	-	-
Al ₂ O ₃	-	-	-	-	-	-
MgO	22.8	22.8	22.8	22.8	22.8	21.6
F	6.5	6.5	6.5	6.5	6.5	6.5
K ₂ O	10.7	10.7	10.7	10.7	10.7	10.7
TiO ₂	-	-	-	-	-	-
ZrO ₂	1.5	1.5	1.5	1.5	1.5	1.5
Colorants (in batch)						
Fe ₂ O ₃	-	-	-	-	-	-
x Co ₃ O ₄	-	1.0	-	-	-	-
x NiO	-	-	1.0	-	-	-
x Cr ₂ O ₃	-	-	-	0.25	-	-
x CuO	-	-	-	-	1.0	-
x FeO	-	-	-	-	-	2.7
x CdS	1.5	-	-	-	-	-
x ZnS	-	-	-	-	-	-
x V ₂ O ₅	-	-	-	-	-	-
Glass Color	Yellow	Black	Black	Green	Turquoise	Green
Heat treatment	925°C 4 hr	1075°C 6 hr	1075°C 6 hr	1075°C 6 hr	1075°C 6 hr	1075°C 6hr
Glass-ceramic Color	Yellow	Blue-violet	Beige	Pale green-brown	Pale green	Pale blue-green

[0021] Table 2 continued: Colored machinable glass-ceramics

Wt% (batched)	US	UQ	UW	UX	UY	VD	VL
SiO ₂	59.0	61.0	46.8	46.8	46.8	62.3	57.1
B ₂ O ₃	-	-	8.1	8.1	8.1	-	
Al ₂ O ₃	-	-	16.9	16.9	16.9	-	
MgO	22.5	22.5	14.4	14.4	14.4	22.9	18.5
F	6.1	6.1	7.3	7.3	7.3	6.2	5.9
K ₂ O	13.0	11.0	9.6	9.6	9.6	11.2	10.4
TiO ₂	-	-	-	-	-	-	
ZrO ₂	2.0	2.0	-	-	-	2.0	2.4
Colorants (in batch)							
Fe ₂ O ₃	-	-	-	-	-	-	8.2
x Co ₃ O ₄	1.0	-	-	1.0	0	0.5	
x NiO	-	-	1.0	-	-	1.0	
x Cr ₂ O ₃	-	-	-	-	-	-	
x CuO	-	-	-	-	1.0	-	
x FeO	-	-	-	-	-	-	
x CdS	-	-	-	-	-	-	
x ZnS	-	-	0.2	0.2	-	0.2	
x V ₂ O ₅	-	1.0	-	-	-	-	
Glass	Black	Green	Brown opal	Black	Blue-green opal	Black	Black
Heat treatment	1100°C 4 hr	1150°C 4 hr	1060°C 4 hr	1060°C 4 hr	1060°C 4 hr	1100°C 4 hr	1075°C 4 hr
Glass-ceramic Color	Violet	Buff	Grey- brown	Lavender	Pale green	Grey- blue	Brown

[0022] Table 3: High-iron, black, machinable glass-ceramics

Wt% (batched)	VF	VH
SiO ₂	42.4	41.2
B ₂ O ₃	5.0	8.0
Al ₂ O ₃	14.1	16.1
MgO	17.0	18.0
F	7.4	5.7
K ₂ O	3.0	2.3
TiO ₂	1.0	1.0
ZrO ₂	-	-
Colorants (in batch)		
Fe ₂ O ₃	13.1	7.0
x FeO	-	-
x ZnS	0.2	-
x V ₂ O ₅	-	-
Glass	Black	Black
Heat treatment	1075°C 4 hr	1075°C 4 hr
Glass-ceramic Color	Black	Black

[0023] Many natural micas and other phyllosilicates contain some iron in the octahedral site, the most common mineral being biotite which has the formula $K(Fe^{2+},Mg)_3[(Si_3Al)O_{10}](OH,F)_2$. This mineral forms a complete solid solution with phlogopite (see Figure 1), $K(Mg)_3[(Si_3Al)O_{10}](OH,F)_2$, the predominant crystal phase in trisilicic mica glass-ceramics, for example, such as MACOR[®] (Corning Incorporated, Corning, New York). Other mica-containing glass-ceramics may have different predominant crystalline phases or contain additional microcrystals. For example, DICOR (Corning Incorporated/Dentsply) is based on tetrasilicic mica, contains added ceria and is used for dental restorations; Vitronit (Vitron Spezialwerkstoffe GmbH, Jena, Germany), a glass-ceramic having cabbage-head microstructure of mica crystals; and Photoveel (Sumikin Photon Ceramics Co., Ltd., Japan) is a fluoromica type glass-ceramic that also contain zirconia microcrystals in the glass matrix.

[0024] While less common in rocks, there are also higher iron micas such as the iron “end member” annite, $K(Fe^{2+})_3[(Si_3Al)O_{10}](OH,F)_2$ and the mixed micas ferriannite $K(Fe^{2+},Mg)[(Si_3Fe^{3+})O_{10}](OH,F)_2$ and siderophyllite $K(Fe^{2+}_2Al)[(Si_2Al_2)O_{10}](OH,F)_2$. Solid solutions among these phases are very common. Titania is another constituent in mica; the coexistence of Ti^{3+} with iron can also darken the color. The X-ray diffraction patterns of the mica phases and their solid solutions are very similar, so it is difficult to determine precisely the compositions of the mica phases in these glass-ceramics.

[0025] Depending on iron level and heat treatment, the iron-rich micas in these glass-ceramics can co-exist with iron oxide phases such as hematite (Fe_2O_3) and magnetite ($Fe^{2+}(Fe^{3+})_2O_4$.) Figure 2 shows the X-ray diffraction pattern of composition VF (composition given in Table 2). The major phases are mica (M) and hematite (H). Despite the presence of the hematite, the glass-ceramic remains highly machinable.

[0026] These high iron glass batches of Table 3 are stable and fluid and can be cast into molds and subsequently cerammed. It is likely that some of the higher silica (more viscous) compositions are compatible with pressing to near net shape, though this has not yet been carried out. For the black glasses, it is preferable to fabricate relatively thin shapes in order to more efficiently remove the heat from the glass during cooling.

Figure 3 illustrates a machined black glass-ceramic article made from composition VF that has a hole or opening drilled in the center of the article. The size of the article is 1 cm x 1 cm x 3 cm.

[0027] In additional embodiments the invention is directed to an article suitable for housing the components of a portable electronic device, said article comprising colored, machinable glass-ceramic having a composition, as batched and before ceramming, of:

SiO ₂	25-75%
Al ₂ O ₃	0-26%
B ₂ O ₃	0-15%
MgO	5-35%
F	3-20 %
K ₂ O	0-20%
TiO ₂	0-5%
Na ₂ O	0-15%
Li ₂ O	0-7%
ZrO ₂	0-7%
SrO	0-25%
BaO	0-25%

and colorant in an amount of $0 \text{ wt\%} < \text{colorant} \leq 3 \text{ wt\%}$, except that when the colorant is iron the colorant is present in an amount of $0 \text{ wt\%} < \text{colorant} \leq 20 \text{ wt\%}$;

wherein said glass-ceramic article surrounds and protects the internal components of the electronic device and said article has one or a plurality of openings for enabling communication between the user and the internal components of the electronic device, allow the device to display information for the user's viewing and allow the device to wirelessly communicate with a communications network.

[0027] An article suitable for housing the components of a portable electronic device, said article comprising black-colored, machinable glass-ceramic having a composition, as batched and before ceramming, of:

SiO ₂	40-65%
Al ₂ O ₃	10-20%
B ₂ O ₃	3-10%

MgO	10-25%
F	4-9 %
K ₂ O	1-15%
FeO + Fe ₂ O ₃	2-20%
TiO ₂	0-5%
Na ₂ O	0-5%
Li ₂ O	0-5%.

wherein said glass-ceramic article surrounds and protects the internal components of the electronic device and said article has one or a plurality of openings for enabling communication between the user and the internal components of the electronic device, allow the device to display information for the user's viewing and allow the device to wirelessly communicate with a communications network.

[0028] Various modifications and variations can be made to the materials, methods, and articles described herein. Other aspects of the materials, methods, and articles described herein will be apparent from consideration of the specification and practice of the materials, methods, and articles disclosed herein. It is intended that the specification and examples be considered as exemplary.

We claim:

1. A composition suitable for ceramming to make a colored, machinable glass-ceramic article, said composition, as batched, consisting essentially of, weight percent:

SiO ₂	25-75%
Al ₂ O ₃	0-26%
B ₂ O ₃	0-15%
MgO	5-35%
F	3-20 %
K ₂ O	0-20%
TiO ₂	0-5%
Na ₂ O	0-15%
Li ₂ O	0-7%
ZrO ₂	0-7%
SrO	0-25%
BaO	0-25%

and colorant in an amount of $0 \text{ wt}\% < \text{colorant} \leq 3 \text{ wt}\%$, except that then the colorant is iron the colorant is present in an amount of $0 \text{ wt}\% < \text{colorant} \leq 20 \text{ wt}\%$.

2. The composition according to claim 1, wherein said colorants are added to the batch as transition metal oxides and/or sulfides.
3. The composition according to claim 1, wherein after ceramming said composition contains a mica phase selected from the group consisting of trisilicic, tetrasilicic or non-alkali-containing mica phases, and intermediate mica phases.
4. The composition according to claim 1, wherein after ceramming iron is present in the form of iron-rich mica crystals.
5. The composition according to claim 1, wherein after ceramming iron is present in the form of iron-rich mica crystals admixed with iron oxide .

6. A composition suitable for making a black colored, machinable glass-ceramic article, said composition as batched consisting essentially of, weight percent:

SiO ₂	40-65%
Al ₂ O ₃	10-20%
B ₂ O ₃	3-10%
MgO	10-25%
F	4-9 %
K ₂ O	1-15%
FeO + Fe ₂ O ₃	2-20%
TiO ₂	0-5%
Na ₂ O	0-5%
Li ₂ O	0-5%.

7. The composition according to claim 6, wherein after ceramming said iron is present in the form of iron-rich mica crystals.

8. The composition according to claim 6, wherein after ceramming said iron is present in the form of iron-rich mica crystals admixed with iron oxide .

9. An article suitable for housing the components of a portable electronic device, said article comprising colored, machinable glass-ceramic having a composition, as batched, consisting essentially of, in weight percent:

SiO ₂	25-75%
Al ₂ O ₃	0-26%
B ₂ O ₃	0-15%
MgO	5-35%
F	3-20 %
K ₂ O	0-20%
TiO ₂	0-5%
Na ₂ O	0-15%
Li ₂ O	0-7%
ZrO ₂	0-7%
SrO	0-25%
BaO	0-25%

and colorant in an amount of $0 \text{ wt}\% < \text{colorant} \leq 3 \text{ wt}\%$, except that when the colorant is iron the colorant is present in an amount of $0 \text{ wt}\% < \text{colorant} \leq 20 \text{ wt}\%$;


wherein said glass-ceramic article surrounds and protects the internal components of the electronic device and said article has one or a plurality of openings for enabling communication between the user and the internal components of the electronic device, allow the device to display information for the user's viewing and allow the device to wirelessly communicate with a communications network.

10. An article suitable for housing the components of a portable electronic device, said article comprising black-colored, machinable glass-ceramic having a composition, as batched, consisting essentially of, in weight percent::

SiO ₂	40-65%
Al ₂ O ₃	10-20%
B ₂ O ₃	3-10%
MgO	10-25%
F	4-9 %
K ₂ O	1-15%
FeO + Fe ₂ O ₃	2-20%
TiO ₂	0-5%
Na ₂ O	0-5%
Li ₂ O	0-5%.

wherein said glass-ceramic article surrounds and protects the internal components of the electronic device and said article has one or a plurality of openings for enabling communication between the user and the internal components of the electronic device, thereby allowing the device to display information for the user's viewing and allowing the device to wirelessly communicate with a communications network.

FIGURE 1

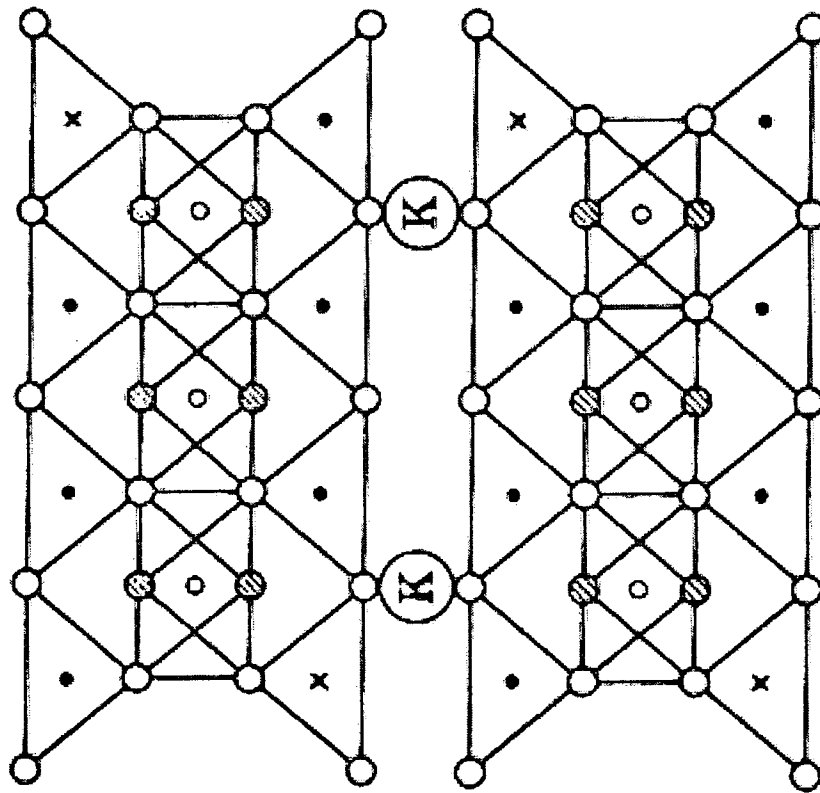

Phlogopite

- = Oxygen
- ◐ = Hydroxyl
- = Silicon
- x = Aluminum
- = Magnesium

FIGURE 2


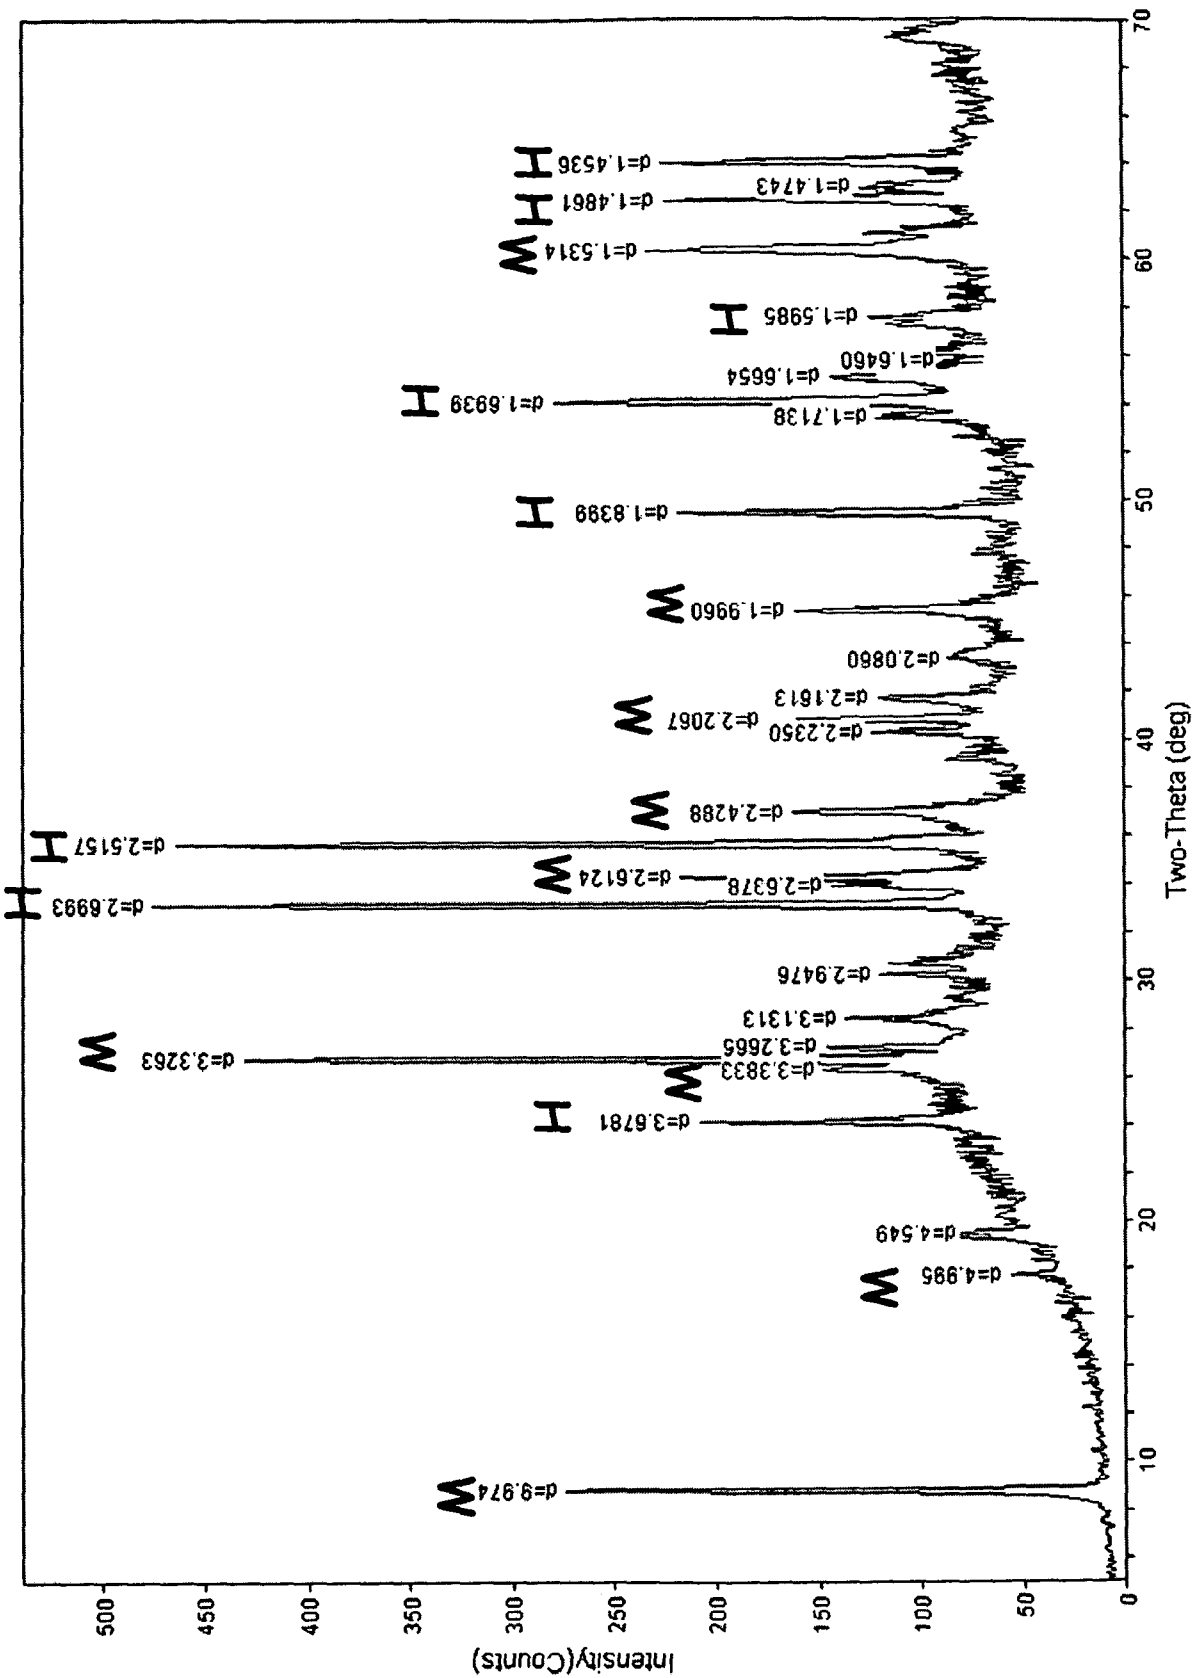


FIGURE 3

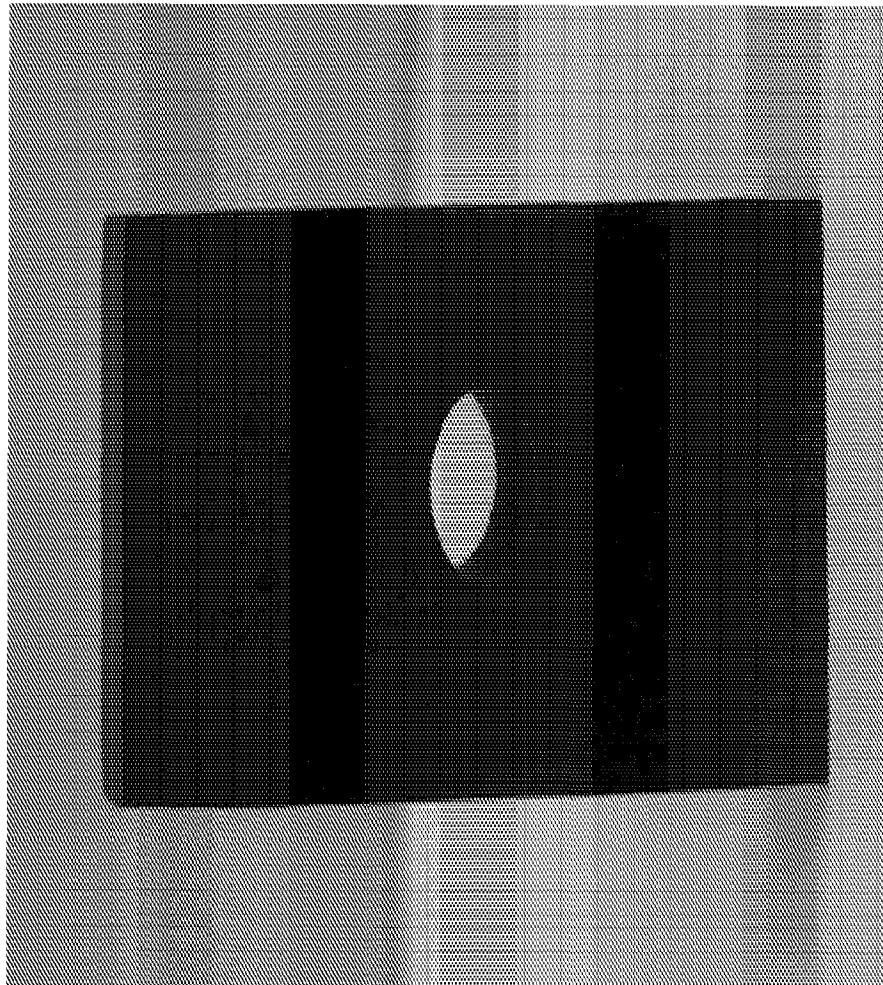

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 09/02721

A. CLASSIFICATION OF SUBJECT MATTER IPC(8) - C03C 10/00 (2009.01) USPC - 501/17; 501/3; 501/5; 501/6; 501/7 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC(8) - C03C 10/00 (2009.01) USPC - 501/17; 501/3; 501/5; 501/6; 501/7 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched IPC(8) - C03C 10/00 (2009.01) USPC - 501/17; 501/3; 501/5; 501/6; 501/7 (keyword delimited) Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) PubWEST(USPT,PGPB,EPAB,JPAB); Google; Google Patents Search Terms: glass ceramic, machinable, SiO ₂ , Al ₂ O ₃ , B ₂ O, MgO, F, K ₂ O, TiO ₂ , Na ₂ O, Li ₂ O, ZrO ₂ , SrO, BaO, FeO, Fe ₂ O ₃ , electronic device, mica		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X ---- Y	US 6,645,285 B2 (Brodkin et al.) 11 November 2003 (11.11.2003), Tables 1 and 3; col 1, ln 3-17; col 2, ln 55-66; col 5, ln 22-23;	1, 3 ----- 2, 4-10
Y	US 2007/0149379 A1 (Hsu et al.) 28 June 2007 (28.06.2007), para [0015], [0018]	2, 4-8, 10
Y	US 4,991,582 A (Byers et al.) 12 February 1991 (12.02.1991), figs. 2, 3 and 4; col 1, ln 7-10; col 4, ln 11-16; col 7, ln 16-20	9, 10
A	US 2006/0010917 A1 (Fechner et al.) 19 January 2006 (19.01.2006), para [0024]	1-10
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/>		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 09 June 2009 (09.06.2009)		Date of mailing of the international search report 02 JUL 2009
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201		Authorized officer: Lee W. Young PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774