



(51) International Patent Classification:

B64C 25/56 (2006.01) B63C 9/00 (2006.01)
B64C 25/54 (2006.01) B63C 9/125 (2006.01)
F17C 5/06 (2006.01)

(21) International Application Number:

PCT/EP2018/075727

(22) International Filing Date:

24 September 2018 (24.09.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/562,854 25 September 2017 (25.09.2017) US
62/562,872 25 September 2017 (25.09.2017) US
62/562,839 25 September 2017 (25.09.2017) US

(71) Applicant: **SAFRAN AEROSYSTEMS** [FR/FR]; 61 rue Pierre Curie, 78370 PLAISIR (FR).

(72) Inventors: **BOULANGER, Romain**; 1169 rue des Porches Frégefont, 16430 CHAMPNIERS (FR). **RIVAULT, Jean-Yves**; 62 rue d'Angoulême, 16290 HIERSAC (FR).

(74) Agent: **CABINET PLASSERAUD**; 66 rue de la Chaussée d'Antin, 75440 PARIS CEDEX 09 (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,



AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: INFLATABLE DEVICE FOR EMERGENCY AIRCRAFT BUOYANCY

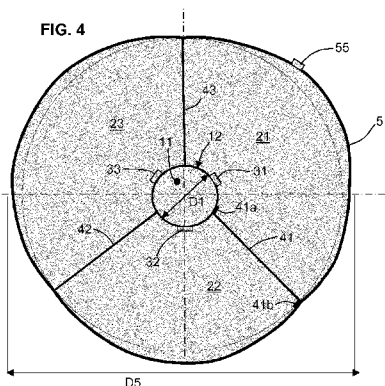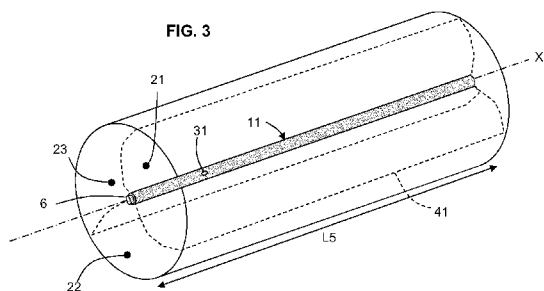

(57) Abstract: An inflatable device for aircraft buoyancy, configured to be inflated in case of emergency landing on water, the device comprising a first inflatable chamber (11;111) configured to be inflated from a source of gas (9), to change from a folded state to an inflated stated, a plurality of second inflatable chambers (21-24; 121-125), each configured to be supplied from gas flowing in the first chamber, via at least one supply passage (31-35), each second inflatable chamber configured to be inflated to change from a folded state to an inflated stated, wherein each supply passage (31-34) comprises a check valve (8).



Inflatable device for emergency aircraft buoyancy

FIELD OF THE INVENTION

The present disclosure relates to inflatable devices for emergency aircraft buoyancy. In particular, it is desired to provide a buoyancy system on helicopters, such that in case of water landing, notably under emergency condition, the helicopter remains afloat and sinking and/or capsizing is thereby prevented.

BACKGROUND OF THE DISCLOSURE

There is a need to provide helicopters with a buoyancy system. Such buoyancy system is generally an inflatable system that is activated only when needed, and the rest of the time, i.e. under normal operational conditions, the inflatable system is not inflated and shall occupy a space as small as possible. Also the weight of the system shall be as small as possible.

Such inflatable systems are known from documents US4655415 or US4165059. In addition to aircraft buoyancy aids, there may be provided a raft for evacuating people.

Usually, in the aircraft buoyancy aids, there are provided several compartments, each of them being supplied independently from a gas source via dedicated piping whereby some redundancy is achieved.

Under the above exposed perspective, there is a need to propose new solutions to improve the overall compromise regarding weight and occupied volume in deflated state versus performance after deployment and/or inflation.

SUMMARY OF THE DISCLOSURE

According to a first general aspect of the present disclosure, there is disclosed an inflatable device for aircraft buoyancy, configured to be inflated in case of emergency landing on water, the device comprising :

a first inflatable chamber configured to be inflated from a source of gas, to change from a folded state to an inflated state,

a plurality of second inflatable chambers, each configured to be supplied from gas flowing in the first chamber, via at least one supply passage, each second inflatable chamber configured to be inflated to change from a folded state to an inflated state, wherein at least one supply passage comprises a check valve.

Thanks to these dispositions, only one piping is required to supply the whole device through the first inflatable chamber, and we avoid the use of other piping(s) for supplying the second chambers.

It should be noted that the so-called '*second chambers*' constitute here the main buoyancy units (otherwise called buoyancy bladders or bags) of the device.

The term 'first chamber' designates here an inflatable bladder, which is advantageously the

sole one coupled to the source of gas. The 'first chamber' may also participate to the overall buoyancy, but in most proposed embodiments, to a much lesser extent than the second chambers.

Both first and second chambers are made from a flexible airtight fabric. This fabric is thin and light, i.e. less than 400g per m². This fabric is less than 2mm thick, preferably less than 1mm thick. This can be a woven or non-woven nylon/polyurethane compound.

The term '*folded state*' means a compacted, minimal volume state, achievable when no gas remains in the chambers.

Since only one supply piping is used, the device can be packed in a very efficient fashion and there is more flexibility to propose different small deflated packed configurations, e.g. cylindrical or parallelepiped, or any desired packed volume.

It should be understood by '*gas*' either simply air or more preferably a specific gas or gas combination, based on helium or nitrogen. Helium can be considered as an optimized choice due to its low weight. The source of gas is designed to supply a predetermined quantity of gas to inflate the first and second chambers up to a target pressure at normal environmental condition (1 bar, 20°C), such target absolute pressure is comprised between 1,05 bar and 1,5 bar, preferably between 1,15 bar and 1,2 bar. Under another perspective, the inflation pressure is stated as a relative pressure that can be comprised in the range [0,05 bar - 0,5 bar].

It should be noted that each respective check valve allows a passage of gas from the first chamber to a respective second chamber, and prevent a passage of gas from a second chamber to the first chamber. Hence, after inflation, if one second chamber is punctured, the other second chambers remain unaffected, being protected by their respective check valves.

Regarding the clause "*wherein at least one supply passage comprises a check valve*", it should be understood that if there are provided N second chambers, the number of check valve is at least (N-1). In the case one particular second chamber is deprived of check valve, this second chamber is fluidly united with the first chamber, such first chamber may have a check valve at its inlet port.

Each supply passage, fitted with a check valve or not, is arranged directly in a wall separating the first chamber from the adjacent second chamber.

In a preferred configuration, there provided as many check valves (i.e. N) as the number N of second chambers.

According to one option, each supply passage can comprise a calibrated orifice. Thereby, respective inflations of the second chambers can be caused to follow a predefined flow rate, and the inflation sequence of the overall device can be made more predictable and reliable. For example one second chamber can be inflated faster than another one to promote a

preferred deployment. Deployment preferred sequence may depend on the packed configuration when the device is at rest before inflation.

According to one option, the first chamber is coupled to a source of gas under pressure via a selectively controlled valve. The source of gas can be a pressurized reservoir (also called
5 canister) with a predetermined quantity of gas such as nitrogen, helium or the like. The selectively controlled valve is caused to change to its open state upon signal from the pilot of the aircraft or from an automatic emergency onboard controller, so to cause inflation of the chambers.

According to an alternative option, the source of gas can be a chemical gas generator
10 triggered by an igniter. This represents an alternative lightweight solution for providing gas is a predetermined quantity.

According to one advantageous aspect, there is provided a main envelope which forms an outer wall of the second chambers at inflated state, and the first chamber is housed within the main envelope. Whereby, the first chamber is protected inside the main envelope against
15 environmental hazards; also the inlet ports of the second chambers (and their check valves) are protected inside the main envelope against environmental hazards; there are no inlet ports projecting outwardly at the second chambers.

According to one option, each second chamber may be adjacent to two other neighboring second chambers. This turns out to be a balanced configuration, with functional symmetry. In
20 case one second chamber is punctured and deflates, the two neighboring other second chambers can protrude inside the volume left free by the deflated chamber. Advantageously, this is true for any punctured second chamber.

According to one option, each second chamber is separated from two neighboring second
25 chambers by partition walls, each second chamber being delimited radially outwards by the main envelope, sidewise by two partition walls, and radially inwards by the first chamber. This is a simple cylindrical configuration.

According to one option, each partition wall exhibits a first border disposed radially inwards, wherein said first border is glued to the wall of the first chamber, and a second
30 border disposed radially outwards, said second border being glued to the main envelope inner side. Besides, the two longitudinal ends of the partition wall are also glued to the main envelope inner side.

According to one option, the first chamber is elongated and extends substantially in a longitudinal direction (X).

35 According to one option, the partition walls extend generally along the longitudinal

direction (X).

According to one possible choice, the first chamber is tubular when inflated.

After inflation, the first chamber exhibits a first volume at inflated state, said first volume being generally less than 5% of the overall volume of all second chambers at inflated state.

5 The inventors have achieved a typical ratio of 3% or less, and preferably 1% for the first volume versus the overall volume of all second chambers.

According to one option, there is provided a main inlet port at the first chamber and said inlet port is located in axial position, namely at one axial end of the device.

10 According to an alternative option, the main inlet port at the first chamber can be arranged radially with respect to an elongation axis of the first chamber.

According to one option, the check valves are each at different axial positions along the longitudinal direction. This provides flexibility for packing and this enables to downsize the occupied volume in most cases.

15 According to one option, there are provided attachment means to attach the chambers assembly to at least to a portion of the aircraft frame or to a portion of the landing skid / wheel landing gear. Such attachment means can be one or more girt(s), harness, retaining net or the like, that can be compatible with any type of landing gear.

20 According to one option, the attachment means comprise at least a girt having an end pad glued to the main envelope outer side. Advantageously, the end pad can be glued to an area astride two second chambers.

According to an alternative option, the attachment means may comprise a net that surrounds at least partially the chambers assembly.

25 According to one option, the second chambers are arranged one after another along the longitudinal direction X, with partition walls disposed transversally, and the first chamber is located at a radially out ward position. This forms a conventional 'in-line' configuration.

30 According to one option, the number (N) of buoyancy chambers (second chambers) is comprised between 3 and 6. The number of buoyancy chambers can be adapted to the helicopter manufacturer needs and/or the missions assigned to the helicopter. Dependency requirements and resistance to one or more failure can dictate the need to increase the number of compartments/buoyancy chambers.

35 According to one option, the device may further comprise a pop out protective cover in a

packed configuration. Thereby, the inflatable device is protected before use. The cover is released under the inflation pressure or via the blowing of a pyrotechnic fuse.

5 According to one option, the device may further comprise purge passages at each second chamber to deflate the second chambers after test, and then the purge passages remaining closed in a normal use configuration. For deflating after pressure testing, gas is drawn by a vacuum source. This allows testing process to be carried out prior to packing and delivery in the packed state

10 According to one option, there may be defined a packing density index PDI defined by the gas volume obtained at the inflated state under normal conditions, i.e. 1 atm of external pressure and a temperature of 20°C, divided by the occupied volume in the packed state, characterized in that PDI is at least 25, typically around 40, and preferably around 50.

15 According to a second aspect of the present, which is considered to be possibly independent from the first aspect exposed above, there is proposed an inflatable device for aircraft buoyancy, configured to be inflated in case of emergency landing on water, the device comprising :

20 a plurality of buoyancy inflatable chambers (21-25), each buoyancy inflatable chamber being configured to be inflated to change from a folded state to an inflated state, wherein there is provided a main envelope, with substantially a cylindrical shape with a longitudinal axis (X) at inflated state, wherein each buoyancy inflatable chamber is adjacent to two neighboring other second chambers, wherein each buoyancy inflatable chamber (21-25) is separated from two neighboring buoyancy inflatable chambers by partition walls which arranged parallel to the longitudinal axis (X).

25 Each compartment/ buoyancy chamber extends from one axial end to the device to the other axial end to the device.

The inventors have found that this longitudinal arrangement provides a better behavior against pitch and roll according to sea state in case on compartment is punctured.

30 According to one option, the number (N) of buoyancy inflatable chambers is comprised between 3 and 4.

Gas supply can be provided from a central tubular chamber as proposed above. Alternately, gas supply can be provided individually from external inlet ports.

Regarding the second aspect of the disclosure, it can be combined with any optional feature presented for the first aspect of the disclosure.

35 For example there may be provided a main envelope which forms an outer wall of the second chambers at inflated state.

BRIEF DESCRIPTION OF THE DRAWINGS

Other features and advantages of the invention appear from the following detailed description of one of its embodiments, given by way of non-limiting example, and with reference to the accompanying drawings, in which:

- Figure 1 is a diagrammatic perspective view of a rotary wing aircraft equipped with a buoyancy equipment according to the present disclosure, in an inflated state.

- Figure 2A illustrates a diagrammatic perspective view of a buoyancy equipment according to a first embodiment, in a deflated packed state,

- Figure 2B illustrates a diagrammatic perspective view of a buoyancy equipment according to a variant embodiment, in a deflated packed state,

- Figure 3 is a diagrammatic perspective view of a buoyancy equipment according to a first embodiment, in an inflated state,

- Figure 4 is a sectional view of the buoyancy equipment shown at figure 3, comprising three buoyancy chambers,

- Figure 5 is a sectional view of a buoyancy equipment according to a second embodiment, comprising four buoyancy chambers,

- Figure 6 illustrates some features of the distribution chamber,

- Figure 7 shows a section view of a check valve involved in the present disclosure,

- Figure 8 illustrates a control electrical bloc diagram,

- Figure 9 illustrates a third embodiment, namely a 'in-line' partition configuration

- Figure 10 illustrates another embodiment with longitudinal compartments, but without a central distribution chamber, the figure showing a transverse section of the device.

DETAILED DESCRIPTION OF THE DISCLOSURE

In the figures, the same references denote identical or similar elements. For the sake of clarity, some elements may not be represented at scale.

System overview

In the context of the present disclosure, as illustrated at Figure 1, a rotary wing aircraft such as a helicopter **H** is provided with a buoyancy aid system **1**. The term 'floatation aid' is also used. It prevents sinking of the aircraft. The buoyancy aid system is attached to at least a portion of the aircraft frame or to a portion of the landing gear **LG**. The landing gear **LG** can be a skid-type landing gear or wheeled landing gear according to the type of helicopter, other types of landing gear are nonetheless not excluded.

The pilot is sitting in the passenger compartment **PC** otherwise called cockpit. The

buoyancy aid system can also be lodged in an outer compartment next to the passenger compartment **PC**, or generally in an outer compartment attached to the structure of the aircraft.

In the shown example, there are four inflatable devices, each denoted by reference **1**, one at left front corner, one at right front corner, one at left aft corner and one at right aft corner. When the aircraft floats at sea, there are more or less pitch and roll movements, according to the state of the sea, and the overall stability of the aircraft depends on Archimedes buoyancy thrust exerted at each inflatable device **1**.

In the stand-by mode as well as when inflated, as depicted at figures 1 & 3, each inflatable device **1** is attached to the aircraft structure via attachment means **14**, which are to be described in further details later.

The aircraft **H** is depicted with the following space reference : **X1** denotes the longitudinal axis of the aircraft, **Y1** denotes the transverse axis of the aircraft, **Z1** denotes the vertical axis of the aircraft.

In normal conditions, each inflatable device **1** is arranged in a minimal volume configuration, in a stand-by mode, ready to be activated and inflated. The minimal volume configuration is otherwise called “packed configuration”.

In the example depicted and described, no evacuation raft is included. However in other embodiments, a raft can be added to the buoyancy aid system.

Fig 2A depicts packed configuration having a substantially cylindrical shape. The package extends along a longitudinal axis **X**, over a distance **L2** substantially corresponding to the length in the inflated state. Diameter of the packed configuration, denoted **D2**, is typically comprised between 10 cm and 50 cm.

It should be appreciated that the longitudinal axis **X** of the inflatable device **1** is not necessarily parallel to the longitudinal axis **X1** of the aircraft. However, **X** may be parallel to **Y1**, **Z1** or to any other direction.

Inflation of the inflatable device **1** is obtained by introduction of gas coming from a gas source **9**. In the shown embodiment, the gas source is a canister or reservoir **9** arranged either at immediate proximity of the chambers to be inflated, or remotely in the aircraft passenger compartment **PC**.

A supply hose **7** has one end connected to the reservoir **9** and the other end connected to an inlet port **6** of the inflatable device **1**. The supply hose **7** is flexible, it can be made of elastomer.

The source of gas **9** is coupled to the inflatable device inlet port **6** via a selectively controlled valve **91**. In one preferred embodiment, the controlled valve **91** is located at the head of the reservoir **9**, but other locations are not excluded.

In the shown example, the reservoir (i.e. source of gas) **9** is a pressurized reservoir (also

called canister) with a predetermined quantity of gas such as nitrogen or helium. The controlled valve **91** is caused to change to its open state upon signal (ref **93** figure 8) from the pilot of the aircraft or from an automatic emergency onboard controller (ref **90** figure 8) relying on immersion sensor **96**, so to cause inflation of the inflatable chambers provided in the device that are described below.

It should be appreciated that alternatively, the source of gas can be a chemical gas generator triggered by an igniter, as known per se.

Fig **2B** depicts a simplified example of a packed configuration having a substantially parallelepiped shape. **L3**, **W3**, **E3** denote dimensions along axis **X3**, **Y3**, **Z3**.

Dimensions **L3** can be comprised between 20 cm and 120 cm.

Dimensions **W3** can be comprised between 20 cm and 120 cm.

Dimensions **E3** (thickness) can be comprised between 10 cm and 50 cm.

Practically, the packed volume is given by the aircraft manufacturer and the packed configuration together with occupied volume of the inflatable device(s) must comply and fit with the available volume.

Folding pattern can be designed on purpose according to the available space for the packed configuration. Folding pattern can be designed according to the required deployment sequence/ unfolding.

Arrangement of inflatable chambers

In one embodiment shown at figures 3 and 4, the device comprises a first inflatable chamber **11** centrally arranged. The device is configured to be inflated from the source of gas **9**.

Further, the device comprises three second inflatable chambers ('second chambers' in short) denoted respectively **21,22,23**. We define a "*chambers assembly*" which includes all the inflatable chambers, first chamber **11** and second chambers **21,22,23**.

There is provided a main envelope **5** forming an outer wall of the second chambers. This is shown particularly at inflated state, but this is also true at the packed state whereas not visible on the figures.

It should be noted that instead of three, the number **N** of second inflatable chambers can be any from 2 to 8, therefore it's relevant to use a clause of a "plurality of second inflatable chambers". Practically it is preferred to have **N** comprised between 3 and 6, notably according to the aircraft mission requirements.

Each second inflatable chamber is configured to change from a folded state to an inflated

stated upon supply of air.

Each second inflatable chamber **21,22,23** is configured to be supplied from gas flowing from the first chamber **11**, via one supply passage denoted respectively **31,32,33**.

5 In the shown example each supply passage **31-33** comprises a check valve **8**. Each supply passage **31-33** may also comprise a calibrated orifice **81** that can be preferably part of the check valve, however having the calibrated orifice downstream or upstream the check valve is also possibly considered.

10 More precisely, there is provided a supply passage **31** from the first chamber to the first second chamber denoted **21** with a check valve **8**. The check valve **8** allows a passage of gas from the first chamber **11** to the second chamber **21**, and prevents a passage of gas from the second chamber **21** to the first chamber **11**.

15 For the second second chamber **22**, there is provided a supply passage **32** from the first chamber to the second second chamber denoted **22** with a check valve **8**. The check valve **8** allows a passage of gas from the first chamber **11** to the second second chamber **22**, and prevents a passage of gas from the second second chamber **22** to the first chamber **11**.

20 Similarly for the third second chamber **23**, there is provided a supply passage **33** from the first chamber to the third second chamber **23** with a check valve **8**. The check valve **8** allows a passage of gas from the first chamber **11** to the third second chamber **23**, and prevents a passage of gas from the third second chamber **23** to the first chamber **11**.

25 Hence, once inflated, if one of the second chambers is punctured, the other second chambers remain unaffected, being protected by their respective check valves. Therefore, adequate redundancy is provided for floatability.

30 Each second chamber **21-23** is separated from two neighboring second chambers **21-23** by partition walls **41,42,43**. Cross-section wise, each second chamber is delimited radially outwards by the main envelope **5**, sidewise by two partition walls, and radially inwards by the first chamber. The two longitudinal ends of each partition wall are joined to the longitudinal end portions of the main envelope **5** as seen from figure 3.

35 Partition wall **41** separates chamber **21** from chamber **22**, partition wall **42** separates chamber **22** from chamber **23**, partition wall **43** separates chamber **23** from chamber **21**.

We note **R** a radial direction, each partition wall extends in radial plane defined by a radial direction **R** and the axis **X**. From the cross section standpoint, we have three sectors separated by partition walls angularly spaced at about 120°. The second chambers **21-23** surrounds the centrally arranged, smaller, first chamber **11**.

Each partition wall exhibits a first border **41b** disposed radially inwards and glued to the wall **12** of the first chamber, and a second border **41a** disposed radially outwards and glued to

the main envelope inner side (illustrated only at Figure 5 for the first second chamber 21). First and second borders 41b, 41a extend mainly along the longitudinal direction, with a width of some centimeters.

Besides, the two longitudinal ends of the partition wall are also glued to the main envelope inner side.

At inflated state, the chambers assembly is generally cylindrical, the main envelope 5 exhibits a diameter **D5**, the first chamber 11 extends generally in a cylindrical shape with regard to axis denoted **X** and with a diameter **D1**.

Diameter **D1** of the first chamber 11 can be chosen in the range [0 – 100 mm].

The floatability volume **VF** can therefore be calculated approximately by

$$\mathbf{VF} = \frac{1}{4} \cdot \pi \cdot \mathbf{L5} \cdot (\mathbf{D5})^2$$

VF is defined by the floatability requirements regarding the aircraft and load. The aircraft size can be as small as a drone and as big as heavy duty helicopters, weight can range from 1 kg to several tons. Therefore the range of possible **VF** targets is very wide.

VF can be greater than 800 liters, greater than 1 m³, greater than 1,5 m³, greater than 2 m³, greater than 3 m³, without excluding larger volumes.

By comparison, if there is a simple folding along **X** (**L2=L5/2**), the volume **Vp** occupied by packed configuration in the embodiment shown at figure 2 is $\mathbf{Vp} = \frac{1}{4} \cdot \pi \cdot (\mathbf{D2})^2 \cdot \mathbf{L2}$

We define a packing density index **PDI** defined by the total gas volume obtained at the inflated state under normal conditions (i.e. 1 atm of external pressure and a temperature of 20°C) divided by the occupied volume in the packed configuration, namely $\mathbf{PDI} = \mathbf{VF/Vp}$

D2 can be substantially smaller than **D5**, in one example **PDI** is 25.

In practice, the inventors have found that **PDI** is at least 25, typically around 40, and preferably around 50.

In practice, in the case of large helicopters, **L2** can be comprised between 2,5 m and 5 m; and **D5** can be in the range from 0,8 m up to 2 m.

It should be noted that the first chamber 11 exhibits a first volume **V1** at inflated state, and the overall volume of all second chambers is denoted **V2**. Total floatation volume is therefore $\mathbf{VF}=\mathbf{V1}+\mathbf{V2}$.

The first volume **V1** is generally less than 5% of the overall volume **V2** of all second chambers at inflated state. The inventors have achieved a typical ratio **V1/V2** of 3% or less, and preferably around 1%.

Both first and second chambers are made from a flexible airtight fabric. This fabric is thin and light, i.e. less than 400g per m². This fabric is less than 2mm thick, preferably less than 1mm thick. This can be a woven or non-woven nylon/polyurethane compound. The thickness of the fabric is in the range 0,3 mm to 0,5mm.

This fabric exhibits a low inline extensibility. This fabric exhibits a good transverse flexibility, so it can be easily folded. Stated otherwise, the chamber unfolds upon inflation but the fabric does not extend itself much.

Various sheets of such fabric are assembled by gluing/assembly process.

5 One can use a chemical glue technique based on a polyurethane compound.

One can also use a mechanical assembly process with high frequency thermo-welding technique (“thermo-bonding” or “heat-welding” can also be used).

Variant with four chambers

10 As presented on figure 5, instead of three second chambers, the device may comprise four second chambers 21,22,23,24. Only the major differences are discussed below, the rest of the features are similar or identical to what was described above for the three compartment configuration.

15 The four second chambers have substantially the same size, occupy the same volume and therefore provide similar floatability. In a cross-section perspective, each occupies generally one quarter of a disc. The second chambers 21-24 surrounds the centrally arranged, smaller, first chamber 11.

20 There is provided a supply air passage denoted 31 from the first chamber 11 to the second inflatable chamber 21, a supply air passage denoted 32 from the first chamber 11 to the second chamber 22, a supply air passage denoted 33 from the first chamber 11 to the second inflatable chamber 24.

25 Partition wall 41 separates chamber 21 from chamber 22, partition wall 42 separates chamber 22 from chamber 23, partition wall 43 separates chamber 23 from chamber 24, partition wall 44 separates chamber 24 from chamber 21.

R being the radial direction, each partition wall extends in radial plane defined by a radial direction **R** and the axis **X**.

Gas passages / Check valve / calibrated orifice

30 As apparent from figure 6, the passages are each located at different axial positions **P1-P4** along the longitudinal direction. More precisely, starting from the left end of the first chamber where the inlet port is arranged, we find first the first passage 31 supplying the first second chamber 21 from the first chamber 11, directed upwardly, then further along the axis **X** and at another angular position around the axis **X** the second passage 32 supplying the second second chamber 22 from the first chamber 11, directed toward the viewpoint, then still further along the axis **X** and still at another angular position around the axis **X** the third passage 33 supplying the third second chamber 23 from the first chamber 11 directed

35

downwardly, then still further along the axis X and still at another angular position around the axis X a fourth third passage **33** supplying the fourth second chamber **24** from the first chamber **11** directed away from the viewpoint.

5 The passages can be spaced from one another along the axis X, with an interval distance $(P_i - P_{i+1})$ comprised between 5 cm and 50 cm.

Other type of positions of the passages along the axis can be considered, this provides flexibility for packing and this enables to downsize the occupied volume in most cases.

Each air passage can comprise a check valve that is described now in detail with reference to figure 7.

10 Check valve comprises a housing **84**, a valve **86** and a valve seat **88**. The valve seat can be arranged together with the housing or directly onto the wall **12** separating the first chamber from the second chamber.

There is provided a spring **87** to bias the valve **86** against the valve seat **88** such that the passage is closed.

15 The spring **87** has a low stiffness, such that the passage opens as early as delta pressure > 50 mbars (pressure in first chamber is at least 50 mbars higher than pressure in second chamber). This threshold can be chosen differently for example in the range [10 mbars, 100 mbars].

20 Further, there are provided one or more vents **85** to let air enter the second chamber from the valve housing **84**. The supply passage may comprise a calibrated orifice formed either by the orifice **81** at the valve seat or by the vents **85** at the back of the valve housing **84**.

25 All calibrated orifices **81** from first chamber **11** to second chambers can have the same size. Alternately, some calibrated orifices can have a different size with regard to others. Each calibrated orifice can be sized specifically on purpose with regard to the desired deployment pattern. In practice, from the common supply formed by the first chamber **11**, respective inflations of the second chambers can be caused to follow a predefined flow rate, and the inflation sequence of the overall device can be made more predictable and reliable. For example one second chamber can be inflated faster than another one to promote a preferred
30 deployment fashion. Deployment preferred sequence and specific orifice sizes may depend on the packed configuration when the device is at rest before inflation.

It should be noted that the length of the first chamber can be shorter than the overall device length.

35 Under another perspective, the length of the first chamber can be longer than the overall device length, and at the inlet end can exhibit a curve such that the inlet can be located not right in the axis but rather at a radial position away from the axis.

Attachment means

There are provided attachment means to attach the chambers assembly to at least to a portion of the aircraft frame or to a portion of the landing gear **LG**. According to one option, the attachment means comprise at least a girt **14** surrounding part or all the chambers assembly. One end of the girt is attached to the aircraft structure whereas the other end comprised a pad be glued to the main envelope. Advantageously, the pad can be glued to an area astride two second chambers.

In addition or alternatively, the attachment means may comprise a net, like a fishnet structure, that surrounds at least partially the chambers assembly. The attachment means allow the inflatable chambers to inflate, without hindrance. Thus, the attachment means are sized for the inflated geometry of the chambers assembly, although they are assembled to the chambers assembly at the deflated state.

Testing process prior to delivery

Each second chamber can comprise purge passages 55 to deflate the second chambers after test, the purge passages remaining closed in a normal use configuration. Only one is represented at figures 4 & 5.

It may be required to test the inflatable device 1 prior to delivery. Inflation can be carried out as normal use (i.e. via the main inlet 6), but purge should be performed afterward to return the device into the packed configuration. For that purpose, the device can be provided with purge passages for each compartment (i.e. each second chamber).

According to one possibility, there may be provided a purge valve **55** arranged at the external wall of each second chamber. In this case, it is possible to plug manually a purge device to deflate the second chamber. After that the purge valve is return to its rest closed state, and then the purge valve remains closed in a normal use configuration.

According to another possibility, there may be provided a purge valve **51** arranged between each second chamber and the first chamber as illustrated in dotted line at figure 6. This purge valve remains closed unless a vacuum is applied to the first chamber. This will be done only on purpose and therefore purge cannot happen during normal use configuration. This purge valve can have an opening threshold higher than the one of the air inflation check valves described above.

Other variants

According to another variant represented in figure 9, there may be provided second chambers arranged one after another along the longitudinal direction X, with transverse

partition walls separating the second chambers, i.e. the partition walls extend perpendicularly with respect to the axis X. Further there is provided a first chamber **111** is located at a radially outward position. The partition walls are perpendicular to the longitudinal direction X.

5 The second chambers are denoted **121-125** are arranged, taken from far left to far right on the figure 9, one after another along the longitudinal direction X. More precisely, starting from the left end, we find first the first passage **31** supplying the first second chamber **121** from the first chamber **111**, then further along the axis the second passage **32** supplying the second second chamber **122** from the first chamber **111**, then still further along the axis X the third passage **33** supplying the third second chamber **123** from the first chamber **111**, then still
10 further along the axis X a fourth third passage **34** supplying the fourth second chamber **124** from the first chamber **111**, then still further along the axis X a fifth passage **35** supplying the fifth second chamber **125** from the first chamber **111**. Here we note that inlet port **6** is located at a longitudinal middle portion of the first chamber **111**. We also note that the inlet port **6** can be located elsewhere, notably at one end of the first chamber. Also the first chamber **111** can
15 have one longitudinal end with a curve shape, i.e. the first chamber is not necessarily straight or strictly tubular.

According to second aspect of the present disclosure represented in figure 10, there is proposed an inflatable device comprising a plurality of buoyancy inflatable chambers **21-24**,
20 arranged generally parallel to the longitudinal direction X.

Similar to what was described earlier with reference to figure 5, there is provided a main envelope, with substantially a cylindrical shape and a longitudinal direction X at inflated state. Each second chamber **21-24** is adjacent to two neighboring other second chambers **21-24**, each second chamber **21-24** is separated from two seconds chambers **21-24** by partition
25 walls **41-44** which arranged parallel to the longitudinal direction.

Each compartment/ second chamber extends from one axial end to the device to the other axial end to the device.

It should be noted that in this second aspect, the device is deprived of any central chamber. Inlet passages **31-34** are arranged at the outer wall of each chamber **21-24**. Each
30 inlet passages **31-34** is connected to a supply hose, and may comprise a check valve preventing gas back flow once the chambers are inflated.

CLAIMS

1. An inflatable device for aircraft buoyancy, configured to be inflated in case of emergency landing on water, the device comprising :
5 a first inflatable chamber (11;111) configured to be inflated from a source of gas (9), to change from a folded state to an inflated stated,
a plurality of second inflatable chambers (21-24;121-125), each configured to be supplied from gas flowing in the first chamber, via at least one supply passage (31-35), each second inflatable chamber configured to be inflated to change from a folded state to an inflated
10 stated, wherein at least one supply passage (31-35) comprises a check valve (8).
2. The device according to claim 1, wherein each supply passage (31-35) comprises a calibrated orifice (81).
- 15 3. The device according to any of claims 1 to 2, wherein the first chamber (11) is coupled to a source of gas (9) under pressure via a selectively controlled valve (91).
4. The device according to any of claims 1 to 3, wherein there is provided a main envelope (5) forming an outer wall of the seconds chambers at inflated state and the first chamber
20 (11) is housed within the main envelope (5).
5. The device according to claim 4, wherein each second chamber (21-24) is adjacent to two neighboring other second chambers (21-24).
- 25 6. The device according to claim 5, wherein each second chamber (21-24) is separated from two neighboring second chambers (21-24) by partition walls (41-43), each second chamber being delimited radially outwards by the main envelope, sidewise by two partition walls, and radially inwards by the first chamber (11).
- 30 7. The device according to of claims 1 to 6, wherein the first chamber (11) is elongated and extends substantially in a longitudinal direction (X).
8. The device according to claim 7, wherein the first chamber (11) is tubular when inflated.
- 35 9. The device according to claim 1, wherein there is provided a main inlet port (6) at the first

chamber and said inlet port is located in axial position, namely at one axial end of the device.

- 5 **10.** The device according to any of claims 7 to 8, wherein the check valves (41-44) are each at different axial positions (P1-P4) along the longitudinal direction.
- 10 **11.** The device according to any of claims 1 to 8, wherein the chambers assembly is defined as the assembly of first and second chambers, wherein the device further comprises attachment means to attach the chambers assembly to a portion of the aircraft frame or to a portion of the landing gear (LG).
- 15 **12.** The device according to claim 11, wherein the attachment means comprise at least a girt (14) having an end pad glued to the main envelope outer side.
- 20 **13.** The device according to claim 1, wherein the second chambers (121-125) are arranged one after another along the longitudinal direction X, with transverse partition walls, and the first chamber (111) is located at a radially outward position.
- 25 **14.** The device according to any of claims 1 to 13, wherein the number (N) of buoyancy chambers is comprised between 3 and 6.
- 30 **15.** The device according to any of claims 1 to 14, further comprising a pop out protective cover (18) in a packed configuration.
- 16.** The device according to any of claims 1 to 15, further comprising purge passages (51;55) at each second chamber to deflate the second chambers after test, the purge passages remaining closed in a normal use configuration.
- 17.** The device according to any of claims 1 to 16, wherein there is defined a packing density index PDI defined by the gas volume obtained at the inflated state under normal conditions, i.e. 1 atm of external pressure and a temperature of 20°C, divided by the occupied volume in the packed state, characterized in that PDI is at least 25, typically around 40, and preferably around 50.

FIG. 1

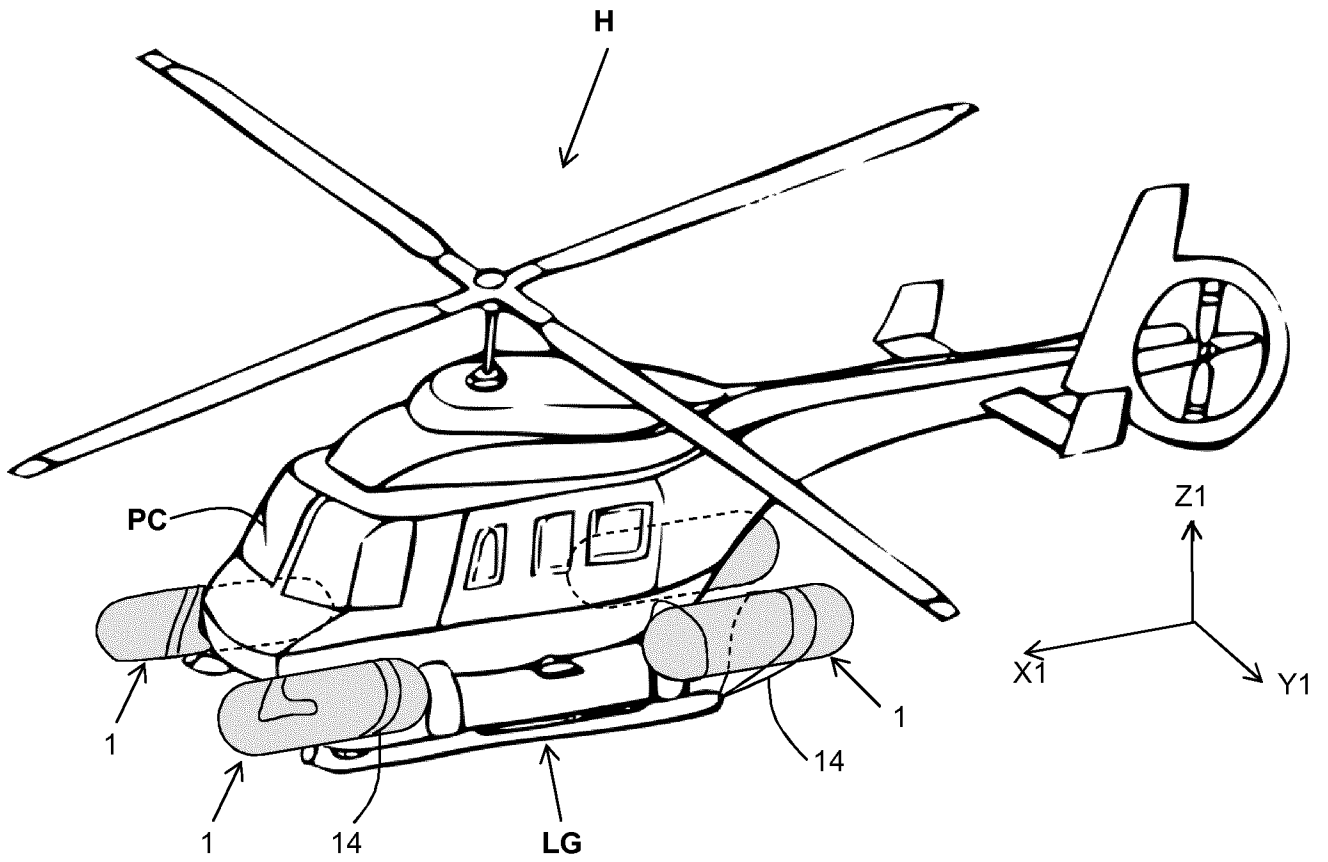


FIG. 2A

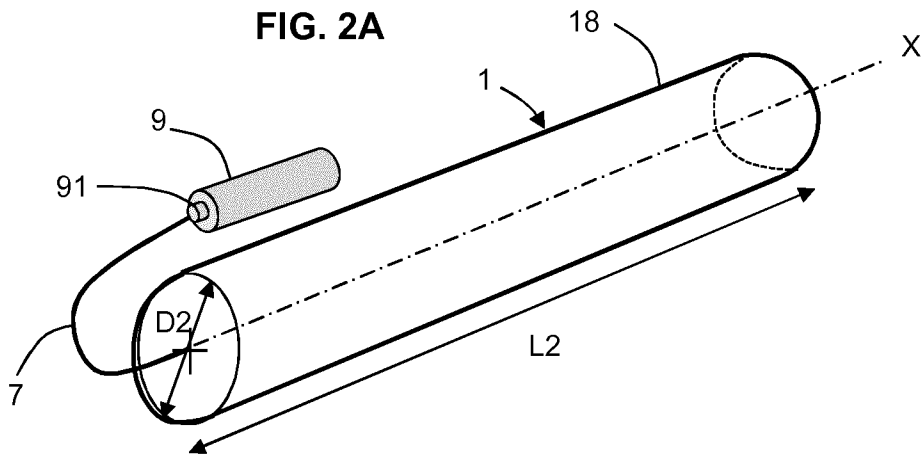


FIG. 2B

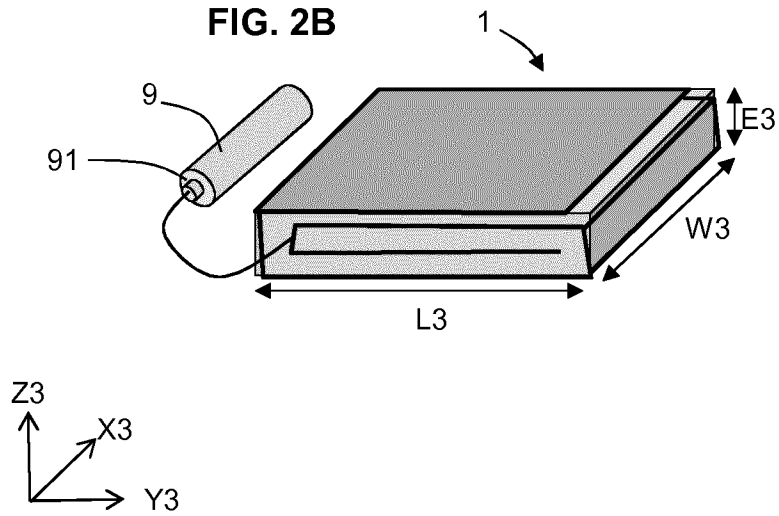


FIG. 3

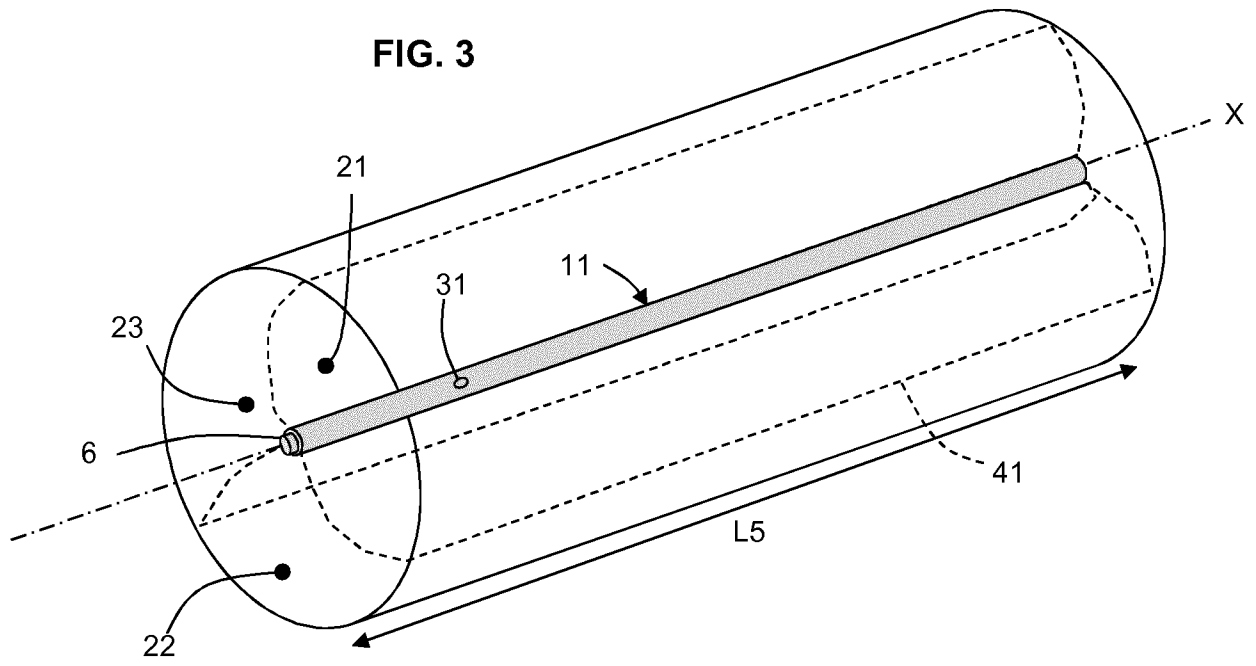


FIG. 4

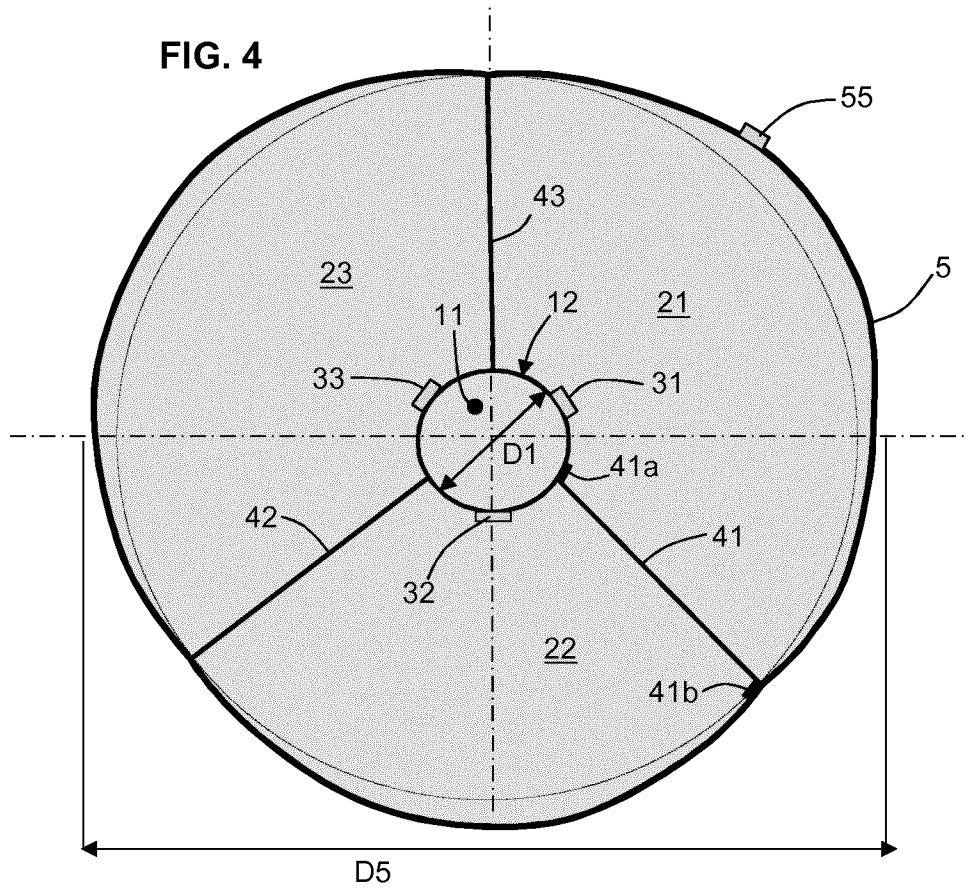


FIG. 5

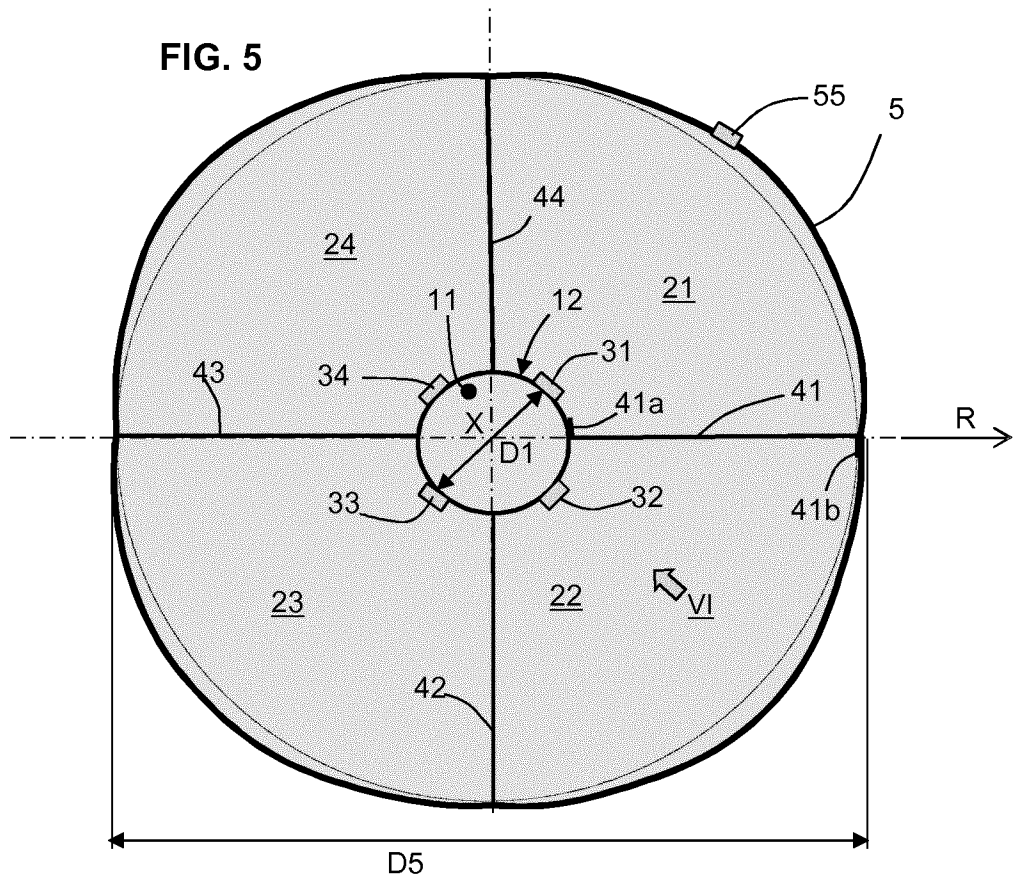


FIG. 6

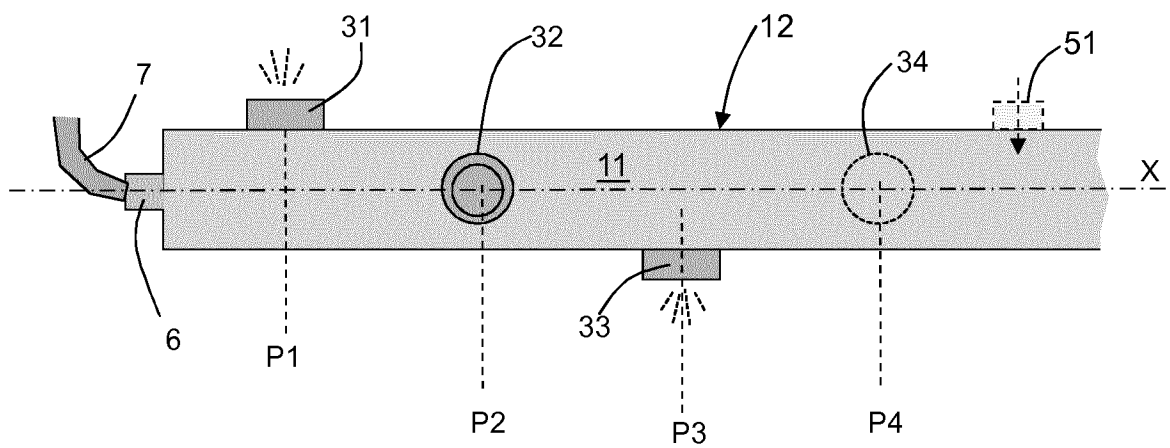


FIG. 7

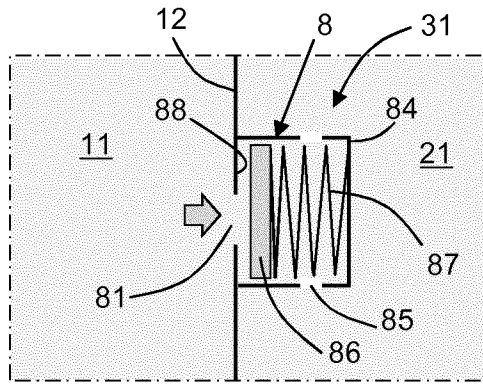


FIG. 8

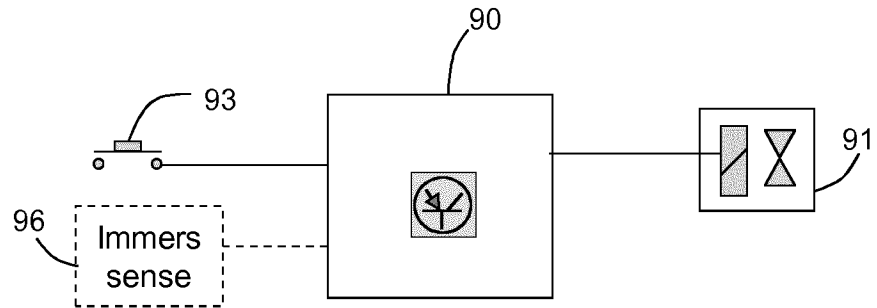


FIG. 9


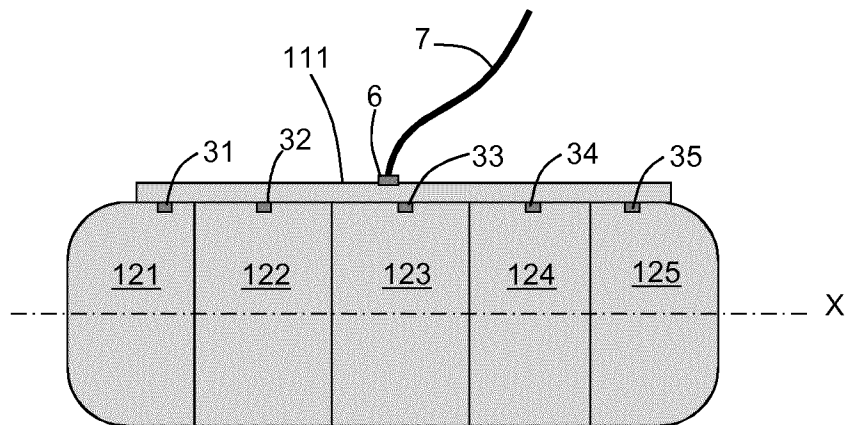


FIG. 10

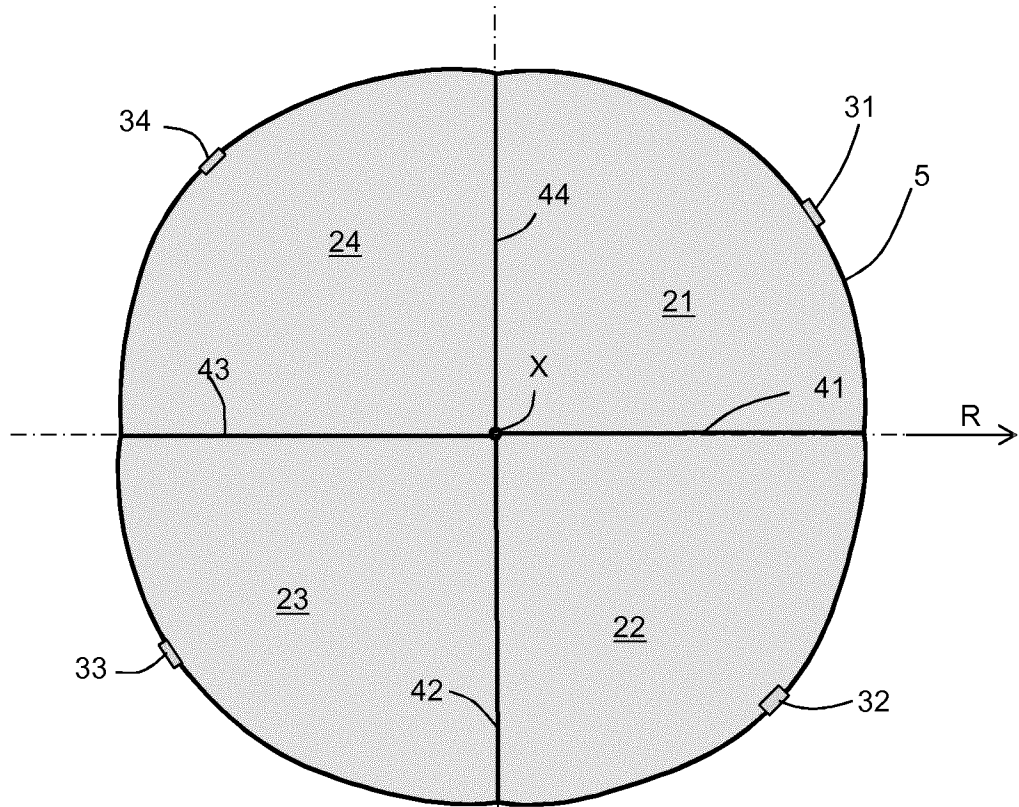

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/075727

A. CLASSIFICATION OF SUBJECT MATTER
INV. B64C25/56 B64C25/54 F17C5/06 B63C9/00 B63C9/125
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B64C F17C B63J B63C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	WO 2016/186914 A1 (SIKORSKY AIRCRAFT CORP [US]) 24 November 2016 (2016-11-24) paragraph [0018] - paragraph [0019]; figures 1-5 paragraph [0022] - paragraph [0027] -----	1-3,7-9, 11,14,17 13,15
X	US 2015/102164 A1 (DELORME LOUIS [FR] ET AL) 16 April 2015 (2015-04-16) paragraph [0067] - paragraph [0072]; figures 1-8 paragraph [0083] - paragraph [0089] paragraph [0078] -----	1-3,7-9, 11
X	GB 2 343 152 A (C M HAMMAR UTVECKLING AB [SE]) 3 May 2000 (2000-05-03) page 9, line 13 - page 10, line 11; figures 4-6 page 12, line 7 - page 12, line 11 ----- -/--	1-6,14, 16

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search 27 November 2018	Date of mailing of the international search report 11/12/2018
--	---

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Retucci, Adriano
--	---

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2018/075727

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 312 484 A (MEISNER DAVID J) 26 January 1982 (1982-01-26) column 2, line 4 - column 2, line 17; figure 2a -----	1,2,7,8, 10-12
Y	US 3 507 466 A (FLEUR JEAN L LA) 21 April 1970 (1970-04-21) column 2, line 17 - column 2, line 57; figure 11 -----	15
Y	EP 0 091 660 A1 (GOODRICH CO B F [US]) 19 October 1983 (1983-10-19) page 5, line 2 - page 6, line 7; figures 1-4 -----	13
A	US 7 056 179 B2 (COURTNEY WILLIAM L [US]) 6 June 2006 (2006-06-06) figure 19 -----	1-17
A	US 5 494 469 A (HEATH CLEVELAND A [US] ET AL) 27 February 1996 (1996-02-27) figures 1-3 -----	1-17
A	GB 1 551 523 A (AMERICAN SAFETY EQUIP) 30 August 1979 (1979-08-30) figures 1-6 -----	1-17

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2018/075727

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2016186914 A1	24-11-2016	US 2018156246 A1 WO 2016186914 A1	07-06-2018 24-11-2016
US 2015102164 A1	16-04-2015	CN 104554744 A EP 2862802 A1 FR 3011817 A1 US 2015102164 A1	29-04-2015 22-04-2015 17-04-2015 16-04-2015
GB 2343152 A	03-05-2000	NONE	
US 4312484 A	26-01-1982	FR 2455546 A1 IT 1144089 B US 4312484 A	28-11-1980 29-10-1986 26-01-1982
US 3507466 A	21-04-1970	NONE	
EP 0091660 A1	19-10-1983	DE 3371770 D1 EP 0091660 A1 JP S58185400 A US 4451016 A	02-07-1987 19-10-1983 29-10-1983 29-05-1984
US 7056179 B2	06-06-2006	AU 2003223455 A1 US 2004002270 A1 WO 03093100 A2	17-11-2003 01-01-2004 13-11-2003
US 5494469 A	27-02-1996	NONE	
GB 1551523 A	30-08-1979	DE 2719089 A1 FR 2349497 A1 GB 1551523 A IT 1077732 B	10-11-1977 25-11-1977 30-08-1979 04-05-1985