




(72) GAWLEY, James Ernest, CA
(72) MAY, Charlotte Mary-Anne, CA
(72) ROCHON, Glenn Emile, CA
(71) COMPACT WASTE SYSTEMS INC., CA
(51) Int.Cl.⁶ B30B 15/14, B30B 1/10, B65F 9/00
(54) **COMPACTEUR DE DECHETS**
(54) **WASTE COMPACTOR**



(57) A refuse compactor has a housing for containing a garbage receptacle, and a compression unit for compacting the refuse in the compaction unit from time to time. The compactor has a sensor for sensing the approach of persons wishing to deposit garbage. This sensor causes the opening an inlet door. It has a second sensor, for gauging the level of refuse in the receptacle. When a sufficient bulk is collected, then the compression unit operates to compact the refuse. The compression unit is subject to three limiting conditions, the first being a "receptacle full" limit, the second being a load limit, and the third being a stroke limit. The compaction unit used is a scissors mechanism having one side of the scissors mechanism held in one plane.

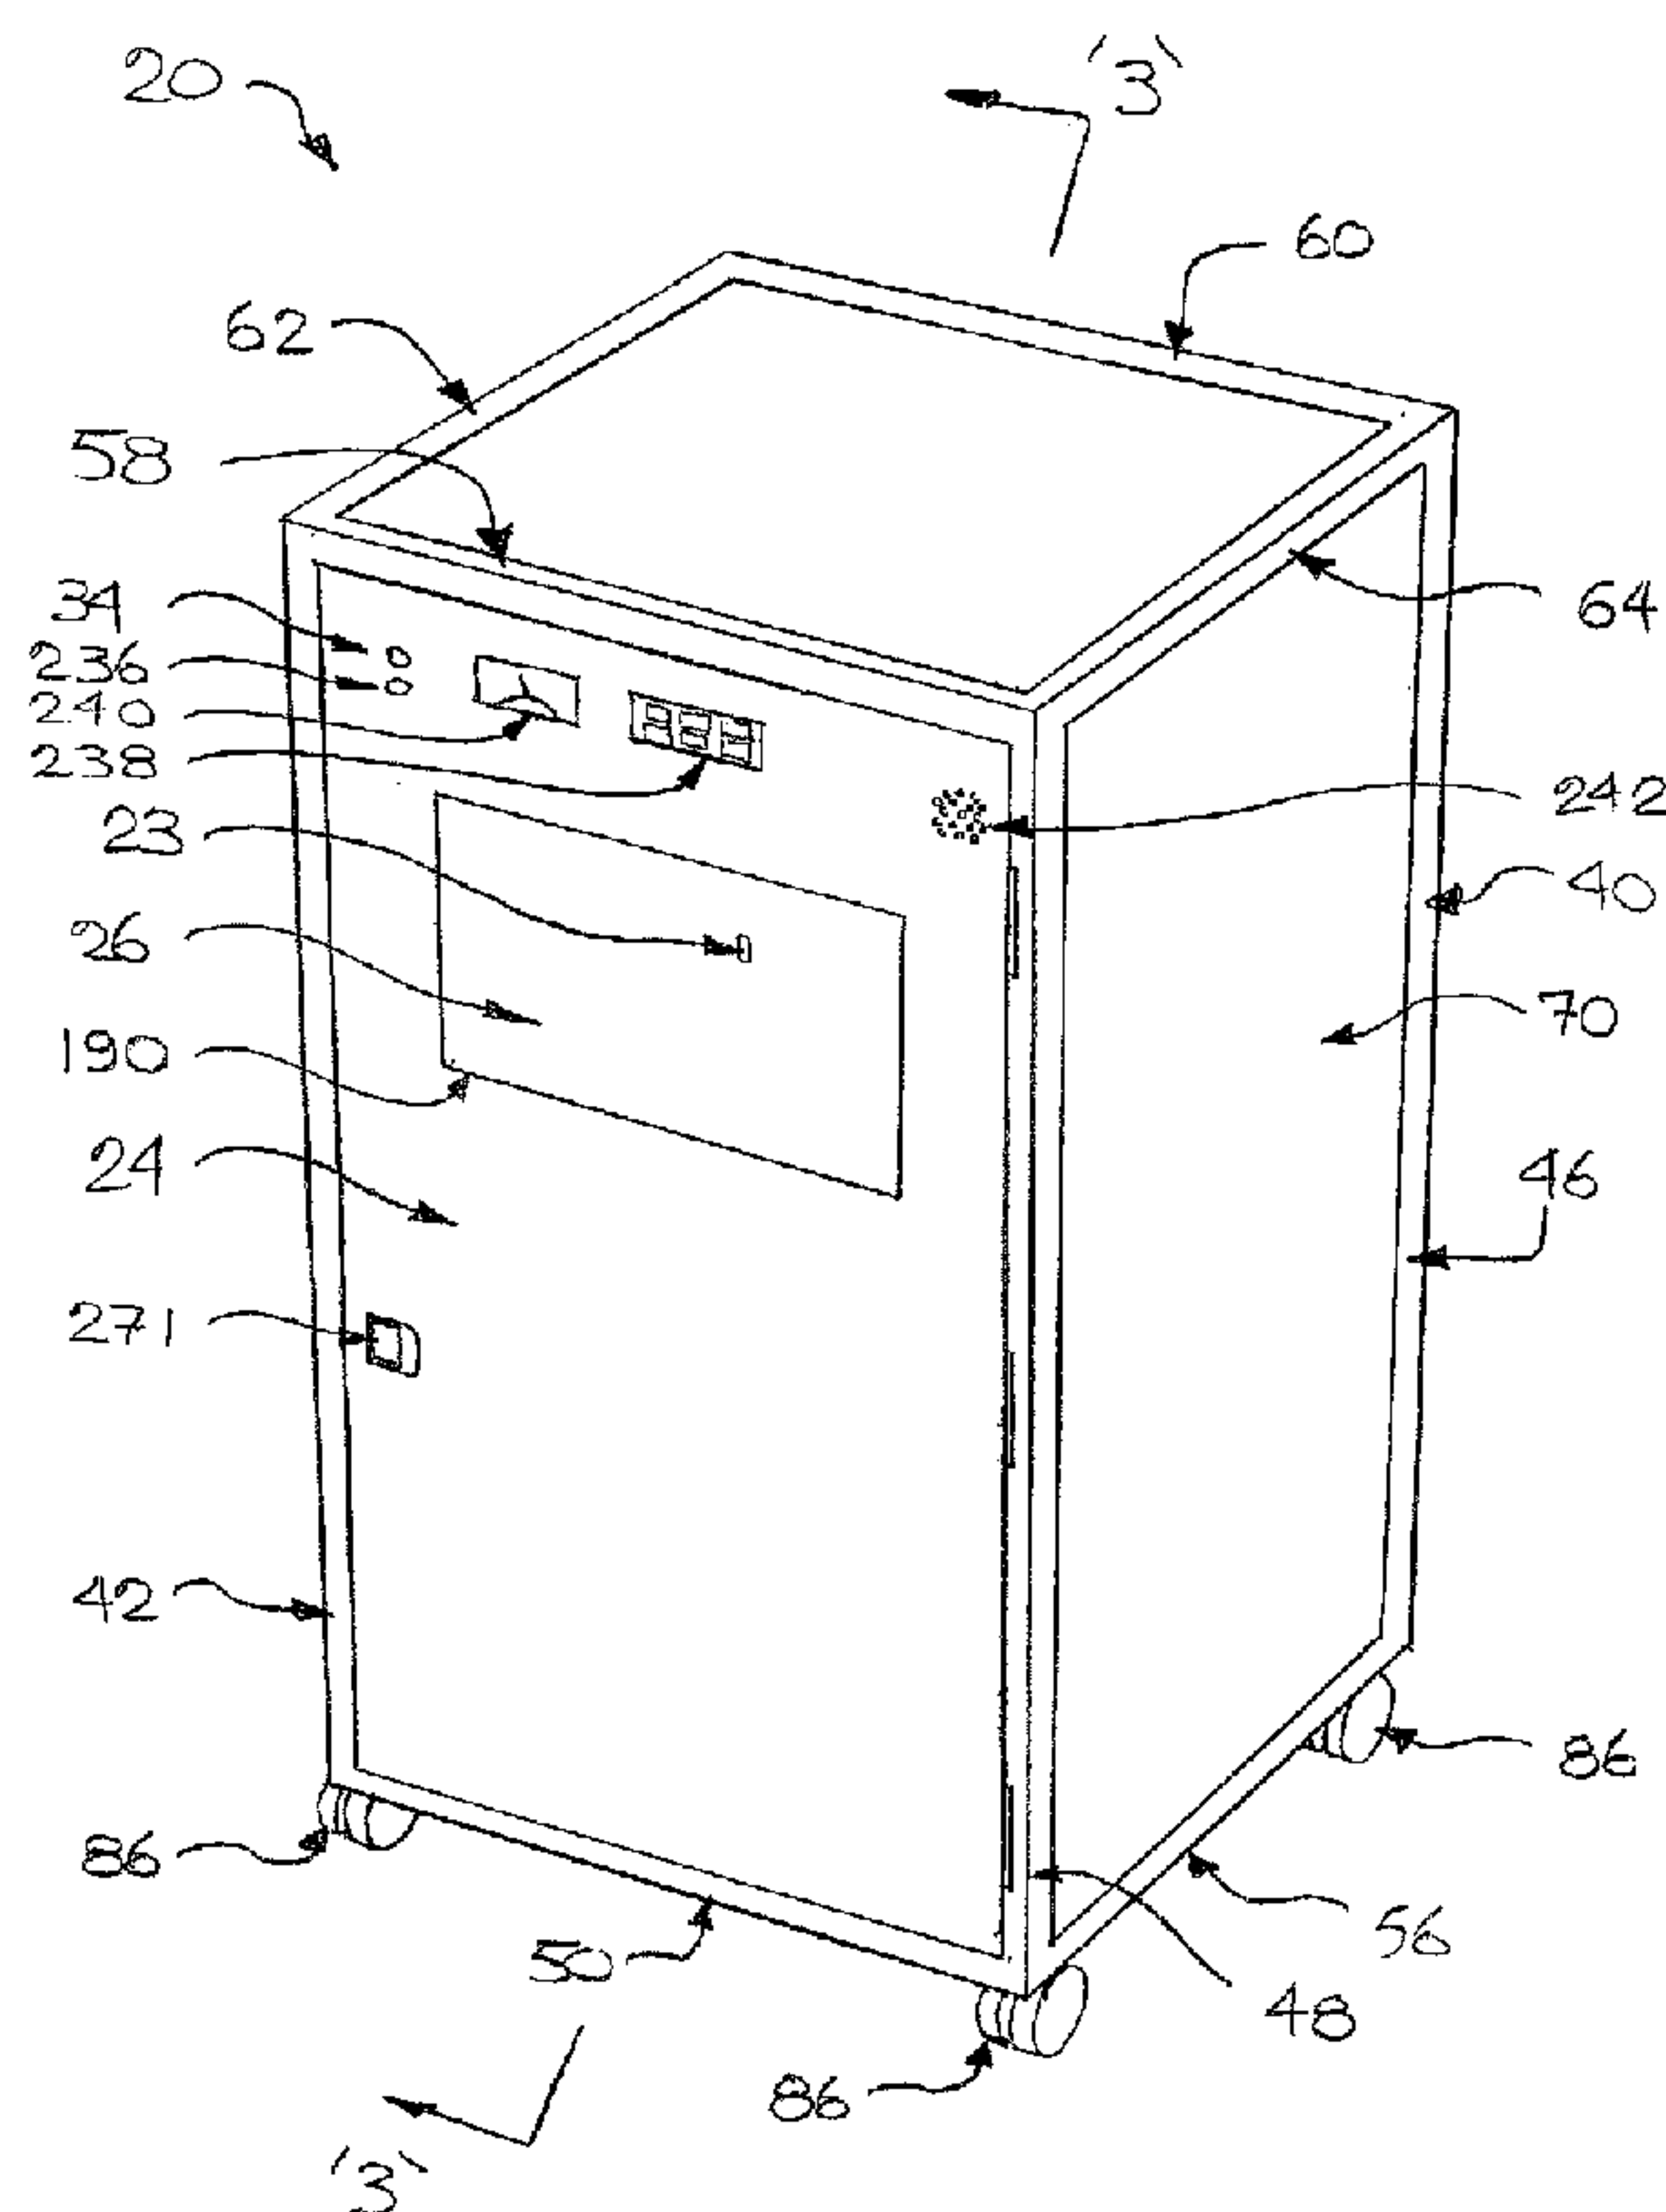

- 26 -

Waste CompactorAbstract of the Disclosure

5 A refuse compactor has a housing for containing a garbage receptacle, and a
compression unit for compacting the refuse in the compaction unit from time to time. The
compactor has a sensor for sensing the approach of persons wishing to deposit garbage. This
sensor causes the opening an inlet door. It has a second sensor, for gauging the level of refuse
10 in the receptacle. When a sufficient bulk is collected, then the compression unit operates to
compact the refuse. The compression unit is subject to three limiting conditions, the first being
a "receptacle full" limit, the second being a load limit, and the third being a stroke limit. The
compaction unit used is a scissors mechanism having one side of the scissors mechanism held
in one plane.

Attorney Docket
No. 56892/2

IN THE CANADIAN PATENT OFFICE

APPLICATION FOR LETTERS PATENT

WASTE COMPACTOR

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT We,

James Ernest Gawley

23 Hobbs Drive, Bowmanville, Ontario L1C 3R8;

Charlotte Mary-Anne May

37 Bruce Avenue, Keswick, Ontario L4P 1K4; and

Glenn Emile Rochon

37 Bruce Avenue, Keswick, Ontario L4P 1K4

all citizens of Canada, have invented a: **WASTE COMPACTOR** of which the following is a specification.

Waste CompactorField of Invention

5 This invention relates generally to waste compactors, and, in particular, to waste compactors for receiving inputs of waste and periodically compacting those inputs.

Background Art

10 While waste compactors have been known for domestic use, such machines can also be useful in fast food restaurants and shopping malls for compaction of loose garbage. In general, refuse from fast food restaurants such as may be deposited in waste containers has a relatively low density. It is desirable to compact this garbage for several reasons. First, very low density garbage such as paper cups, hamburger containers, tissue napkins,
15 and the like, can fill waste containers in high usage areas in a relatively short period of time. It is inefficient for staff to have to remove full containers more frequently than necessary. Costs associated with large garbage containers, such as may be transported to a dumpsite or emptied into a large truck, tend to vary as the number of times they are filled. In consequence it is advantageous to compact the garbage to lengthen the time
20 interval between removals, and to reduce the cost of dumping the materials.

The use of such machines in a public or quasi-public space, such as in the relatively large garbage containers used in restaurants and shopping malls poses challenges that may not be as prevalent in the small domestic garbage compactors. First, the overall weight
25 of the compacted mass must be kept to a level that is safe for workers, generally in the range of 35 lbs. Some jurisdictions limit the allowable weight of garbage bags to 25 lbs. In one known unit, a system of hydraulic cylinders is used to compress the waste material. In that known system, a unit having an overall size of 51" height, 24 1/2" width and 22" depth accomodates a bin that is 19 3/4" deep, 18" wide and 17" high. This system can,
30 under some conditions, compress more than 100 lbs of garbage in a single load. This is well in excess of what an employee is generally expected, or allowed by law in some jurisdictions, to lift.

- 2 -

In general garbage compactors have a receptacle for receiving garbage, and a compression unit for compacting the garbage after a certain amount has been collected in the receptacle. The compression units generally force a platen to extend into the garbage, causing it to compress. It is important that it be highly improbable, preferably impossible, for the compression unit to operate at any time that a person's hands could be caught in the machinery.

The risk of injury is highest in three instances. The first is when a person is emptying garbage into the input chute of the receptacle. The second is when a person is removing collected garbage or cleaning the inside of the unit. The third is when the compaction machinery is in operation. It is also important that objects not become stuck in the input chute when the compression unit is in the middle of operation, such that it cannot retract. Similarly, it is important to be able to extend the compression unit to permit cleaning, without the risk of having the units retract in the middle of the cleaning operation.

A further problem is the tendency of sticky liquids or gums to build up inside the garbage receptacle. In one known machine a solenoid whose purpose was to lock an input chute door during operation compression became gummed over with sticky materials, and in some instances would not lock the door. Another problem with a known machine was that the compression unit had a hinged pressure plate. On the return stroke the hinged plate had a tendency to flip liquids that collected on top of the plate up into the innards of the machinery space. The machinery space was relatively inaccessible for cleaning.

Whereas a homeowner can explicitly decide when to cause a trash compactor to cycle, it may be advantageous for a machine in a public space, a mall, or a restaurant to operate automatically. On one hand customers may not operate the machine when it is required, and on the other hand, they may not operate it correctly in any event, possibly with unfortunate consequences. Further, a person approaching a public garbage receptacle may be carrying a cafeteria tray. It may be awkward for that person to open the garbage chute with one hand while holding the tray with the other. A person may need both hands to carry the tray, particularly if the user is a child. Alternatively, a person having only one

- 3 -

arm may find opening the chute and dumping the tray a difficult task. It would be advantageous to have an input chute that opens automatically. However, once the chute is open, it would not be advantageous to have it close while either a tray or a person's hand was still in the chute.

5

It is known to use a scissors jack mechanism to drive a compression plate, typically downward, into the garbage. Previous scissors jacks have at times shown a tendency to twist or wander, particularly if the garbage has local discontinuities, that is, it compresses more easily on one side than another. If the wander, or tolerance build-up, is too great, the mechanism may ride against the side of the receptacle or other structure. This can lead to wear and damage to the structure, and is undesirable.

10

Summary of the Invention

In a first aspect of the invention there is an apparatus for compacting refuse. It has a compression member moveable to compress refuse collected in a receptacle, a drive connected to move the compression member, a structure to which the drive is mounted, and a sensor for gauging the level of refuse in the receptacle. The drive and the compression member are operable in response to a signal from the sensor.

20

In an additional feature of that aspect of the invention, the apparatus includes a housing enclosing the compression member, the drive and the sensor. The housing has an accommodation for the receptacle and an inlet for admitting refuse to the receptacle. The apparatus has an inlet closure member operable to lock the inlet during operation of the compression member.

25

In another additional feature of that aspect of the invention, the apparatus includes the receptacle. In a still further additional feature of that aspect of the invention, the compression member is moveable to an inactive position. The apparatus includes a proximity sensor connected to cause the inlet closure member to open when the compression member is in the inactive position and the proximity sensor senses an object near the inlet.

30

- 4 -

In still another further additional feature of that aspect of the invention, the apparatus is responsive to resistive loading of the compression member by the refuse. In yet another additional feature of that aspect of the invention, the compression member is constrained by any one of a load limit and a displacement limit.

5

In still another additional feature of that aspect of the invention, the compression member is constrained by a receptacle full limit condition. The apparatus has an signalling device for signalling to an operator that the receptacle full limit condition has been reached. In still yet another additional feature of that aspect of the invention, the apparatus includes a weight sensor mounted to gauge the amount of refuse in the receptacle and the "receptacle full" limit condition is signalled by the weight sensor.

10

In another additional feature of that aspect of the invention, the apparatus further comprises a load sensor for gauging the resistance opposing the drive and a sensor for gauging displacement of the compression member. The "receptacle full" limit condition is determined as a function of signals received from the load sensor and from the sensor for gauging displacement of the compression member.

15

In yet another additional feature of that aspect of the invention, the compression member is moveable to engage and disengage the refuse. The apparatus has a wiper mounted to discourage refuse from clinging to the compression member when the compression member is disengaged from the refuse. In another additional feature of that aspect of the invention, the drive is free of hydraulic elements.

20

In yet another feature of that aspect of the invention, the drive includes a scissors mechanism having a pair of input legs extending from a common fulcrum. The input legs have input feet mounted to the structure. The mechanism also has a pair of output legs having output feet mounted to the compression member. One of the input feet is mounted to pivot about a first axis whose location is fixed relative to the structure. The compression member is constrained to move in a direction parallel to the bisector of the angle defined between the input legs.

25

30

- 5 -

In still yet another feature of that aspect of the invention, one of the output feet is constrained to pivot about a second axis whose location is fixed relative to the compression member, the first and second axes being parallel. In a further additional feature of that aspect of the invention, one of the output feet is constrained to pivot about
5 a second axis whose location is fixed relative to the compression member, the first and second axes being parallel and lying in a common plane parallel to the bisector.

In still yet another additional feature of that aspect of the invention, the drive includes a scissors mechanism having a pair of input feet mounted to the structure and a pair of
10 output feet mounted to the compression member. One of the input feet is constrained to pivot about a first axis whose location is fixed relative to the structure. The other of the input feet is constrained to follow a first linear path lying on a radius from the first axis. One of the output feet is constrained to pivot about a second axis, whose location is fixed relative to the compression member. The other of the output feet is constrained to follow
15 a second linear path lying on a radius from the second axis, the first and second axes being parallel and lying in a common plane, the first and second paths being parallel, the others of the input and output feet both lying to the same side of the plane, the paths being perpendicular to the plane.

In a further additional feature of that aspect of the invention, the drive comprises a
20 pair of the scissors mechanisms mounted in parallel. In still a further additional feature of that aspect of the invention, the others of the output feet of the pair of parallel scissors mechanisms each has one of a pair of gears mounted thereto. The gears are mounted to a common shaft parallel to the second axis. Each of the gears is constrained to mesh with
25 a linear rack mounted to the compression member.

In yet a further additional feature of that aspect of the invention, the drive further includes a motor, screw driven by the motor, and a yoke engaged to be moved by the screw. The yoke has a screw follower mounted to ride on the screw, a drag member
30 connected to move the other of the input feet and a resilient member mounted to transmit motion between the screw follower and the drag member.

- 6 -

In another aspect of the invention, there is a method of compacting refuse in a refuse receptacle with a compression member, gauging the level of refuse in the receptacle, sending a signal when the refuse is ready to be compressed, moving the compression member to compress the refuse in response to the signal and governing the movement of the compression member according to the resistance presented by the refuse.

In an additional feature of that aspect of the invention, the step of governing includes monitoring load feedback from the compression member. In another additional feature of that aspect of the invention, the step of monitoring load feedback includes monitoring the current of a motor driving the compression member.

In a still further additional feature of that aspect of the invention, the step of moving includes extending the compression member on a compression stroke, and the step of governing includes ending the compression stroke in response to one of the conditions chosen from the set of conditions consisting of (a) a full stroke displacement limit condition; (b) a load limit condition; and (c) a "receptacle full" limit condition.

In a yet further additional feature of that aspect of the invention, the step of governing includes gauging the weight of refuse in said receptacle. In a still further additional feature of that aspect of the invention, the method includes the step of preventing more refuse from entering the receptacle when the compression member is in motion. In another further additional feature of that aspect of the invention, the step of moving the compression member includes returning the compression member to an initial position. In an additional feature of that additional feature, the step of returning includes cushioning the arrival in the initial position.

In a yet further additional feature of that aspect of the invention, the step of gauging includes the steps of waiting for refuse to be put in said receptacle. In another further additional feature of that aspect of the invention, the step of waiting includes the steps of sensing for persons near said receptacle, and opening an accessway to permit refuse to enter the receptacle when persons are near the receptacle.

Brief Description of Drawings

Figure 1 is a general arrangement isometric view of an example of a compactor according to the present invention as it appears externally;

5 Figure 2a is a view of the compactor of Figure 1 with portions of its external panelling removed to expose the internal structure of the compactor in an extended position.

Figure 2b is a view of the compactor of Figure 1 with portions of its external panelling removed to expose the internal structure of the compactor in a retracted position.

10 Figure 3 is a cross-section of the compactor of Figure 1 taken at section '3 -3', and showing the structure of a door mechanism.

Figure 4 is a three quarter view of a door panel of the compactor of Figure 1.

Figure 5 is an isometric exploded view of elements of the drive system of the compactor of Figure 1.

Figure 6 is a cross section of some of the drive elements of Figure 5 as assembled.

15 Figure 7 shows an alternate embodiment of the compactor of Figure 3.

Figure 8 illustrates a portion of the operating logic of the compactor of Figure 1.

Figure 9 illustrates another portion of the operating logic of the compactor of Figure 1.

Figure 10 illustrates a lower portion of an alternative embodiment of a waste compactor for co-operation with a rolling bin.

20

Detailed Description of the Invention

The description which follows, and the embodiments described therein, are provided by way of illustration of an example of a particular embodiment, or examples of particular
25 embodiments, of the principles of the present invention. These examples are provided for the purposes of explanation, and not of limitation, of those principles and of the invention. In the description which follows, like parts are marked throughout the specification and the drawings with the same respective reference numerals. The drawings are not necessarily to scale and
30 in some instances proportions may have been exaggerated in order more clearly to depict certain features of the invention.

- 8 -

By way of a general conceptual overview, in operation, a person carrying a tray of garbage approaches a garbage compactor unit **20** such as is shown in Figure 1. A proximity sensor identified as door sensor **22** is mounted to peer through an aperture **23** in the front panel **24** of unit **20** to sense the approach of the tray. When a person approaches unit **20** with a tray, inlet door **26** opens. Garbage introduced at door **26** falls inside unit **20** to collect in a receptacle in the nature of a stainless steel garbage bin **28** that has a liner, or bag **29** for collection refuse. After a number of such deposits the loose pile of garbage in bin **28** will be sufficiently high to activate a pile sensor **30**. A compression unit in the nature of a scissors jack mechanism **32** is then extended to compress the garbage. Once the compression is complete, mechanism **32** retracts and awaits the next filling before compressing the garbage again. When the unit reaches a full condition, an annunciator, or signalling device in the nature of a signal light **34**, signals for an operator to open front panel **24**, which is hinged to form a door, to remove the collected garbage. Unit **20** has overall dimensions of 24" width, 24" depth, and 50" height. A more detailed description of the structure and operation of unit **20** is given below.

The description begins with Figure 1 and Figure 2 in which near surface panels have been removed to expose internal elements. The basic structural skeleton of unit **20** is a support structure in the nature of a frame **40** that has four hollow square steel tube corner uprights **42**, **44**, **46**, and **48** whose bottom ends are joined by lower front, rear and side peripheral tube members **50**, **52**, **54**, and **56**, and whose top ends are joined by upper front, rear and side peripheral tube members **58**, **60**, **62** and **64**. Frame **40** has mounting tabs, **66** to permit the mounting of the outer casing made up of left and right hand side panels **68** and **70**, front panel **72**, rear panel **74**, and top panel **76**. When assembled, unit **20** forms an enclosure, or housing, that has a space, or accommodation, in which a receptacle for accumulating refuse, such as bin **28**, can be received. When unit **20** is in operation, ribs **80** and **82** carry the reaction force on bin **28** to the other members of frame **40**. This load path forms a closed loop since the other end of the compression unit is also mounted, ultimately, to frame **40** as will be described below. Thus the force of compression is contained within unit **20**, and is not passed to the ground. Frame **40** has a pair of intermediate cross bars, in the nature of ribs **80** and **82**, extending between lower front and

rear peripheral tube members **50** and **52** to support bin **28**, and to carry, on their lower face, a bottom closure panel **84**. Frame **40** itself rests on rollers **86** mounted at each corner, although it could rest on non-rolling feet. A pair of sidewall cross supports **88** and **90** extend between uprights **42**, **44** and **46**, **48** respectively.

5

Mechanism **32** is also mounted to frame **40**. A pair of relatively deep main left and right hand fore-and-aft stringers **92** and **94** are mounted to uprights **42**, **44** and **46**, **48** at a level corresponding generally to the upper extremity of inlet door **26**. A pair of generally parallel front and rear main cross braces **96** and **98** span the distance between stringers **92** and **94**, inset asymmetrically from uprights **42** through **48**, such that a centreline drawn between, and parallel to braces **96** and **98** is closer to the back of unit **20** than to the front. A main motor **100** is mounted to a motor mount **102** that extends like a bridge between braces **96** and **98**. A motor belt tensioning strut is indicated as **104** and extends between brace **96** and motor **100**. Also mounted across braces **96** and **98** is a controller enclosure **106** that houses the programmable logic circuitry that controls operation of unit **20**. Enclosure **106** is removable as a module for repair, maintenance and upgrade as required.

10

15

20

25

A more detailed description of the drive train is best understood with reference to Figures **2** and **5**. Motor **100** is slung from mount **102** and supported by braces **96** and **98** as noted above, in a position to be concealed behind front panel **72** and below top panel **76**. It is located within the enclosure envelope of unit **20** in the location least likely to accumulate splattered material. Motor **100** is a 1/2 h.p. reversible, 4 pole single phase induction electric motor with a nominal speed of 1725 r.p.m. It turns a small pulley **110** which is linked by a timing belt **112** to a driven sheave **114**. The speed reduction in this step has a ratio of 1:3. Sheave **114** is mounted to turn a jack screw **116**. Jack screw **116** is a 3/4" acme screw having 6 threads per inch. It is carried in bearings **118** at either end mounted in stringers **92** and **94**.

30

Mounted in threaded engagement with jack screw **116** is a crosshead yoke assembly **120**, shown in the exploded detail of Figure **5** and in the cross-section of Figure **6**. It has a socket formed by mounting a sleeve **122** perpendicularly to a transverse yoke beam **124**. A capture

- 10 -

plate **126** is attachable at the bolt bosses of sleeve **122** to capture a spacer, **127**, a resilient cushioning member in the nature of a spring **128**, and a screw follower, or screw engaging member in the nature of a Delrin (T.M.) nut **130**. As assembled, nut **130** functions as a screw follower, and the remainder of assembly **120** acts as a drag member for governing the motion of whatever is attached to the ends of yoke beam **124**. Spring **128** is located to transmit motion, in at least one direction, between the screw follower, nut **130**, and the drag member.

When the drive system is returning to its initial, retracted position, the notched portions of beam **124**, activates a microswitch **134** mounted to brace **98** to cause the unit to stop. In the time delay while this occurs and motor **100** decelerates, nut **130** will continue to travel, but will slow down as it compresses spring **128**. The presence of spring **128** causes the stop to occur more smoothly, and over a longer period of time, than might otherwise be the case. It discourages the jerking motion sometimes seen with this kind of equipment. A through bore through all of assembly **120** accommodates screw **116**. In an alternative embodiment, springs can be placed to either side of Delrin (T.M.) nut **130** to cushion motion in both directions.

Transverse yoke beam **124** has, mounted at either end thereof, stub shafting **138** and **140** at either end, upon which a pair of primary translating arms in the nature of front and rear first scissor arm links **142** and **144** are mounted in bushings. At the outer extremities of yoke beam **124** are a pair of front and rear upper cam followers in the nature of rollers **146** and **148**, that ride along respecting front and rear upper cam tracks **150** and **152**. Cross braces **96** and **98** are channel shaped sections with mutually inwardly facing toes such that the profile of the channel itself yields tracks **150** and **152**.

A pair of front and rear primary pivoting arms **154** and **156** are mounted to pivot at one end on bushings mounted at fixed pivot points spaced apart on a common pivot axis shaft **158** perpendicular to jack screw **116** and cam tracks **150** and **152** such that the linear path of the centers of rollers **146** and **148** lies on a radius extending perpendicularly away from the axis of shaft **158**. Pivoting arms **154** and **156** are linked to scissor arm links **142** and **144** by a primary fulcrum pivot shaft **160** located midway between the respective ends of links **142**, **144**, and arms **154** and **156**. In the preferred embodiment fulcrum shaft **160** is

- 11 -

located at the mid-point of each of the respective arms, but this is not a necessary condition for the operation of such scissors devices in general.

5 Connected in folding-accordion fashion to the distal ends of arms **154** and **156** and links **142** and **144**, are respective front and rear secondary pivoting arms **162** and **164**, and secondary translating links **166** and **168**. These pairs of arms are also cross linked at their respective end joints by intermediate pivot shafts **170** and **172**. As shown in Figure 3 arms **162** and **164** are stepped outward from arms **154** and **156** to lie generally in the same respective vertical planes as links **142** and **144**. Similarly, links **166** and **168** are stepped
10 inwardly of links **142** and **144** to lie in the same respective vertical planes as arms **154** and **156**. At their most extreme points, arms **162** and **164** are pivotally mounted in fixed location bushings on a common shaft **174** mounted to the upper side of a compression member in the nature of a pressure plate **176**. Links **166** and **168** have outwardly extending stub shafts and rollers **178** and **180** that are engaged in slides, in the nature of trackways
15 **182** and **184** formed from channels mounted to the upper face of pressure plate **176**. Rollers **178** and **180** share a common shaft **188**. As above, secondary arms **162** and **164** and secondary links **166** and **168** cross in scissors like fashion. They are linked on a common fulcrum axis by secondary fulcrum shaft **186**.

20 As illustrated, shafts **138**, **140**, **158**, **160**, **170**, **172**, **174**, **186** and **188** are all intended to be parallel. Shafts **138**, **140**, **172** and **188** are coplanar. Shafts **158**, **170** and **174** are coplanar. Shafts **160** and **186** are coplanar. The linear paths traced by the center of rollers **178** and **180** lie on radii extending perpendicular to the axis of shaft **174**. From this geometry, the paths of trackways **150**, **152**, **182** and **184** are all mutually parallel, and
25 perpendicular to the axes of the various shafts. For this geometry the direction of extension and retraction of pressure plate will be in a direction parallel to the bisector of the angle at fulcrum shaft **160** defined between the legs of line **142** (or **144**) and arm **154** (or **156**) that have feet constrained, respectively to pivot about shaft **158** and to follow the linear path of trackways **150** and **152**.

30

- 12 -

Also, in the case of the geometry illustrated, this bisector will lie in the plane of the axes of shaft **160** and **186**. The pivot axes **158** and **174**, respectively fixed in location relative to the support structure of braces **96** and **98**, and to pressure plate **176**, always lie to one side of this plane. the axes of rollers **146**, **148**, **178** and **180** which are constrained to follow the linear paths of their respective trackways, always lie to the other side of the bisector plane. Furthermore, as shown, the bisector plane is perpendicular to the linear travel of the rollers in the trackways. While the geometry of linkages of this type can be varied, the inventors have found it convenient for the fulcrums to be located at the mid point of the members (that is items **142**, **144**, **154**, **156**, **162**, **164**, **166** and **168**), and for the members to be of equal lengths.

Given the mechanical relationship of motor **100**, jackscrew **116** and scissor mechanism **32** generally as described above, forward operation of motor **100** to drive sheave **114** will tend to draw crosshead yoke assembly **120** toward the axis of shaft **158**, extending scissor mechanism **32**. The vertical force exerted by plate **176** for a given torque in jackscrew **116** will tend to increase as the arms and links extend. As pressure plate **176** encounters more resistance in compressing garbage, at whatever height, motor **100** will tend to draw a greater current and produce a greater torque until the chosen current limit is reached. This load can be measured directly, with load cells or other devices, or it can be measured indirectly by measuring motor current to give suitable feedback.

Whether the scissors mechanism is a single scissors mechanism having a single fulcrum axis, a double scissors mechanism having two fulcrum axes as illustrated, or a multiple scissors mechanism having a larger number of fulcrum axes, scissor mechanisms have, in general, an input end having a pair of legs extending from a common fulcrum axis, and an output pair of members, arms, or fingers, extending from a fulcrum axis. In the case of a single scissors mechanism, the fulcrum axis will be the same in both instances. The legs at the input end will have feet, or toes, that are alternately drawn together to extend the mechanism, and driven apart to retract it. At the output, there are feet mounted to a device to be extended.

- 13 -

In the preferred embodiment the input feet are the ends of input arms **154** and **156** that are constrained to pivot about the axis of shaft **158**, and the ends of links **142** and **144** that are constrained to follow the linear path traced by rollers **146** and **148** along trackways **150** and **152**. The output feet are the ends of the secondary pivoting arms **162** and **164**, constrained to pivot about the axis of shaft **174**, and the ends of secondary translating links **166** and **169** that are constrained to follow the linear path of rollers **178** and **180** in trackways **182** and **184**.

It would be possible to use only one scissors mechanism, but lateral stiffness is improved by mounting two such systems in spaced apart parallel relationship, as shown in the preferred embodiment. That is, the front mechanism, which includes arm **156**, is parallel to the rearward mechanism, which includes arm **158**. It would also be possible to use a different kind of compression unit, whether a mechanism that depends on gears, hydraulics, or a vertical screw driving a plate. Unit **20** is intended to provide a moderate amount of compaction to relatively loose, mostly paper garbage of the kind found, for example, in malls and at fast food restaurants and the like. The electrically driven scissors mechanism of Figure **3** is preferred, since it permits unit **20** to be free of a hydraulic system and hydraulic fluid.

The fixed axes of shafts **158** and **174** will tend to reduce the tendency of plate **176** to twist as compression occurs, as compared to a scissors mechanism in which both sides are permitted to travel. A reduction in twisting is desirable, since it reduces the probability that plate **176** will ride against, and damage, the inner walls of bin **28**. Such twisting can further be discouraged by the use of gears and torque tubes, as noted below since this will tend to compel the legs, that is the translating links, to advance in their trackways at the same rate.

Operation of mechanism **32** occurs after garbage has been deposited through inlet door **26** of front panel **72**. Figure **4** shows the inner face of front panel **72**. A generally rectangular opening **190** is defined in the upper region of panel **72**, and a door **26**, of a size to mate with opening **190** pivots inwardly and upwardly of panel **72** about a hinge **192** extending along the upper margin of door **26** and opening **190**. A scrap section of a door covering **194** is shown. For the purposes of explanatory illustration cover **194** has been removed except for the partial

- 14 -

section indicated. In actual use covering **194** covers all of the working parts mounted to door **26**, as described below, to discourage the accumulation of sticky materials on them.

5 Located on the upper portion of door **26** is a cam follower made of a bracket **196** fastened to door **26** by rivets, screws or other means. Bracket **196** has an inwardly and upwardly extending arm **198**. An actuator arm **200** is mounted to frame **40** and is driven by a door motor and driving linkage **202** provided that the compression member is in its retracted, or inactive position, when door sensor **22** senses that a person is approaching to dump garbage, actuator arm **200** is driven forward to engage inwardly extending arm **198**. Although actuator arm **200** and door motor and linkage **202** are mounted to motor mount **102** in front of brace **96**, they are shown in Figure **4** to illustrate the spatial relationship to arm **198**. As the motion continues, inwardly extending arm **198** rides against actuator arm **200** as a cam follower follows a cam, until door **26** reaches its fully open position. Door **26** is held in the fully open position as long as sensor **22** is activated. When sensor **22** is deactivated, and after a time delay of 2.0 seconds actuator arm **200** is returned to its initial, inactive position. Notably, door **26** is not driven closed to lessen the probability of catching a person's fingers. If a person's fingers are still in the door, then only the weight of the door will bear against them. The logic of this process is set out in the flow chart of Figure **8**.

20 On the lower inside portion of door **26** there is a solenoid **210** arranged to extend or retract a connecting rod **212**. Connecting rod **212** bears upon a crank **214** mounted to pivot about a fulcrum **216**. A pair of links **218** and **220** each have one end mounted to crank **214**, one between fulcrum **216** and rod **212**, and the other being to the other side of fulcrum **216**. The distal ends of links **218** and **220** are restrained by a slide **222** or **224** respectively. Slides **222** and **224** are located to place the distal ends of links **218** and **220** opposite to a pair of door lock sockets **226** and **228** mounted on the inside face of panel **26**. In the general case, when pile sensor **30** has not received a high garbage signal, solenoid **210** is inactive. Its coil is not energized, and so its body is relatively cool. When it is activated, rod **212** is forced outward to turn crank **214** about fulcrum **216**, in turn driving links **218** and **220** outward through slides **222** and **224**, and into locking engagement in sockets **226** and **228**. Notably, unlike a known type of garbage compactor in which a solenoid is used to engage a locking socket, neither

- 15 -

slides **222** and **224** nor sockets **226** and **228** is hot, so the tendency for sticky liquids to dry and become encrusted is reduced. Solenoid **210** does become warm when cycled "On", but is less exposed.

5 As noted above, scissors mechanism **32** will not be activated until door **26** is locked closed. To achieve this, a full travel microswitch **230** is mounted to panel **36** and is activated when the locking mechanism is driven fully home. Rod **212** has a return spring **232** to urge links **218** and **220** toward their disengaged position when solenoid **210** is deactivated. Although the mechanism shown is preferred, other types of door locking mechanism could be used,
10 including other arrangements of cables, bell cranks connecting rods and similar door closure and locking means.

 Also as noted above, unit **20** includes a pile sensor for sensing the height of the pile of garbage in bin **28**. Pile sensor **30** is mounted to frame **40** at an angle to rear panel **38** of
15 unit **20**. It is aimed to sense pile height closer to the rear of bin **28** than to the front, on the general assumption that the trajectory of the garbage entering through door **26** will generally result in a pile that is deeper toward the back than toward the front. Pile sensor **30** is a background suppressed sensor. It is looking for a pile height that is nominally 16 inches, as indicted in Figure **9**. However, it will be understood that loose garbage is
20 unlikely to collect in a level manner at a precise height. Rather, there will be a random variation of height within bin **28**. The pile sensor does not rely on brightness of reflection, since that may vary according to the reflectivity of the particular object. Instead, sensor **30** has a pair of beams that cross at a focus, such that the device detects whether any object is present, rather than how bright the reflection may be. Pile sensor **30** provides a means for
25 gauging the level of refuse in the receptacle in an approximate manner.

 As reflected in the logic of Figure **9**, when an object is detected by pile sensor **30**, the system tests to make sure that the signal persists for a significant period of time, at least 5 seconds in the preferred embodiment, to allow the garbage to settle somewhat. If the sensor
30 still senses the presence of garbage after 5 seconds then a signal is sent to lock door **26** in the closed position. Once it is confirmed that door **26** is locked then the compression unit

- 16 -

is activated in response to the signal from pile sensor **30**. Motor **100** begins to drive jack screw **116** to extend mechanism **32**, carrying pressure plate **176** downward as it does so.

5 The time of operation of motor **100**, and its current draw are monitored. The extension (and retraction) can occur in any of three regimes. First, if motor **100** operates for less than 3 seconds, and yet the current draw is 120 % of the design rated current draw, then the controller infers that bin **28** is full. Jack screw **116** is turned in the other direction, and the "receptacle full" signal light **34** is activated to tell staff to empty bin **28**.

10 The second regime is a load limited regime. If the motor current then increases to exceed the preset value, then the controller infers that plate **176** has encountered material, and has compacted it enough to reach the desired density. In that case the extension stroke ends, plate **176** is retracted to its initial, or inactive stored position, and unit **20** goes into a waiting mode until sensor **30** again senses material. The use of a load limit in this way
15 may tend to encourage longer motor life.

In the third regime, if motor **100** current does not reach the limiting value, then a full travel microswitch **234**, mounted to brace **98**, will be activated by the notched end of yoke beam **124** when plate **176** reaches full stroke displacement limit. Microswitches **134** and
20 **234** are mounted in line, roughly 8 inches apart, on brace **98**. In the preferred embodiment the full stroke displacement limit corresponds to 90 % of full stroke length that would occur if the mechanism were allowed to advance until the scissor arms jammed. The microswitch can be set to be tripped by plate **176**, or by some part of mechanism **32** or by counting the number of turns of motor **100**, or any other suitable means. It is preferred to measure the
25 travel of the sleeve on the jack screw, since this part of the mechanism is less likely to accumulate splattered material. In the event that microswitch **234** is tripped, the logical inference is that bin **28** is almost empty. Plate **176** is then retracted to its rest position above the level of door **26**.

30 When the full condition is reached, signal light **34** on the front console of the unit is illuminated, to notify the operator to empty bin **28**. In an optional embodiment the motor

- 17 -

controller can count the elapsed time to end of stroke on a current based limit, and when it is less than, for example, 3 seconds, a light **236** of one colour, such as yellow, can be illuminated to warn the operator that bin **28** is almost full, and a red light, such as signal light **34** can be illuminated when the "receptacle full" condition is reached. Although the simple light is preferred, a number of other means could be used alternatively or additionally for indicating the amount of garbage collected in the receptacle. Either an LED display **238** showing the percentage of fullness or a direct weight measurement, or a gauge **240** with a pointer on a scale, or similar mechanical or electrical system, or a speaking synthesized voice system **242** could be used. An annunciator, or signalling device, in the form of a single glowing light is a relatively simple solution, and is preferred for its simplicity.

It should be noted that the programmable controller polls the status of door sensor **22** and pile sensor **30** continuously. If one of these becomes active, then operation of the other part of the system is inhibited. That is, if the compactor is operating, door **26** will not be opened, whatever sensor **22** may indicate. Similarly, if door **26** is being held open in response to a signal from sensor **22**, the compaction unit will be disabled while door **26** is open. If the controller senses input signals that are contradictory, then it inhibits both door **26** and scissors mechanism **32** from working, and displays a fault warning instead. This fault warning can be a flashing light signal, as from light **34**, or a fault code display on LED display **238**, or by use of some similar audio or visual warning means. If one of the sensors becomes inoperative, as for example, if pile sensor **30** were to be covered with ketchup, then a warning signal is displayed accordingly.

Pressure plate **176** has an upwardly bent lip **244** along its front edge. In an alternative embodiment as illustrated in Figure 7, the entire periphery of pressure plate **176** has an upwardly extending lip or skirt **246** to discourage material from accumulating on top of plate **176**. In addition, an inwardly oriented flexible wiper **248** (shown in Figure 3) is mounted to the inside faces of front panel **72**, rear panel **74**, left hand side panel **68** and right hand side panel **70** at a level roughly corresponding to the top of inlet door **26**, close to the upper limit of the retraction stroke of pressure plate **176**. As plate **176** rises wiper

- 18 -

248 is intended to encourage cups, napkins and other material that may have become caught on the edges of plate **176** to be stripped off. Wiper **248** can have bristles, or be made of a rubber strip, or have a plurality of inwardly oriented flexible fingers that deflect as plate **176** passes.

5

As noted above, the fullness of bin **28** can be inferred by a direct weight measurement. This provides a second means to increase the tendency to stay within the local weight limit. Furthermore, it permits the weight in bin **28** to be recorded by the programmable logic controller as a function of time. In normal use the weight in bin **28** will increase relatively slowly. A sudden increase in weight could indicate that matter has been dumped in bin **28** that may not be suitable for compression. As illustrated in the optional alternative embodiment of compactor **250** of Figure 7, the support for bin **28** is provided by a floor panel **252** shown in scrap section to reveal three load cells **254**, **256**, and **258** upon which floor panel **252** rests. Load cells **254**, **256**, and **258** are in turn mounted in a three point triangular array to ribs **260** and **262** that complete the load path to frame **264** generally. (The remainder of frame **264** is, unless noted otherwise, the same as frame **40**). The increase in the sum of the values sensed at load cells **254**, **256**, and **258** over the empty weight of bin **28** will yield the weight of refuse in bin **28**. More than three load cells could be used if desired. Although other, mechanical weigh scale systems could also be used, load cells are capable of withstanding the loads imposed during compression of the refuse in bin **28**, (in the range of 600 to 1000 Lbs.) and yet provide sufficiently accurate discrimination of smaller weights in the 0 to 50 Lbs. range. The signals from the load cells and their variation with time are monitored and the result displayed on display **238**. In the event of a sudden increase in weight, such as a jump in excess of 3 Lbs., display **238** can be used to provide a fault warning to the operator, and to prevent further operation of the compression unit until the contents of bin **28** have been examined.

10

15

20

25

30

Whether activated inferentially as in the first regime described above, or directly by a weight measurement, when the "receptacle full" signal is given, it is intended that an operator will empty out the collected garbage and return an empty receptacle for the next load. Front panel **24** has mounted to it a contact in the nature of an electrically conductive

- 19 -

key **266** that fits in a mating socket **268** mounted to doorjamb **270**. If an electrical connection is not made through key **266** and lock **268**, power cannot reach motor **100**. It is intended that it not be possible to operate motor **100** when front panel **24** is open. When an operator unlocks and opens door handle **271**, door panel **24** swings outward, withdrawing key **266** from socket **268**, and breaking the main power circuit to motor **100**.

It is possible to achieve this in a number of alternative ways. For example a logic system could be used to sense the position of the door, and, through software or relays, prevent the motor from being activated. Alternatively microswitches could be mounted either at the hinge or at the closure of door **24**. The engaging electrified lock is preferred because, unlike some microswitches, it is relatively difficult, if not impossible, to fool or tape closed. Further, it is not vulnerable to a software failure. With the power shut off so that motor **100** cannot run, it is safe to reach inside and remove bin **28**, to remove the full bag **29** and to replace it with a new bag. Although door panel **24** is shown with hinges along the righthand side, the arrangement of the hinges, handle **271**, key **266** and socket **268** could be reversed to permit door panel **24** to swing to the other side.

In the alternative embodiment illustrated in Figure 7, rollers **168** and **170** can be replaced by gears **272** and **274** joined by a shaft or torque tube **276**, and trackways **172** and **174** can be replaced by toothed racks **278** and **280**. In this alternative embodiment, the rack and gear arrangement further encourages the arms to move equally on left and right hand sides, further discouraging the tendency of the scissors mechanism, and particularly pressure plate **176**, to twist as garbage is compressed.

In another alternative embodiment of the invention, as shown in Figure 10, a compactor unit **280** has a frame **282** that differs from frame **40** of the preferred embodiment of Figure 2, in that front lower peripheral member **50** has been removed, leaving a U-shaped entranceway **284**. This permits use of a bin **286** mounted on wheels **288** as shown, so that a person emptying unit **280** can roll the existing load away, and replace bin **286** with an empty bin. Bin **286** can then be rolled to the nearest dumpster, bag **289** can be removed, and a new bag put in place.

- 20 -

Bin 286 is equipped with frame engagement members in the nature of inclined side flanges 290 and 292. These engage, and ride upon, receptacle engaging members in the nature of inclined flanges 294 and 296 that have an angle of incline of 3 to 4 degrees. For the last few inches of travel, the entire weight of bin 286 is lifted off wheels 288, and carried by flanges 294 and 296 instead. Flanges 294 and 296 can be mounted directly to cross supports 88 and 90, or can be mounted to load cells mounted on supports 88 and 90, to permit the weight of garbage to be monitored over time. In use, the force during the compaction cycle holds bin 286 firmly in place on flanges 294 and 296. The location of bin 286 in suitable position is further assured by the position of front panel 24, which, when closed, limits the movement of bin 286. Other engagement means could be used, including detent catches, wheels chocks, latches, and other similar mechanical devices.

It is not necessary that the access panel for removing full bins be the front panel of the unit. Either the side or back faces could be used. However, it is preferred that the front face be used as this permits several units to be lined up side by side or back to back. Equally, although the preferred scissors jack mechanism, 32, is shown as a double scissors jack (that is, is has an upper, or primary scissor pair which transmits motion to a lower, or secondary scissor pair), it could be made in a single scissor, or a multi-scissor unit, depending on the space available and the stroke to be achieved. It is, of course, not necessary that a scissors jack be used. A geared system or a compacting screw, or a hydraulic system could be used. However, a mechanical linkage system, such as scissors jack 32 is preferred since it permits the elimination of the need for a hydraulic system.

Various embodiments of the invention have now been described in detail. Since changes in and/or additions to the above-described best mode may be made without departing from the nature, spirit or scope of the invention, the invention is not to be limited to said details, but only by the appended claims.

- 21 -

Claims

I claim:

1. An apparatus for compacting refuse, comprising:
5 a compression member moveable to compress refuse collected in a receptacle;
 a drive connected to move said compression member;
 a structure to which said drive is mounted;
 a sensor for gauging the level of refuse in the receptacle;
 said drive and said compression member being operable in response to a signal
10 from said sensor.
2. The apparatus of claim 1 wherein
 said apparatus includes a housing enclosing said compression member, said drive and
 said sensor;
15 said housing has an accommodation for the receptacle and an inlet for admitting refuse
 to the receptacle; and
 said apparatus has an inlet closure member operable to lock said inlet during operation
 of said compression member.
- 20 3. The apparatus of claim 2 wherein said apparatus includes the receptacle.
4. The apparatus of claim 2 wherein said compression member is moveable to an inactive
 position and said apparatus includes a proximity sensor connected to cause said inlet closure
 member to open when said compression member is in said inactive position and said proximity
25 sensor senses an object near said inlet.
5. The apparatus of claim 1 wherein said apparatus is responsive to resistive loading of said
 compression member by the refuse.
- 30 6. The apparatus of claim 1 wherein operation of said compression member is constrained
 by any one of (a) a load limit; and (b) a displacement limit.

7. The apparatus of claim 1 wherein operation of said compression member is constrained by a receptacle full limit condition and said apparatus has an signalling device for signalling to an operator that said receptacle full limit condition has been reached.

5 8. The apparatus of claim 7 wherein said apparatus includes a weight sensor mounted to gauge the amount of refuse in the receptacle and said "receptacle full" limit condition is signalled by said weight sensor.

10 9. The apparatus of claim 7 further comprising a load sensor for gauging the resistance opposing said drive and a sensor for gauging displacement of said compression member, and said "receptacle full" limit condition is determined as a function of signals received from said load sensor and from said sensor for gauging displacement of said compression member.

15 10. The apparatus of claim 1 wherein said compression member is moveable to engage and disengage the refuse, and said apparatus has a wiper mounted to discourage refuse from clinging to said compression member when said compression member is disengaged from the refuse.

20 11. The apparatus of claim 1 wherein said drive is free of hydraulic elements.

25 12. An apparatus for compacting refuse as claimed in claim 1 wherein said drive includes a scissors mechanism having a pair of input legs extending from a common fulcrum, said input legs having input feet mounted to said structure, and a pair of output legs having output feet mounted to said compression member;
one of said input feet is mounted to pivot about a first axis whose location is fixed relative to said structure; and
said compression member is constrained to move in a direction parallel to the bisector of the angle defined between said input legs.

30

- 23 -

13. The apparatus of claim 12 wherein one of said output feet is constrained to pivot about a second axis whose location is fixed relative to said compression member, said first and second axis being parallel.

5 14. The apparatus of claim 12 wherein one of said output feet is constrained to pivot about a second axis whose location is fixed relative to said compression member, said first and second axes being parallel and lying in a common plane parallel to said bisector.

15. The apparatus of claim 1 wherein
10 said drive includes a scissors mechanism having a pair of input feet mounted to said structure and a pair of output feet mounted to said compression member;
one of said input feet is constrained to pivot about a first axis whose location is fixed relative to said structure; the other of said inlet feet is constrained to follow a first linear path lying on a radius from said first axis;
15 one of said output feet is constrained to pivot about a second axis, whose location is fixed relative to said compression member; the other of said output feet is constrained to follow a second linear path lying on a radius from said second axis;
said first and second axes being parallel and lying in a common plane;
20 said first and second paths being parallel; the others of said input and output feet both lying to the same side of said plane; and
said paths being perpendicular to said plane.

25 16. The apparatus of claim 15 wherein said drive comprises a pair of said scissors mechanisms mounted in parallel.

17. The apparatus of claim 16 wherein:
the others of said output feet of said pair of parallel scissors mechanisms each has one
of a pair of gears mounted thereto;
30 said gears are mounted to a common shaft parallel to said second axis; and
each of said gears is constrained to mesh with a linear rack mounted to said compression member.

18. The apparatus of claim 15 wherein:

said drive further includes a motor, screw driven by said motor, and a yoke engaged to
be moved by said screw;

said yoke has a screw follower mounted to ride on said screw, a drag member
connected to move the other of said input feet and a resilient member mounted
to transmit motion between said screw follower and said drag member.

19. A method of compacting refuse in a refuse receptacle with a compression member,
comprising the steps of:

gauging the level of refuse in the receptacle;

sending a signal when the refuse is ready to be compressed;

moving the compression member to compress the refuse in response to the signal; and
governing the movement of the compression member according to the resistance

presented by the refuse.

20. The method of claim 19 wherein said step of governing includes monitoring load
feedback from said compression member.

21. The method of claim 20 wherein said step of monitoring load feedback includes
monitoring the current of a motor driving said compression member.

22. The method of claim 19 wherein said step of moving includes extending the compression
member on a compression stroke; and said step of governing includes ending said compression
stroke in response to one of the conditions chosen from the set of conditions consisting of:

(a) a full stroke displacement limit condition;

(b) a load limit condition; and

(c) a receptacle full limit condition.

23. The method of claim 19 wherein said step of governing includes gauging the weight of
refuse in said receptacle.

- 25 -


24. The method of claim 19 wherein said method includes the step of preventing more refuse from entering the receptacle when the compression member is in motion.

5 25. The method of claim 19 wherein the step of moving the compression member includes returning the compression member to an initial position.

26. The method of claim 25 wherein said step of returning includes cushioning the arrival in said initial position.

10 27. The method of claim 19 wherein the step of gauging includes the steps of waiting for refuse to be put in said receptacle.

15 28. The method of claim 27 wherein said step of waiting includes the steps of:
sensing for persons near said receptacle; and
opening an accessway to permit refuse to enter the receptacle when persons are near
said receptacle.

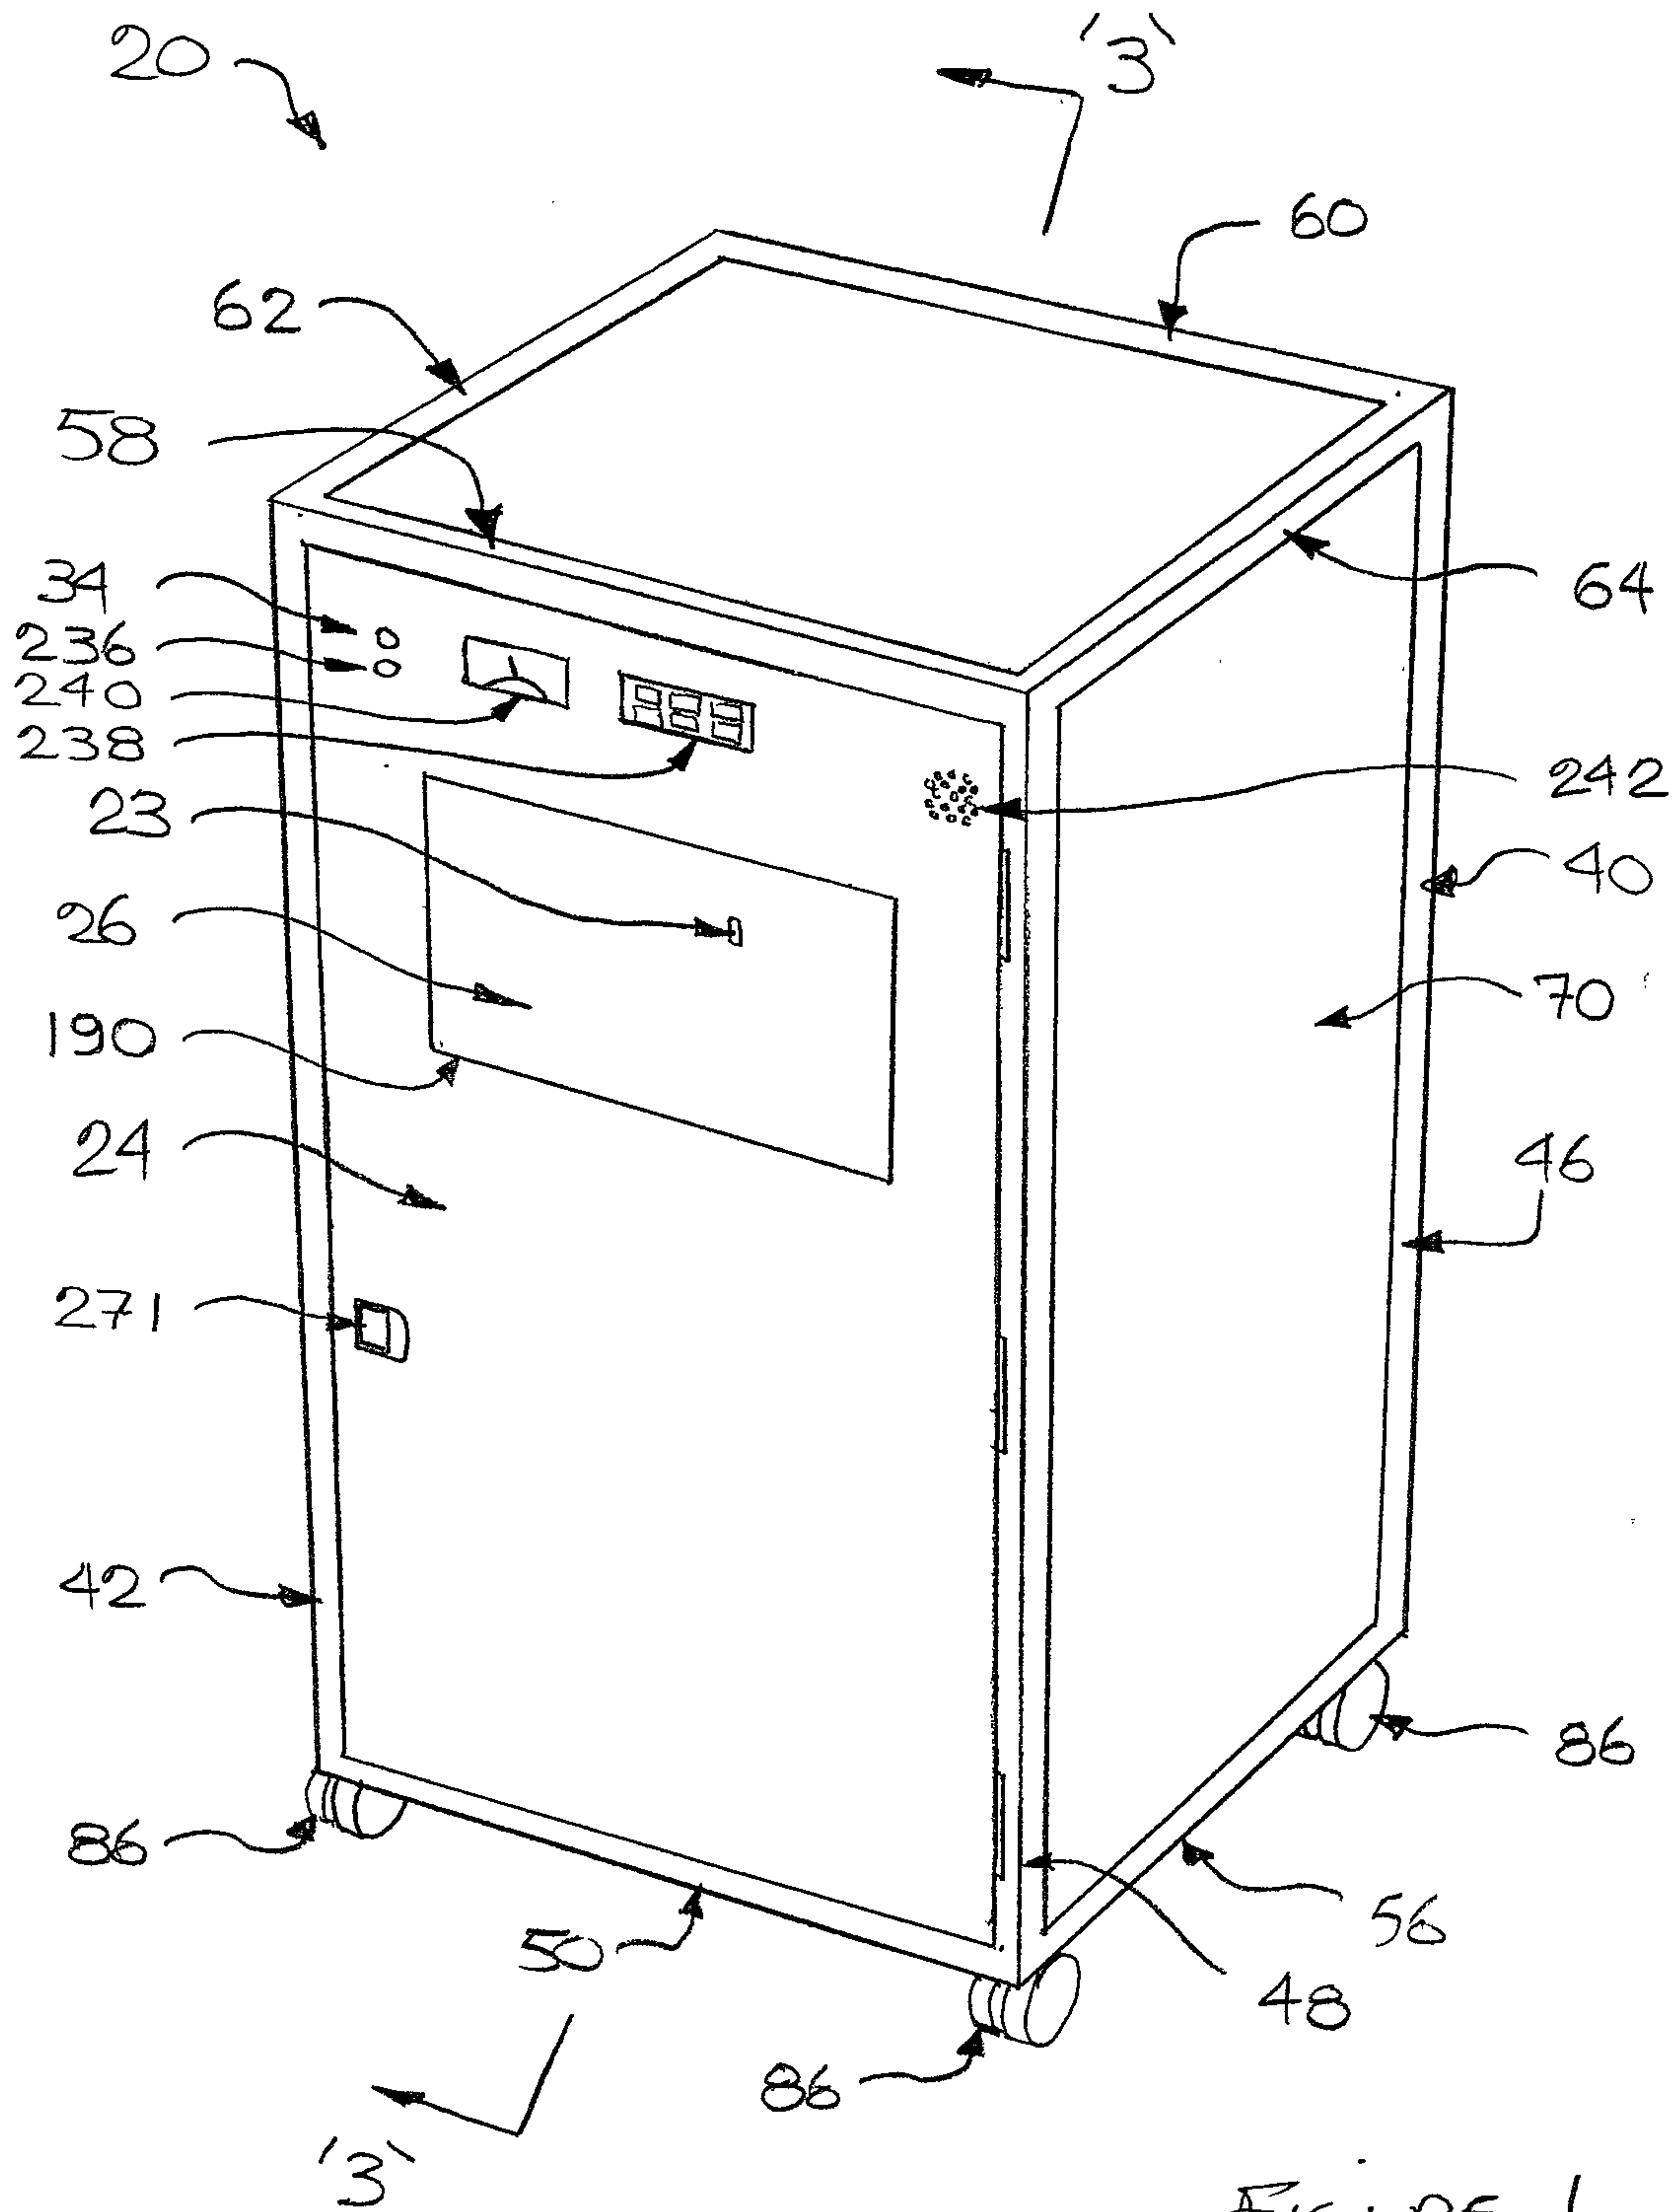

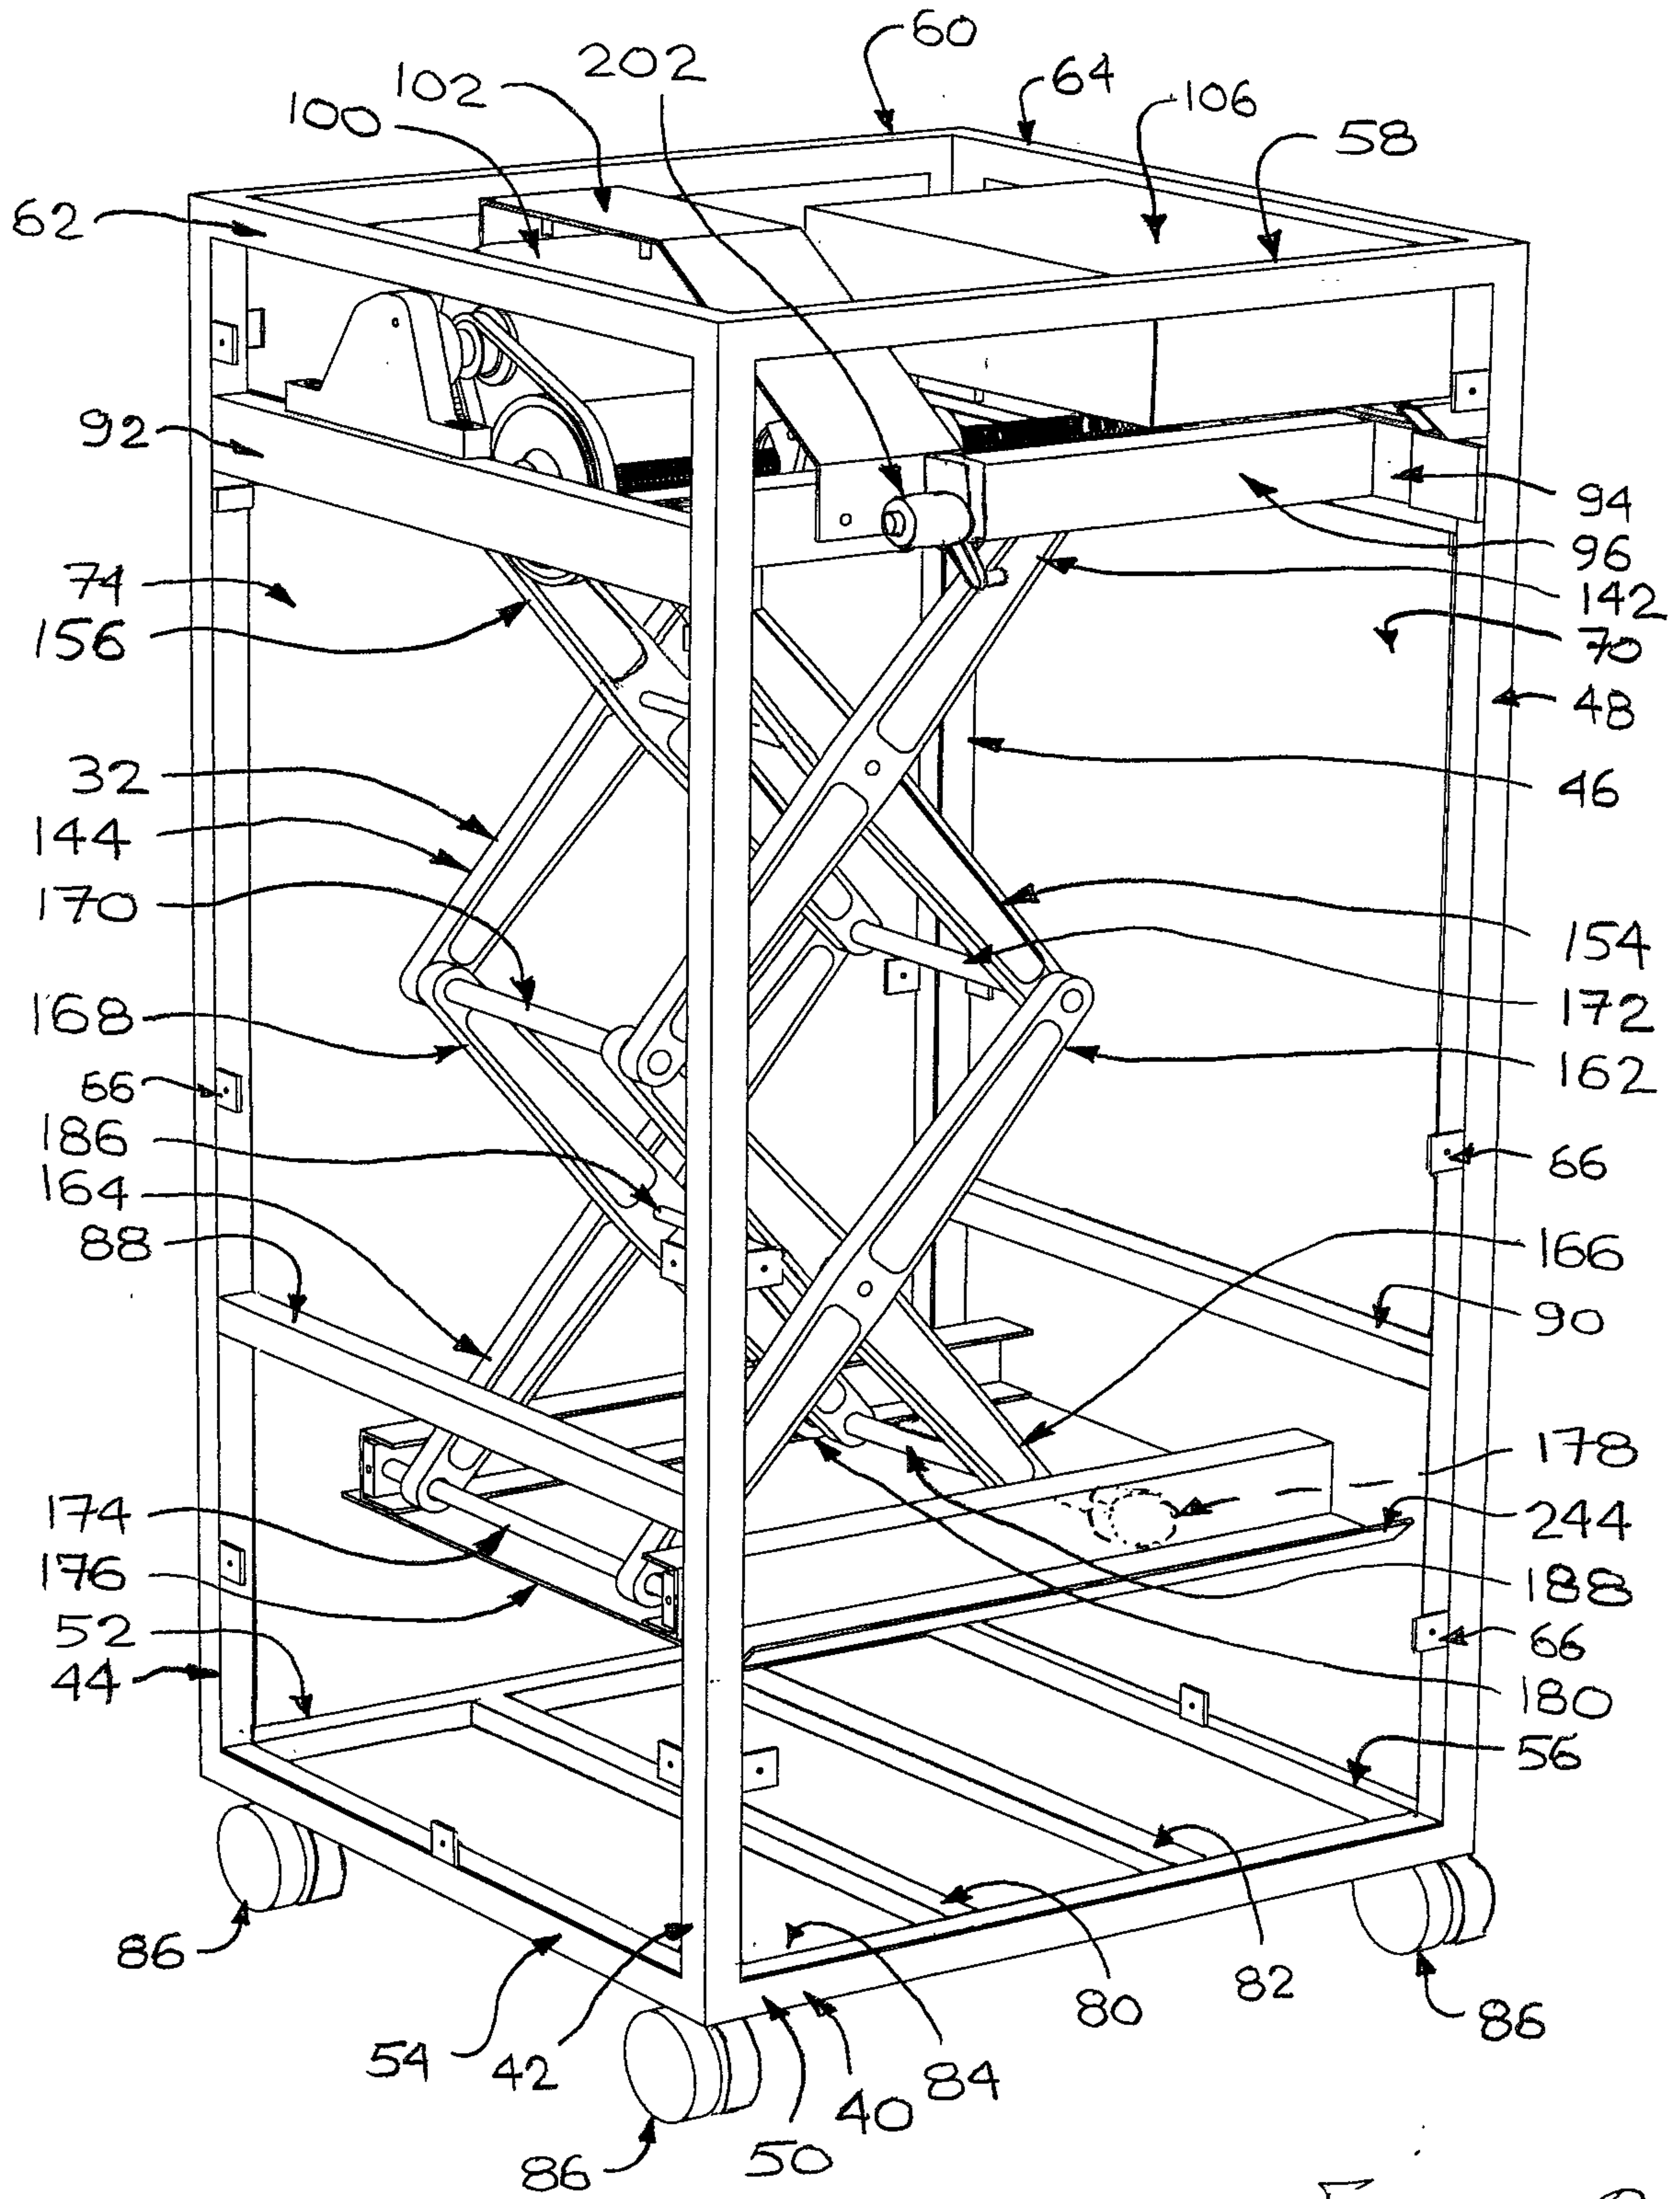


FIGURE 2a.

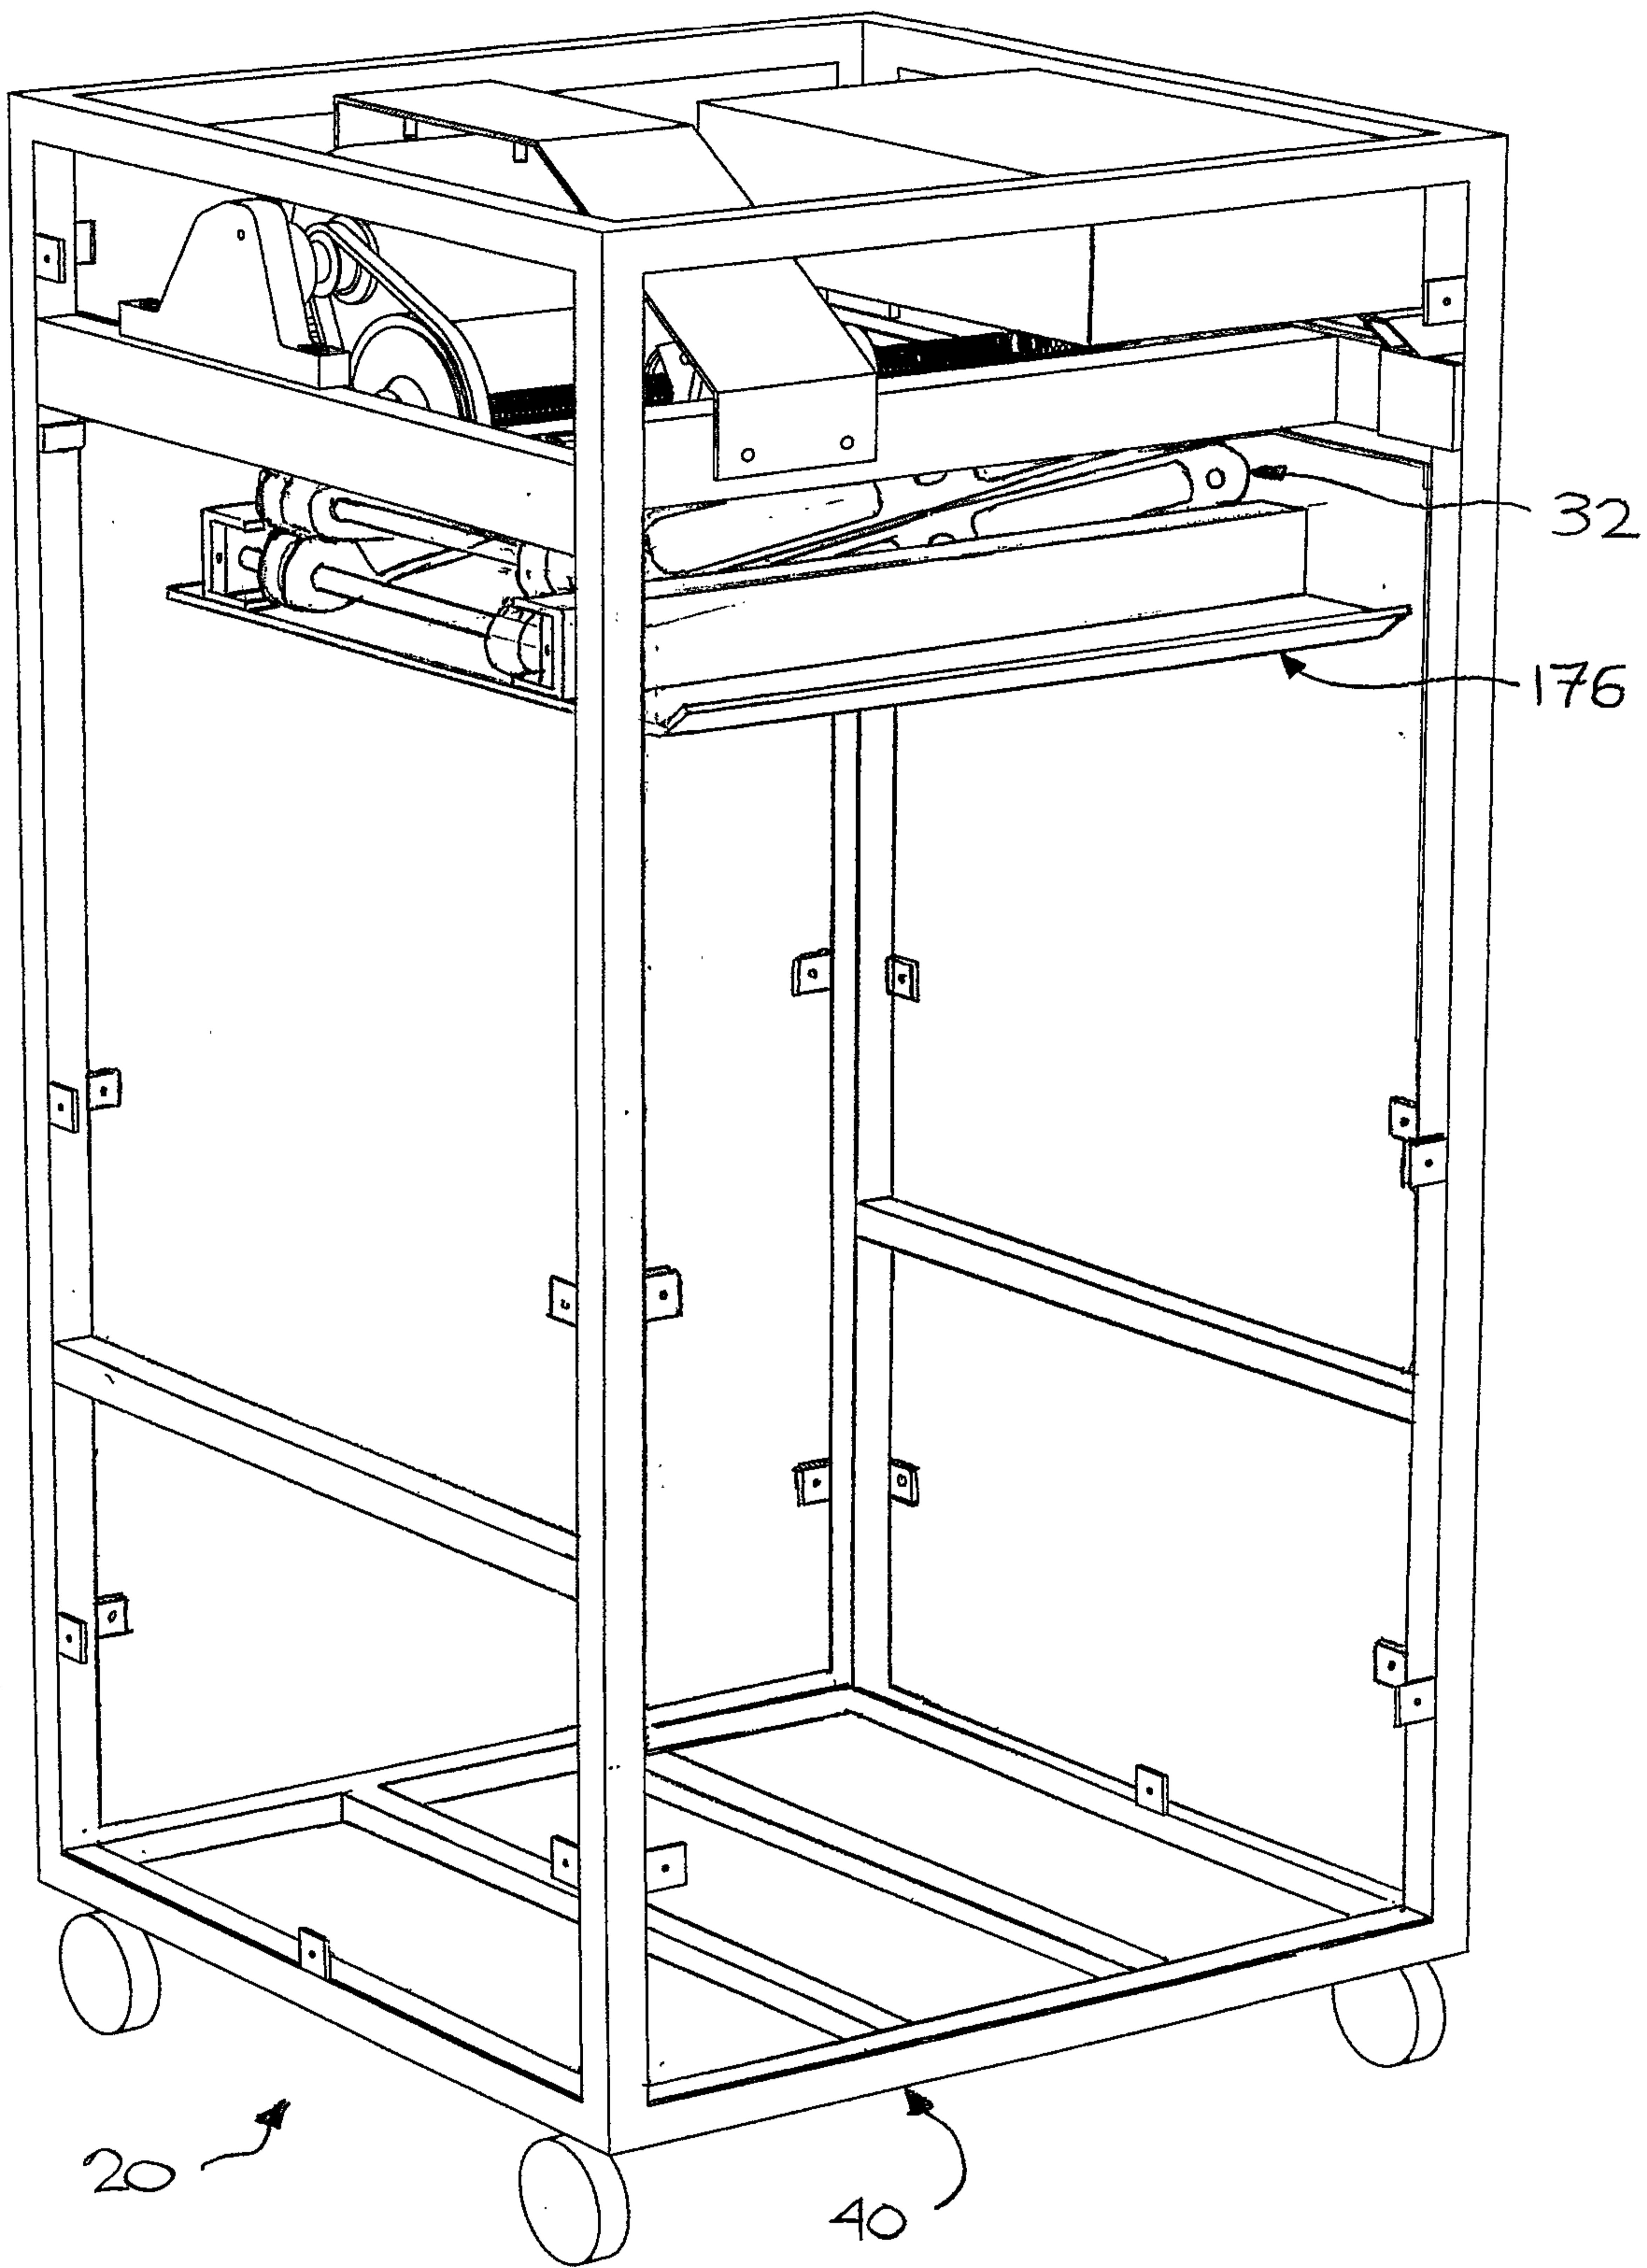


FIGURE 2b.

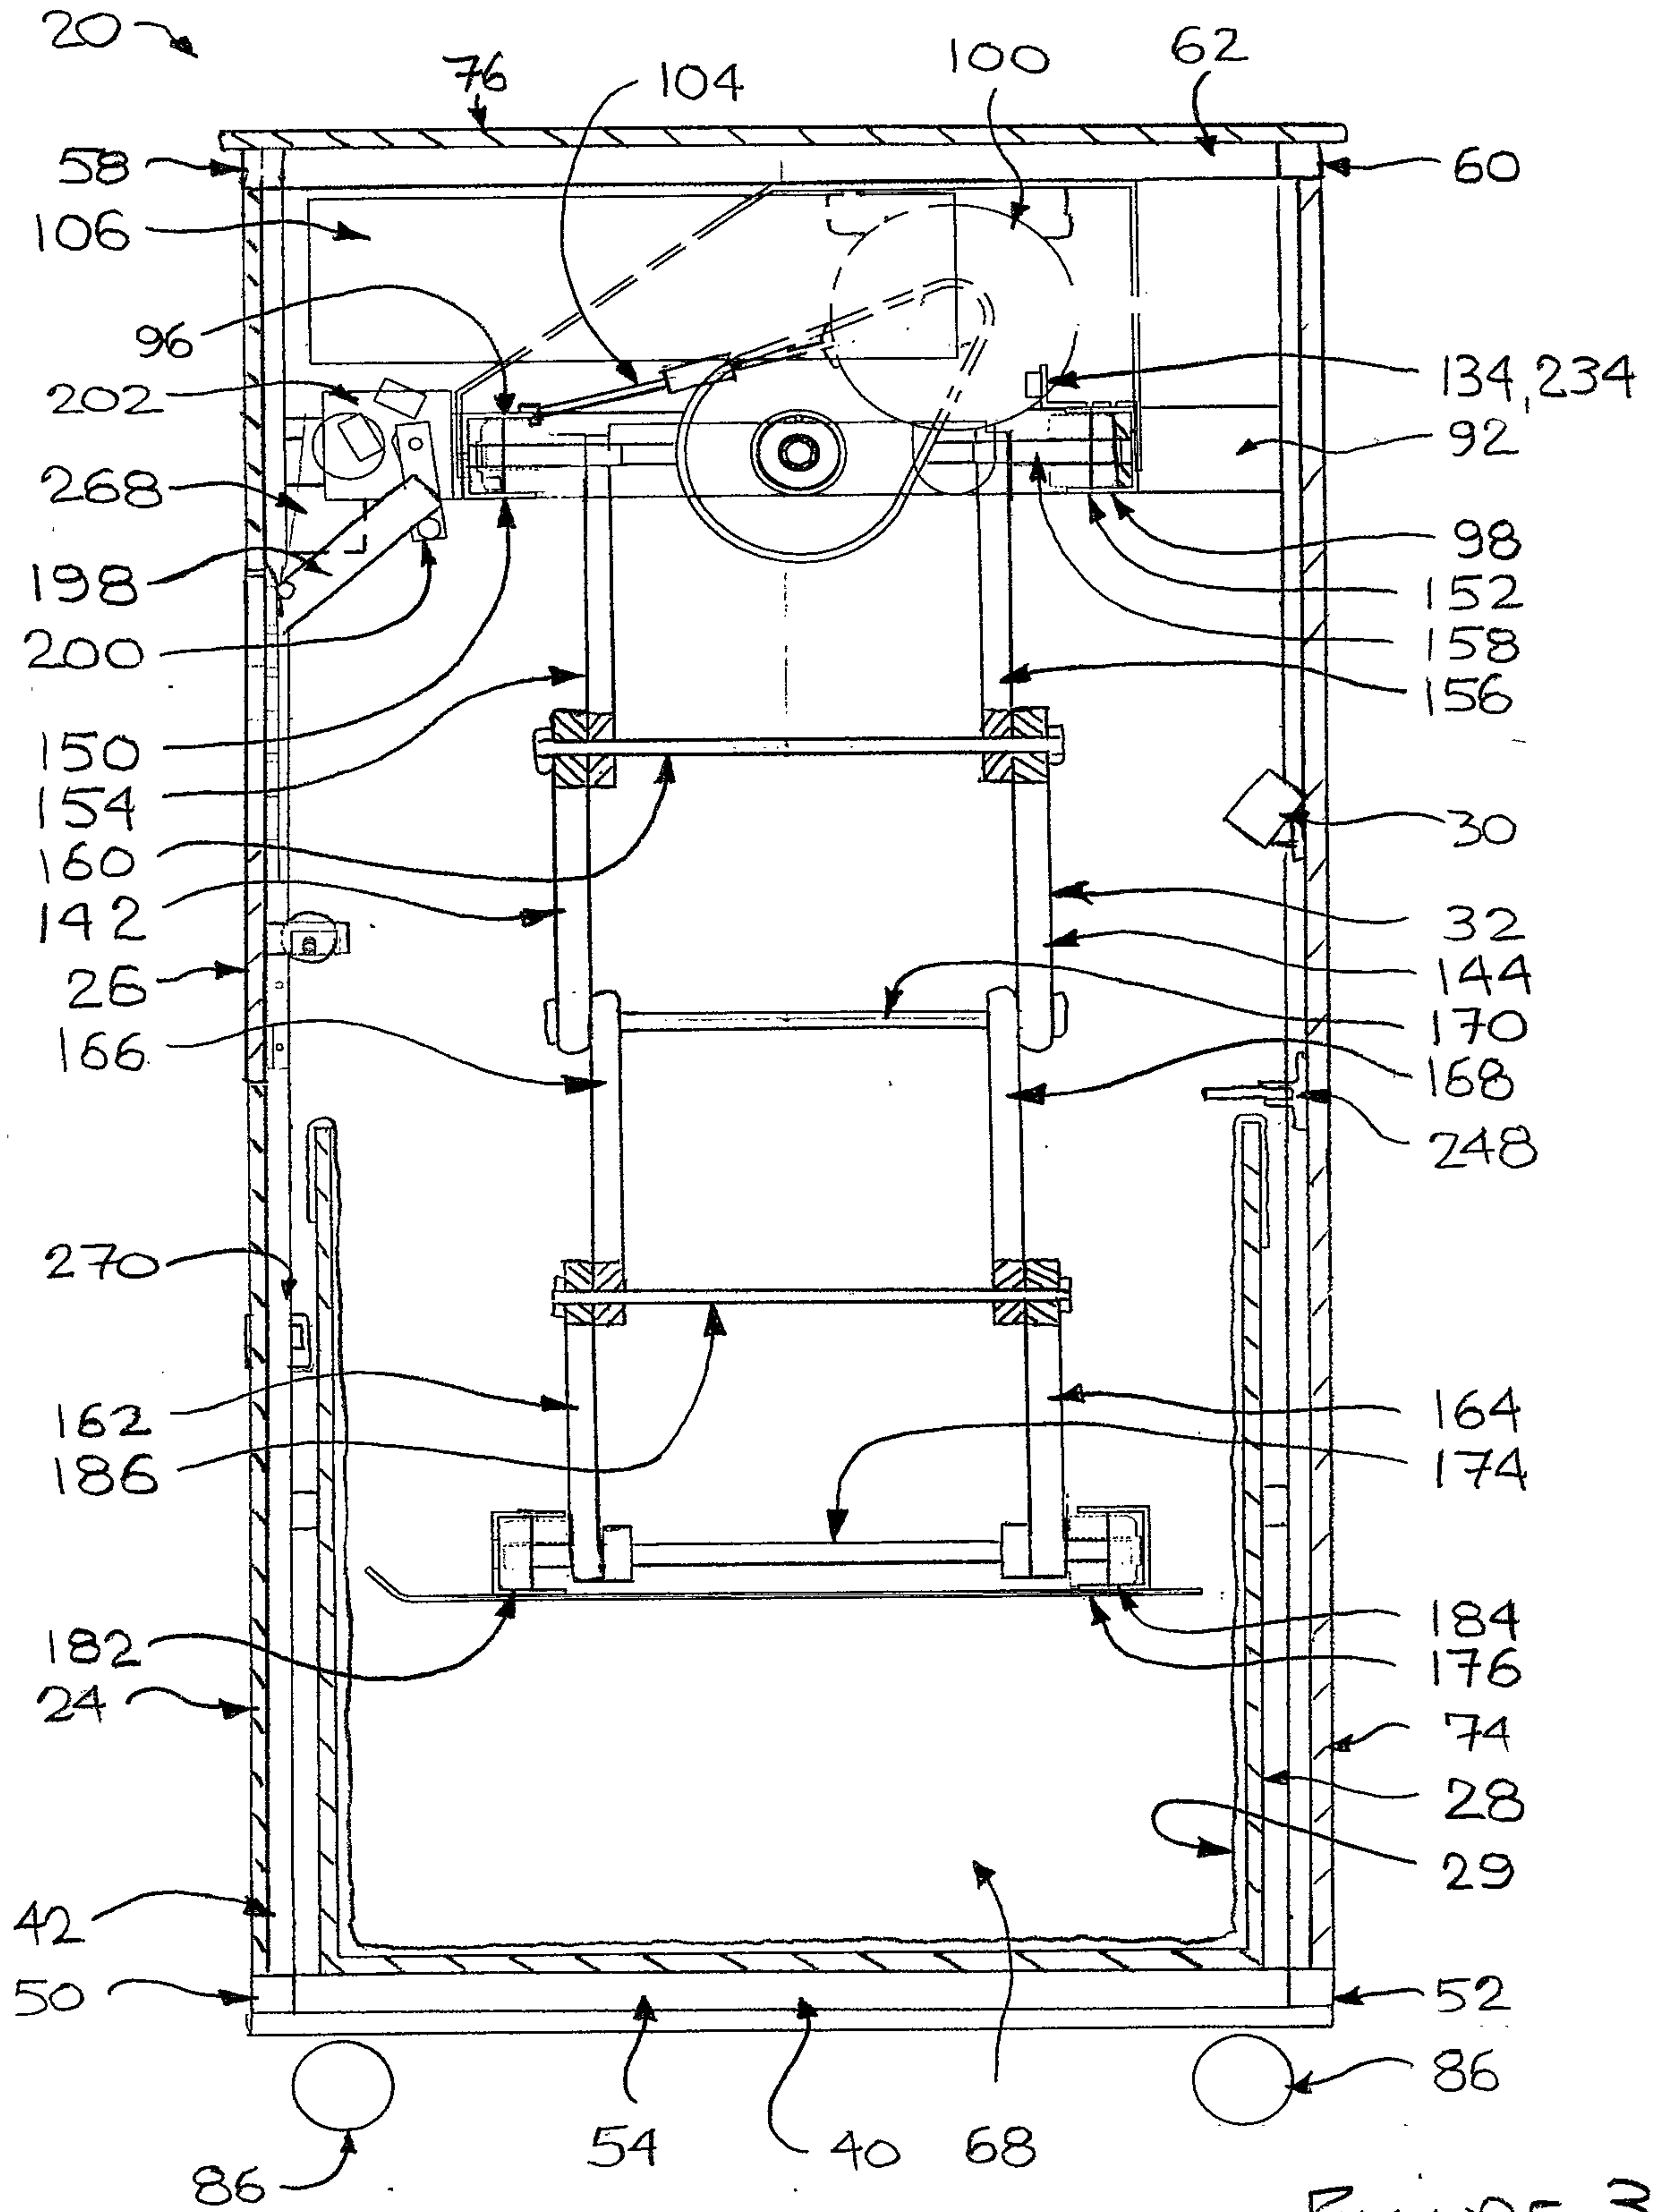


FIGURE 3

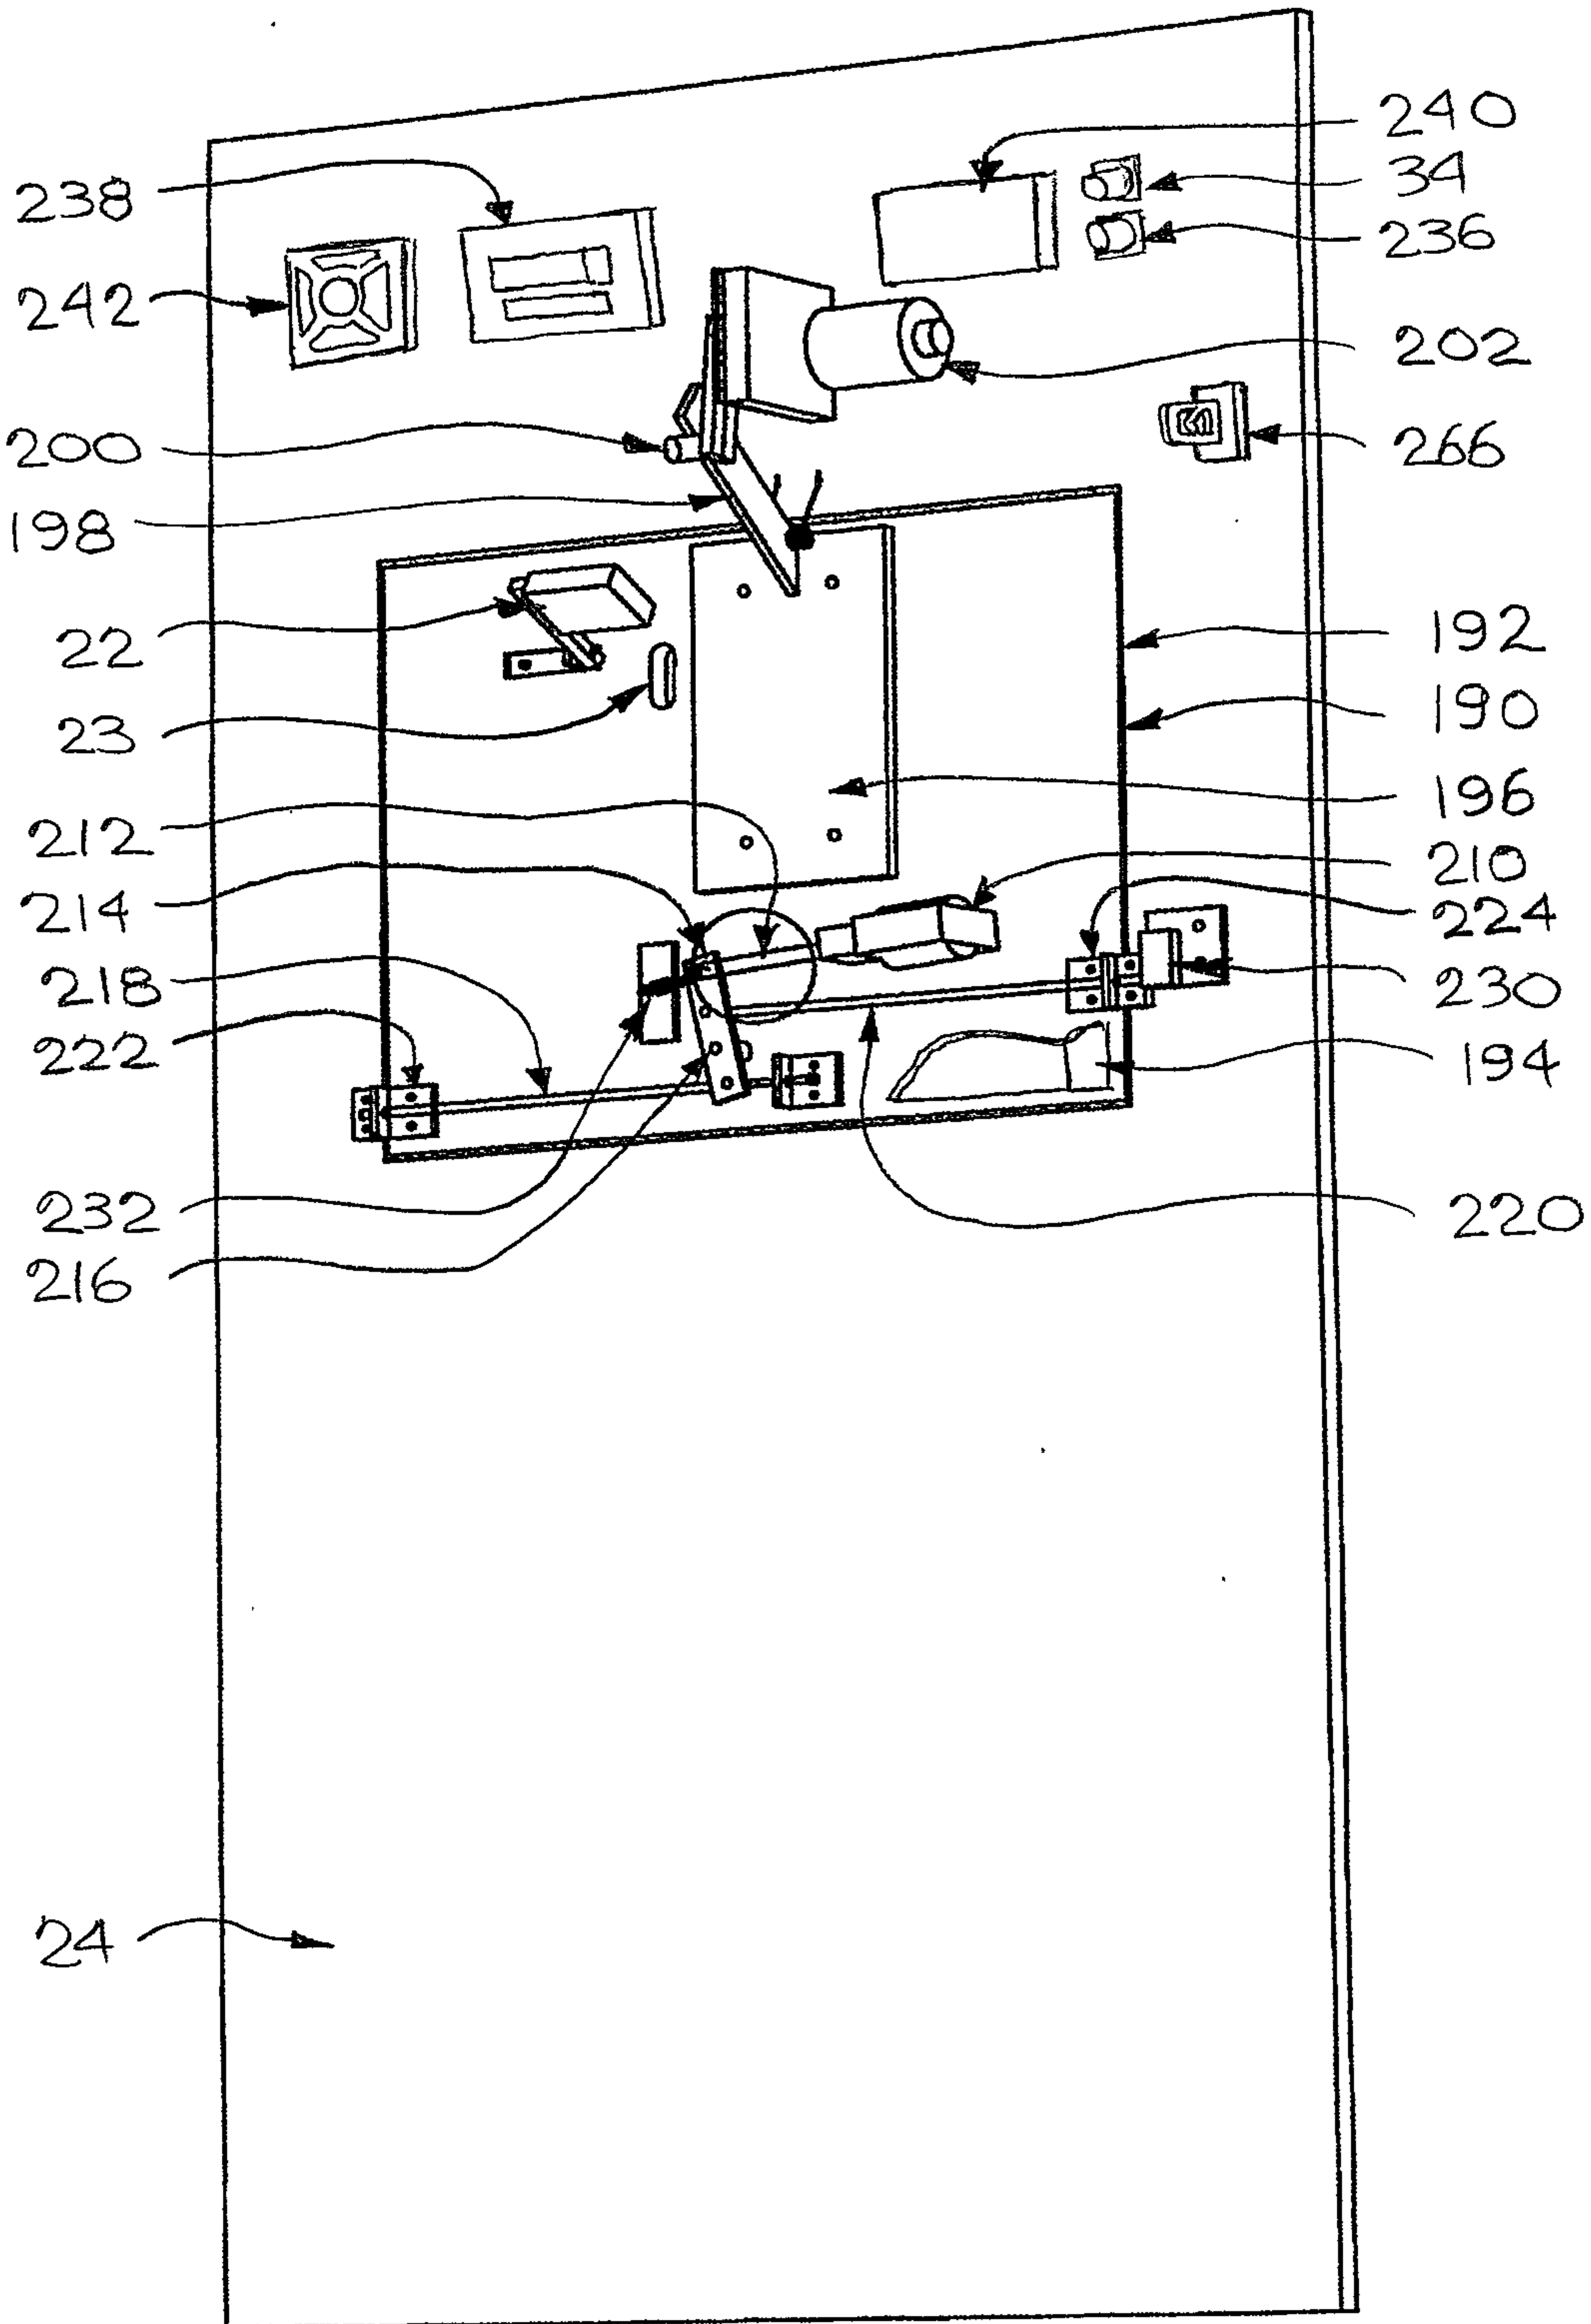


FIGURE 4.

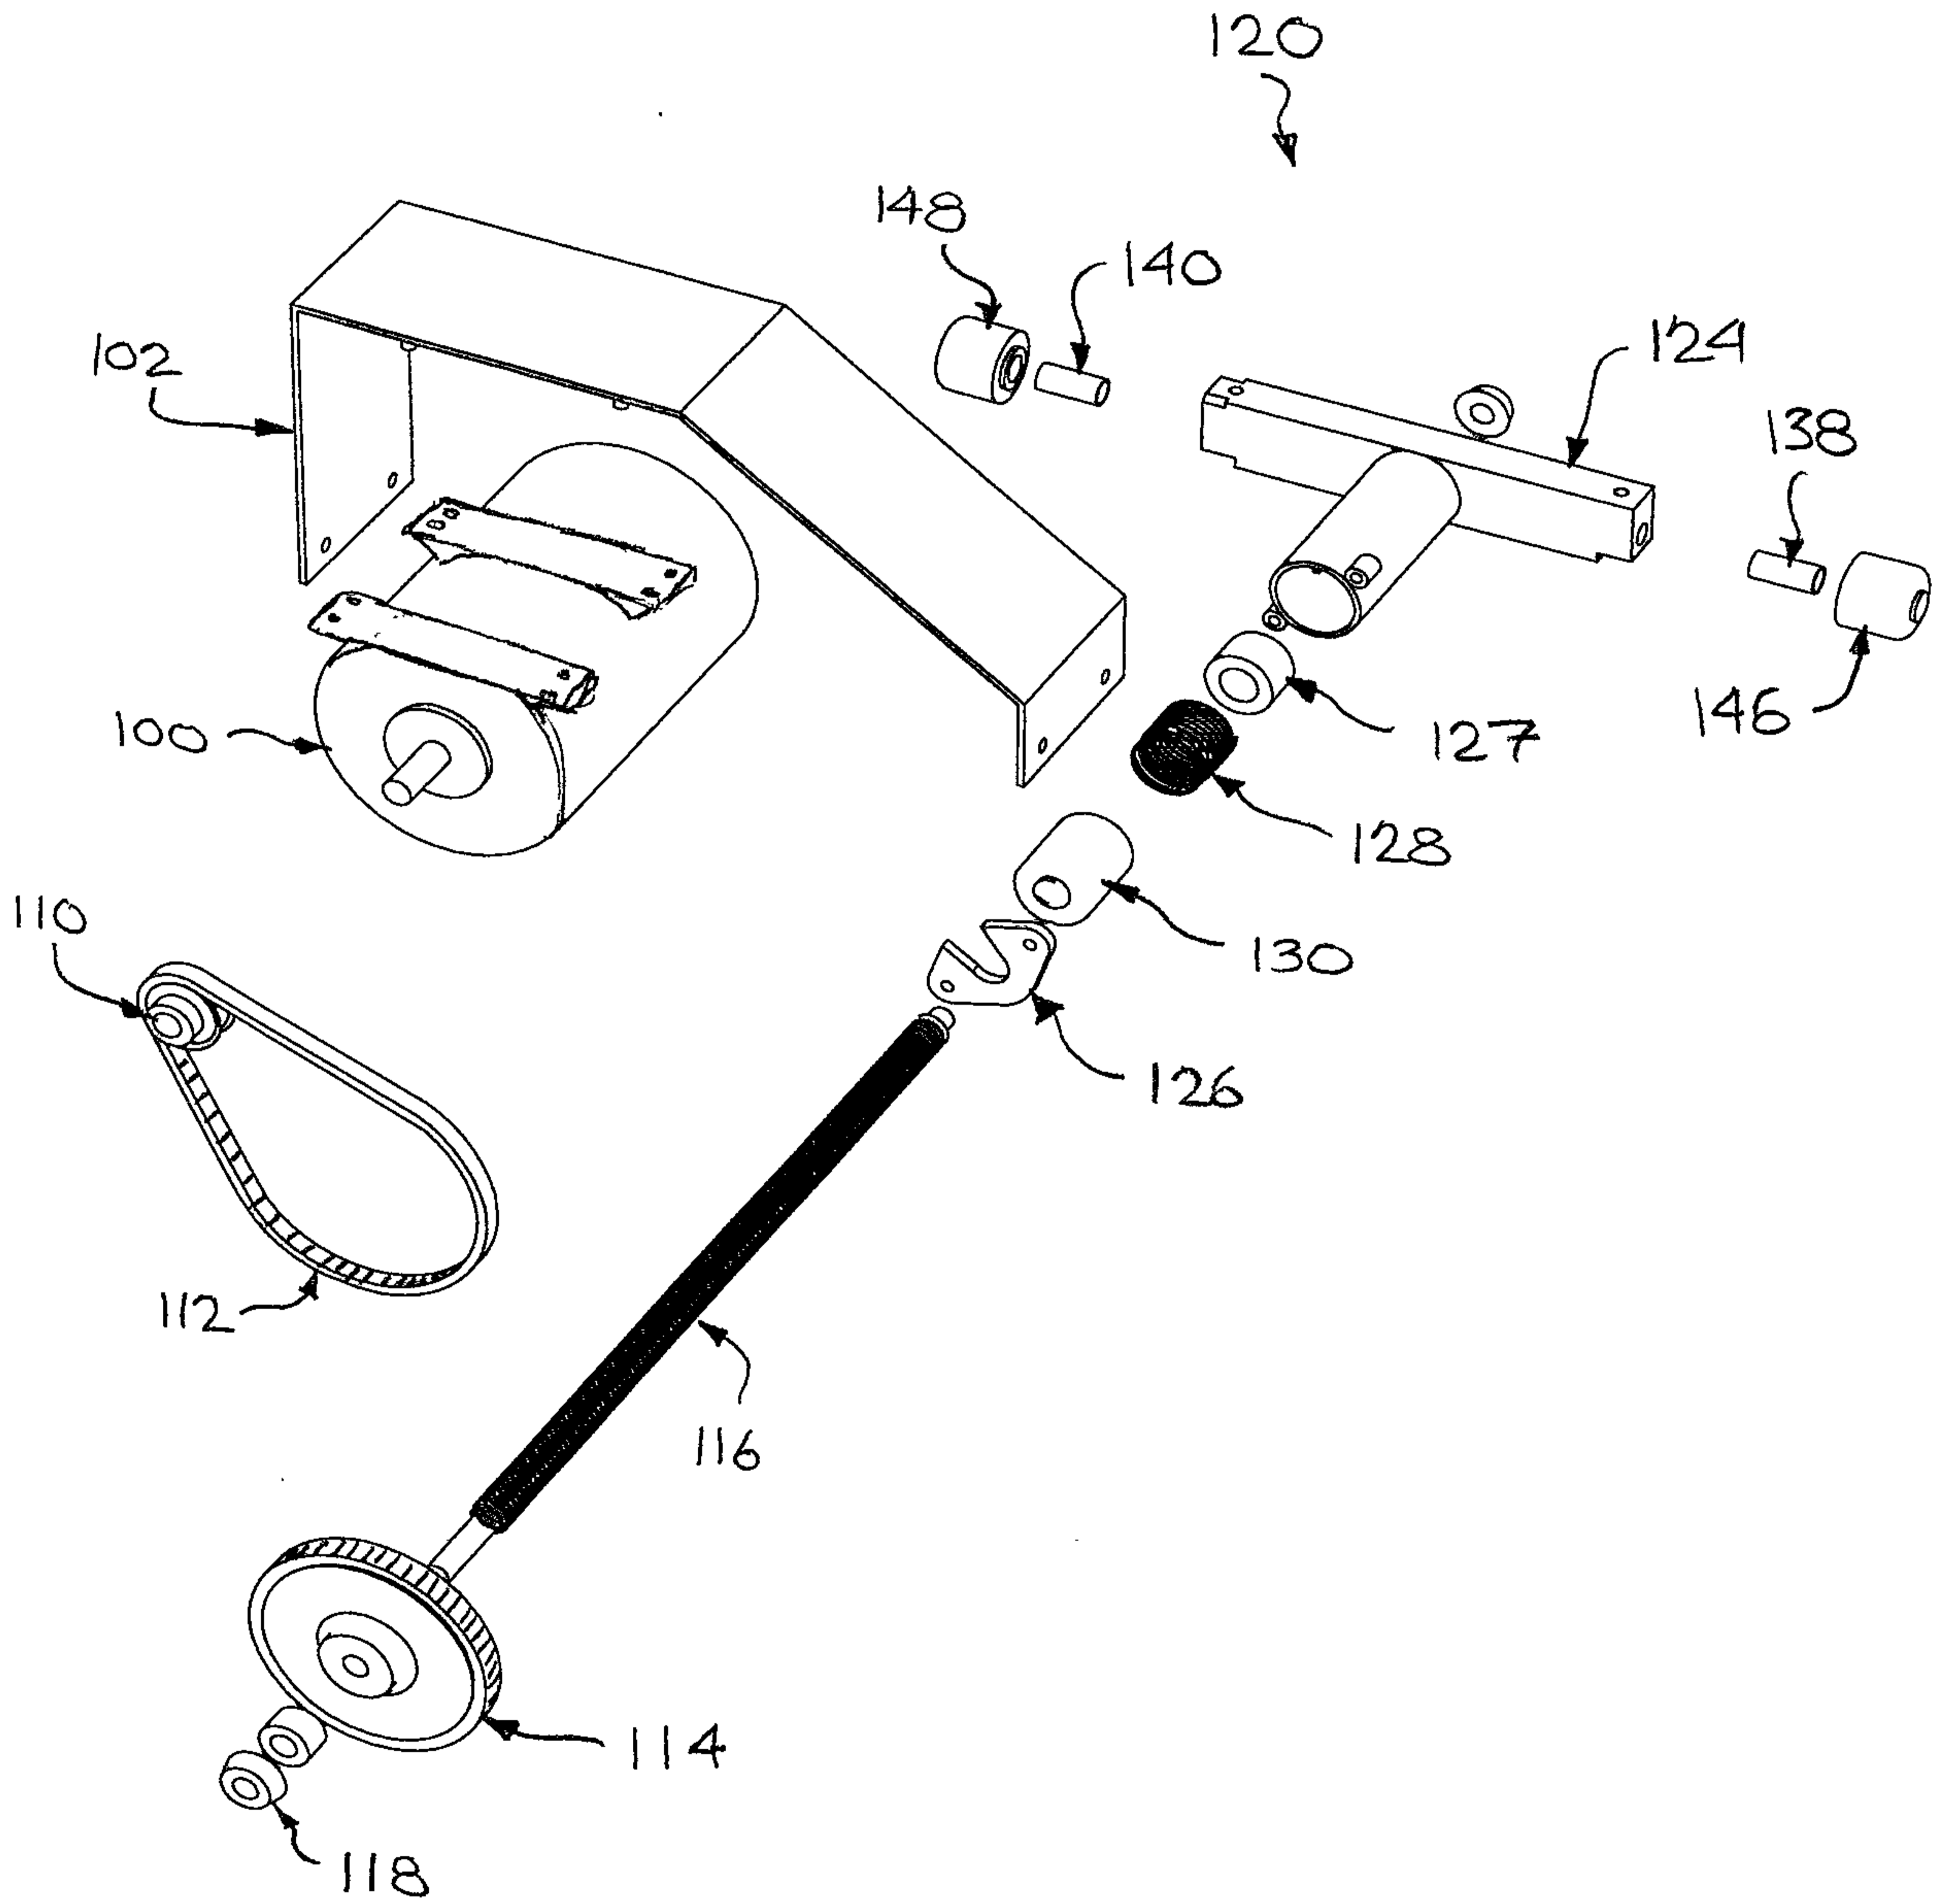


FIGURE 5

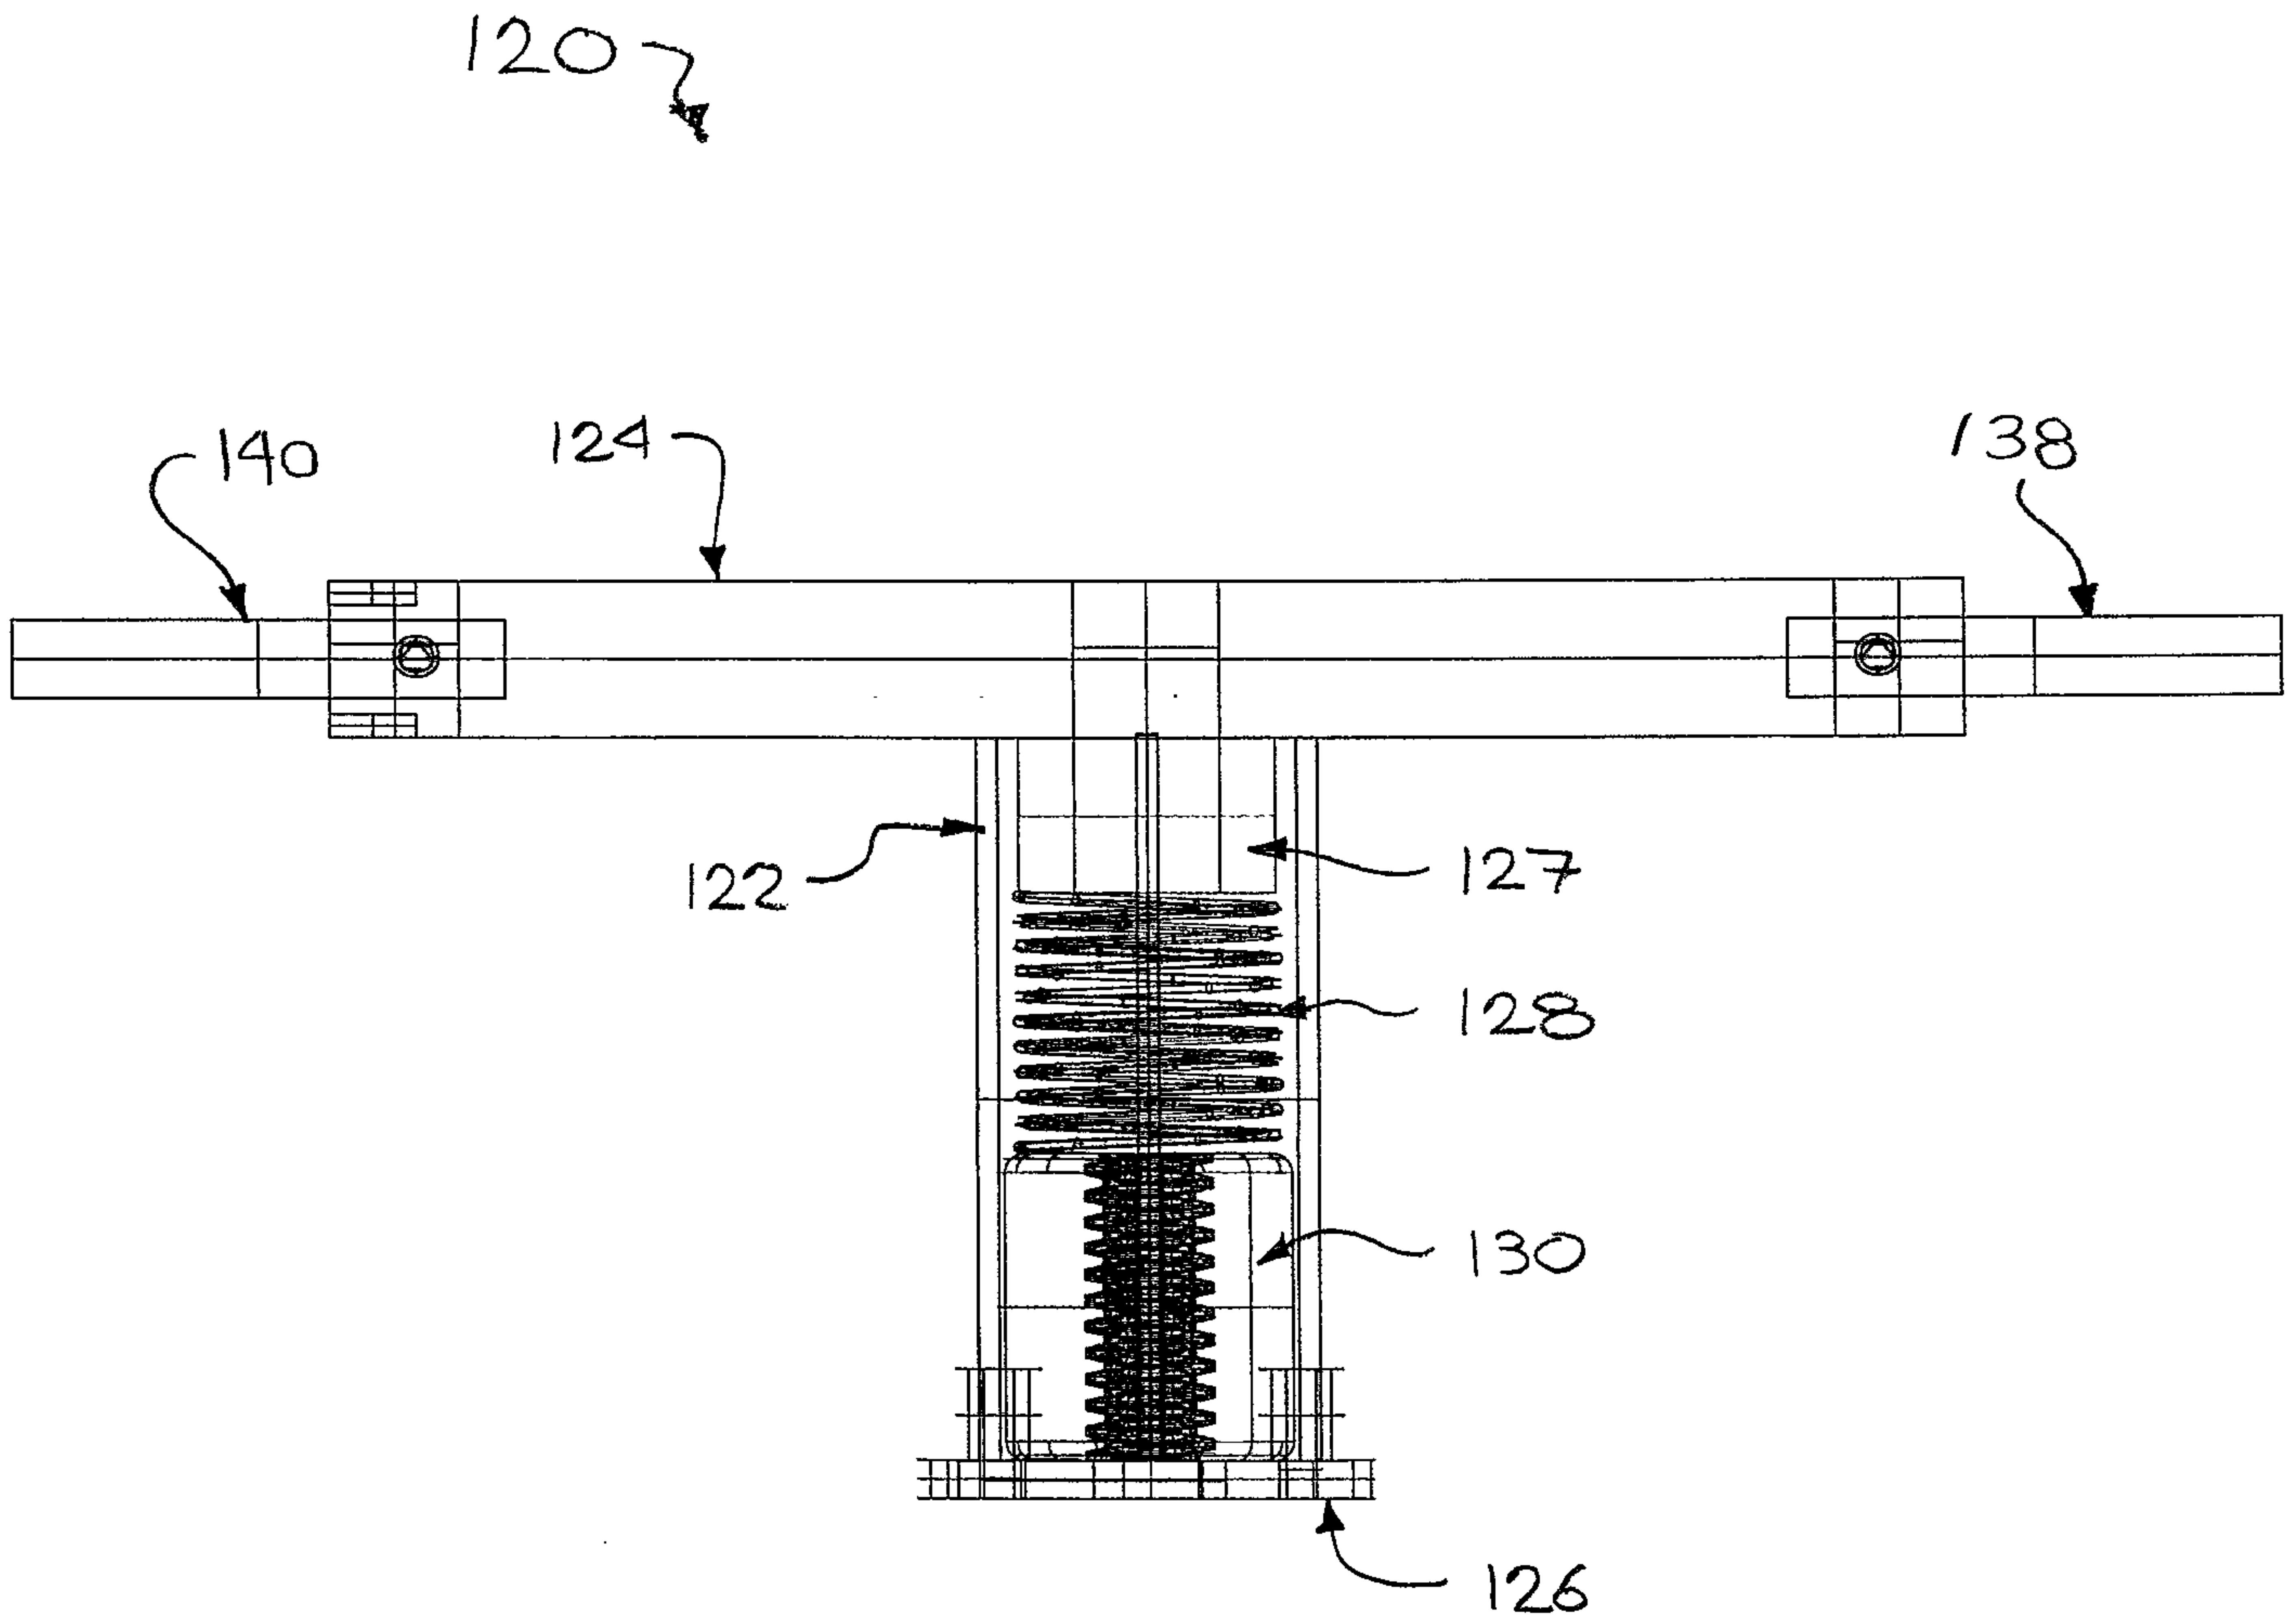


FIGURE 6.

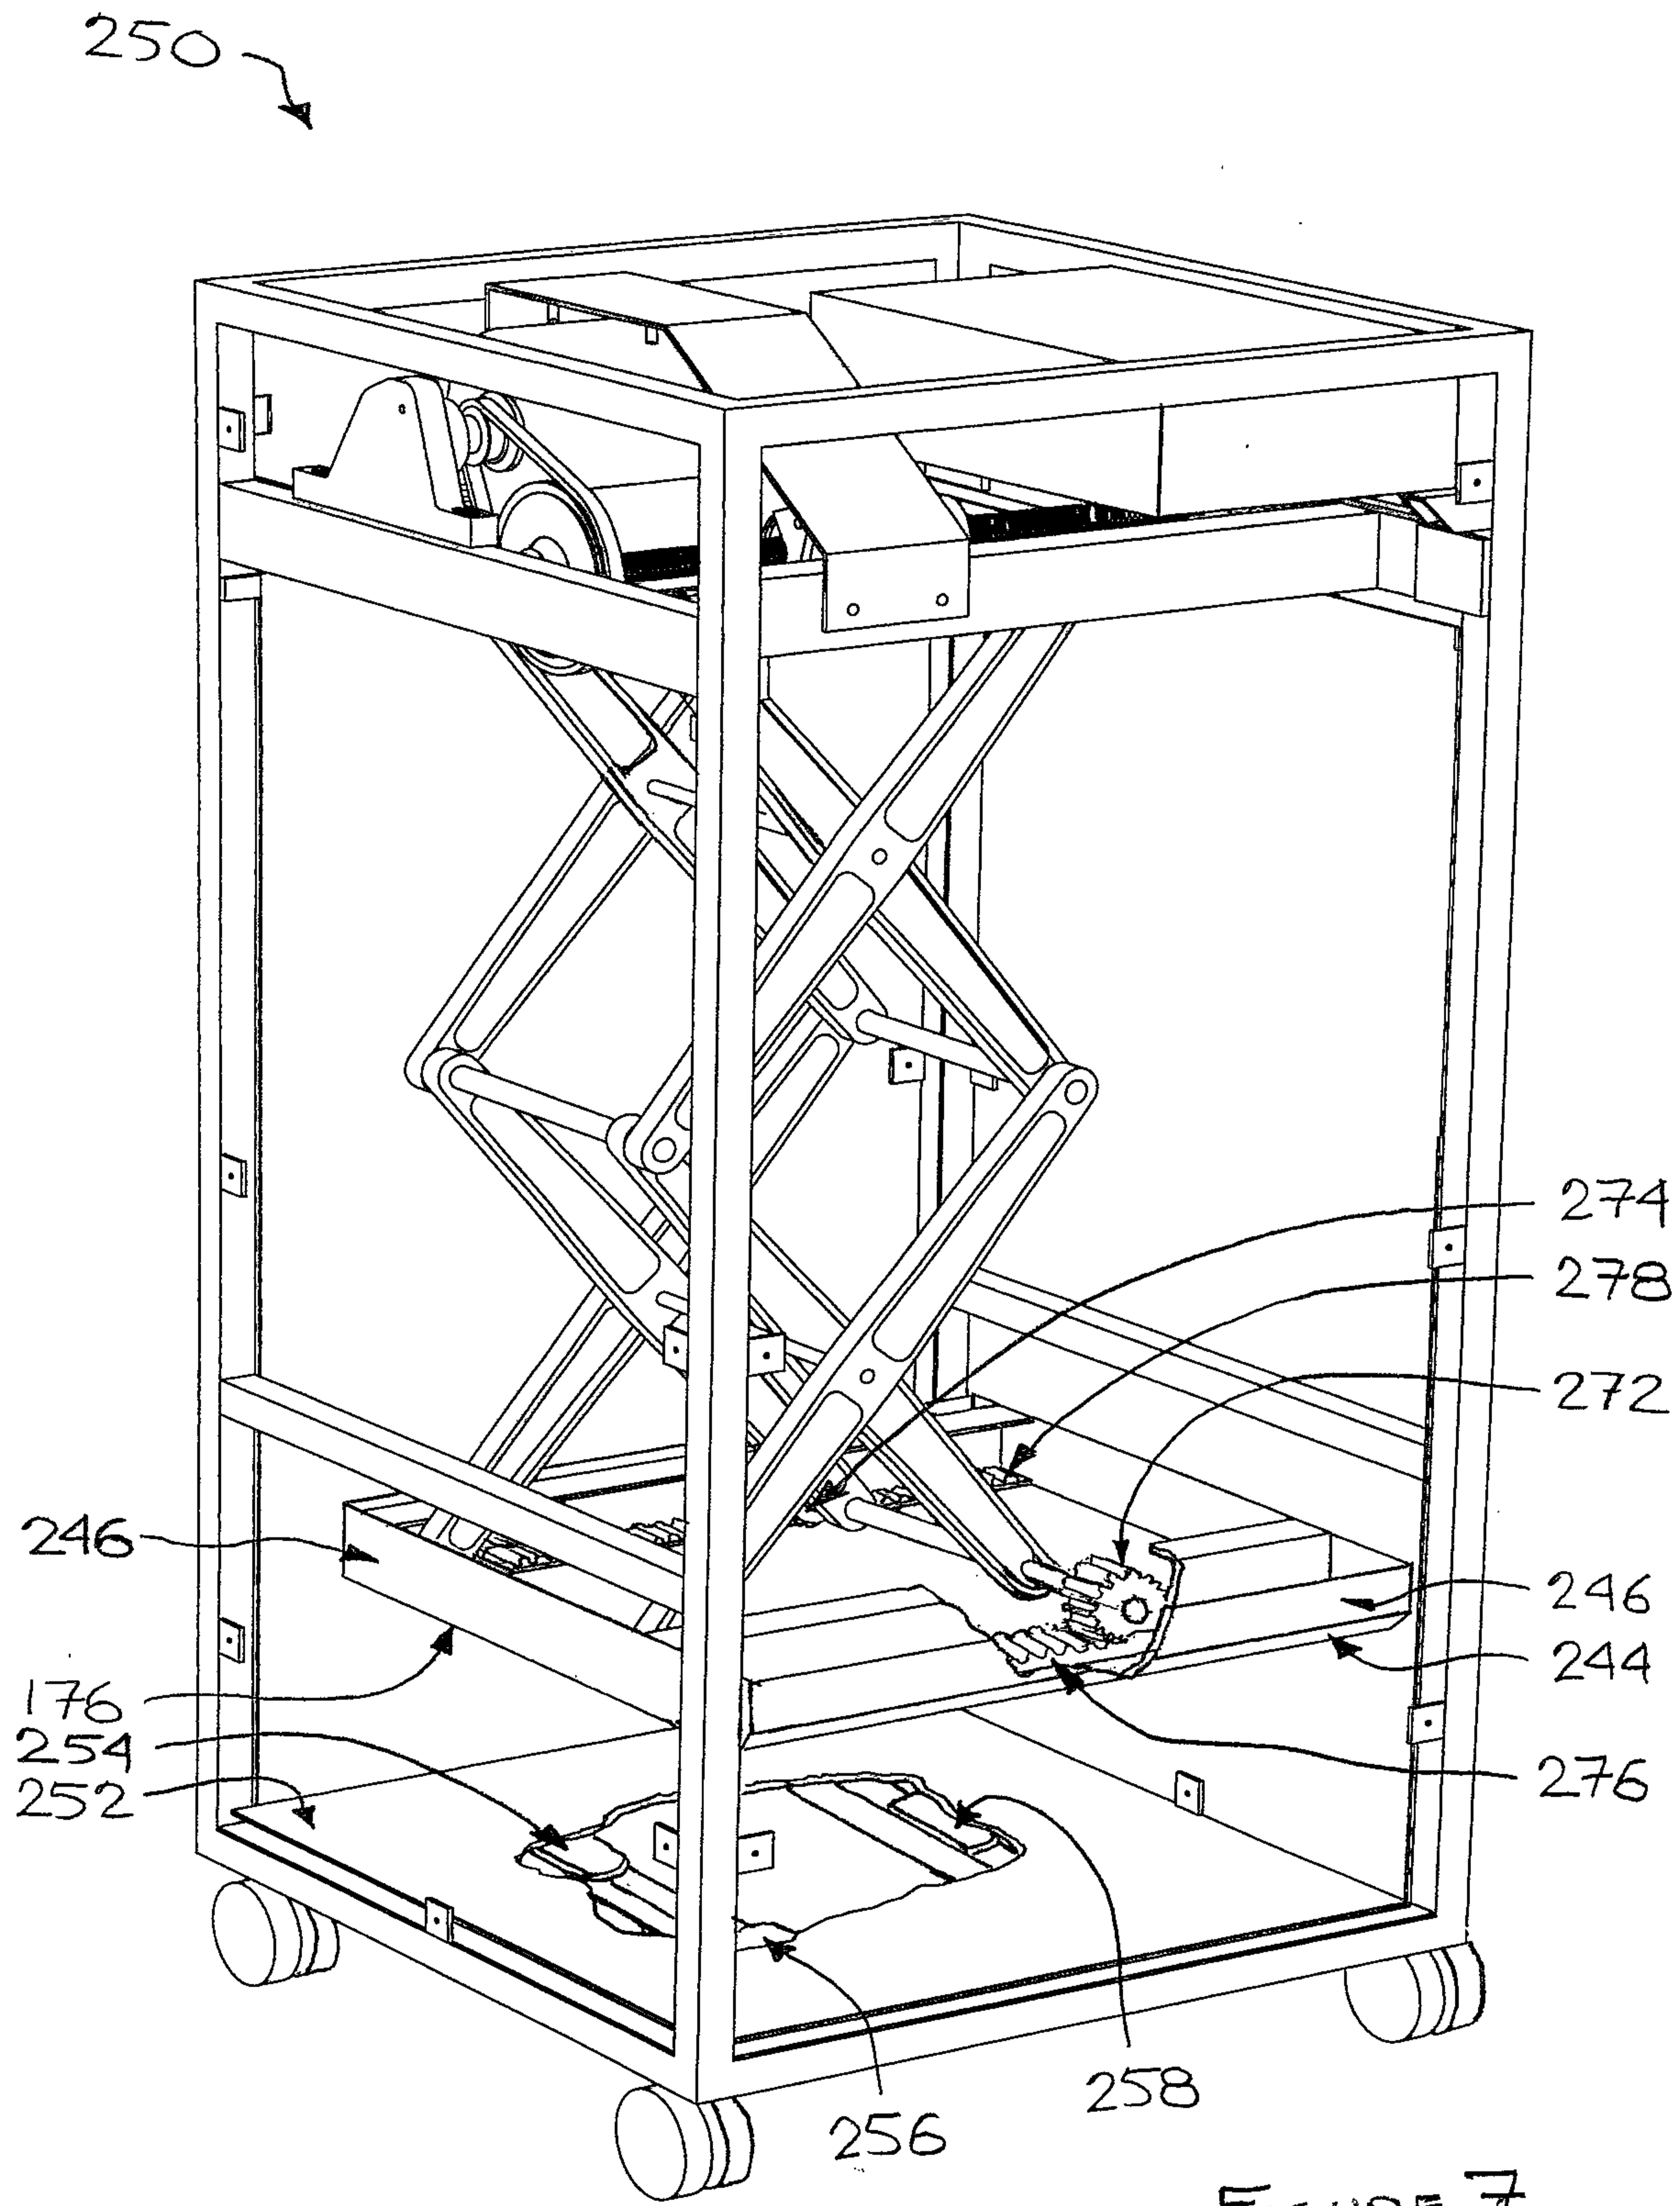


FIGURE 7.

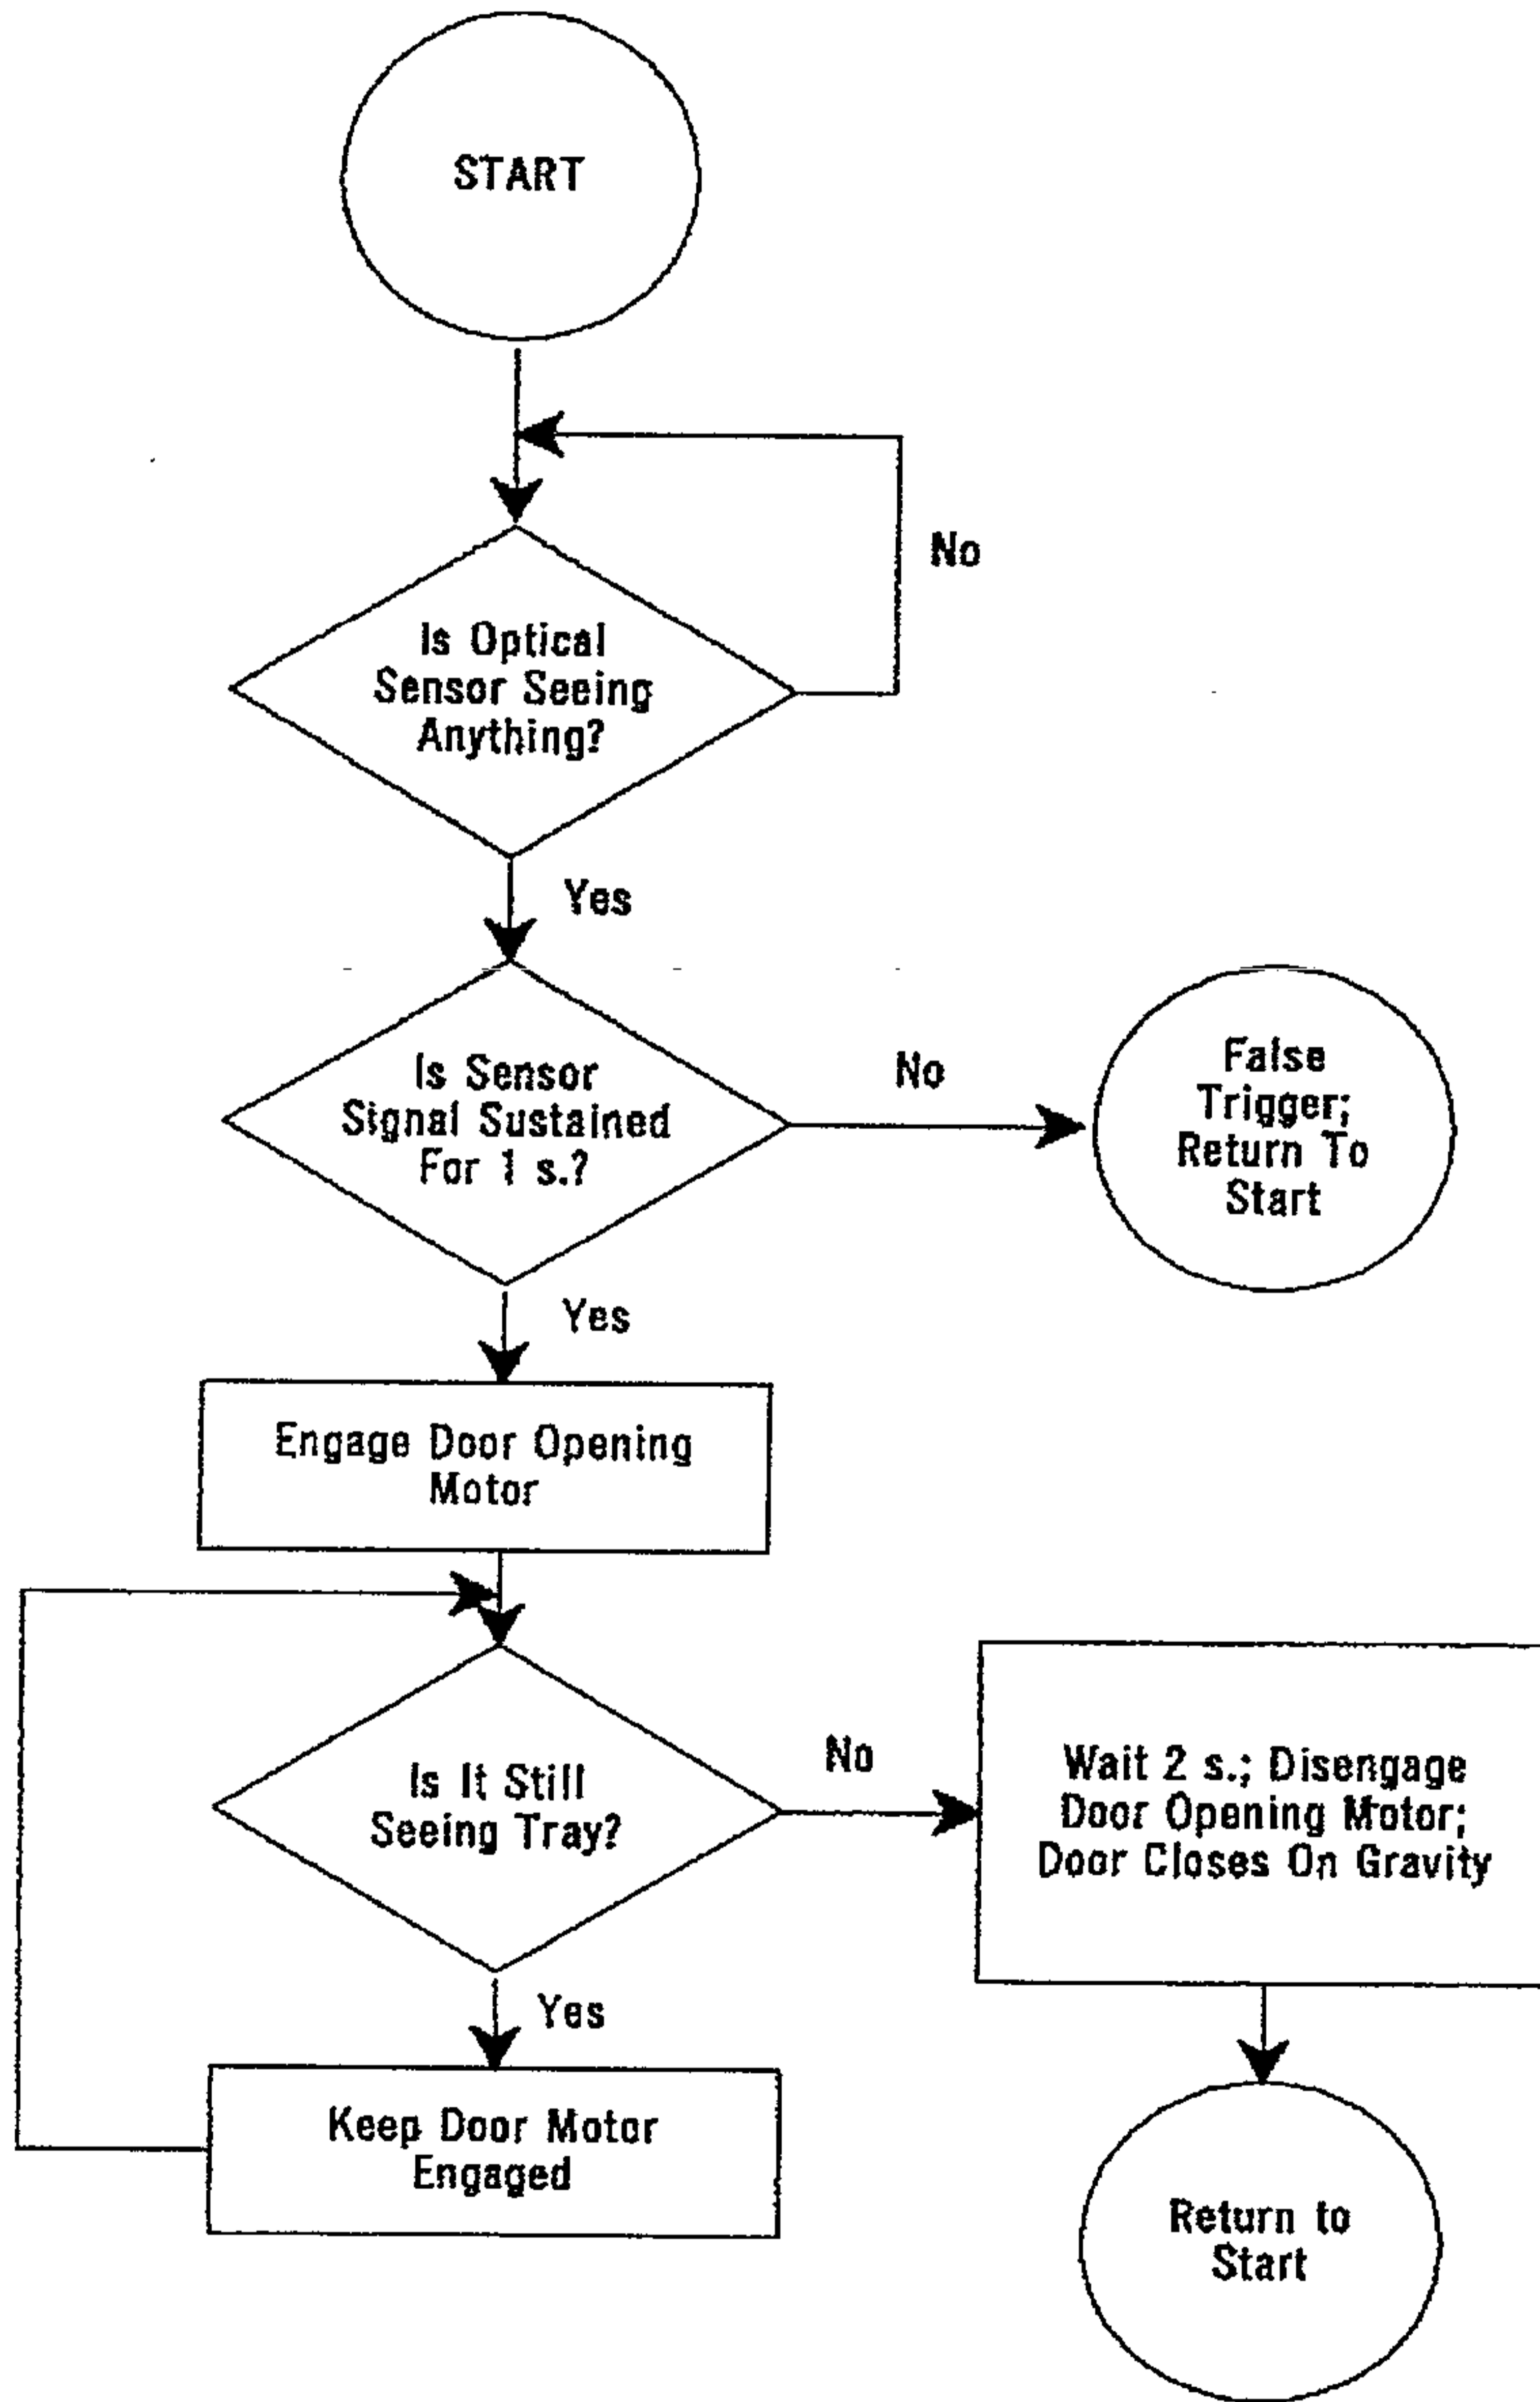


Figure 8

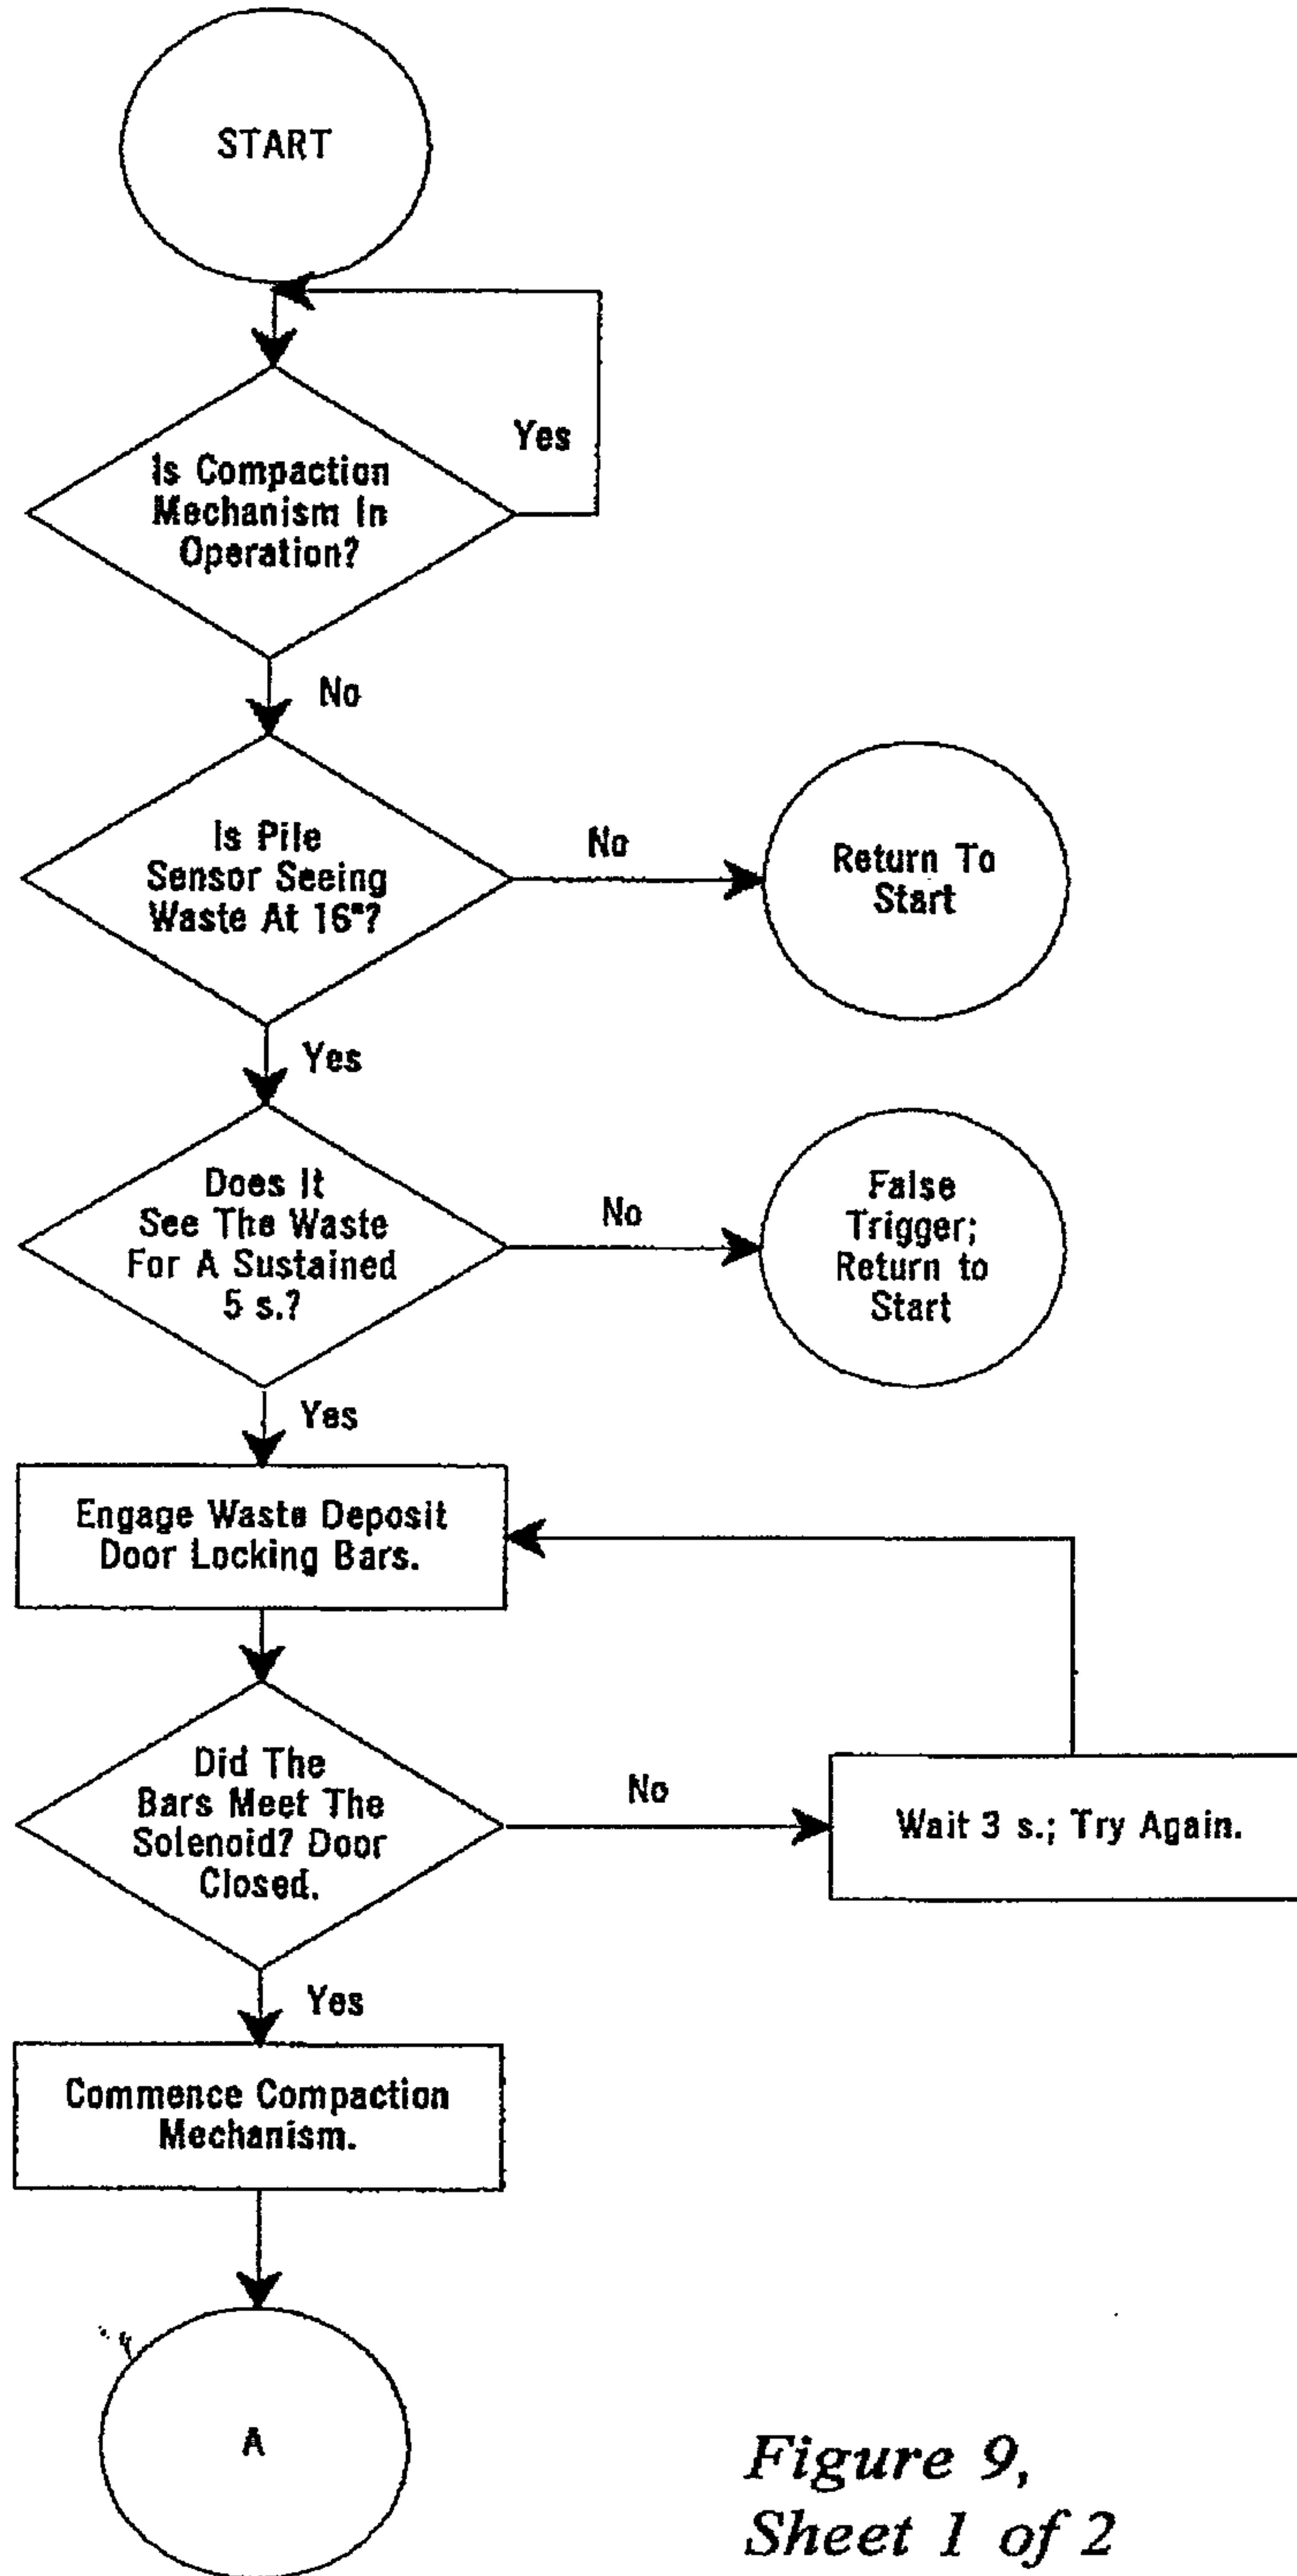


Figure 9,
Sheet 1 of 2

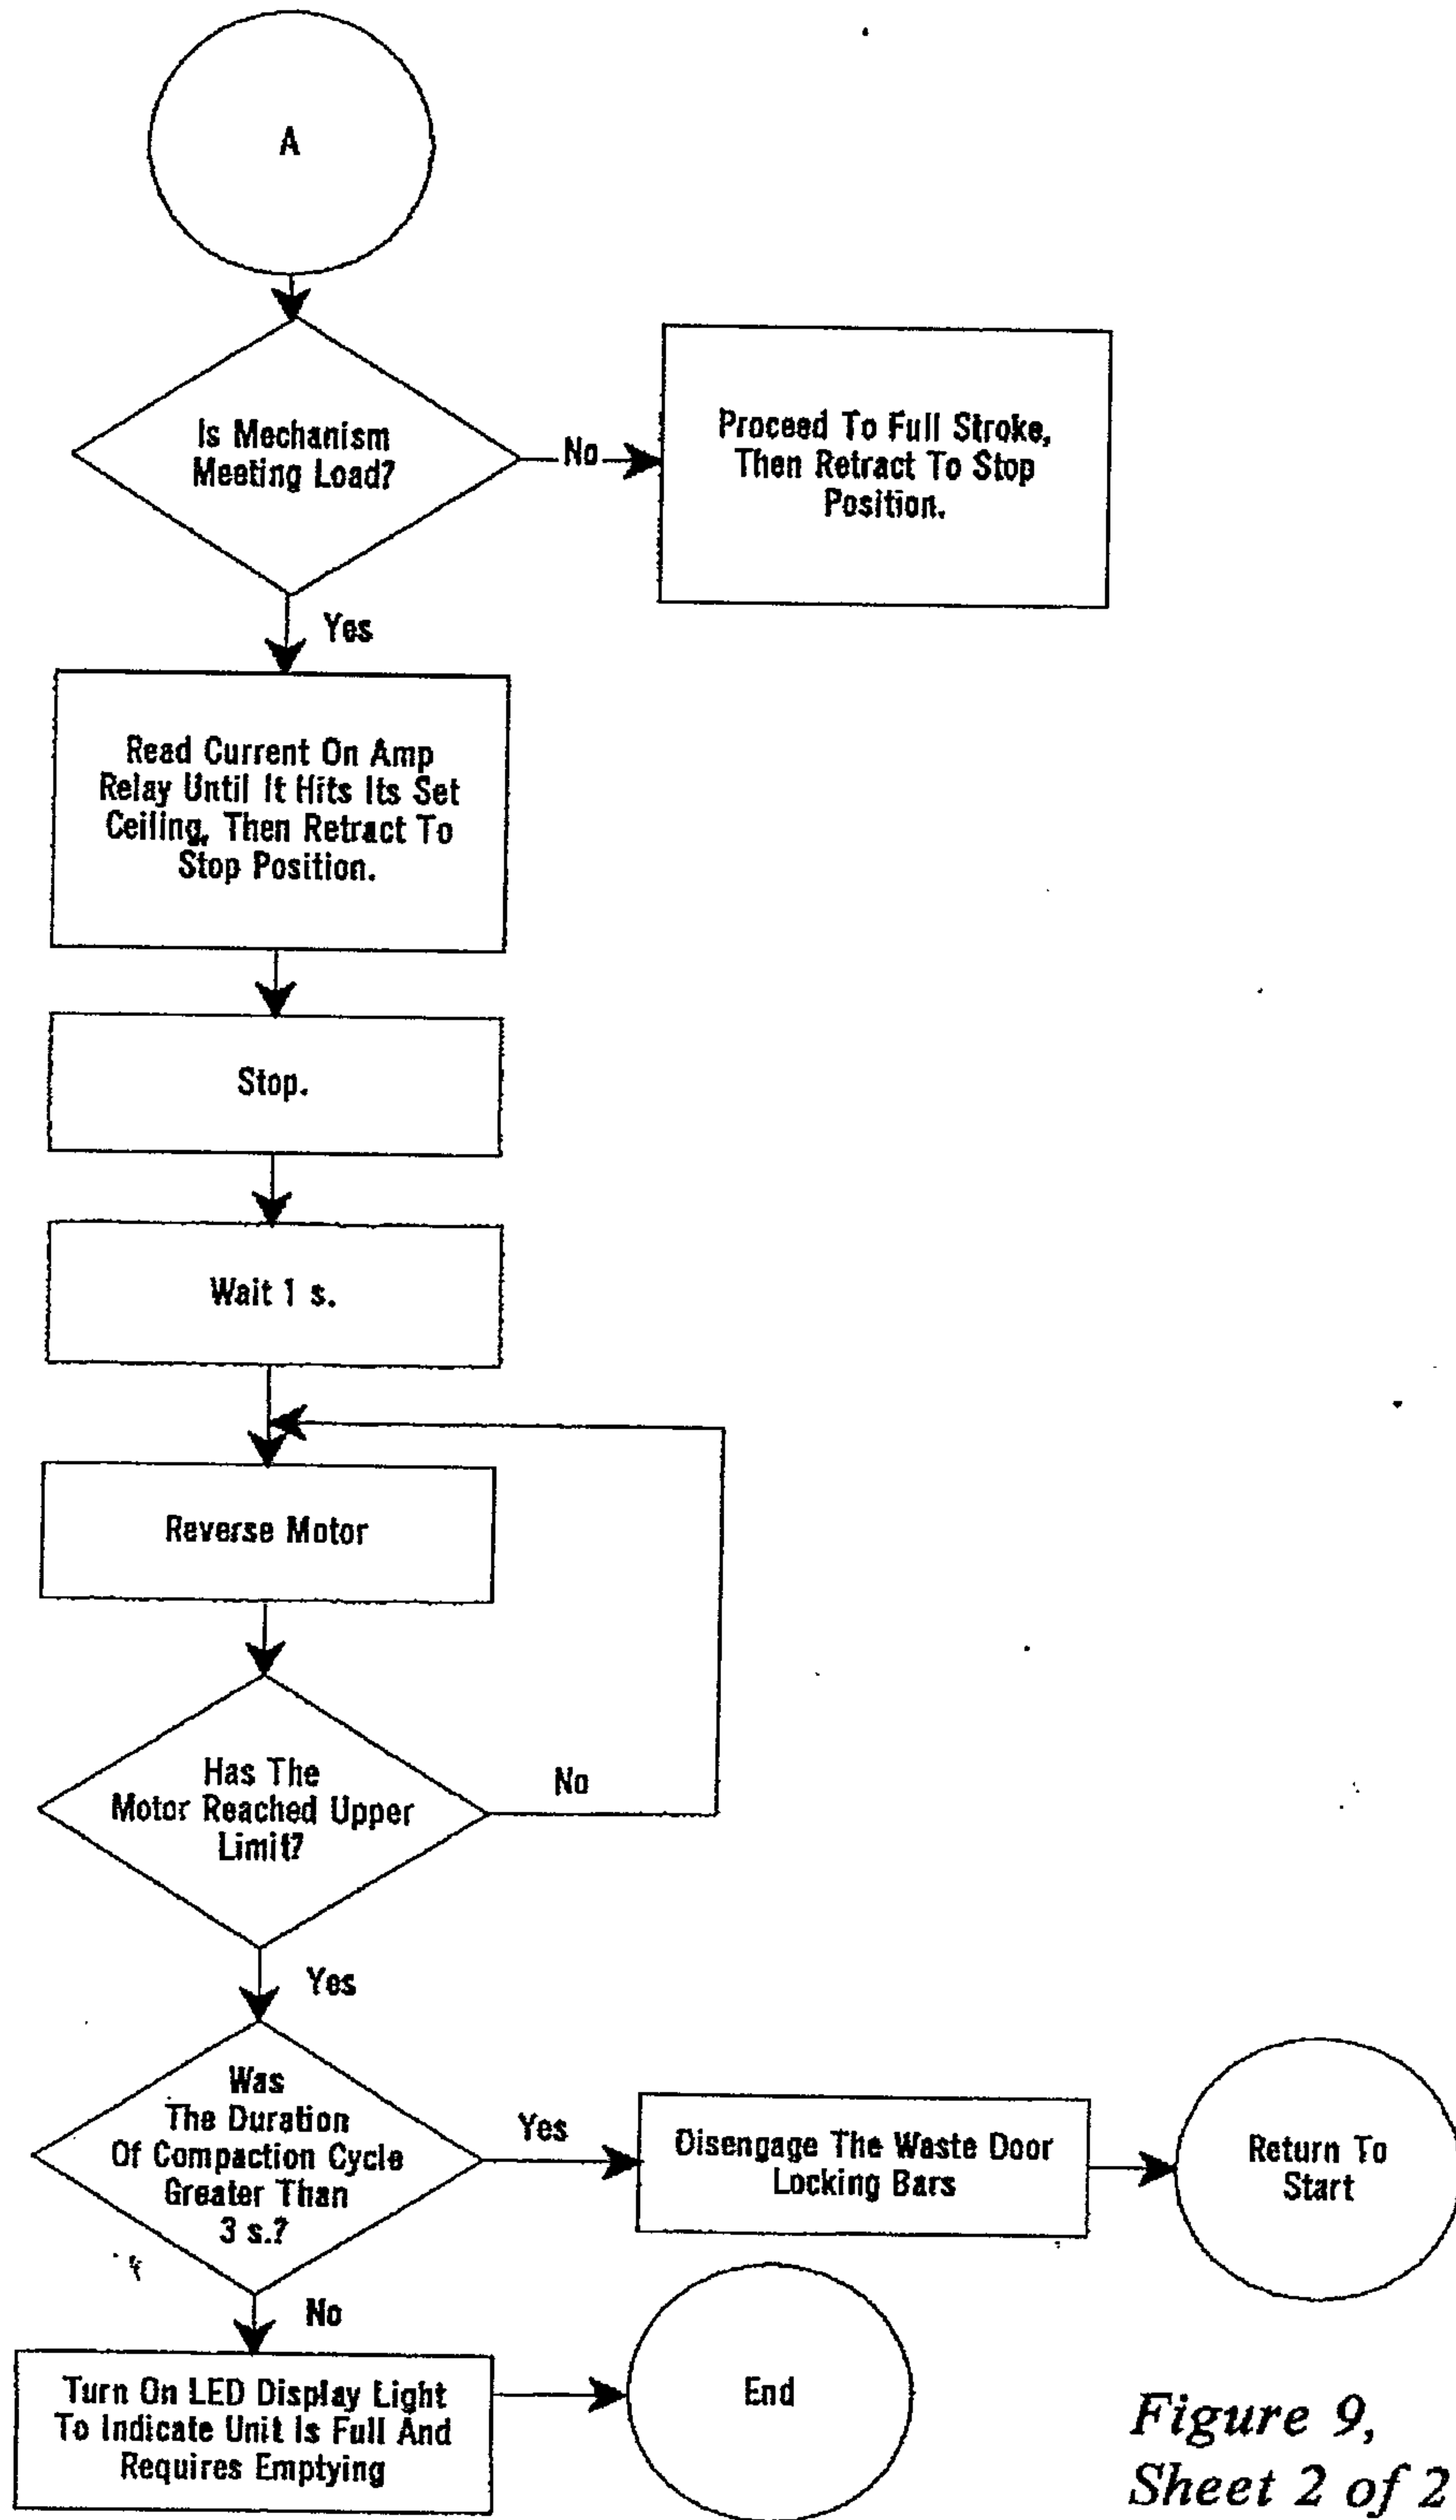


Figure 9,
Sheet 2 of 2

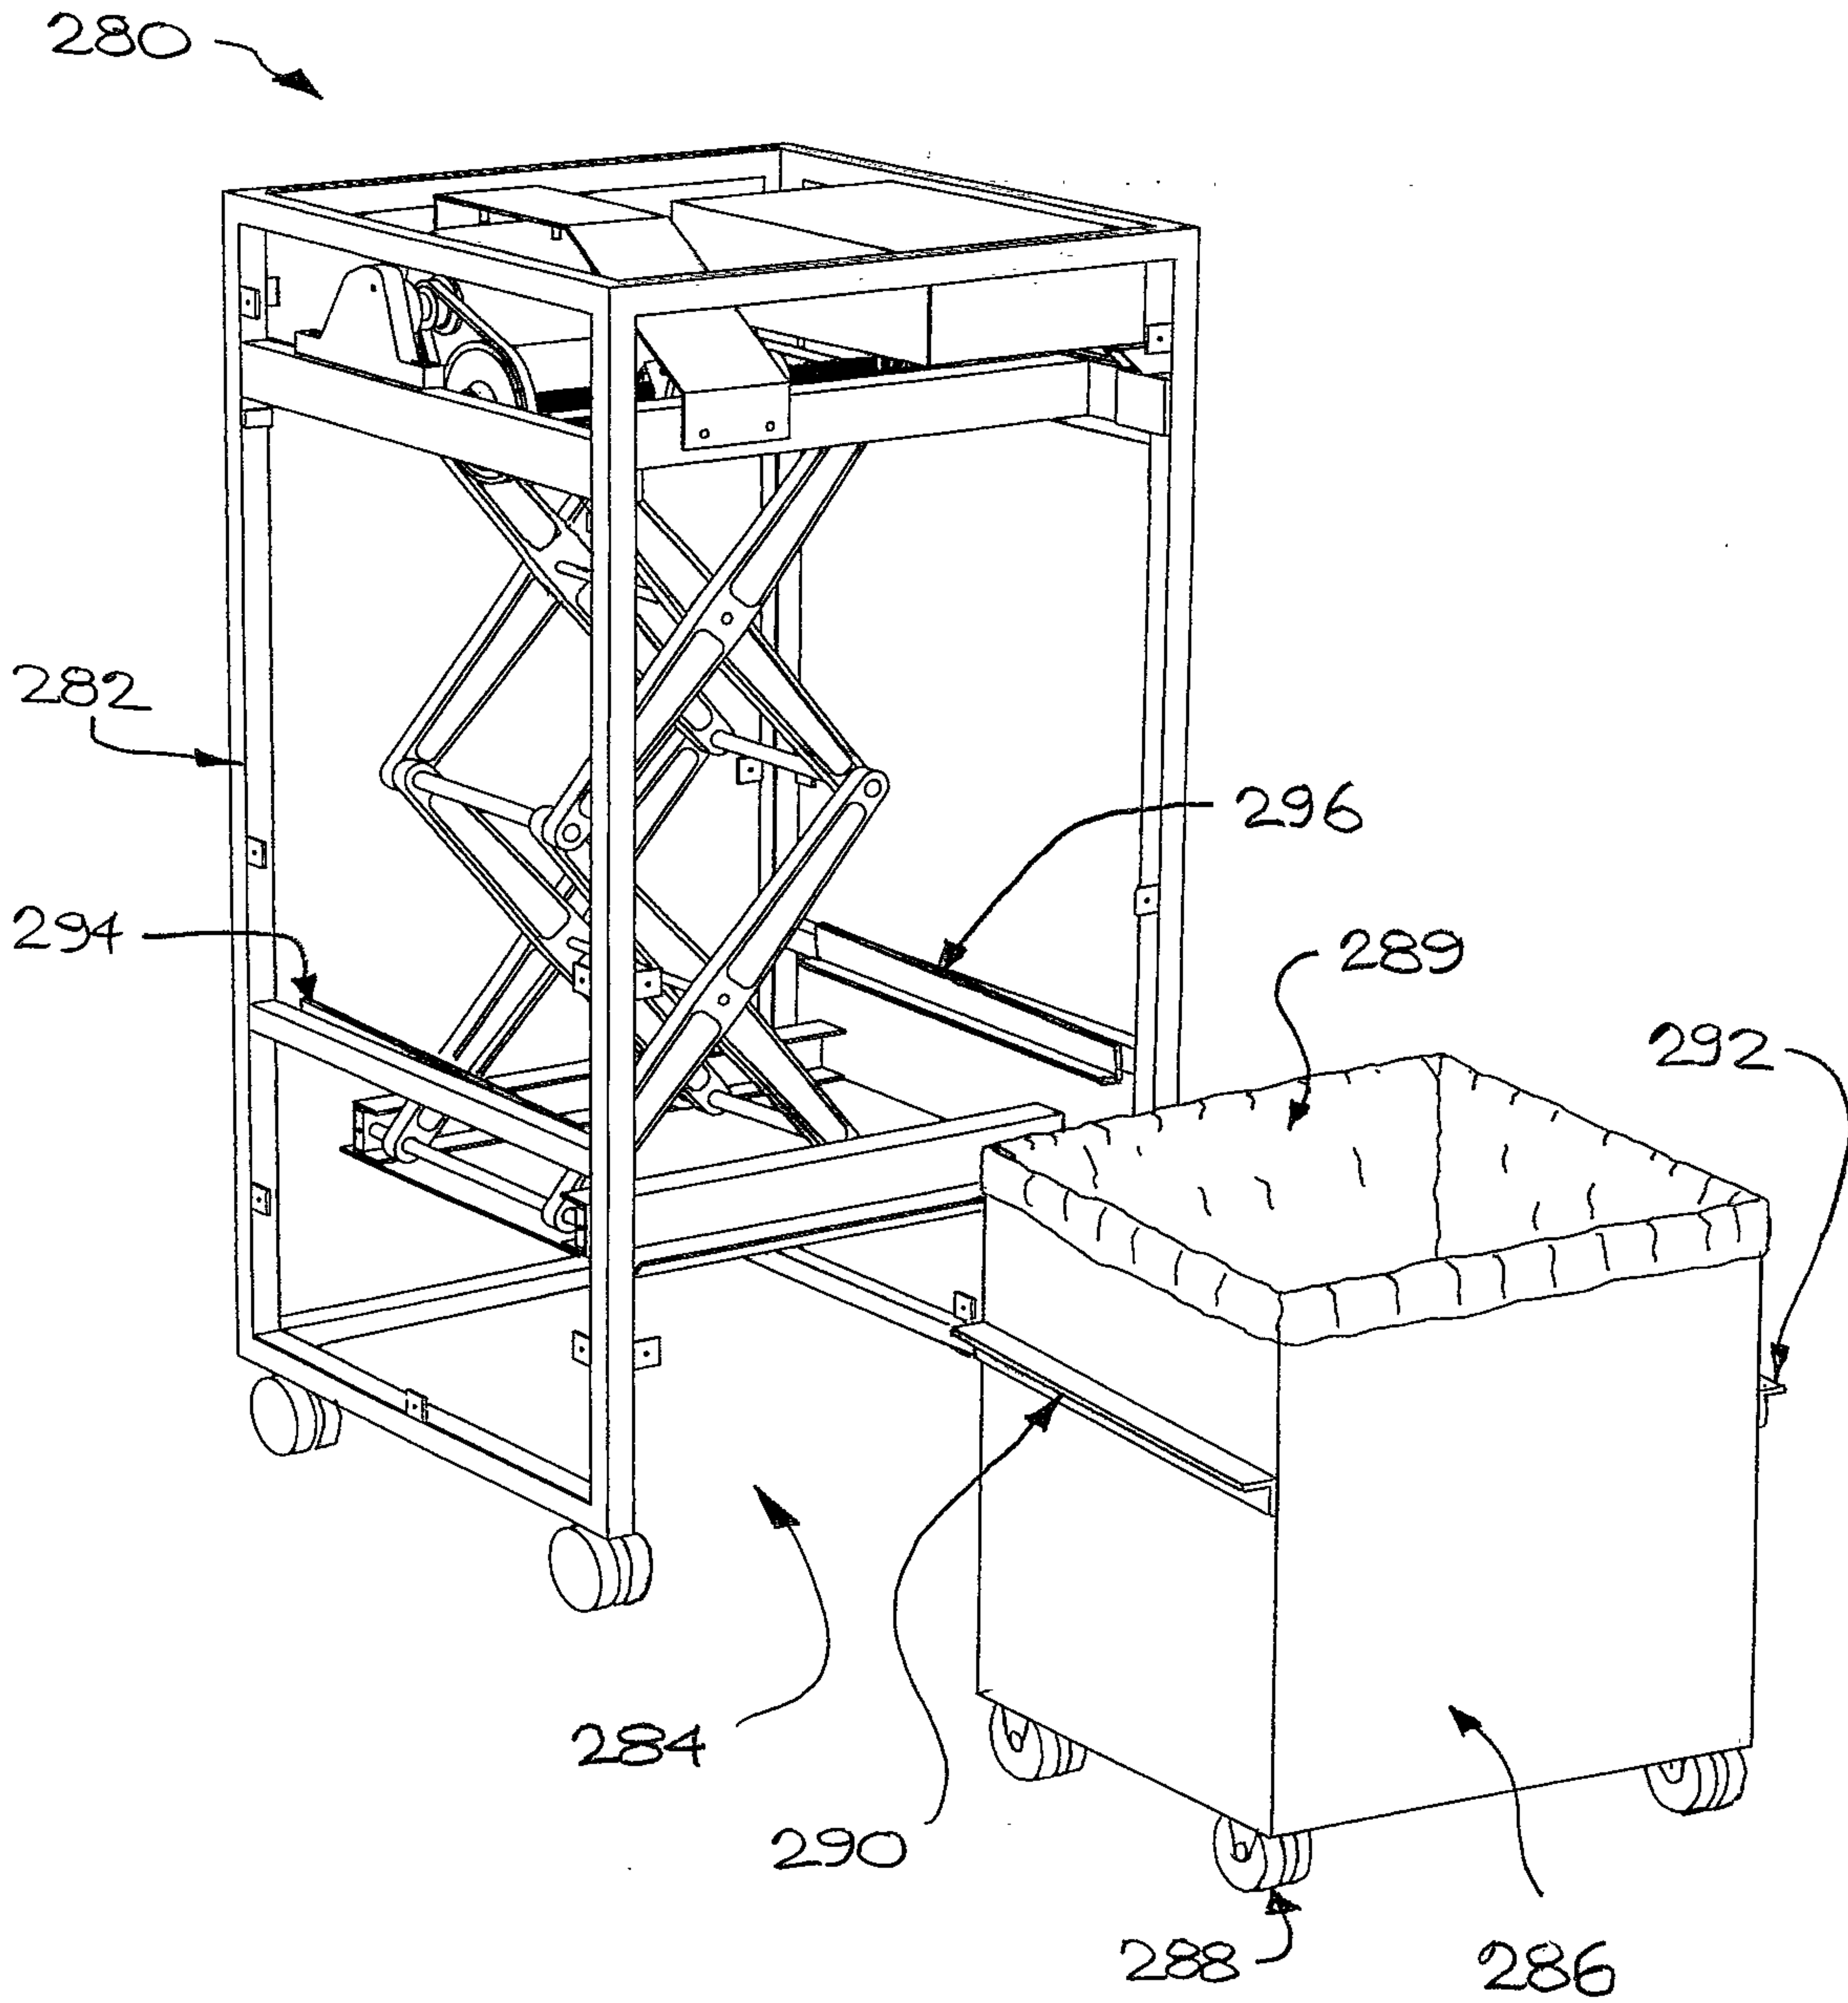


FIGURE 10.