

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2011202777 B2**

(54) Title
Implantable band with transverse attachment mechanism

(51) International Patent Classification(s)
A61B 17/00 (2006.01) **A61F 5/00** (2006.01)

(21) Application No: **2011202777** (22) Date of Filing: **2011.06.10**

(43) Publication Date: **2011.06.30**

(43) Publication Journal Date: **2011.06.30**

(44) Accepted Journal Date: **2012.10.18**

(62) Divisional of:
2004216634

(71) Applicant(s)
Ethicon Endo-Surgery, Inc.

(72) Inventor(s)
Jambor, Kristin L.;Byrum, Randal T.;Crawford, Norman

(74) Agent / Attorney
Callinans, 1193 Toorak Road, Camberwell, VIC, 3124

(56) Related Art
EP 608580 A1
US 4532868 A
US 4592355 A

Abstract of the Invention

An implantable band for placement around an anatomical passageway, such as the stomach or other lumen, includes a transverse attachment mechanism, such as a dovetail connection or a lateral member disposed in a spiral path.

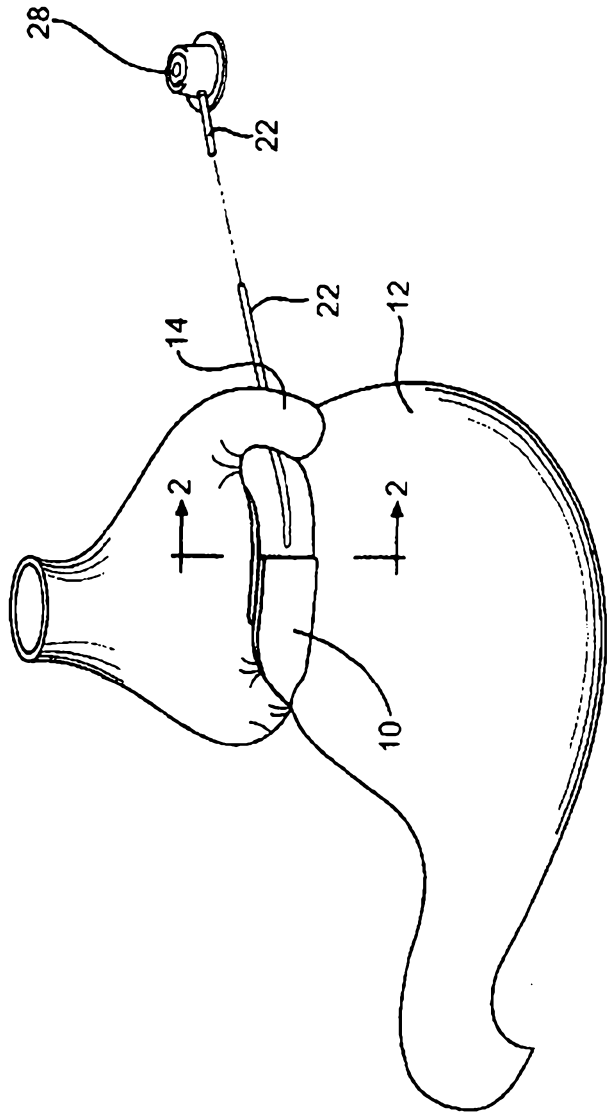


FIG. 1




FIG. 2

2011202777 10 Jun 2011

AUSTRALIA

Patents Act 1990

ORIGINAL

COMPLETE SPECIFICATION

INVENTION TITLE:

**IMPLANTABLE BAND WITH TRANSVERSE ATTACHMENT
MECHANISM**

The following statement is a full description of this invention, including the best method of performing it known to us:-

1a

IMPLANTABLE BAND WITH TRANSVERSE ATTACHMENT MECHANISM

Kristin Jambor

Randall Byrum

Norman Crawford

Related Applications

- [0001] This application claims the priority of provisional patent application serial number 60/483,353 filed on June 27, 2003, the disclosure of which is incorporated herein by reference. The application also incorporates by reference the following co-pending United States Patent Applications filed of even date herewith: Provisional Application Serial No. 60/507,625 (*Implantable Band Having Improved Attachment Mechanism*, inventors: Byrum, Jambor, Albrecht); Application Serial No. 10/676,368 (*Implantable Band with Non-Mechanical Latching Mechanism*, inventors: Byrum, Nuchols); Provisional Application Serial No. 60/507,916 (*Implantable Band with Attachment Mechanism*, inventors: Byrum, Jambor, Conlon, Crawford, Harper, Spreckelmeier); and Provisional Application Serial No. 60/507,812 (*Implantable Band with Deformable Attachment Mechanism*, inventors: Byrum, Wiley, Conlon, Fender).

Technical Field

- [0002] This present invention relates generally to a surgically implantable band for encircling an anatomical passageway, and is particularly directed to an adjustable gastric band for encircling the stomach for the control of obesity. The invention will be specifically disclosed in connection with an improved attachment mechanism for an adjustable gastric band.

Background Of The Invention

[0003] Since the early 1980s, adjustable gastric bands have provided an effective alternative to gastric bypass and other irreversible surgical weight loss treatments for the morbidly obese. The gastric band is wrapped around an upper portion of the patient's stomach, forming a stoma that is less than the normal interior diameter of the stomach that restricts food passing from an upper portion to a lower digestive portion of the stomach. When the stoma is of the appropriate size, food held in the upper portion of the stomach provides a feeling of fullness that discourages overeating.

[0004] In addition to a latched position to set the diameter of the gastric band, adjustability of gastric bands is generally achieved with an inwardly directed inflatable balloon, similar to a blood pressure cuff, into which fluid, such as saline, is injected through a fluid injection port to achieve a desired diameter. The balloon is typically deflated or only partially inflated when first placed in the body to allow for body adjustments and healing around the new band site. Since adjustable gastric bands may remain in the patient for long periods of time, the fluid injection port is typically installed subcutaneously to avoid infection, for instance in front of the sternum. Following the initial implantation, the surgeon may adjust the band by loosening or tightening depending on the patients' needs. Adjusting the amount of fluid in the adjustable gastric band is achieved by inserting a Huber tip needle through the skin into a silicone septum of the injection port. Once the needle is removed, the septum seals against the hole by virtue of compressive load generated by the septum. A flexible conduit communicates between the injection port and the adjustable gastric band.

Summary of The Invention

[0008] The present invention addresses these and other problems in the prior art, by providing an adjustable gastric band device that is engaged with less force, thereby facilitating implementation with laparoscopic instruments, yet the attachment remains secure over long term use.

[0009] The invention seeks to provide an adjustable gastric band having a transverse attachment mechanism.

[0010] The invention also seeks to provide a readily reversible adjustable gastric band which can be fastened and unfastened without reducing the holding strength of the attachment mechanism.

[0011] The present invention further seeks to provide an adjustable gastric band in which the force necessary to disengage the ends of the adjustable gastric band is nominal, and is not in same direction as the longitudinal holding forces so as not to separate the two ends.

[0012] In accordance with one aspect of the present invention, therefore, there is provided an implantable band for treatment of a medical condition, the band, including: (a) a strap configured to encircle a portion of an anatomical passageway, said strap having an inner and outer surface; (b) said strap including first and second end portions disposed at either end of said strap, said first and second end portions including respective inner and outer surfaces which correspond to said inner and outer surfaces of said strap, said first end portion having a first distal end, said second end portion having a second distal end; (c) a laterally extending member extending laterally from said inner surface of said first end, said laterally extending member defining a passageway, said laterally extending member having a first leading edge proximal said first distal end and a first trailing edge; (d) said second end portion including a retaining member having a generally tapered shape terminating in a second trailing edge so as to be easily passed through said passageway to an attached position, said second trailing edge including at least one retention surface extending therefrom and positioned to engage said first leading edge when said second end

portion is disposed in said attached position, said at least one retention surface cooperating with said first leading edge to resist withdrawal of said retaining member from said passageway; wherein said second end portion includes a neck portion adjacent said retaining member, said neck portion having a reduced cross section relative to the band and retaining member adjacent the neck portion, said neck portion including a base configured to cooperate with said first trailing edge to resist said base portion being pulled through said passageway; wherein said neck portion is sized such that the neck portion is under tension when said second end portion is disposed in said attached position.

[0013] In accordance with a further aspect of the present invention there is provided an implantable band for treatment of a medical condition, the band including: (a) a strap configured to encircle a portion of an anatomical passageway, said strap having an inner and outer surface; (b) said strap including first and second end portions disposed at either end of said strap, said first and second end portions including respective inner and outer surfaces which correspond to said inner and outer surfaces of said strap, said first end portion having a first distal end, said second end portion having a second distal end; (c) a laterally extending member extending laterally from said inner surface of said first end, said laterally extending member defining a passageway, said laterally extending member having a first leading edge proximal said first distal end and a first trailing edge; (d) said second end portion including a retaining member having a generally tapered shape terminating in a second trailing edge so as to be easily passed through said passageway to an attached position, said second trailing edge including at least one retention surface extending therefrom and positioned to engage said first leading edge when said second end portion is disposed in said attached position, said at least one retention surface cooperating with said first leading edge to resist withdrawal of said retaining member from said passageway; wherein said second end portion includes a neck portion adjacent said retaining member, said neck portion having a reduced cross section relative to the band and retaining member adjacent the neck portion, said neck portion including a base configured to cooperate with said first trailing edge to resist said base portion being pulled through said passageway; wherein said neck portion includes at least one angled surface which engages a complementarily shaped angled surface of said first trailing edge.

Brief Description of the Figures

[0014] The accompanying drawings, which are incorporated in and constitute part of this specification, illustrate embodiments of the invention, and, together with the general description of the invention given above, and the detailed description of the embodiments given below, serve to explain the principles of the present invention.

[0015] FIG.1 is a diagrammatic drawing showing an adjustable gastric band wrapped around an upper part of a stomach.

- [0016] FIG. 2 is a cross sectional view of the adjustable gastric band of FIG 1 taken along line 2-2.
- [0017] FIG. 3 is a perspective view of an adjustable gastric band having a dovetail transverse attachment mechanism.
- [0018] FIG. 4 is a top view of the adjustable gastric band shown in FIG. 3.
- [0019] FIG. 5 is a perspective view of an adjustable gastric band having a projected dovetail transverse attachment mechanism shown unattached.
- [0020] FIG. 6 is a side view of the adjustable gastric band of FIG. 5 with the two ends of the projected dovetail transverse attachment mechanism attached together.
- [0021] FIG. 7 is top view of the adjustable gastric band shown in FIG. 6.
- [0022] FIG. 8 is a perspective view of an adjustable gastric band with a hook transverse attachment mechanism shown unattached.
- [0023] FIG. 9 is a perspective of the adjustable gastric band of FIG. 8 with the hook transverse attachment mechanism attached together.
- [0024] FIGS. 10A-D are a sequence of side views in cross section taken along plane 10-10 of FIG. 9 illustrating engagement of the hook end to the buckle.
- [0025] FIG. 11 depicts an alternate embodiment of the hook member of FIG. 8.
- [0026] Reference will now be made in detail to the present preferred embodiment of the invention, an example of which is illustrated in the accompanying drawings.

Detailed Description of Embodiments of the Invention

- [0027] In the following description, like reference characters designate like or corresponding parts throughout the several views. Also, in the following description, it is to be understood that terms such as front, back, inside, outside, and the like are words of convenience and are not to be construed as limiting terms. Terminology used in this patent is not meant to be limiting insofar as devices described herein, or portions thereof, may be attached or utilized in other orientations. Referring in more detail to the drawings, the invention will now be described.
- [0028] Referring to Fig. 1, an adjustable gastric band 10 is shown wrapped around an upper portion of a stomach 12, kept in place by attaching the two ends together and extending a portion 14 of the stomach 12 over the adjustable gastric band 10 by suturing portion 14 to the stomach. Referring also to Fig. 2, the adjustable gastric band 10 includes a non-extensible strap 16 and an inflatable balloon 18, made of a medical grade silicone polymer or any other suitable material, is carried by the inner surface 20 of the strap 16. The balloon 18 may be secured to the inner surface 20 in any well known manner, or even made of unitary construction with the strap 16, although the strap 16 may typically be formed of a different material.
- [0029] One end of a flexible conduit 22 is in fluid communication with the internal cavity 24 of the balloon 18, with the other end being in fluid communication with an internal cavity (not shown) of a remote injection port 26. The remote injection port 26 includes a silicone septum 28. At the time the adjustable gastric band 10 is implanted around a portion of the stomach, the remote injection port 26 is also implanted at a suitable

location, usually within the rectus sheaths, for transcutaneous access via a Huber needle.

[0030] As is well known, the internal cavity 24, the flexible conduit 22 and the internal cavity of the remote injection port 26 are preferably at least partially filled with a physiologically compatible fluid, such as a saline solution. Postoperative adjustment of the perimeter enclosed by the balloon 18, and therefore the size of the stoma, is accomplished by addition or removal of fluid from the interior cavity 24 of the balloon 18 by inserting a Huber needle percutaneously into the silicone septum 28 of the injection port 18.

[0031] As is well known in the field the adjustable gastric band 10 may be made from any suitable medically compatible material having sufficient strength necessary for a particular laparoscopic surgery or particular patient.

[0032] As mentioned above, the two ends of the adjustable gastric band 10 are attached together (the specific attachment mechanism structure is not illustrated in FIG. 1). The present invention is directed to various embodiments of transverse attachment mechanisms for connecting the two ends together. The general construction of adjustable gastric band 10 shown in FIGS. 1 and 2 and described above is common to the embodiments illustrated in FIGS. 3-11, with the embodiments differing by the specific attachment mechanisms. It is noted that the practice of the present invention may be used with any band, and is not limited to use with an adjustable gastric band having the exact features described above or below.

[0033] Turning now to FIGS. 3 and 4, the adjustable gastric band 30 includes an elongated strap 32 extending in what is referred to herein as the longitudinal direction, even though when implanted the adjustable gastric

band 30 has an arcuate configuration. The strap 32 includes an inner surface 34 and an outer surface 36, with the balloon 38 extending inwardly from adjacent the inner surface 34. The adjustable gastric band 30 includes a first end portion 40 which overlaps a second end portion 42, with the inner surface 34 of the adjustable gastric band 30 at the first end portion 40 being disposed adjacent and outside the outer surface 36 of the adjustable gastric band 30 at the second end 42 portion.

[0034] The first and second end portions 40, 42 are secured together by a dovetail transverse attachment mechanism. A generally trapezoidally shaped member 44, which is the pin portion of the dovetail connection, oriented transverse to the longitudinal direction, extends from inner surface 34 at first end portion 40. The member 44 has three sides of a trapezoid with the opposite sides 46, 48 inclined toward each other. A complementary shaped transverse channel 50, the tail portion of the dovetail connection, is formed in the outer surface 36 at the second end portion 42, configured to receive member 44.

[0035] The transverse attachment mechanism includes a detent 52 which locates the member 44 relative to the channel 50, resists relative transverse movement therebetween, and provides positive feedback to the surgeon regarding engagement. The detent 52 is formed by a bump 54 extending from the lower end of member 44 and a complementarily shaped recess 56 formed in the base of the channel 50.

[0036] It should be appreciated that the positions of the dovetail shaped member 44 and the channel 50 could be switched, with the member 44 being formed on the outer surface 36 of second end portion 42, and the channel 50 could be formed on the inner surface 34 of first end portion 40. The positions of the bump 54 and recess 56 could also be switched.

Additionally, those skilled in the art will recognize that the trapezoidal cross section is illustrative and that many geometric shapes and quantities of member 44 and channel 50, and detent 52 may be used.

- [0037] To connect the two ends together, after wrapping the adjustable gastric band 30 about the stomach, member 44 is slid into the channel 50, requiring only a nominal force to overcome detent 52. Because the relative motion between the engaged first and second end portions 40, 42 is constrained to the transverse direction until they are disengaged, any longitudinal or radial (outward) force on the adjustable gastric band 30 will not separate the end portions 40, 42 (without breakage or deformation). To separate the end portions 40, 42 only a nominal transverse force is required to produce transverse movement there between, a force greater than transverse forces which the dovetail transverse attachment mechanism would normally experience when the adjustable gastric band 30 is implanted. Once the end portions 40, 42 are disengaged they may move longitudinally.
- [0038] Although the member 44 and channel 50 have been depicted as trapezoidal in shape, any shape may be used which resists the first and second end portions 40, 42 from moving longitudinally or radially once engaged, but which provide transverse movement as substantially the only direction of relative movement and force which allows the two end portions 40, 42 to be disengaged.
- [0039] Since the longitudinal width of the channel 50 is narrower than the longitudinal width of a portion of the member 44, a result of the general trapezoidal shape of the member 44 and the channel 50, relative radial (outward) movement between the end portions 40, 42 is prevented. Since the transverse surfaces of the member 44 and the channel 50 are generally

perpendicular to the direction of longitudinal loading (the holding force), relative transverse movement does not result from the loading. Thus, due to the orthogonal relationship between longitudinal force (holding or separating force) and only transverse force and movement being operative to disengage the ends of the adjustable gastric band decouples the longitudinal force from the removal force.

- [0040] In FIG. 5, another embodiment of a dovetail transverse attachment mechanism is illustrated. A first end portion 58 of an adjustable gastric band 60 includes an U-shaped integral member 62 extending from the outer surface 64 of the adjustable gastric band 60. The U-shaped member 62 includes an outwardly extending base 66 which supports at its distal end a transversely extending member 68 which is spaced from and generally parallel to the outer surface 62, and which forms the pin portion of a dovetail connection.
- [0041] As shown, member 68 has a trapezoidal shape. There is a complementarily shaped transverse channel 72 formed in the outer surface 62 of the adjustable gastric band 60 at the second end portion 70, which is configured to received the member 68.
- [0042] A retaining member 74 extends from the outer surface 62 at first end portion 58, transversely aligned with the gap between the member 68 and the outer surface 62. Referring also to FIGS. 6 and 7, retaining member 74 includes inclined surface 76 beginning at the upper edge 78 of the first end portion 58 and terminating at the lower surface 80 of retaining member 74. As seen in FIGS. 6 and 7, the lower surface 80 is spaced above, but does not overlie, the distal end 82 of the member 68 leaving a gap 84 therebetween. The gap 84 is sized to allow, in conjunction with the flexibility of the adjustable gastric band 60, the second end portion 70 to

be inserted therethrough, with guidance from the inclined surface 76 acting as a ramp, so that the member 68 may be disposed in the channel 72 with the second end portion 70 extending through the space between the member 68 and the outer surface 62 at the first end portion 58.

[0043] The transverse width of the second end portion 70 is less than the transverse space between the base 66 and the lower surface 80. The lower surface 80 extends generally perpendicular from the outer surface 62, and perpendicular to any relative movement between the first and second end portions 58, 70 when engaged, resisting transverse forces so as to retain the second end portion 70 in place. Because the relative movement between the first and second end portions 58, 70 is constrained to the transverse direction until they are uncoupled, longitudinal or radial forces on the adjustable gastric band 60 will not separate them.

[0044] Referring to FIGS. 8 and 9, there is illustrated in perspective an adjustable gastric band with a hook transverse attachment mechanism shown unattached. The adjustable gastric band 88 includes a first end portion 90 that terminates in a spiral hook member 92 which defines a spiral gap 94 of approximately 1-2 mm. The spiral hook member 92 may be formed of metal, hard plastic, or other suitable material, and is attached to the adjustable gastric band 88 in any appropriate manner, such as with silicone adhesive, or the like. The configuration and material of hook member 92 may provide spring like qualities, which may have desirable therapeutic and performance benefits.

[0045] The second end portion 96 of adjustable gastric band 88 terminates in a buckle 98, having a catch bar 100 extending across a gap 102 defined by two spaced apart parallel flanges 104, 106.

- [0046] The process of engaging the first and second end portions 90, 96 is depicted in the sequence of positions illustrated in FIGS. 10A-D. The hook member 94 is initially aligned below the gap 102. In FIG. 10A, the spiral hook member 94 is disposed within the gap 102, with the catch 100 located in the entrance 108, an narrowing opening in the first end portion 90 which leads to the spiral gap 94. The catch 100 is advanced along the path of the spiral gap 94 by moving the first end portion 90 transversely and longitudinally relative to the second end portion 96, to the position shown in FIG. 10B. Further transverse and longitudinal movement of the first end portion 90 relative to the second end portion 96 places catch 100 further along the spiral gap 94, to the position shown in FIG. 10C, and ultimately in the final position shown in FIG. 10D.
- [0047] In the fully engaged position of FIG. 10D, longitudinal force will not cause the engaged first and second end portions 90, 94, to separate. Disengagement requires coordinated transverse and longitudinal relative movement between the two end portions 90, 94. Although a spiral path is shown, any circuitous path may be used which requires coordinated longitudinal and transverse movement directions, to disengage the two ends portions 90, 94.
- [0048] FIG. 11 illustrates an alternate embodiment of the hook member forming a longitudinally adjustable transverse attachment mechanism. The first end portion 110 terminates in the hook member 112 which defines a divergent path 114. The divergent path 114 allows selection of a desired position 116, 118 into which catch 100 may be transversely positioned. Hook member 112 terminates in spaced apart ends 120, 122 which define positions 116, 118. The configuration of hook member 112 allows the circumference of the adjustable gastric band to be set at more than one length.

- [0049] Additional spaced apart ends may be incorporated to provide additional positions. The ends of the hook member may be configured to extend longitudinally so that the catch cannot be repositioned by transverse movement alone.
- [0050] It will become readily apparent to those skilled in the art that the above invention has equally applicability to other types of implantable bands. For example, bands are used for the treatment of fecal incontinence. One such band is described in U.S. Patent 6,461,292 which is hereby incorporated herein by reference. Bands can also be used to treat urinary incontinence. One such band is described in U.S. Patent Application 2003/0105385 which is hereby incorporated herein by reference. Bands can also be used to treat heartburn and/or acid reflux. One such band is described in U.S. Patent 6,470,892 which is hereby incorporated herein by reference. Bands can also be used to treat impotence. One such band is described in U.S. Patent Application 2003/0114729 which is hereby incorporated herein by reference.
- [0051] Thus, as used herein and in the claims, an implantable band is a band which may be implanted in a position to occlude flow, such as food or body fluids, through an anatomical passageway, such as a stomach or lumen.
- [0052] In summary, numerous benefits have been described which result from employing the concepts of the invention. The foregoing description of one or more embodiments of the invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed. Obvious modifications or variations are possible in light of the above teachings. The one or more embodiments were chosen and described in order to best illustrate the

principles of the invention and its practical application to thereby enable one of ordinary skill in the art to best utilize the invention in various embodiments and with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the claims appended hereto.

[0053] This Application is a divisional of the present applicant's Australian Patent Application No. 2004216634, and the whole contents thereof are incorporated herein by reference.

[0054] Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

[0055] The reference to any prior art in this specification is not, and should not be taken as, an acknowledgment or any form or suggestion that the prior art forms part of the common general knowledge in Australia.

The claims defining the invention are as follows:

1. An implantable band for treatment of a medical condition, the band, including:
 - (a) a strap configured to encircle a portion of an anatomical passageway, said strap having an inner and outer surface;
 - (b) said strap including first and second end portions disposed at either end of said strap, said first and second end portions including respective inner and outer surfaces which correspond to said inner and outer surfaces of said strap, said first end portion having a first distal end, said second end portion having a second distal end;
 - (c) a laterally extending member extending laterally from said inner surface of said first end, said laterally extending member defining a passageway, said laterally extending member having a first leading edge proximal said first distal end and a first trailing edge;
 - (d) said second end portion including a retaining member having a generally tapered shape terminating in a second trailing edge so as to be easily passed through said passageway to an attached position, said second trailing edge including at least one retention surface extending therefrom and positioned to engage said first leading edge when said second end portion is disposed in said attached position, said at least one retention surface cooperating with said first leading edge to resist withdrawal of said retaining member from said passageway; wherein said second end portion includes a neck portion adjacent said retaining member, said neck portion having a reduced cross section relative to the band and retaining member adjacent the neck portion, said neck portion including a base configured to cooperate with said first trailing edge to resist said base portion being pulled through said passageway; wherein said neck portion is sized such that the neck portion is under tension when said second end portion is disposed in said attached position.
2. The band of claim 1, wherein said at least one retention surface is inclined outwardly away from said second distal end, and said first leading edge is inclined complementarily to said at least one retention surface.
3. The band of claim 1 or claim 2, wherein said neck portion includes at least one angled surface which engages a complementarily shaped angled surface of said first

trailing edge.

4. The band of any one of the preceding claims, wherein said retaining member includes a resilient element.
5. The band of any one of the preceding claims, wherein said retaining member includes a cavity.
6. The band of any one of the preceding claims, wherein said laterally extending member includes a tab extending therefrom.
7. The band of any one of the preceding claims, wherein said second trailing edge has a normal orientation such that said retaining member must be rotated from said normal orientation to align said retaining member with said passageway prior to disposing said retaining member through said passageway.
8. The band of claim 7, wherein the first leading edge of the laterally extending member includes at least one pair of spaced apart members extending therefrom, wherein said spaced apart members define a gap therebetween which is configured to receive said second trailing edge in said normal orientation.
9. The band of any one of the preceding claims, wherein said retaining member has an arrowhead shape.
10. An implantable band for treatment of a medical condition, the band including:
 - (a) a strap configured to encircle a portion of an anatomical passageway, said strap having an inner and outer surface;
 - (b) said strap including first and second end portions disposed at either end of said strap, said first and second end portions including respective inner and outer surfaces which correspond to said inner and outer surfaces of said strap, said first end portion having a first distal end, said second end portion having a second distal end;
 - (c) a laterally extending member extending laterally from said inner surface of said first end, said laterally extending member defining a passageway, said laterally

extending member having a first leading edge proximal said first distal end and a first trailing edge;

(d) said second end portion including a retaining member having a generally tapered shape terminating in a second trailing edge so as to be easily passed through said passageway to an attached position, said second trailing edge including at least one retention surface extending therefrom and positioned to engage said first leading edge when said second end portion is disposed in said attached position, said at least one retention surface cooperating with said first leading edge to resist withdrawal of said retaining member from said passageway; wherein said second end portion includes a neck portion adjacent said retaining member, said neck portion having a reduced cross section relative to the band and retaining member adjacent the neck portion, said neck portion including a base configured to cooperate with said first trailing edge to resist said base portion being pulled through said passageway; wherein said neck portion includes at least one angled surface which engages a complementarily shaped angled surface of said first trailing edge.

11. The band of claim 10, wherein said at least one retention surface is inclined outwardly away from said second distal end, and said first leading edge is inclined complementarily to said at least one retention surface.

12. The band of claim 10 or claim 11, wherein said neck portion is sized such that the neck portion is under tension when said second end portion is disposed in said attached position.

13. The band of any one of claims 10 to 12, wherein said retaining member includes a resilient element.

14. The band of any one of claims 10 to 13, wherein said retaining member includes a cavity.


15. The band of any one of claims 10 to 14, wherein said laterally extending member includes a tab extending therefrom.

16. The band of any one of claims 10 to 15, wherein said second trailing edge has a normal orientation such that said retaining member must be rotated from said normal orientation to align said retaining member with said passageway prior to disposing said retaining member through said passageway.


17. The band of claim 16, wherein the first leading edge of the laterally extending member includes at least one pair of spaced apart members extending therefrom, wherein said spaced apart members define a gap therebetween which is configured to receive said second trailing edge in said normal orientation.

18. The band of any one of claims 10 to 17, wherein said retaining member has an arrowhead shape.

19. An implantable band for treatment of a medical condition, substantially as described herein with reference to the accompanying drawings.

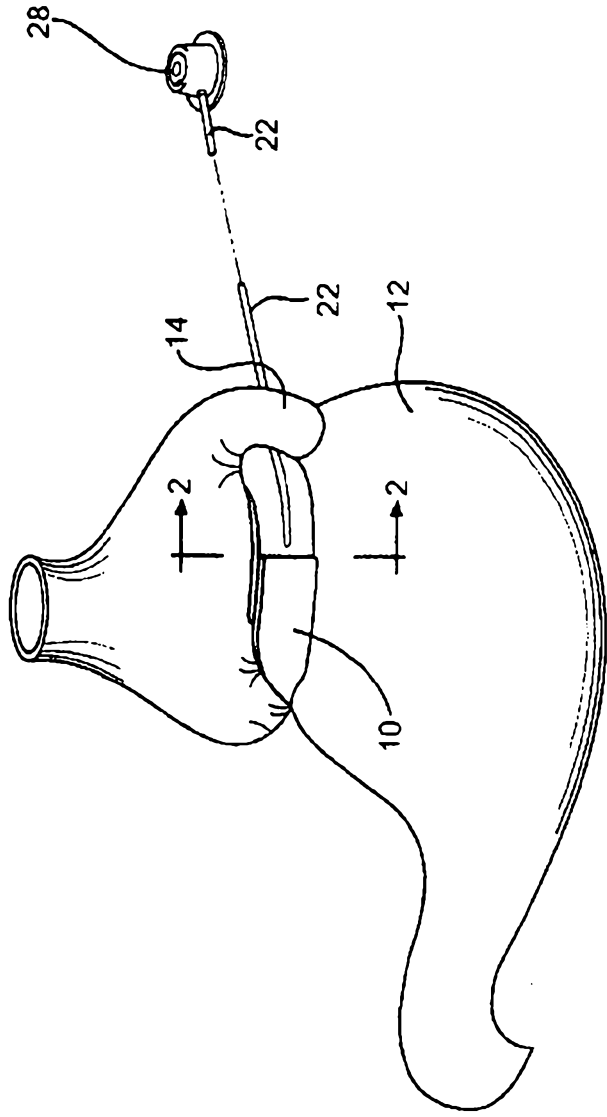

—FIG.1



—FIG.2

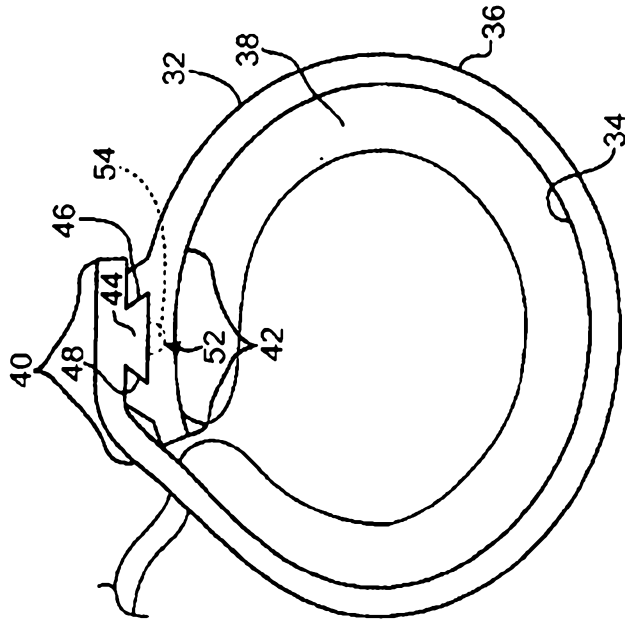


FIG. 4

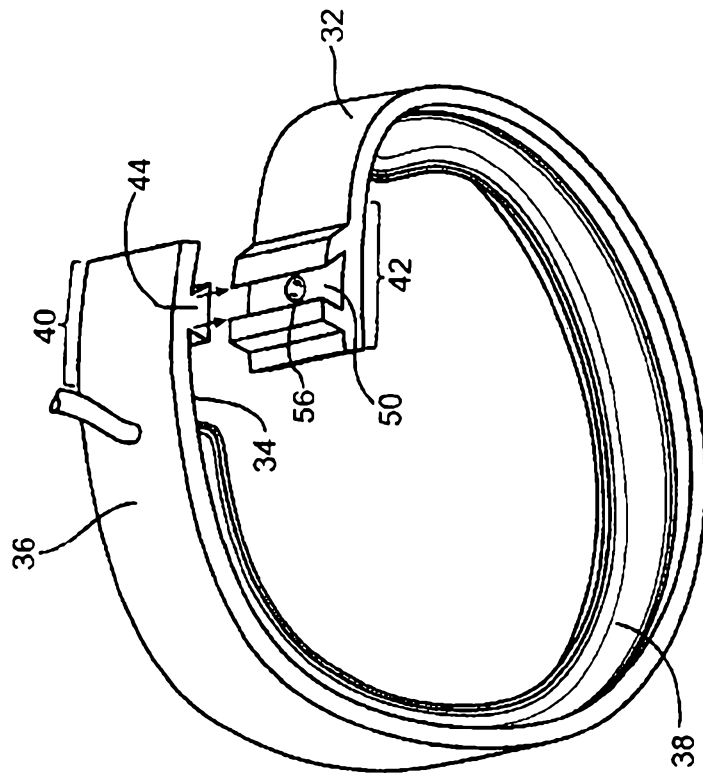


FIG. 3

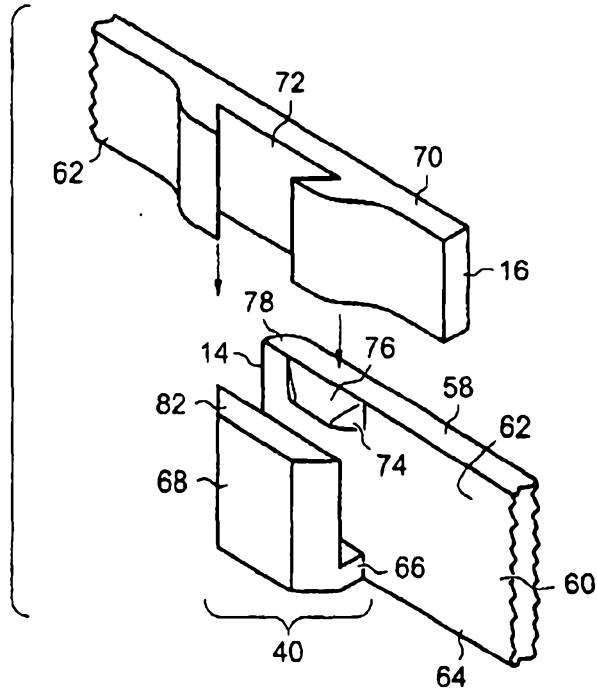


FIG. 5

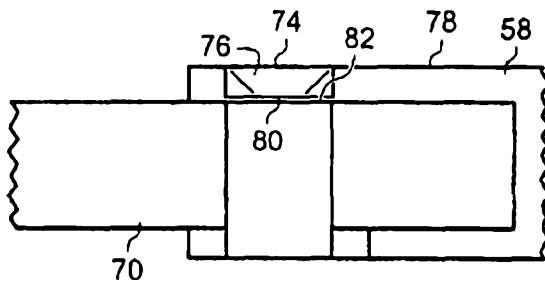


FIG. 6

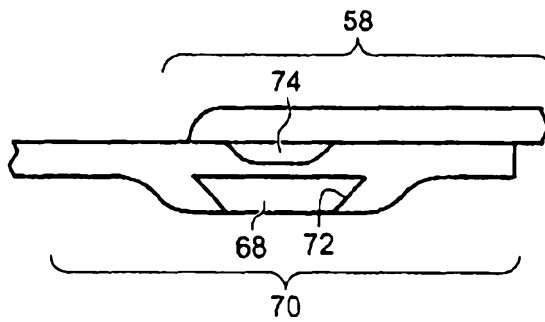
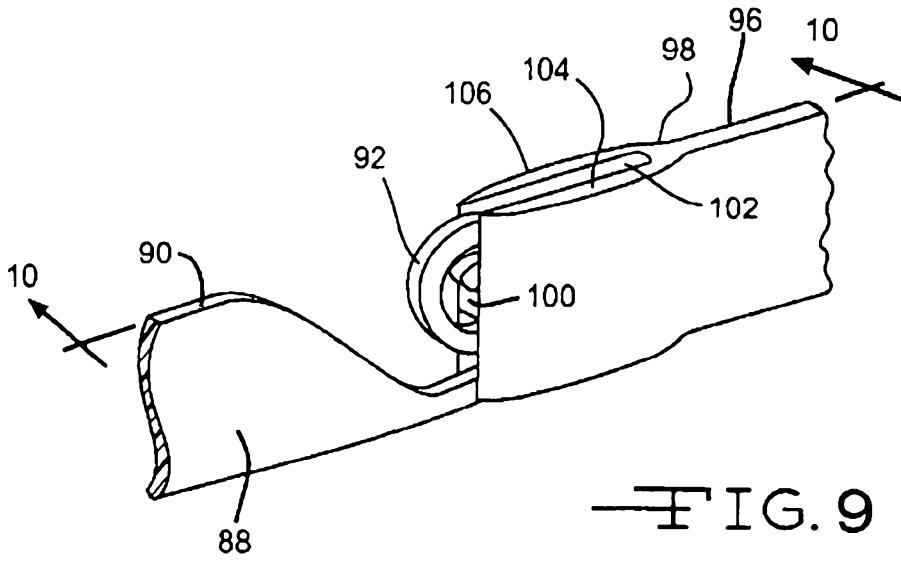
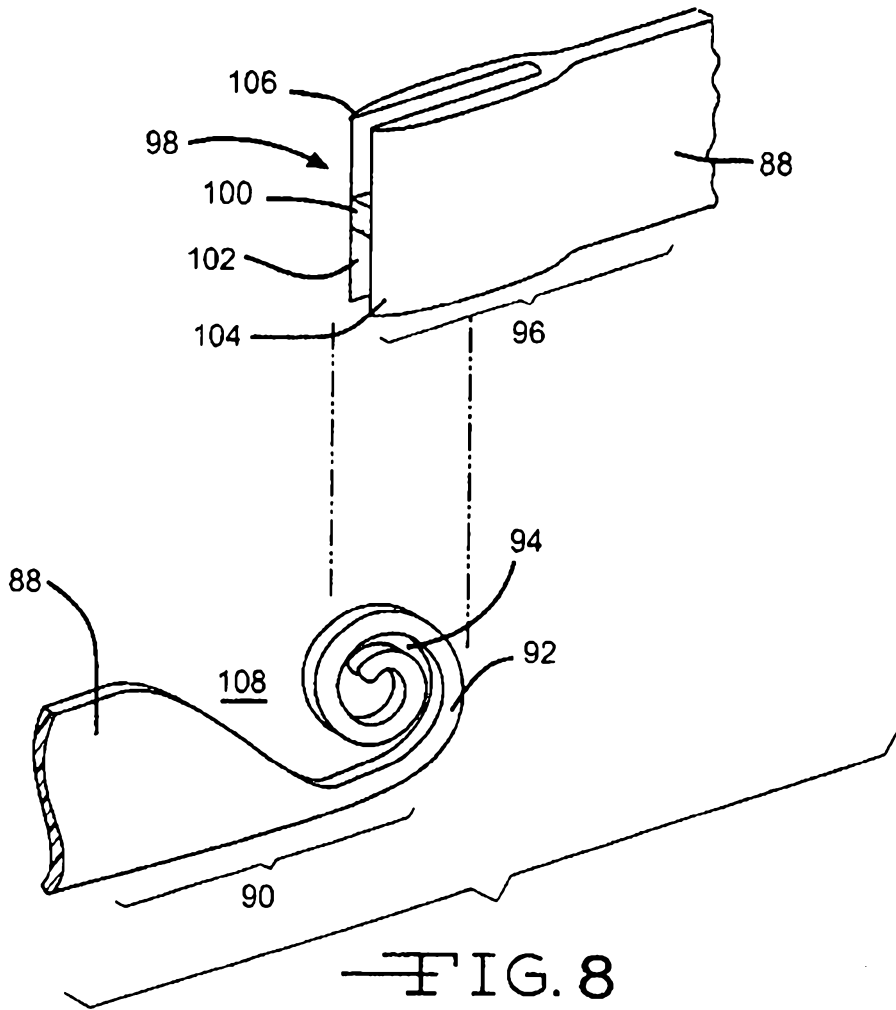


FIG. 7



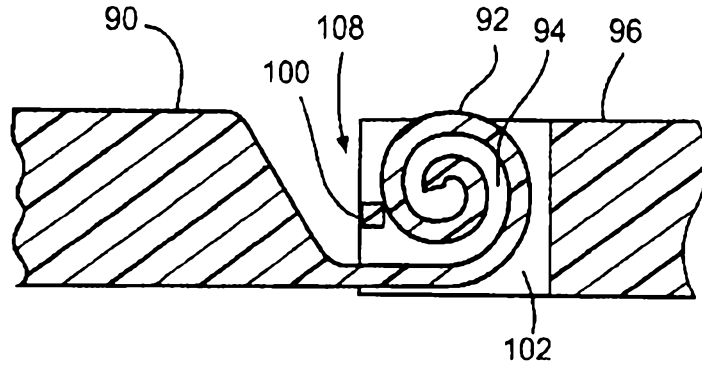


FIG. 10A

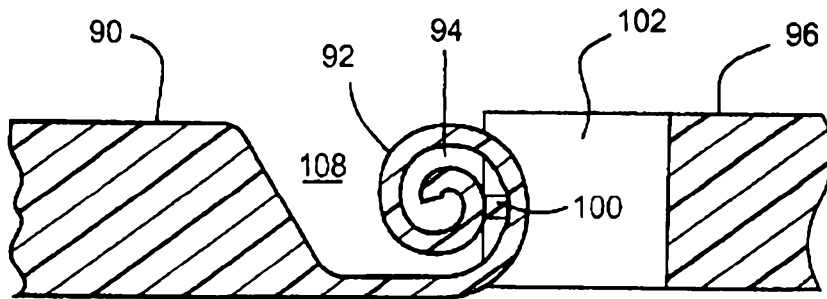


FIG. 10B

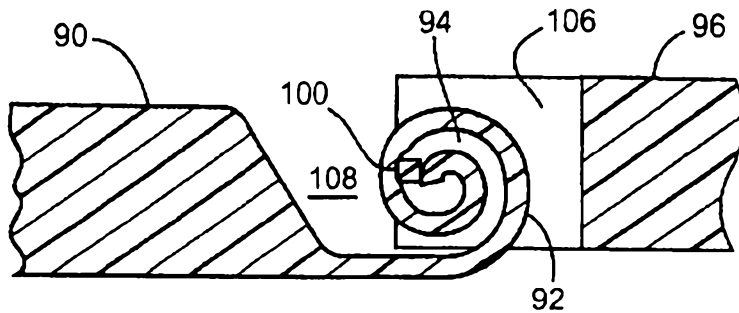


FIG. 10C

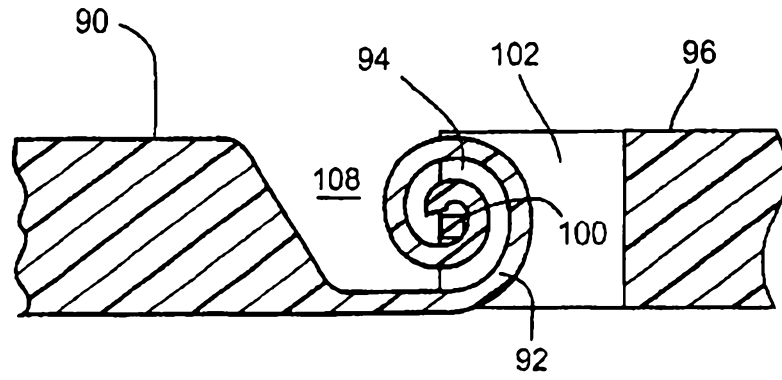


FIG. 10D

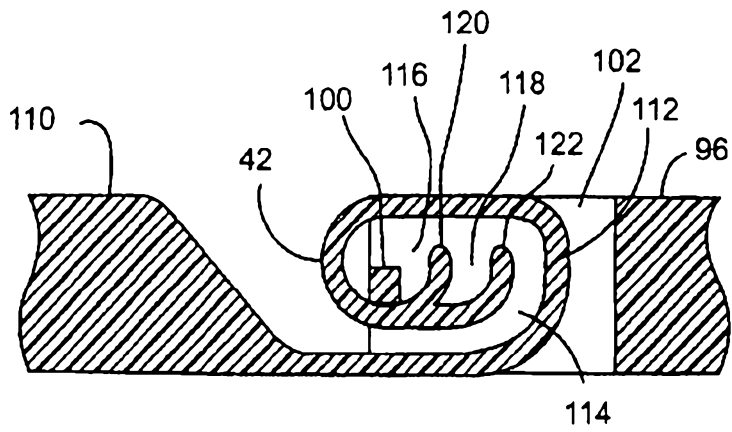


FIG. 11