

(12) **UK Patent Application** (19) **GB** (11) **2 360 791** (13) **A**

(43) Date of A Publication **03.10.2001**

(21) Application No **0007652.1**

(22) Date of Filing **29.03.2000**

(71) Applicant(s)
Unilever Plc
(Incorporated in the United Kingdom)
Unilever House, Blackfriars, LONDON, EC4P 4BQ,
United Kingdom

(72) Inventor(s)
Andrew Hopkinson
Christopher Clarkson Jones

(74) Agent and/or Address for Service
Peter William Elliott
Unilever Plc, Patent Division, Colworth House,
Sharnbrook, BEDFORD, MK44 1LQ, United Kingdom

(51) INT CL⁷
D06M 15/07 , C11D 3/22

(52) UK CL (Edition S)
D1P PDP P1255 P1256 P1303
C5D DHC D104 D106 D107 D108 D110 D116 D117 D118
D120 D121 D123 D125 D126 D127 D128 D130 D131
D132 D142 D147 D149 D150 D166 D173 D180 D182

(56) Documents Cited
WO 00/18860 A1 US 4235735 A

(58) Field of Search
UK CL (Edition R) **D1P PDP PDX**
INT CL⁷ **C11D 3/22 , D06M 15/03 15/05 15/07**
Online:WPI,EPODOC,JAPIO

(54) Abstract Title
Softening treatment for fabrics

(57) A laundry treatment composition is used to soften fabric and improve fabric drape, the composition comprising a water-soluble or water-dispersible rebuild agent for deposition onto a fabric during a treatment process wherein the material undergoes during the treatment process, a chemical change by which change the affinity of the material for the fabric is increased. The agent may be a polymer, e.g. cellulose, with pendant ester linkages.

GB 2 360 791 A

Treatment for Fabrics

Technical Field

5 The present invention relates to a method of softening
fabric, comprising treating the fabric with a laundry wash
composition comprising a detergent active and an ingredient
for laundry cleaning or treatment products. It further
extends to the use of the laundry cleaning or treatment
10 ingredient to soften fabric in a laundry process.

Background of the Invention

Alternating cycles of using and laundering textile items
15 results in adverse effects on the tactile and mechanical
properties of the fabric. Laundering is necessary to remove
stains and soils that accumulate on the textiles during use.
However, the laundering process itself tends to accelerate
or cause degradation of tactile and mechanical properties.
20 In particular, repeated laundering of textiles can result in
mechanical damage to the constituent fibres leading to the
textiles feeling harsher and stiffer. Moreover, the
increased stiffness alters the way that the fabric drapes
and can reduce the visual appearance of the item during use.

25

Cationic surfactants such as dimethyl distearyl ammonium
chloride are frequently used in the form of an additive to
the final rinse of a wash cycle to lubricate the textile
fibres and so counteract the damaging effect of the wash-
30 wear cycle and impart a soft feel to the textile. The use
of a separate product adds complexity to the wash process

and it would be advantageous to deliver these beneficial effects directly from a main wash formulation. Cationic surfactants of the traditional rinse conditioner type are generally not effective when incorporated into main wash
5 detergent formulations containing high levels of anionic surfactant, as the two surfactants interact to form an insoluble complex. In order to deliver softening of textiles from a main wash formulation, clays have been used. However, these clays tend to be inefficient at softening and
10 become less effective in the presence of anionic surfactant. Siloxane polymers have also been used in a main wash detergent formulation but again their delivery to fabrics from the main wash is very inefficient.

15 The present inventors have sought methods of softening fabrics in laundry processes. It has been discovered that certain polymeric fabric rebuild agents which undergo during the wash a chemical change by which the affinity of the rebuild agent for the fabric is increased, can be used to
20 soften fabric and improve drape in laundry processes.

The fabric rebuild agents used are themselves the subject of our copending patent application no. PCT/EP99/07422, published on In that patent application, it
25 is realised that fabric rebuild agents may have an effect on the appearance of fabric or comfort during wear, but it is not realised that fabric rebuild agents can act as softening agents, particularly in the presence of anionic surfactants.

30 WO-A-99/14245 discloses laundry detergent compositions containing cellulosic based polymers to provide appearance

and integrity benefits to fabrics. These polymers are cellulosic polymers in which the saccharide rings have pendant oxygen atoms to which substituents 'R' are bonded, i.e. they are attached to the rings via an ether linkage.

5 The groups 'R' can be hydrogen, lower alkyl or alkylene linkages terminated by carboxylic acid, ester or amide groups. Optionally, up to five alkyleneoxy groups may be interspersed between the groups are the respective oxygen atom. At least some of these groups may undergo a chemical
10 change such as hydrolysis, in the wash liquor. However no such change would result in an increased affinity for the fabric. On the contrary, because the "ester" group is configured with the carbonyl group closer to the polysaccharide than the oxygen atom (i.e. esters of
15 carboxyalkyl groups), any hydrolysis will result in free acid substituents which will actually result in an increase in solubility and therefore, a decrease in affinity for the fabric.

20 WO-A-99/14295 discloses structures analogous to those described in WO-A-99/14245 but in one alternative, the substituents 'R' together with the oxygen on the saccharide ring, constitute pendant half-esters of certain dicarboxylic acids. A single example of such a material is given. The
25 dicarboxylic acid half-esters would tend to hydrolyse in the wash liquor and thereby increase affinity of the material for a cotton fabric. However, first, this mechanism of action or behaviour is not mentioned. Second, the hydrolysis rate of such dicarboxylic acids half esters is
30 not as great as that of esters of monocarboxylic acids (which are not disclosed or claimed in WO-A-99/14295).

Third, the degree of substitution for this variant is specified as being from 0.001 to 0.1. This is so low as to make the enhancement of fabric affinity too low to be worthwhile for this mechanism of action. Fourth, the structures described and claimed insofar as they have such half ester substituents, must also have substituents of the type which are carboxyalkyl groups or esters thereof, i.e. of the type also described in WO-A-99/14245. In the latter (ester) case, these would hydrolyse to the free acid form. The degree of substitution of the latter (0.2 to 2) is considerably higher than for the half-ester groups and the resultant increase in solubility would easily negate any enhanced affinity for the fabric by hydrolysis of the half-ester groups.

WO 99/14295 indicates that the cellulose polymers thereof lead to improved overall appearance. Overall appearance is stated to include factors such as formation of lint, fuzz or pills and dye removal. However, there is no indication that the polymers of WO 99/14295 can have any softening benefit.

Definition of the Invention

Thus, a first aspect of the present invention now provides a method of softening fabric and/or improving drape, comprising treating the fabric with a laundry wash composition comprising a detergent active and a laundry treatment composition comprising a water-soluble or water-dispersible rebuild agent for deposition onto a fabric during the wash wherein the rebuild agent undergoes during the wash, a chemical change by which change the affinity of

the rebuild agent for the fabric is increased, said chemical change resulting in the loss or modification of one or more groups covalently bonded to be pendant to a polymeric backbone of the rebuild agent via an ester linkage, the ester-linked group(s) being selected from monocarboxylic acid esters.

In compositions used in the first aspect of the invention, the polymeric backbone of the rebuild agent preferably comprises cellulose units or other β -1,4 linked polysaccharide units. Moreover, the average degree of substitution of all pendant group(s), i.e. all the group(s) which undergo the chemical change plus any other groups per saccharide rings for the totality of saccharide rings in the rebuild agent is preferably from 0.3 to 3, more preferably from 0.4 to 1, still more preferably from 0.5 to 0.75 and most preferably from 0.6 to 0.7.

Throughout this specification, "average degree of substitution" refers to the number of substituted pendant groups per saccharide ring, averaged over all saccharide rings of the rebuild agent. Each saccharide ring prior to substitution has three -OH groups and therefore, an average degree of substitution of 3 means that each of these groups on all molecules of the sample, bears a substituent.

By ester linkage is meant that the hydrogen of an -OH group has been replaced by a substituent such as $R'-CO-$, $R'SO_2-$ etc to form a carboxylic acid ester, sulphonic acid ester (as appropriate) etc together with the remnant oxygen attached

to the saccharide ring. In some cases, the group R' may for example contain a heteroatom, e.g. as an -NH- group, attached to the carbonyl, sulphonyl etc group, so that the linkage as a whole could be regarded as a urethane etc linkage. However, the term ester linkage is still to be construed as encompassing these structures. The compositions according to the second aspect are not limited to those incorporating rebuild agents incorporating monocarboxylic acid ester linkages.

10

A second aspect of the present invention provides a method of softening fabric and/or improving drape, comprising treating the fabric with a laundry wash composition comprising a detergent active and laundry treatment composition comprising a water-soluble or water-dispersible rebuild agent for deposition onto a fabric during the wash wherein the rebuild agent undergoes during the wash, a chemical change by which change the affinity of the rebuild agent for the fabric is increased, wherein the chemical change occurring in or to a group or groups covalently bonded to be pendant on a polymeric backbone of the rebuild agent and which backbone comprises cellulose units or other β -1,4 linked polysaccharide units, the average degree of substitution of the total of all group(s) pendant on the saccharide rings of the backbone being from 0.4 to 3, preferably from 0.4 to 1, more preferably from 0.5 to 0.75, most preferably from 0.6 to 0.7.

25

Optionally, compositions as defined for both the first and second aspects of the invention, simultaneously, may be used.

30

A third aspect of the present invention provides the use of a fabric rebuild agent as defined for the first and/or second aspect of the invention to soften fabric.

5 The exact mechanism by which any of these rebuild agents exert their effect is not fully understood.

In the case of those rebuild agents having a cellulose backbone and pendant ester groups, without being bound by
10 any particular theory or explanation, the inventors have conjectured that the mechanism of deposition is as follows.

Cellulose is substantially insoluble in water. Attachment of the ester groups causes disruption of the hydrogen
15 bonding between rings of the cellulose chain, thus increasing water solubility or dispersibility. In the treatment liquor, it is believed that the ester groups are hydrolysed, causing the affinity for the fabric to increase and the polymer to be deposited on the fabric. The
20 deposited material is believed to impart softening and drape improvements to the fabric.

Detailed Description of the Invention.

25 The Rebuild Agent

The rebuild agent material used in the present invention is water-soluble or water-dispersible in nature and in a preferred form comprises a polymeric backbone having one or
30 more pendant groups which undergo the chemical change to cause an increase in affinity for fabric.

The weight average molecular weight (M_w) of the rebuild agent (as determined by GPC) may typically be in the range of 500 to 2,000,000 for example 1,000 to 1,500,000. Preferably
5 though, it is from 1,000 to 100,000, more preferably from 5,000 to 50,000, and most preferably 12,000 to 20,000.

By water-soluble, as used herein, what is meant is that the material forms an isotropic solution on addition to water or
10 another aqueous solution.

By water-dispersible, as used herein, what is meant is that the material forms a finely divided suspension on addition to water or another aqueous solution. Preferably though,
15 the term "water-dispersible" means that the material, in water at pH 7 and at 25°C, produces a solution or a dispersion having long-term stability.

By an increase in the affinity of the material for the
20 fabric upon a chemical change, what is meant is that at some time during the treatment process, the amount of material that has been deposited is greater when the chemical change is occurring or has occurred, compared to when the chemical change has not occurred and is not occurring, or is
25 occurring more slowly, the comparison being made with all conditions being equal except for that change in the conditions which is necessary to affect the rate of chemical change.

30 Deposition includes adsorption, cocrystallisation, entrapment and/or adhesion.

The Polymeric Backbone

For the first aspect of the invention, it is especially preferred that the polymeric backbone is of a similar
5 chemical structure to that of at least some of the fibres of the fabric onto which it is to be deposited.

For example, if the fabric is cellulosic in nature, e.g. cotton, the polymeric backbone is preferably cellulose or a
10 cellulose derivative or a another β -1,4-linked polysaccharide having an affinity for cellulose, such as mannan and glucomannan. This is essential in the case of the second aspect of the invention. The average degree of substitution on the polysaccharide of the pendant groups
15 which undergo the chemical change (plus any non-functional pendant groups which may be present) is preferably (for compositions according to the first aspect of the invention) or essential (for compositions according to the second aspect of the invention) from 0.3 to 3, more preferably from
20 0.4 to 1. Still more preferred is a degree of substitution of from 0.5 to 0.75 and yet more preferred is 0.6-0.7.

The polysaccharide may be straight or branched. Many naturally occurring polysaccharides have at least some
25 degree of branching, or at any rate, at least some saccharide rings are in the form of pendant side groups (and therefore are not in themselves counted in the degree of substitution) on a main polysaccharide backbone.

30 A polysaccharide comprises a plurality of saccharide rings which have pendant hydroxyl groups. The pendant groups can

be bonded chemically or by other bonding mechanism, to these hydroxyl groups by any means described hereinbelow. The "average degree of substitution" means the average number of pendant groups per saccharide ring for the totality of polysaccharide molecules in the sample and is determined for all saccharide rings whether they form part of a linear backbone or are themselves, pendant side groups in the polysaccharide.


Other polymeric backbones suitable for polymeric material for use in the present invention include those described in Hydrocolloid Applications, A. Nussinswitch, Blackie 1997.

Pendant Groups which undergo the Chemical Change

In the case of the first aspect of the invention, the chemical change which causes the increased fabric affinity will usually be hydrolysis. In the case of the second aspect of the invention it is preferably lysis, for example hydrolysis or, perhydrolysis or else it is preferably bond-cleavage, optionally catalysed by an enzyme or another catalyst. Hydrolysis of ester-linked groups is most typical. However, preferably this change is not merely protonation or deprotonation, i.e. a pH induced effect.

The chemical change occurs in or to a group covalently bonded to a polymeric backbone, especially, the loss of one or more such groups. These group(s) is/are pendant on the backbone. In the case of the first aspect of the invention these are ester-linked groups based on monocarboxylic acids.





Preferred for use in the first aspect of the invention are cellulosic polymers of formula (I):-

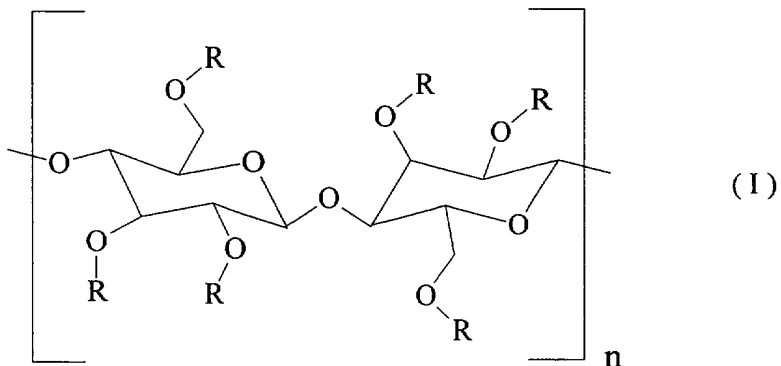

5

wherein at least one or more R groups of the polymer are independently selected from groups of formulae:-

10




15 wherein each R^1 is independently selected from C_{1-20} (preferably C_{1-6}) alkyl, C_{2-20} (preferably C_{2-6}) alkenyl (e.g. vinyl) and C_{5-7} aryl (e.g. phenyl) any of which is optionally substituted by one or more substituents independently selected from C_{1-4} alkyl, C_{1-12} (preferably C_{1-4}) alkoxy,
20 hydroxyl, vinyl and phenyl groups; and

each R² is independently hydrogen or a group R¹ as hereinbefore defined.



The second aspect of the invention is not limited to (but may include) use of rebuild agents incorporating ester linkages based on monocarboxylic acids. Mono-, di- and polycarboxylic ester- or semi-ester- linkages, ester and semi-ester linkages derived from non-carboxylic acids, as well as carbamate, urea or silyl linked groups, as well as others, are also possible.

However, preferred for use in the second aspect of the invention are cellulosic polymers of formula (II):-






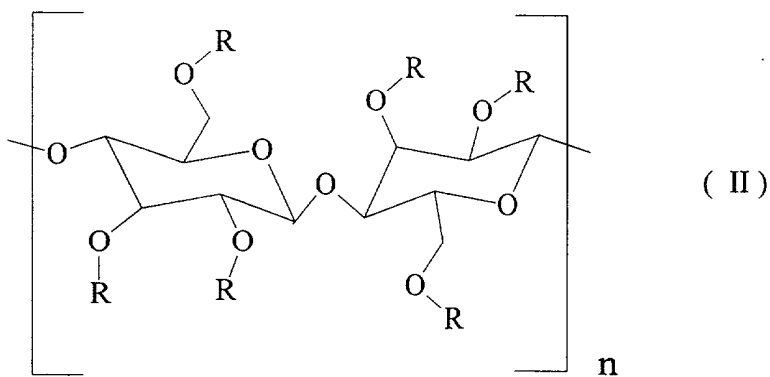


15


wherein at least one or more R groups of the polymer are independently selected from groups of formulae:-



20



5



10

wherein each R¹ is independently selected from C₁₋₂₀ (preferably C₁₋₆) alkyl, C₂₋₂₀ (preferably C₂₋₆) alkenyl (e.g. vinyl) and C₅₋₇ aryl (e.g. phenyl) any of which is optionally substituted by one or more substituents independently selected from C₁₋₄ alkyl, C₁₋₁₂ (preferably C₁₋₄) alkoxy, hydroxyl, vinyl and phenyl groups;

15

each R² is independently selected from hydrogen and groups R¹ as hereinbefore defined;

20

R³ is a bond or is selected from C₁₋₄ alkylene, C₂₋₄ alkenylene and C₅₋₇ arylene (e.g. phenylene) groups, the carbon atoms in any of these being optionally substituted by one or more substituents independently selected from C₁₋₁₂ (preferably C₁₋₄) alkoxy, vinyl, hydroxyl, halo and amine groups;

25

each R⁴ is independently selected from hydrogen, counter cations such as alkali metal (preferably Na) or $\frac{1}{2}$ Ca or $\frac{1}{2}$ Mg, and groups R¹ as hereinbefore defined; and

5 wherein each R₅ is independently selected from the group consisting of H, C₁-C₂₀ alkyl, C₅-C₇ cycloalkyl, C₇-C₂₀ arylalkyl, C₇-C₂₀ alkylaryl, substituted alkyl, hydroxyalkyl, (R₆)₂N-alkyl, and (R₆)₃N-alkyl, where R₆ is independently
10 selected from the group consisting of H, C₁-C₂₀ alkyl, C₅-C₇ cycloalkyl, C₇-C₂₀ arylalkyl, C₇-C₂₀ alkylaryl, aminoalkyl, alkylaminoalkyl, dialkylaminoalkyl, piperidinoalkyl, morpholinoalkyl, cycloaminoalkyl and hydroxyalkyl;

groups R which together with the oxygen atom forming the
15 linkage to the respective saccharide ring forms an ester or hemi-ester group of a tricarboxylic- or higher polycarboxylic- or other complex acid such as citric acid, an amino acid, a synthetic amino acid analogue or a protein.

20 For the avoidance of doubt, as already mentioned, in both formula (I) and formula (II) some of the R groups may optionally have one or more structures, for example as hereinbefore described. For example, one or more R groups may simply be hydrogen or an alkyl group.

25 In the case of formula (II), some preferred R groups may be independently selected from one or more of methanesulphonate, toluene, sulphonate, groups and hemiester groups of fumaric, malonic, itaconic, oxalic, maleic,
30 succinic, tartaric, glutamic, aspartic and malic acids.

In the case of formula (I) and formula (II), they may be independently selected from one or more of acetate, propanoate, trifluoroacetate, 2-(2-hydroxy-1-oxopropoxy) propanoate, lactate, glycolate, pyruvate, crotonate, isovalerate, cinnamate, formate, salicylate, carbamate, methylcarbamate, benzoate and gluconate groups.

Particularly preferred are cellulose monoacetate, cellulose hemisuccinate, and cellulose 2-(2-hydroxy-1-oxopropoxy)propanoate. The term "cellulose monoacetate" is used herein to denote those acetates with the degree of substitution of 1 or less. Particularly preferred is cellulose acetate having a degree of substitution of 0.55-0.70 and a molecular weight in the range 12,000-20,000.

15

Other Pendant Groups

As mentioned above, preferred (for the first aspect of the invention) or essential (for the second aspect of the invention) are degrees of substitution for the totality of all pendant substituents in the following order of increasing preference: from 0.3 to 3, from 0.4 to 1, from 0.5 to 0.75, from 0.6 to 0.7. However, as well as the groups which undergo the chemical change, pendant groups of other types may optionally be present, i.e. groups which do not undergo a chemical change to enhance fabric affinity. Within that class of other groups is the sub-class of groups for enhancing the solubility of the rebuild agent (e.g. groups which are, or contain one or more free carboxylic acid/salt and/or sulphonic acid/salt and/or sulphate groups).

30

Examples of solubility enhancing substituents include carboxyl, sulphonyl, hydroxyl, (poly)ethyleneoxy-and/or (poly)propyleneoxy-containing groups, as well as amine groups.

5

The other pendant groups preferably constitute from 0% to 65%, more preferably from 0% to 10% (e.g. from 0% to 5%) of the total number of pendant groups. The minimum number of other pendant groups may, for example be 0.1% or 1% of the total. The water-solubilising groups could comprise from 0% to 100% of those other groups but preferably from 0% to 20%, more preferably from 0% to 10%, still more preferably from 0% to 5% of the total number of other pendant groups.

15 Synthetic Routes

Those rebuild agents for use in the present invention which are not commercially available may be prepared by a number of different synthetic routes, for example:-

20

(1) polymerisation of suitable monomers, for example, enzymatic polymerisation of saccharides, e.g. per S. Shoda, & S. Kobayashi, Makromol. Symp. 1995, 99, 179-184 or oligosaccharide synthesis by orthogonal glycosylation e.g. per H. Paulsen, Angew. Chem. Int. Ed. Engl. 1995, 34, 1432-1434.;

25

(2) derivatisation of a polymeric backbone (either naturally occurring, especially polysaccharides, especially beta-1,4-linked polysaccharides, especially cellulose, mannan, glucomannan, galactomannan, xyloglucan; or synthetic

30

polymers) up to the required degree of substitution with functional groups which improve the solubility of the polymer using a reagent (especially acid halides, especially carboxylic acid halides, anhydrides, carboxylic acid
5 anhydrides, carboxylic acids or, carbonates) in a solvent which either dissolves the backbone, swells the backbone, or does not swell the backbone but dissolves or swells the product;

10 (3) hydrolysis of polymer derivatives (especially esters) down to the required degree of substitution; or

(4) a combination of any two or more of routes (1)-(3).

15 The degree and pattern of substitution from routes (1) or (2) may be subsequently altered by partial removal of functional groups by hydrolysis or solvolysis or other cleavage. Relative amounts of reactants and reaction times can also be used to control the degree of substitution. In
20 addition, or alternatively, the degree of polymerisation of the backbone may be reduced before, during, or after the derivatisation with functional groups. The degree of polymerisation of the backbone may be increased by further polymerisation or by cross linking agents before, during, or
25 after the derivatisation step.

Cellulose esters of hydroxyacids can be obtained using the acid anhydride, typically in acetic acid solution at 20-
30 30°C. When the product has dissolved the liquid is poured into water. Glycollic and lactic esters can be made in this way.

Cellulose glycollate may also be obtained from cellulose chloracetate (B.P. 320,842) by treating 100 parts with 32 parts of NaOH in alcohol added in small portions.

5 An alternative method of preparing cellulose esters consists in the partial displacement of the acid radical in a cellulose ester by treatment with another acid of higher ionisation constant (F.P. 702,116). The ester is heated at about 100° with the acid which, preferably, should be a
10 solvent for the ester. By this means cellulose acetate-oxalate, tartrate, maleate, pyruvate, salicylate and phenylglycollate have been obtained, and from cellulose tribenzoate a cellulose benzoate-pyruvate. A cellulose acetate-lactate or acetate-glycollate could be made in this
15 way also. As an example cellulose acetate (10 g) in dioxan (75 ml) containing oxalic acid (10 g) is heated at 100° for 2 hours under reflux.

Multiple esters are prepared by variations of this process.
20 A simple ester of cellulose, e.g. the acetate, is dissolved in a mixture of two (or three) organic acids, each of which has an ionisation constant greater than that of acetic acid (1.82×10^{-5}). With solid acids suitable solvents such as propionic acid, dioxan and ethylene dichloride are used. If
25 a mixed cellulose ester is treated with an acid this should have an ionisation constant greater than that of either of the acids already in combination. Thus:

A cellulose acetate-lactate-pyruvate is prepared from
30 cellulose acetate, 40 per cent. acetyl (100 g), in a bath of 125 ml pyruvic acid and 125 ml of 85 per cent. lactic acid

by heating at 100° for 18 hours. The product is soluble in water and is precipitated and washed with ether-acetone. M.p. 230-250°.

5 Compositions

According to the first aspect of the invention, the compositions must be main wash compositions which comprise a detergent active ingredient.

10

According to the third aspect of the invention, however, the rebuild agent may be used to soften fabric in any composition, for example a composition containing only diluent and/or also comprising another active ingredient.

15

According to the third aspect of the invention, the active may be a surface active agent or a fabric conditioning agent more than one active ingredient may be included.

The compound is typically included in said compositions at levels of from 0.005% to 25% by weight, preferably 0.01% to 10%, most preferably 0.025% to 2.5%.

The compositions used in the invention may be in any physical form e.g. a solid such as a powder or granules, a tablet, a solid bar, a paste, gel or (especially aqueous) liquid.

The method of the present invention preferably employs liquid or powder laundry compositions for use in a wash process. Use according to the third aspect of the invention may take place in any laundry process, for example in a wash

and/or rinse or drying process. In the case of a drying process, the composition may be in the form of a tumble dryer article, for example a sheet of absorbent material on which the composition used in the invention is absorbed
5 therein, for use in a tumble drying process.

The compositions used in the present invention are preferably main wash (fabric washing) compositions. The main wash compositions may include a fabric softening if appropriate.

10 The detergent compositions used in the invention may contain a surface-active compound (surfactant) which may be chosen from soap and non-soap anionic, cationic, non-ionic, amphoteric and zwitterionic surface-active compounds and mixtures thereof. Many suitable surface-active compounds are
15 available and are fully described in the literature, for example, in "Surface-Active Agents and Detergents", Volumes I and II, by Schwartz, Perry and Berch.

The preferred detergent-active compounds that can be used are
20 soaps and synthetic non-soap anionic and non-ionic compounds.

The compositions used in the invention may contain linear alkylbenzene sulphonate, particularly linear alkylbenzene sulphonates having an alkyl chain length of C₈-C₁₅. It is
25 preferred if the level of linear alkylbenzene sulphonate is from 0 wt% to 30 wt%, more preferably 1 wt% to 25 wt%, most preferably from 2 wt% to 15 wt%.

The compositions used in the invention may additionally or
30 alternatively contain one or more other anionic surfactants

in total amounts corresponding to percentages quoted above for alkyl benzene sulphonates. Suitable anionic surfactants are well-known to those skilled in the art. These include primary and secondary alkyl sulphates, particularly C₈-C₁₅ primary alkyl sulphates; alkyl ether sulphates; olefin sulphates; alkyl xylene sulphonates; dialkyl sulphosuccinates; and fatty acid ester sulphonates. Sodium salts are generally preferred.

10 Preferably, the total level of non-soap anionic surfactant is in the range 0-35 wt%, more preferably 5-30 wt%, most preferably 5-20 wt%.

The compositions used in the invention may contain non-ionic surfactant. Nonionic surfactants that may be used include the primary and secondary alcohol ethoxylates, especially the C₈-C₂₀ aliphatic alcohols ethoxylated with an average of from 1 to 20 moles of ethylene oxide per mole of alcohol, and more especially the C₁₀-C₁₅ primary and secondary aliphatic alcohols ethoxylated with an average of from 1 to 10 moles of ethylene oxide per mole of alcohol. Non-ethoxylated nonionic surfactants include alkylpolyglycosides, glycerol monoethers, and polyhydroxyamides (glucamide).

25 It is preferred if the level of total non-ionic surfactant is from 0 wt% to 30 wt%, preferably from 1 wt% to 25 wt%, most preferably from 2 wt% to 15 wt%.

Another class of suitable surfactants comprises certain mono-alkyl cationic surfactants useful in main-wash laundry compositions. Cationic surfactants that may be used include

quaternary ammonium salts of the general formula $R_1R_2R_3R_4N^+ X^-$ wherein the R groups are long or short hydrocarbon chains, typically alkyl, hydroxyalkyl or ethoxylated alkyl groups, and X is a counter-ion (for example, compounds in which R_1 is
5 a C₈-C₂₂ alkyl group, preferably a C₈-C₁₀ or C₁₂-C₁₄ alkyl group, R_2 is a methyl group, and R_3 and R_4 , which may be the same or different, are methyl or hydroxyethyl groups); and cationic esters (for example, choline esters).

10 The choice of surface-active compound (surfactant), and the amount present, will depend on the intended use of the detergent composition. In fabric washing compositions, different surfactant systems may be chosen, as is well known to the skilled formulator, for handwashing products and for
15 products intended for use in different types of washing machine.

The total amount of surfactant present will also depend on the intended end use and may be as high as 60 wt%, for
20 example, in a composition for washing fabrics by hand. In compositions for machine washing of fabrics, an amount of from 5 to 40 wt% is generally appropriate. Typically the compositions will comprise at least 2 wt% surfactant e.g. 2-60%, preferably 15-40% most preferably 25-35%.

25 Detergent compositions suitable for use in most automatic fabric washing machines generally contain anionic non-soap surfactant, or non-ionic surfactant, or combinations of the two in any suitable ratio, optionally together with soap.

30

Any conventional fabric conditioning agent may be used in the present invention. The conditioning agents may be cationic or non-ionic. If the fabric conditioning compound is to be employed in a main wash detergent composition the compound will typically be non-ionic. If used in the rinse phase, they will typically be cationic. They may for example be used in amounts from 0.5% to 35%, preferably from 1% to 30% more preferably from 3% to 25% by weight of the composition.

10

Preferably the fabric conditioning agent has two long chain alkyl or alkenyl chains each having an average chain length greater than or equal to C₁₆. Most preferably at least 50% of the long chain alkyl or alkenyl groups have a chain length of C₁₈ or above. It is preferred if the long chain alkyl or alkenyl groups of the fabric conditioning agents are predominantly linear.

15

The fabric conditioning agents are preferably compounds that provide excellent softening, and are characterised by a chain melting L β to L α transition temperature greater than 25°C, preferably greater than 35°C, most preferably greater than 45°C. This L β to L α transition can be measured by DSC as defined in " Handbook of Lipid Bilayers, D Marsh, CRC Press, Boca Raton, Florida, 1990 (pages 137 and 337).

20

25

Substantially insoluble fabric conditioning compounds in the context of this invention are defined as fabric conditioning compounds having a solubility less than 1×10^{-3} wt % in demineralised water at 20°C. Preferably the fabric softening compounds have a solubility less than 1×10^{-4} wt

30

%, most preferably less than 1×10^{-8} to 1×10^{-6} . Preferred cationic fabric softening agents comprise a substantially water insoluble quaternary ammonium material comprising a single alkyl or alkenyl long chain having an average chain length greater than or equal to C₂₀ or, more preferably, a compound comprising a polar head group and two alkyl or alkenyl chains having an average chain length greater than or equal to C₁₄.

10 Preferably, the cationic fabric softening agent is a quaternary ammonium material or a quaternary ammonium material containing at least one ester group. The quaternary ammonium compounds containing at least one ester group are referred to herein as ester-linked quaternary ammonium
15 compounds.

As used in the context of the quaternary ammonium cationic fabric softening agents, the term 'ester group', includes an ester group which is a linking group in the molecule.

20

It is preferred for the ester-linked quaternary ammonium compounds to contain two or more ester groups. In both monoester and the diester quaternary ammonium compounds it is preferred if the ester group(s) is a linking group
25 between the nitrogen atom and an alkyl group. The ester groups(s) are preferably attached to the nitrogen atom via another hydrocarbyl group.

Also preferred are quaternary ammonium compounds containing
30 at least one ester group, preferably two, wherein at least one higher molecular weight group containing at least one

ester group and two or three lower molecular weight groups are linked to a common nitrogen atom to produce a cation and wherein the electrically balancing anion is a halide, acetate or lower alkylsulphate ion, such as chloride or methosulphate. The higher molecular weight substituent on the nitrogen is preferably a higher alkyl group, containing 12 to 28, preferably 12 to 22, e.g. 12 to 20 carbon atoms, such as coco-alkyl, tallowalkyl, hydrogenated tallowalkyl or substituted higher alkyl, and the lower molecular weight substituents are preferably lower alkyl of 1 to 4 carbon atoms, such as methyl or ethyl, or substituted lower alkyl. One or more of the said lower molecular weight substituents may include an aryl moiety or may be replaced by an aryl, such as benzyl, phenyl or other suitable substituents.


15

Preferably the quaternary ammonium material is a compound having two C_{12} - C_{22} alkyl or alkenyl groups connected to a quaternary ammonium head group via at least one ester link, preferably two ester links or a compound comprising a single long chain with an average chain length equal to or greater than C_{20} .

More preferably, the quaternary ammonium material comprises a compound having two long chain alkyl or alkenyl chains with an average chain length equal to or greater than C_{14} . Even more preferably each chain has an average chain length equal to or greater than C_{16} . Most preferably at least 50% of each long chain alkyl or alkenyl group has a chain length of C_{18} . It is preferred if the long chain alkyl or alkenyl groups are predominantly linear.

30

The most preferred type of ester-linked quaternary ammonium material that can be used according to the invention is represented by the formula (A):

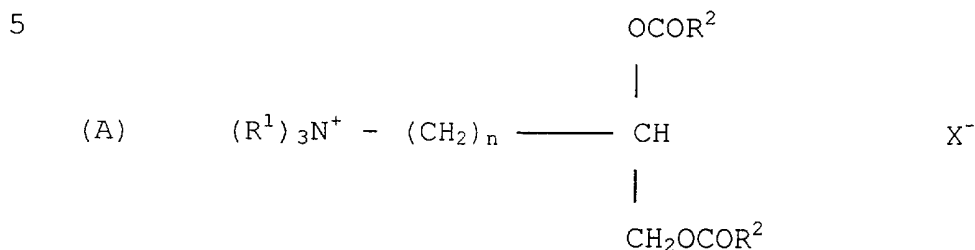

wherein R^1 , n , R^2 and X^- are as defined above.


It is advantageous for environmental reasons if the quaternary ammonium material is biologically degradable.

15

Preferred materials of this class such as 1,2 bis[hardened tallowoyloxy]-3-trimethylammonium propane chloride and their method of preparation are, for example, described in US-A-4 137 180. Preferably these materials comprise small amounts of the corresponding monoester as described in US-A-4 137 180 for example 1-hardened tallow-oyloxy-2-hydroxy-3-trimethylammonium propane chloride.

20

Another class of preferred ester-linked quaternary ammonium materials for use according to the invention can be represented by the formula:

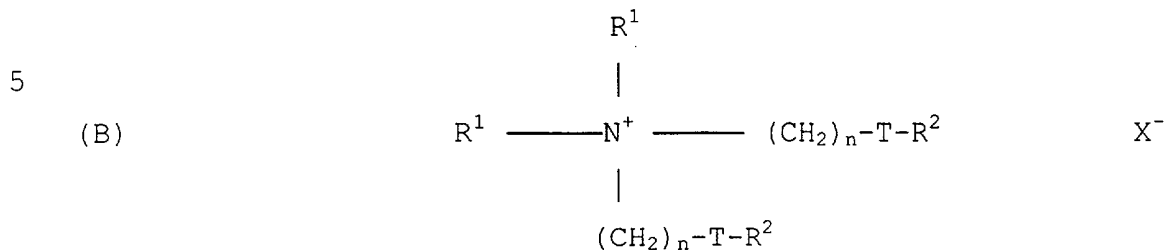

10 wherein each R¹ group is independently selected from C₁₋₄ alkyl, hydroxyalkyl or C₂₋₄ alkenyl groups; and wherein each R² group is independently selected from C₈₋₂₈ alkyl or alkenyl groups; X⁻ is any suitable counter-ion, i.e. a halide, acetate or lower alkylsulphate ion, such as chloride or
15 methosulphate.



T is -O-C- or -C-O-; and


20 n is an integer from 1-5 or is 0.

It is especially preferred that each R¹ group is methyl and each n is 2.

25 Of the compounds of formula (B), Di-(tallowoxyethyl)-dimethyl ammonium chloride, available from Hoechst, is the most preferred. Di-(hardened tallowoxyethyl)dimethyl ammonium chloride, ex Hoechst and di-(tallowoxyethyl)-methyl hydroxyethyl methosulphate are also preferred.

30

Another preferred class of quaternary ammonium cationic fabric softening agent is defined by formula (C):-

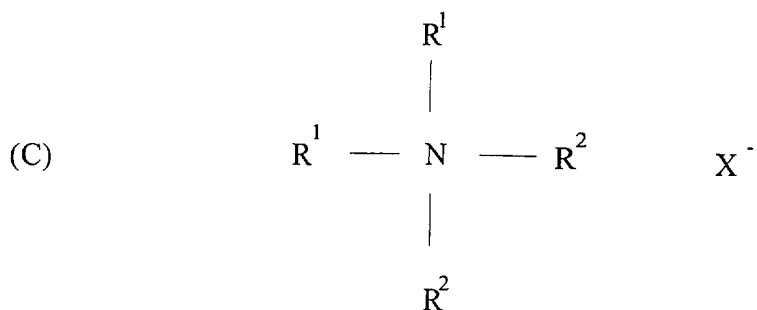

5 where R¹, R² and X are as hereinbefore defined.

A preferred material of formula (C) is di-hardened tallow-diethyl ammonium chloride, sold under the Trademark Arquad 2HT.

10

The optionally ester-linked quaternary ammonium material may contain optional additional components, as known in the art, in particular, low molecular weight solvents, for instance isopropanol and/or ethanol, and co-actives such as nonionic softeners, for example fatty acid or sorbitan esters.

15

The compositions of the invention, when used as main wash fabric washing compositions, will generally also contain one or more detergency builders. The total amount of detergency builder in the compositions will typically range from 5 to 80 wt%, preferably from 10 to 60 wt%.

20

Inorganic builders that may be present include sodium carbonate, if desired in combination with a crystallisation seed for calcium carbonate, as disclosed in GB 1 437 950 (Unilever); crystalline and amorphous aluminosilicates, for

25

example, zeolites as disclosed in GB 1 473 201 (Henkel),
amorphous aluminosilicates as disclosed in GB 1 473 202
(Henkel) and mixed crystalline/amorphous aluminosilicates as
disclosed in GB 1 470 250 (Procter & Gamble); and layered
5 silicates as disclosed in EP 164 514B (Hoechst). Inorganic
phosphate builders, for example, sodium orthophosphate,
pyrophosphate and tripolyphosphate are also suitable for use
with this invention.

10 The compositions used in the invention preferably contain an
alkali metal, preferably sodium, aluminosilicate builder.
Sodium aluminosilicates may generally be incorporated in
amounts of from 10 to 70% by weight (anhydrous basis),
preferably from 25 to 50 wt%.

15

The alkali metal aluminosilicate may be either crystalline
or amorphous or mixtures thereof, having the general
formula: $0.8-1.5 \text{ Na}_2\text{O} \cdot \text{Al}_2\text{O}_3 \cdot 0.8-6 \text{ SiO}_2$

20 These materials contain some bound water and are required to
have a calcium ion exchange capacity of at least 50 mg CaO/g.
The preferred sodium aluminosilicates contain 1.5-3.5 SiO_2
units (in the formula above). Both the amorphous and the
crystalline materials can be prepared readily by reaction
25 between sodium silicate and sodium aluminate, as amply
described in the literature. Suitable crystalline sodium
aluminosilicate ion-exchange detergency builders are
described, for example, in GB 1 429 143 (Procter & Gamble).
The preferred sodium aluminosilicates of this type are the
30 well-known commercially available zeolites A and X, and
mixtures thereof.

The zeolite may be the commercially available zeolite 4A now widely used in laundry detergent powders. However, according to a preferred embodiment of the invention, the zeolite builder incorporated in the compositions of the invention is
5 maximum aluminium zeolite P (zeolite MAP) as described and claimed in EP 384 070A (Unilever). Zeolite MAP is defined as an alkali metal aluminosilicate of the zeolite P type having a silicon to aluminium ratio not exceeding 1.33, preferably within the range of from 0.90 to 1.33, and more preferably
10 within the range of from 0.90 to 1.20.

Especially preferred is zeolite MAP having a silicon to aluminium ratio not exceeding 1.07, more preferably about 1.00. The calcium binding capacity of zeolite MAP is
15 generally at least 150 mg CaO per g of anhydrous material.

Organic builders that may be present include polycarboxylate polymers such as polyacrylates, acrylic/maleic copolymers, and acrylic phosphinates; monomeric polycarboxylates such as
20 citrates, gluconates, oxydisuccinates, glycerol mono-, di and trisuccinates, carboxymethyloxy succinates, carboxymethoxymalonates, dipicolinates, hydroxyethyliminodiacetates, alkyl- and alkenylmalonates and succinates; and sulphonated fatty acid salts. This list is
25 not intended to be exhaustive.

Especially preferred organic builders are citrates, suitably used in amounts of from 5 to 30 wt%, preferably from 10 to 25 wt%; and acrylic polymers, more especially acrylic/maleic
30 copolymers, suitably used in amounts of from 0.5 to 15 wt%, preferably from 1 to 10 wt%.

Builders, both inorganic and organic, are preferably present in alkali metal salt, especially sodium salt, form.

5 Compositions used in the invention may also suitably contain a bleach system. Fabric washing compositions may desirably contain peroxy bleach compounds, for example, inorganic persalts or organic peroxyacids, capable of yielding hydrogen peroxide in aqueous solution.

10 Suitable peroxy bleach compounds include organic peroxides such as urea peroxide, and inorganic persalts such as the alkali metal perborates, percarbonates, perphosphates, persilicates and persulphates. Preferred inorganic persalts are sodium perborate monohydrate and tetrahydrate, and sodium
15 percarbonate.

Especially preferred is sodium percarbonate having a protective coating against destabilisation by moisture. Sodium percarbonate having a protective coating comprising
20 sodium metaborate and sodium silicate is disclosed in GB 2 123 044B (Kao).

The peroxy bleach compound is suitably present in an amount of from 0.1 to 35 wt%, preferably from 0.5 to 25 wt%. The
25 peroxy bleach compound may be used in conjunction with a bleach activator (bleach precursor) to improve bleaching action at low wash temperatures. The bleach precursor is suitably present in an amount of from 0.1 to 8 wt%, preferably from 0.5 to 5 wt%.

30

Preferred bleach precursors are peroxy-carboxylic acid precursors, more especially peracetic acid precursors and peroxoanoic acid precursors. Especially preferred bleach precursors suitable for use in the present invention are
5 N,N,N',N',-tetracetyl ethylenediamine (TAED) and sodium noanoyloxybenzene sulphonate (SNOBS). The novel quaternary ammonium and phosphonium bleach precursors disclosed in US 4 751 015 and US 4 818 426 (Lever Brothers Company) and EP 402 971A (Unilever), and the cationic bleach precursors disclosed
10 in EP 284 292A and EP 303 520A (Kao) are also of interest.

The bleach system can be either supplemented with or replaced by a peroxyacid. Examples of such peracids can be found in US 4 686 063 and US 5 397 501 (Unilever). A preferred
15 example is the imido peroxy-carboxylic class of peracids described in EP A 325 288, EP A 349 940, DE 382 3172 and EP 325 289. A particularly preferred example is phthalimido peroxy caproic acid (PAP). Such peracids are suitably present at 0.1 - 12%, preferably 0.5 - 10%.

20 A bleach stabiliser (transition metal sequestrant) may also be present. Suitable bleach stabilisers include ethylenediamine tetra-acetate (EDTA), the polyphosphonates such as Dequest (Trade Mark) and non-phosphate stabilisers
25 such as EDDS (ethylene diamine di-succinic acid). These bleach stabilisers are also useful for stain removal especially in products containing low levels of bleaching species or no bleaching species.

30 An especially preferred bleach system comprises a peroxy bleach compound (preferably sodium percarbonate optionally

together with a bleach activator), and a transition metal bleach catalyst as described and claimed in EP 458 397A ,EP 458 398A and EP 509 787A (Unilever).

- 5 The compositions used in the invention may also contain one or more enzyme(s). Suitable enzymes include the proteases, amylases, cellulases, oxidases, peroxidases and lipases usable for incorporation in detergent compositions. Preferred proteolytic enzymes (proteases) are, catalytically
- 10 active protein materials which degrade or alter protein types of stains when present as in fabric stains in a hydrolysis reaction. They may be of any suitable origin, such as vegetable, animal, bacterial or yeast origin.
- 15 Proteolytic enzymes or proteases of various qualities and origins and having activity in various pH ranges of from 4-12 are available and can be used in the instant invention. Examples of suitable proteolytic enzymes are the subtilisins which are obtained from particular strains of B. Subtilis B.
- 20 licheniformis, such as the commercially available subtilisins Maxatase (Trade Mark), as supplied by Gist Brocades N.V., Delft, Holland, and Alcalase (Trade Mark), as supplied by Novo Industri A/S, Copenhagen, Denmark.
- 25 Particularly suitable is a protease obtained from a strain of Bacillus having maximum activity throughout the pH range of 8-12, being commercially available, e.g. from Novo Industri A/S under the registered trade-names Esperase (Trade Mark) and Savinase (Trade-Mark). The preparation of these and
- 30 analogous enzymes is described in GB 1 243 785. Other commercial proteases are Kazusase (Trade Mark obtainable from

Showa-Denko of Japan), Optimase (Trade Mark from Miles Kali-Chemie, Hannover, West Germany), and Superase (Trade Mark obtainable from Pfizer of U.S.A.).

5 Detergency enzymes are commonly employed in granular form in amounts of from about 0.1 to about 3.0 wt%. However, any suitable physical form of enzyme may be used.

10 The compositions used in the invention may contain alkali metal, preferably sodium carbonate, in order to increase detergency and ease processing. Sodium carbonate may suitably be present in amounts ranging from 1 to 60 wt%, preferably from 2 to 40 wt%. However, compositions containing little or no sodium carbonate are also within the scope of the
15 invention.

Powder flow may be improved by the incorporation of a small amount of a powder structurant, for example, a fatty acid (or fatty acid soap), a sugar, an acrylate or acrylate/maleate
20 copolymer, or sodium silicate. One preferred powder structurant is fatty acid soap, suitably present in an amount of from 1 to 5 wt%.

25 Other materials that may be present in detergent compositions used in the invention include sodium silicate; antiredeposition agents such as cellulosic polymers; inorganic salts such as sodium sulphate; lather control agents or lather boosters as appropriate; proteolytic and lipolytic enzymes; dyes; coloured speckles; perfumes; foam
30 controllers; fluorescers and decoupling polymers. This list is not intended to be exhaustive.

It is often advantageous if soil release or soil suspending polymers are present.

The detergent composition when diluted in the wash liquor
5 (during a typical wash cycle) will typically give a pH of the wash liquor from 7 to 10.5 for a main wash detergent.

Particulate detergent compositions are suitably prepared by spray-drying a slurry of compatible heat-insensitive
10 ingredients, and then spraying on or post-dosing those ingredients unsuitable for processing via the slurry. The skilled detergent formulator will have no difficulty in deciding which ingredients should be included in the slurry and which should not.

15

Particulate detergent compositions used in the invention preferably have a bulk density of at least 400 g/l, more preferably at least 500 g/l. Especially preferred compositions have bulk densities of at least 650 g/litre,
20 more preferably at least 700 g/litre.

Such powders may be prepared either by post-tower densification of spray-dried powder, or by wholly non-tower methods such as dry mixing and granulation; in both cases a
25 high-speed mixer/granulator may advantageously be used. Processes using high-speed mixer/granulators are disclosed, for example, in EP 340 013A, EP 367 339A, EP 390 251A and EP 420 317A (Unilever).

30 Liquid detergent compositions can be prepared by admixing the essential and optional ingredients thereof in any desired

order to provide compositions containing components in the requisite concentrations. Liquid compositions used in the present invention can also be in compact form which means it will contain a lower level of water compared to a
5 conventional liquid detergent.

The present invention will now be explained in more detail by way of the following non-limiting examples.

10 Examples

Example 1: Preparation of Cellulose "Monoacetate"

This was prepared by the methods of WO 91/16359.

15

Example 1a

30.0 g of cellulose diacetate (DS 2.45) (the starting cellulose ester), 0.08 g of molybdenum carbonyl (catalyst),
20 213.6 g of methanol (reactive solvent 1) and 30.0 g of water (reactive solvent 2) are loaded into a 1-litre, steel Parr reactor equipped with a magnetically coupled agitator. The reactor is sealed, then heated to 140°C. The heat-up time is typically 1 to 2 hours. The initial pressure in the
25 reactor is typically 200-500 psi (1379-3447 kPa) nitrogen. The reaction mixture is stirred at 140°C for 7 hours. Then the reaction mixture is allowed to cool to room temperature, which typically takes 2 to 3 hours. The products are isolated by filtration of the resulting slurry. The
30 reactive solvent, as well as by-products such as methyl acetate, can be recovered from the filtrate by distillation.

The product is cellulose monoacetate and the yield is 66%. The key analyses are: DS = 0.48; intrinsic viscosity (0.25 g per 100 ml of DMSO) = 0.55.

5 Example 1b

30.0 g of cellulose diacetate (DS 2.45) (the starting cellulose ester), 0.05 g of molybdenum (VI) oxide and 237.3 g of methanol (reactive solvent) are loaded into a 1-litre,
10 steel Parr reactor equipped with a magnetically coupled agitator. The reactor is sealed, then heated to 155°C. The heat-up time is typically 1 to 2 hours. The initial pressure in the reactor is typically 200-500 psi (1379-3447 kPa) nitrogen. The reaction mixture is stirred at 155°C for
15 3 hours. Then the reaction mixture is allowed to cool to room temperature, which typically takes 2 to 3 hours. The products are isolated by filtration of the resulting slurry. The reactive solvent, as well as certain by-products such as methyl acetate, can be recovered from the filtrate by
20 distillation. The product is cellulose monoacetate and the yield is 87%. The key analyses are: DS = 0.50; intrinsic viscosity (0.25 g per 100 ml of DMSO) = 1.16.

25 Example 2: Preparation of cellulose hemisuccinate (first route)

Cellulose hemisuccinate was prepared following B.P. 410,125. A mixture of cellulose (Whatman cellulose powder CF11 which is cotton, 5g), succinic anhydride (25 g), and pyridine (75
30 ml) was kept at 65°C for a week. On pouring into methanol the pyridinium salt of cellulose hemisuccinate was obtained.

The crude cellulose hemisuccinate, pyridinium salt, was washed repeatedly with methanol to remove pyridine and unused reactants. The pyridinium salt of cellulose hemisuccinate was converted to the free acid form by driving off the
5 pyridine under vacuum at $< 95^{\circ}\text{C}$.

Infrared spectra of reagents and products were recorded on a Bio-Rad FTS-7 infrared spectrometer using a Graseby Specac (Part #10500) Single Reflection Diamond ATR attachment.

10

The degree of substitution of cellulose hemisuccinate prepared from cotton fibres was determined by a one-step neutralisation of the carboxylic acid groups and hydrolysis of the ester groups, using an excess of sodium hydroxide,
15 followed by titration of the excess sodium hydroxide with a standard solution of hydrochloric acid, using phenolphthalein as an indicator. The figure thus obtained was 2.8.

The infrared spectrum of the product in its neutralised, sodium salt form, has two distinct bands attributable to the stretching of $\text{C}=\text{O}$. The band at 1574 cm^{-1} is attributable to carboxylate anion, a band for which is expected at $1550\text{-}1610\text{ cm}^{-1}$. It is therefore reasonable to attribute the other band at 1727 cm^{-1} to ester, a band for which is expected at $1735\text{ -}1750\text{ cm}^{-1}$. The infrared spectrum is therefore consistent with
25 a hemiester salt.

Example 3: Preparation of cellulose hemisuccinate (route 2)

30 Cellulose hemisuccinate was prepared following GB-A-410,125. A mixture of cellulose (Avicel PH105, 5g), succinic

anhydride (25 g), and pyridine (75 ml) was kept at 65°C for a week. On pouring into methanol the pyridinium salt of cellulose hemisuccinate was obtained. The crude cellulose hemisuccinate, pyridinium salt, was washed repeatedly with
5 methanol to remove pyridine and unused reactants.

When this gel was mixed with dilute aqueous sodium hydroxide, it did not immediately dissolve but remained as lumps, but it did slowly dissolve to form a near-optically-clear solution.
10 The fact that the methanol-washed cellulose hemisuccinate was not immediately soluble in dilute aqueous sodium hydroxide indicated that the cellulose hemisuccinate was slightly cross linked.

15 The methanol-rinsed cellulose hemisuccinate was used to prepare a cellulose hemisuccinate having a lower degree of substitution and with fewer cross links which was water dispersable.

20 A homogeneous solution was prepared by partially hydrolysing the cellulose hemisuccinate as follows. Cellulose hemisuccinate prepared from microcrystalline cellulose, in the form of a gel of cellulose hemisuccinate, pyridinium salt, dispersed in methanol, was added to 50 ml of stirred
25 0.1 M NaCl solution at 50 °C. 0.1 M NaOH solution was added until the pH was raised to ~7.0 (18.0 ml was required). More 0.1 M NaOH solution was added until the pH was raised to ~10.5 (3.0 ml was required). This pH was then maintained for 45 minutes by further additions of 0.1 M NaOH solution
- 30 (4.2 ml was required). The mixture was then cooled to room temperature and neutralised using 1.0 M HCl (0.18 ml was

required). After this procedure the solution was only slightly turbid. The polymer was separated from inorganic salts by ultrafiltration (Amicon, Inc.) employing a cellulose triacetate membrane with a molecular weight cut-off of 10,000 (Sartorius SM 145 39).

The degree of substitution of cellulose hemisuccinate prepared from by this route was determined by a one-step neutralisation of the carboxylic acid groups and hydrolysis of the ester groups, using an excess of sodium hydroxide, followed by titration of the excess sodium hydroxide with a standard solution of hydrochloric acid, using phenolphthalein as an indicator. The figure thus obtained was 2.0.

Example 4: Preparation of cellulose 2-(2-hydroxy-1-oxopropoxy)propanoate

Following the method described in DE 3,322,118 a mixture of 2.33 g lactide (3,6-dimethyl-1,4-dioxane-2,5-dione) and 29.7 g of cellulose solution (obtained by dissolving 14 g of microcrystalline cellulose (Avicel PH105) swollen with 14 g of *N,N*-dimethylacetamide in a mixture of 200 ml of *N,N*-dimethylacetamide and 16.8 g of lithium chloride) was treated with 1.5 ml of triethyl amine and stirred at 75°C for 1.5 hours.

Cellulose 2-(2-hydroxy-1-oxopropoxy)propanoate was isolated by pipetting the reaction mixture into 300 ml of methanol. The product gel was washed with a further two batches of 300 ml of methanol. At this stage the methanol-swollen 2-(2-hydroxy-1-oxopropoxy)propanoate was water soluble.

The cellulose 2-(2-hydroxy-1-oxopropoxy)propanoate was dried in a vacuum oven at room temperature. The dry cellulose 2-(2-hydroxy-1-oxopropoxy)propanoate was partially soluble.

5

Examples 5-16 are formulation Examples which illustrate formulations which can be used according to the method of the present invention. In each case, the "Polymer" specified is the material of Example 1.

10

Example 5: Spray-Dried Powder

	<u>Component</u>	<u>% w/w</u>
15	Na PAS	11.5
	Dobanol 25-7	6.3
	Soap	2.0
	Zeolite	24.1
	SCMC	0.6
20	Na Citrate	10.6
	Na Carbonate	23.0
	Polymer	0.3
	Silicone Oil	0.5
	Dequest 2066	0.4
25	Sokalan CP5	0.9
	Savinase 16L	0.7
	Lipolase	0.1
	Perfume	0.4
	Water/salts	to 100

30

Example 6: Detergent Granulate Prepared by Non-Spray Drying Method

The following composition was prepared by the two-stage
5 mechanical granulation method described in EP-A- 367 339.

	<u>Component</u>	<u>% w/w</u>
	NaPAS	13.5
10	Dobanol 25-7	2.5
	STPP	45.3
	Na Carbonate	4.0
	Polymer	0.28
	Na Silicate	10.1
15	Minors	1.5
	Water	balance

Example 7: Isotropic Laundry Liquid

	<u>Component</u>	<u>% w/w</u>
5	Na-citrate (37.5%)	10.7
	Propyleneglycol	7.5
	Ethylene Glycol	4.5
	Borax	3.0
	Savinase 16L	0.3
10	Lipolase	0.1
	Polymer	0.25
	Monoethanolamine	0.5
	Cocofatty acid	1.7
	NaOH (50%)	2.2
15	LAS	10.3
	Dobanol 25-7	6.3
	LES	7.6
	Minors	1.3
	(adjust pH to 7 with NaOH)	
20	Water	up to 100

Example 8: Structured Laundry Liquid

<u>Component</u>	<u>% w/w</u>
LAS	16.5
5 Dobanol 25-7	9
Oleic acid (Priolene 6907)	4.5
Zeolite	15
KOH, neutralisation of acids and pH to 8.5	
Citric acid	8.2
10 deflocculating polymer	1
Protease	0.38
Lipolase	0.2
Polymer	0.15
Minors	0.4
15 Water	to 100%

Component	% w/w					
	Ex.10	Ex.11	Ex.12	Ex.13	Ex.14	E
Na alcohol EO sulphate	0.0	0.0	0.0	0.0	0.0	0
linear alkylbenzenesulfonate, Na salt (LAS)	5.1	5.9	5.8	7.3	8.2	9
sodium stearate	0.0	0.3	0.3	0.3	1.0	1
fatty acid	1.7	0.3	0.3	0.4	0.0	0
alcohol ethoxylate 9EO	0.0	0.0	0.0	0.0	0.0	0
alcohol ethoxylate 7EO branched	2.5	3.9	3.9	4.8	4.3	5
alcohol ethoxylate 3EO branched	3.4	2.9	2.9	3.6	2.3	2
sodium citrate	0.0	0.0	0.0	0.0	3.3	7
propylene glycol	0.0	0.0	0.0	0.0	0.0	0
sorbitol	0.0	0.0	0.0	0.0	0.0	0
sodium borate	0.0	0.0	0.0	0.0	0.0	0
sodium silicate	0.4	5.9	5.8	7.3	1.5	0
sodium carbonate	17.6	9.0	12.0	12.4	9.2	1
sodium bicarbonate	0.0	0.0	0.0	6.1	0.9	3
sodium sulphate	19.8	16.2	13.9	16.3	0.0	0
STPP	0.0	22.1	22.1	27.4	0.0	0
zeolite A24 (anhydrous)	19.8	0.0	0.0	0.0	28.0	3
sodium perborate tetrahydrate	11.7	17.9	17.8	0.0	0.0	0
coated percarbonate 13.5 avOx	0.0	0.0	0.0	0.0	18.0	0
TAED granule (83%)	2.1	2.0	2.0	0.0	5.2	0
minors	5.9	3.8	3.2	4.2	8.0	8
water	0.0	0.0	0.0	0.0	0.0	0
polymer	10.0	10.0	10.0	10.0	10.0	1
TOTAL:	100.0	100.0	100.0	100.0	100.0	1

Raw Material Specification

<u>Component</u>	<u>Specification</u>
LAS	Linear Alkyl Benzene Sulphonic-acid, Marlon AS3, ex Huls
Na-LAS	LAS-acid neutralised with NaOH
Dobanol 25-7	C12-15 ethoxylated alcohol, 7EO, ex Shell
LES	Lauryl Ether Sulphate, Dobanol 25-S3, ex Shell
Zeolite	Wessalith P, ex Degussa
STPP	Sodium Tri PolyPhosphate, Thermphos NW, ex Hoechst
Dequest 2066	Metal chelating agent, ex Monsanto
Dequest 2047	Metal chelating agent, ex Monsanto
Silicone oil	Antifoam, DB 100, ex Dow Corning
Tinopal CBS-X	Fluorescer, ex Ciba-Geigy
Lipolase	Type 100L, ex Novo
Savinase 16L	Protease, ex Novo
Sokalan CP5	Acrylic/Maleic Builder Polymer ex BASF
Deflocculating Polymer	Polymer A-11 disclosed in EP-A- 346 995
SCMC	Sodium Carboxymethyl Cellulose
Minors	antiredeposition polymers, transition-metal scavengers/bleach stabilisers, fluorescers, antifoams, dye- transfer-inhibition polymers, enzymes, and perfume.

Examples 17-22: Performance Evaluation

The aim of the following experiment was to determine the softening of cotton fabric over successive 30 minute, 40°C washes in surfactant-containing, buffered liquors with (and without) various water soluble cellulose acetate samples.

Method

Twelve Tergo-t-ometer pots were filled with 1 litre of demineralised water and heated to 40°C. To each of the

pots were added 5 g of one of the above test formulations above giving four pots for each formulation. To each of the pots were added two 20 cm x 20 cm squares of Terry towelling. The pots were maintained at 40°C and agitated at 60 rpm for thirty minutes. Each of the sets of cloths was then rinsed in two changes of 1 litre of demineralised water at ambient temperature. The cloths were then spun dry for 30 seconds in a domestic spin drier and finally hung up to air dry under ambient conditions. This process was repeated five times. After the final cycle, the cloths were allowed to dry in a controlled atmosphere at 20°C and 65 %RH for twenty-four hours.

The cloths were then assessed by an in-house expert softness assessment panel. A round-robin protocol was used whereby fabrics washed using each formulation are compared with the fabrics washed using the other two formulations. The panel data was analysed using a statistical package employing a Bradley-Terry paired-comparison analysis to determine a preference score for each of the fabric treatments.


The results are set out in Table 2.

Table 2





Ingredient	Quantity/Part by Weight		
	Example 17	Example 18	Comparative Example A
Na-LAS	8.68	8.68	8.68
C ₁₂ -C ₁₅ EO ₇ alcohol ethoxylate	4.55	4.55	4.55
C ₁₂ -C ₁₅ EO ₃ alcohol ethoxylate	2.44	2.44	2.44
sodium stearate	1.12	1.12	1.12
zeolite A24 (ex Crosfield)	29.63	29.63	29.63
sodium citrate	3.49	3.49	3.49
sodium carbonate	13.82	13.82	13.82
sodium carboxymethyl cellulose	0.54	0.54	0.54
silicone oil antifoam	0.30	0.30	0.30
fluorescer	0.20	0.20	0.20
polyester soil release polymer	0.30	0.30	0.30
Sokalan CP5	1.0	1.0	1.0
sodium bicarbonate	1.00	1.00	1.00
sodium silicate	1.7	1.7	1.7
TAED	5.5	5.5	5.5
sodium percarbonate	19.00	19.00	19.00
Dequest 2047	1.00	1.00	1.00
protease	0.78	0.78	0.78
lipase	0.12	0.12	0.12
amylase	0.45	0.45	0.45
polymer a	10.0	1.0	0.0
moisture	4.77	4.77	4.77

CLAIMS:

1. A method of softening fabric, comprising treating the fabric with a laundry wash composition comprising a detergent active and a water-soluble or water-dispersible rebuild agent for deposition onto a fabric during the wash wherein the rebuild agent undergoes during the wash, a chemical change by which change the affinity of the rebuild agent for the fabric is increased, said chemical change resulting in the loss or modification of one or more groups covalently bonded to be pendant to a polymeric backbone of the rebuild agent via an ester linkage, the ester-linked group(s) being selected from monocarboxylic acid esters.
2. A method according to claim 1, wherein the rebuild agent is selected from one or more materials of general formula (I):-

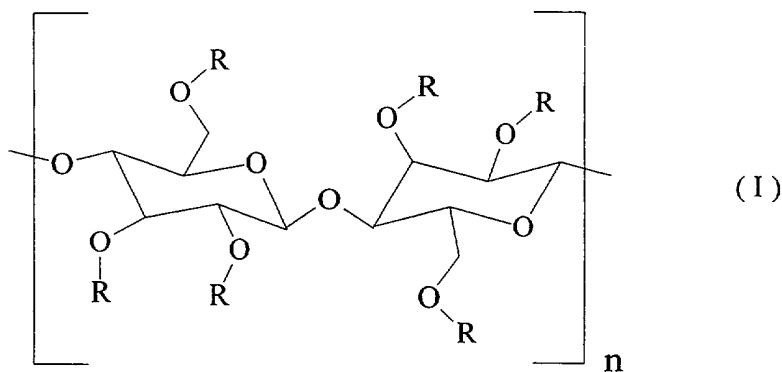

wherein at least one or more R groups of the polymer are independently selected from groups of formulae:-



wherein each R¹ is independently selected from C₁₋₂₀ (preferably C₁₋₆) alkyl, C₂₋₂₀ (preferably C₂₋₆) alkenyl (e.g. vinyl) and C₅₋₇ aryl (e.g. phenyl) any of which is optionally substituted by one or more substituents independently selected from C₁₋₄ alkyl, C₁₋₁₂ (preferably C₁₋₄) alkoxy, hydroxyl, vinyl and phenyl groups; and

each R² is independently hydrogen or a group R¹ as hereinbefore defined.


3. A method according to any preceding claim, wherein the polymeric backbone of the rebuild agent comprises cellulose units or other β-1,4 linked polysaccharide units.
4. A method according to claim 3, wherein the average degree of substitution of the total of all groups on the saccharide rings of the rebuild agent is from 0.4

to 3, preferably from 0.4 to 1, more preferably from 0.5 to 0.75, most preferably from 0.6 to 0.7.





5. A method of softening fabric, comprising treating the fabric with a laundry wash composition comprising a detergent active and a water-soluble or water-dispersible rebuild agent for deposition onto a fabric during the wash wherein the rebuild agent undergoes during the wash, a chemical change by which change the affinity of the rebuild agent for the fabric is increased, the chemical change occurring in or to a group or groups covalently bonded to be pendant on a polymeric backbone of the rebuild agent and which backbone comprises cellulose units or other β -1,4 linked polysaccharide units, the average degree of substitution of the total of all groups pendant on the saccharide rings of the backbone being from 0.3 to 3, preferably from 0.4 to 1, more preferably from 0.5 to 0.75, most preferably from 0.6 to 0.7.
6. A method according to claim 5, wherein the chemical change is lysis, for example hydrolysis or perhydrolysis, or bond-cleavage, optionally catalysed by an enzyme or another catalyst.
7. A method according to either claim 5 or claim 6, wherein the chemical change is not protonation or deprotonation.
8. A method according to any of claims 5-7, wherein the pendant group(s) of the rebuild agent comprise one or






more groups attached via a respective linkage independently selected from ester, carbamate, urea and silyl linkages to the polymeric backbone.

9. A method according to any of claim 5-8, wherein the rebuild agent is selected from one or more molecules of formula (II):-

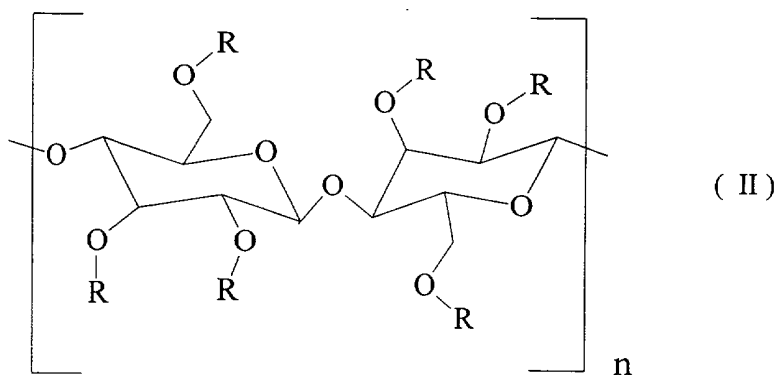

wherein at least one or more R groups of the polymer are independently selected from groups of formulae:-





wherein each R¹ is independently selected from C₁₋₂₀ (preferably C₁₋₆) alkyl, C₂₋₂₀ (preferably C₂₋₆) alkenyl (e.g. vinyl) and C₅₋₇ aryl (e.g. phenyl) any of which is optionally substituted by one or more substituents independently selected from C₁₋₄ alkyl, C₁₋₁₂ (preferably C₁₋₄) alkoxy, hydroxyl, vinyl and phenyl groups;

each R² is independently selected from hydrogen and groups R¹ as hereinbefore defined;

R³ is a bond or is selected from C₁₋₄ alkylene, C₂₋₄ alkenylene and C₅₋₇ arylene (e.g. phenylene) groups, the carbon atoms in any of these being optionally substituted by one or more substituents independently selected from C₁₋₁₂ (preferably C₁₋₄) alkoxy, vinyl, hydroxyl, halo and amine groups;

each R^4 is independently selected from hydrogen, counter cations such as alkali metal (preferably Na) or $\frac{1}{2}$ Ca or $\frac{1}{2}$ Mg, and groups R^1 as hereinbefore defined; and

wherein each R_5 is independently selected from the group consisting of H, C_1 - C_{20} alkyl, C_5 - C_7 cycloalkyl, C_7 - C_{20} arylalkyl, C_7 - C_{20} alkylaryl, substituted alkyl, hydroxyalkyl, $(R_6)_2N$ -alkyl, and $(R_6)_3N$ -alkyl, where R_6 is independently selected from the group consisting of H, C_1 - C_{20} alkyl, C_5 - C_7 cycloalkyl, C_7 - C_{20} arylalkyl, C_7 - C_{20} alkylaryl, aminoalkyl, alkylaminoalkyl, dialkylaminoalkyl, piperidinoalkyl, morpholinoalkyl, cycloaminoalkyl and hydroxyalkyl;

groups R which together with the oxygen atom forming the linkage to the respective saccharide ring forms an ester or hemi-ester group of a tricarboxylic- or higher polycarboxylic- or other complex acid such as citric acid, an amino acid, a synthetic amino acid analogue or a protein.

10. A method according to any of claims 5-9, wherein at least some of the groups of the rebuild agent which undergo the chemical change are selected from one or more independently selected methanesulphonate and toluene sulphonate groups and hemiester groups of fumaric, malonic, itaconic, oxalic, maleic, succinic, tartaric, glutamic, aspartic and malic acids.

11. A method according to any preceding claim, wherein the groups of the rebuild agent which undergo the chemical change are independently selected from one or more of acetate, propanoate, trifluoroacetate, 2-(2-hydroxy-1-oxopropoxy) propanoate, lactate, glycolate, pyruvate, crotonate, isovalerate, cinnamate, formate, salicylate, carbamate, methylcarbamate, benzoate and gluconate groups.
12. A method according to any preceding claim, wherein the rebuild agent comprises cellulose monoacetate.
13. A method according to any preceding claim, wherein up to 65%, preferably up to 10% of the total number of pendant groups of the rebuild agent are groups other than those which undergo the chemical change.
14. A method according to claim 13, wherein up to 20%, preferably up to 10%, more preferably up to 5% of the total number of the other groups of the rebuild agent are water-solubilising groups.
15. A method according to any preceding claim, wherein the composition further comprises a surfactant.
16. A method according to any preceding claim, wherein the composition comprises from 0.005% to 25%, preferably from 0.01% to 10%, more preferably from 0.025% to 2.5% by weight of the rebuild agent.

17. Use of a rebuild agent as defined in any of claims 1 to 14 to soften fabric and/or improve fabric drape.



Application No: GB 0007652.1 Examiner: Peter Davey
 Claims searched: 1-4 and 11-17 (when Date of search: 10 October 2000
 dependent thereon)

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:
 UK CI (Ed.R): D1P (PDP, PDX)
 Int CI (Ed.7): C11D 3/22, D06M 15/03 15/05 15/07
 Other: Online: WPI, EPODOC, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
E,X	WO 00/18860 A1 (UNILEVER), 6 April 2000, see eg. claim 11	1 at least
X	US 4235735 (MILLIKEN), see eg. claim 1	"

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.